

z/OS



Language Environment Programming Reference

z/OS



Language Environment Programming Reference

Note

Before using this information and the product it supports, be sure to read the general information under "Notices" on page 563.

Eighth Edition, September 2006

This is a major revision of SA22-7562-07.

This edition applies to Language Environment® in Version 1 Release 8 of z/OS (5694-A01), Version 1 Release 8 of z/OS.e™ (5655-G52), and to all subsequent releases and modifications until otherwise indicated in new editions.

IBM welcomes your comments. A form for readers' comments may be provided at the back of this document, or you may address your comments to the following address:

International Business Machines Corporation
Department 55JA, Mail Station P384
2455 South Road
Poughkeepsie, NY 12601-5400
United States of America

FAX (United States & Canada): 1+845+432-9405

FAX (Other Countries):

Your International Access Code +1+845+432-9405

IBMLink™ (United States customers only): IBMUSM10(MHVRCFS)

Internet e-mail: mhvrdfs@us.ibm.com

World Wide Web: www.ibm.com/servers/eserver/zseries/zos/webqs.html

If you would like a reply, be sure to include your name, address, telephone number, or FAX number.

Make sure to include the following in your comment or note:

- Title and order number of this document
- Page number or topic related to your comment

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 1991, 2006. All rights reserved.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures	xi
Tables	xv
About this document	xvii
Using your documentation	xviii
Where to find more information	xix
Using LookAt to look up message explanations	xix
Using IBM Health Checker for z/OS	xx
Information updates on the web	xx
Summary of changes	xxi

Part 1. Language Environment Run-Time Options. 1

Chapter 1. Language Environment run-time option reference tables and general information	3
Quick reference tables for AMODE 31 run-time options	3
Quick reference tables for AMODE 64 run-time options	5
How to read syntax diagrams	7
Symbols	7
Syntax items	7
Syntax examples	8
How to specify run-time options	9
Propagating run-time options with spawn and exec	9
Using the CEEOPTS DD statement	9
Usage Notes	10
Chapter 2. Using the Language Environment run-time options	11
ABPERC	11
z/OS UNIX consideration	12
Usage notes	12
ABTERMENC	12
z/OS UNIX consideration	13
Usage notes	13
For more information	13
AIXBLD (COBOL Only)	13
z/OS UNIX consideration	14
Performance consideration	14
For more information	14
ALL31	14
z/OS UNIX considerations	15
Usage notes	15
Performance Consideration	16
For More Information	16
ANYHEAP	16
CICS considerations	17
z/OS UNIX considerations	17
Performance consideration	17
For more information	17
ARGPARSE NOARGPARSE (C only)	17
Usage notes	18
For more information	18

AUTOTASK NOAUTOTASK (Fortran only)	18
BELOWHEAP	19
CICS consideration	19
z/OS UNIX considerations	19
Usage notes	20
Performance consideration	20
For more information	20
CBLOPTS (COBOL only)	20
CBLPSHPOP (COBOL only)	20
Performance consideration	21
For more information	21
CBLQDA (COBOL only)	21
Usage notes	22
CHECK (COBOL only)	22
Usage notes	22
Performance consideration	22
COUNTRY	22
Usage notes	23
For more information	23
DEBUG (COBOL only)	24
Usage notes	24
Performance consideration	24
For more information	24
DEPTHCONDLMT	24
z/OS UNIX consideration	25
Usage notes	25
For more information	25
DYNDUMP	26
Usage Notes	27
Examples	28
ENV (C only)	28
z/OS UNIX consideration	29
ENVAR	29
z/OS UNIX consideration	30
Usage notes	30
For more information	30
ERRCOUNT	31
z/OS UNIX consideration	31
Usage notes	31
For more information	32
ERRUNIT (Fortran only)	32
Usage notes	32
EXECOPS NOEXECOPS (C only)	32
For more information	33
FILEHIST (Fortran only)	33
FILETAG (C/C++ only)	34
Usage notes	35
FLOW (COBOL only)	36
HEAP	36
CICS considerations	38
z/OS UNIX consideration	38
Usage notes	38
Performance consideration	38
For more information	38
HEAP64 (AMODE 64 only)	38
z/OS UNIX consideration	39

Performance consideration	39
For more information.	40
HEAPCHK	40
Usage notes	41
Performance consideration	41
For more information.	41
HEAPPOOLS (C/C++ only)	41
Usage notes	42
Performance considerations	43
HEAPPOOLS64 (C/C++ and AMODE 64 only)	43
Usage notes	43
Performance considerations	44
For more information.	44
INFMSGFILTER	44
INQPCOPN (Fortran only).	45
INTERRUPT.	46
z/OS UNIX consideration	46
Usage notes	46
IOHEAP64 (AMODE 64 only)	47
Performance consideration	48
For more information.	48
LIBHEAP64 (AMODE 64 only)	48
Performance consideration	49
For more information.	49
LIBSTACK	49
CICS consideration	50
z/OS UNIX consideration	50
Usage notes	50
Performance consideration	50
For more information.	50
MSGFILE	50
CICS consideration	51
z/OS UNIX consideration	51
Usage notes	52
For more information.	53
MSGQ	53
Usage notes	53
For more information.	54
NATLANG.	54
Usage notes	54
For more information.	55
OCSTATUS (Fortran only).	55
PC (Fortran only)	56
PLIST (C only)	57
Usage notes	58
PLTASKCOUNT (PL/I only)	58
Usage notes	58
POSIX	59
Usage notes	59
For more information.	60
PROFILE	60
For more information.	60
PRTUNIT (Fortran only)	60
PUNUNIT (Fortran only)	61
RDRUNIT (Fortran only)	61
RECPAD (Fortran only).	62

Usage notes	62
REDIR NOREDIR (C Only)	62
For more information.	63
RPTOPTS	63
Usage notes	64
Performance consideration	64
For more information.	64
RPTSTG	64
CICS consideration	65
z/OS UNIX consideration	65
Usage notes	65
Performance consideration	65
For more information.	65
RTEREUS (COBOL only)	66
Usage notes	66
Performance consideration	67
For more information.	67
SIMVRD (COBOL only)	67
For more information.	68
STACK	68
CICS consideration	69
z/OS UNIX consideration	69
Usage notes	70
Performance consideration	70
For more information.	70
STACK64 (AMODE 64 only)	71
Usage notes	71
Performance consideration	71
For more information.	71
STORAGE	72
CICS consideration	74
z/OS UNIX consideration	74
Usage notes	74
Performance consideration	74
TERMTHDACT	74
CICS consideration	77
Usage notes	80
For more information.	81
TEST NOTEST	81
Usage notes	83
Performance consideration	83
For more information.	83
THREADHEAP	83
CICS consideration	84
Usage notes	84
THREADSTACK	85
Usage notes	87
THREADSTACK64 (AMODE 64 only)	87
Usage notes	88
For more information.	88
TRACE	88
Usage notes	89
For more information.	90
TRAP	90
CICS consideration	91
Usage notes	91

For more information.	92
UPSI (COBOL only)	92
CICS consideration	93
Usage notes	93
For more information.	93
USRHDLR NOUSRHDLR	93
CICS consideration	94
Usage notes	94
For more information.	94
VCTRSAVE	94
CICS consideration	95
Usage notes	95
Performance consideration	95
XPLINK	95
Usage notes	96
XUFLOW	97
Usage notes	98
Language run-time option mapping	98

Part 2. Language Environment callable services 99

Chapter 3. Quick reference tables for Language Environment services	101
Bit manipulation routines	101
Condition handling callable services.	101
Date and time callable services	102
Dynamic storage callable services	103
General callable services.	103
Initialization and termination services	103
Locale callable services	104
Math services	104
Message handling callable services	105
National Language Support callable services	105
 Chapter 4. Language Environment callable services	107
Locating callable service information	107
General usage notes for callable services	108
Invoking callable services	109
Header, copy, or include files	109
Sample programs	111
C/C++ syntax	111
COBOL syntax	112
PL/I syntax	112
Parameter list for invoking callable services	113
Data type definitions	114
C/C++ data type definitions	114
COBOL data type definitions	115
PL/I data type definitions	116
Callable services	117
CEE3ABD—Terminate enclave with an abend	117
CEE3AB2—Terminate enclave with an abend and reason code	122
CEE3CIB—Return pointer to condition information block	126
CEE3CTY—Set default country	131
CEE3DMP—Generate dump	138
CEE3GRC—Get the enclave return code.	146
CEE3GRN—Get name of routine that incurred condition	159
CEE3GRO—Get offset of condition	167

I	CEE3INF—Query enclave information	174
	CEE3LNG—Set national language	181
	CEE3MCS—Get default currency symbol.	189
	CEE3MDS—Get default decimal separator	193
	CEE3MTS—Get Default thousands separator	197
	CEE3PRM—Query parameter string	201
I	CEE3PR2—Query parameter string long	204
	CEE3RPH—Set report heading	210
	CEE3SPM—Query and modify Language Environment hardware condition enablement	213
	CEE3SRC—Set the enclave return code	220
	CEE3SRP—Set resume point	221
	CEE3USR—Set or query user area fields	222
	CEECBLDY—Convert date to COBOL Integer format	227
	CEECMI—Store and load message insert data	232
	CEECRHP—Create new additional heap	239
	CEECZST—Reallocate (change size of) storage	244
	CEEDATE—Convert Lilian date to character format	251
	CEEDATM—Convert seconds to character timestamp	258
	CEEDAYS—Convert date to Lilian format.	266
	CEEDCOD—Decompose a condition token	273
	CEEDSHP—Discard heap	280
	CEEDYWK—Calculate day of week from Lilian date.	285
I	CEEENV—Process environmental variables.	291
	CEEFMDA—Get default date format	297
	CEEFMDT—Get default date and time format	300
	CEEFMON—Format monetary string	304
	CEEFMTM—Get default time format	310
	CEEFRST—Free heap storage	313
	CEEFTDS—Format time and date into character string	319
	CEEGMT—Get current Greenwich Mean Time.	326
	CEEGMTO—Get offset from Greenwich Mean Time to local time	330
	CEEGPID—Retrieve the Language Environment version and platform ID	334
	CEEGQDT—Retrieve q_data_token.	340
	CEEGTST—Get heap storage.	351
	CEEHDLR—Register User-written condition handler.	356
	CEEHDLU—Unregister user-written condition handler	366
	CEEISEC—Convert integers to seconds	372
	CEEITOK—Return initial condition token	379
	CEELCNV—Query Locale numeric conventions	385
	CEELOCT—Get current local date or time	392
	CEEMGET—Get a message	396
	CEEMOUT—Dispatch a message	403
	CEEMRCE—Move resume cursor explicit	407
	CEEMRCR—Move resume cursor	414
	CEEMSG—Get, format, and dispatch a message.	426
	CEENCOD—Construct a condition token	432
	CEEQCEN—Query the century window	439
	CEEQDTC—Query locale date and time conventions	442
	CEEQRYL—Query active locale environment	448
	CEERANO—Calculate uniform random numbers	450
	CEESCEN—Set the century window	453
	CEESCOL—Compare collation weight of two strings	458
	CEESECI—Convert seconds to integers	462
	CEESECS—Convert timestamp to seconds	467
	CEESETL—Set locale operating environment	475

CEESGL—Signal a condition	481
CEESTXF—Transform string characters into collation weights	487
CEETDLI—Invoke IMS	491
CEETEST—Invoke Debug Tool	494
CEEUTC—Get Coordinated Universal Time	499
Chapter 5. Bit manipulation routines	501
CEESICLR—Bit clear	501
CEESISSET—Bit set	501
CEESISHF—Bit shift	502
CEESITST—Bit test	502
Chapter 6. Language Environment math services	505
Call interface to math services	505
Parameter types: parm1 Type and parm2 type	505
Feedback code parameter (fc)	506
Language-specific built-in math services	506
Sample calls to math services	506
C/C++ call to CEESLOG—logarithm base e	507
COBOL call to CEESLOG—logarithm base e	507
PL/I call to CEESLOG—logarithm base e	507
Math services	507
CEESxABS—Absolute value	507
CEESxACS—Arccosine	508
CEESxASN—Arcsine	509
CEESxATH—Hyperbolic arctangent	510
CEESxATN—Arctangent	511
CEESxAT2—Arctangent2	512
CEESxCJG—Conjugate of complex	512
CEESxCOS—Cosine	513
CEESxCSH—Hyperbolic cosine	515
CEESxCTN—Cotangent	516
CEESxDIM—Positive difference	518
CEESxDVD—Floating-point complex divide	519
CEESxERC—Error function complement	519
CEESxERF—Error function	520
CEESxEXP—Exponential base e	521
CEESxGMA—Gamma function	522
CEESxIMG—Imaginary part of complex	523
CEESxINT—Truncation	524
CEESxLGM—Log gamma	525
CEESxLG1—Logarithm base 10	526
CEESxLG2—Logarithm base 2	527
CEESxLOG—Logarithm base e	528
CEESxMLT—Floating-point complex multiply	529
CEESxMOD—Modular arithmetic	529
CEESxNIN—Nearest integer	531
CEESxNWN—Nearest whole number	531
CEESxSGN—Transfer of sign	532
CEESxSIN—Sine	533
CEESxSNH—Hyperbolic sine	535
CEESxSQT—Square root	536
CEESxTAN—Tangent	537
CEESxTNH—Hyperbolic tangent	539
CEESxXPx—Exponentiation	539
Examples of math services	542

C/C++ math service example	542
COBOL math service examples	542
PL/I math service examples.	543

Part 3. Appendixes	545

Appendix A. IBM-supplied country code defaults.	547

Appendix B. Date and time services tables	551

Appendix C. Controlling storage allocation	553

Storage statistics.	553
Stack storage statistics	553
Heap storage statistics	554
Heap pools storage statistics	555
Storage statistics for AMODE 64 applications	557
Stack storage statistics for AMODE 64 applications	557
Heap storage statistics	558
Heap pools storage statistics	558

Appendix D. Accessibility	561

Using assistive technologies	561
Keyboard navigation of the user interface.	561
z/OS information.	561

Notices	563

Programming Interface information	565
Trademarks.	565

Index	567

Figures

	1. Effect of DEPTHCONDLMT(3) on Condition Handling	25
	2. An Invalid COBOL CALL that Omits the fc Parameter	108
	3. An Invalid PL/I CALL that Omits the fc Parameter	108
	4. Valid COBOL CALLs that Use the Optional fc Parameter.	108
	5. Valid PL/I CALLs that Use the Optional fc Parameter	109
	6. Sample Callable Services Invocation Syntax for C/C++	111
	7. Sample Callable Services Invocation Syntax for COBOL	112
	8. Sample Callable Services Invocation Syntax for PL/I	113
	9. C/C++ Example of CEE3ABD.	120
	10. COBOL Example of CEE3ABD	121
	11. PL/I Example of CEE3ABD	122
	12. C/C++ Example of CEE3AB2	124
	13. COBOL Example of CEE3AB2	125
	14. PL/I Example of CEE3AB2.	126
	15. C/C++ Example of EDC3CIB	128
	16. COBOL Example of CEE3CIB	130
	17. PL/I Example of CEE3CIB	131
	18. C/C++ Example of CEE3CTY.	134
	19. COBOL Example of CEE3CTY	135
	20. PL/I Example of CEE3CTY	137
	21. C/C++ Example of CEE3DMP	144
	22. COBOL Example of CEE3DMP	145
	23. PL/I Example of CEE3DMP	146
	24. C/C++ main() Routine that Calls CEEHDLR and CEE3GRC	148
	25. C/C++ User-Written Condition Handler that Sets a User Enclave Return Code.	150
	26. C/C++ Subroutine that Generates the Divide-by-Zero Condition	151
	27. COBOL Main Routine that Calls CEEHDLR and CEE3GRC	152
	28. COBOL Condition Handler that Sets a User Enclave Return Code and Resumes when a Divide-by-Zero Condition Occurs	154
	29. COBOL Subroutine that Generates a Divide-by-Zero	157
	30. PL/I Example that Sets and Retrieves the User Enclave Return Code when a Divide-by-Zero is Generated.	158
	31. C/C++ Example of CEE3GRN	161
	32. COBOL Example of CEE3GRN	163
	33. PL/I Example of CEE3GRN	167
	34. COBOL Example of CEE3GRO	169
	35. PL/I Example of CEE3GRO	172
	36. C/C++ Example of CEE3INF	177
	37. COBOL Example of CEE3INF	178
	38. PL/I Example of CEE3INF	180
	39. C/C++ Example of CEE3LNG.	184
	40. COBOL Example of CEE3LNG	185
	41. PL/I Example of CEE3LNG	187
	42. C/C++ Example of CEE3MCS	191
	43. COBOL Example of CEE3MCS	192
	44. PL/I Example of CEE3MCS	193
	45. C/C++ Example of CEE3MDS	195
	46. COBOL Example of CEE3MDS	196
	47. PL/I Example of CEE3MDS	197
	48. C/C++ Example of CEE3MTS	199
	49. COBOL Example of CEE3MTS	200
	50. PL/I Example of CEE3MTS	201
	51. C/C++ Example of CEE3PRM	202

	52. COBOL Example of CEE3PRM	203
	53. PL/I Example of CEE3PRM	204
I	54. C/C++ Example of CEE3PR2	206
I	55. COBOL Example of CEE3PR2	207
I	56. PL/I Example of CEE3PR2	209
	57. C/C++ Example of CEE3RPH	211
	58. COBOL Example of CEE3RPH	212
	59. PL/I Example of CEE3RPH	213
	60. C/C++ Example of CEE3SPM	217
	61. COBOL Example of CEE3SPM	218
	62. PL/I Example of CEE3SPM	219
	63. C/C++ Example of CEE3USR	224
	64. COBOL Example of CEE3USR	225
	65. PL/I Example of CEE3USR	226
	66. COBOL Example of CEECBLDY	231
	67. C/C++ Example of CEECMI	234
	68. COBOL Example of CEECMI	236
	69. PL/I Example	238
	70. C/C++ Example of CEECRHP	242
	71. COBOL Example of CEECRHP	243
	72. PL/I Example of CEECRHP	244
	73. C/C++ Example of CEECZST	247
	74. COBOL Example of CEECZST	248
	75. PL/I Example of CEECZST	250
	76. C/C++ Example of CEEDATE	254
	77. COBOL Example of CEEDATE	254
	78. PL/I Example of CEEDATE	257
	79. C/C++ Example of CEEDATM	261
	80. COBOL Example of CEEDATM	262
	81. PL/I Example of CEEDATM	265
	82. C/C++ Example of CEEDAYS	269
	83. COBOL Example of CEEDAYS	270
	84. PL/I Example of CEEDAYS	272
	85. C/C++ Example of CEEDCOD	276
	86. COBOL Example of CEEDCOD	277
	87. PL/I Example of CEEDCOD	279
	88. C/C++ Example of CEEDSHP	282
	89. COBOL Example of CEEDSHP	283
	90. PL/I Example of CEEDSHP	284
	91. C/C++ Example of CEEDYWK	287
	92. COBOL Example of CEEDYWK	288
	93. PL/I Example of CEEDYWK	290
I	94. C/C++ Example of CEEENV	293
I	95. COBOL Example of CEEENV	294
I	96. PL/I Example of CEEENV	296
	97. C/C++ Example of CEEFMDA	298
	98. COBOL Example of CEEFMDA	299
	99. PL/I Example of CEEFMDA	300
	100. C/C++ Example of CEEFMDT	302
	101. COBOL Example of CEEFMDT	303
	102. PL/I Example of CEEFMDT	304
	103. COBOL Example of CEEFMON	307
	104. PL/I Example of CEEFMON	309
	105. C/C++ Example of CEEFMTM	311
	106. COBOL Example of CEEFMTM	312
	107. PL/I Example of CEEFMTM	313

108. C/C++ Example of CEEFRST	316
109. COBOL Example of CEEFRST	317
110. PL/I Example of CEEFRST	318
111. COBOL Example of CEEFTDS	323
112. PL/I Example of CEEFTDS	325
113. C/C++ Example of CEEGMT	328
114. COBOL Example of CEEGMT	329
115. PL/I Example of CEEGMT	330
116. C/C++ Example of CEEGMT	333
117. COBOL Example of CEEGMT	333
118. PL/I Example of CEEGMT	334
119. C/C++ Example of CEEGPID	336
120. COBOL Example of CEEGPID	338
121. PL/I Example of CEEGPID	340
122. C/C++ Example of CEEGQDT	342
123. COBOL Example of CEEGQDT	344
124. PL/I Example of CEEGQDT	347
125. COBOL Example of CEEGQDT	350
126. C/C++ Example of CEEGTST	354
127. COBOL Example of CEEGTST	355
128. PL/I Example	356
129. C/C++ Example of CEEHDLR	358
130. COBOL Program that Registers HANDLER Routine	359
131. COBOL User-Written Condition Handler Registered by CBLHDLR and Unregistered by CBLHDLU	361
132. EXCOND Program (PL/I) to Handle Divide-by-Zero Condition	363
133. PL/I Example of CEEHDLR	365
134. C/C++ Example of CEEHDLU	368
135. COBOL Program that Unregisters User-Written Condition Handler	369
136. COBOL User-Written Condition Handler Registered by CBLHDLR and Unregistered by CBLHDLU	371
137. C/C++ Example of CEEISEC	375
138. COBOL Example of CEEISEC	376
139. PL/I Example of CEEISEC	378
140. C/C++ Example of CEEITOK	380
141. COBOL Example of CEEITOK	382
142. PL/I Example of CEEITOK	385
143. COBOL Example of CEELCNV	390
144. PL/I Example of CEELCNV	392
145. C/C++ Example of CEEOCT	394
146. COBOL Example of CEEOCT	395
147. PL/I Example of CEEOCT	396
148. C/C++ Example of CEEMGET	399
149. COBOL Example of CEEMGET	401
150. PL/I Example of CEEMGET	403
151. C/C++ Example of CEEMOUT	405
152. COBOL Example of CEEMOUT	406
153. PL/I Example of CEEMOUT	407
154. COBOL Example of CEEMRCE	409
155. PL/I Example of CEEMRCE	413
156. First Example Moving Resume Cursor Using CEEMRCR	417
157. Second Example Moving Resume Cursor Using CEEMRCR	418
158. Third Example Moving Resume Cursor Using CEEMRCR	419
159. C/C++ Example of CEEMRCR	420
160. COBOL Example of CEEMRCR	422
161. EXCOND Program (PL/I) to Handle Divide-by-Zero Condition	426

162. C/C++ Example of CEEMSG	428
163. COBOL Example of CEEMSG	429
164. PL/I Example of CEEMSG	431
165. type_FEEDBACK Data Type as Defined in the leawi.h Header File	434
166. C/C++ Example of CEENCOD	435
167. COBOL Example of CEENCOD	436
168. PL/I Example of CEENCOD	438
169. C/C++ Example of CEEQCEN	440
170. COBOL Example of CEEQCEN	441
171. PL/I Example of CEEQCEN	442
172. COBOL Example of CEEQDTC	445
173. PL/I Example of CEEQDTC	447
174. C/C++ Example of CEERAN0	451
175. COBOL Example of CEERAN0	452
176. PL/I Example of CEERAN0	453
177. C/C++ Example of CEESCEN	455
178. COBOL Example of CEESCEN	456
179. PL/I Example of CEESCEN	458
180. COBOL Example of CEESCOL	460
181. PL/I Example of CEESCOL	462
182. C/C++ Example of CEESECI	464
183. COBOL Example of CEESECI	465
184. PL/I Example of CEESECI	467
185. C/C++ Example of CEESECS	471
186. COBOL Example of CEESECS	472
187. PL/I Example of CEESECS	475
188. COBOL Example of CEESETL	478
189. COBOL Example of CEESETL	480
190. C/C++ Example of CEESGL	484
191. COBOL Example of CEESGL	485
192. PL/I Example of CEESGL	487
193. COBOL Example of CEESTXF	489
194. PL/I Example of CEESTXF	490
195. C Example of CEETDLI	493
196. COBOL Example of CEETDLI	493
197. PL/I Example of CEETDLI	494
198. C/C++ Example of CEETEST	496
199. COBOL Example of CEETEST	497
200. PL/I Example of CEETEST	499

Tables

1. How to Use z/OS Language Environment Publications	xix
2. Run-Time Options Quick Reference - AMODE 31	3
3. Run-Time Options Quick Reference - AMODE 64	6
4. Syntax examples	8
5. Condition Handling of 0Cx ABENDS	78
6. Handling of Software Raised Conditions	78
7. TRAP Run-Time Option Settings	90
8. Bit Manipulation Routines	101
9. Condition Handling Callable Services	101
10. Date and Time Callable Services	102
11. Dynamic Storage Callable Services	103
12. General Callable Services	103
13. Initialization and Termination Services	103
14. Locale Callable Services	104
15. Math Services	104
16. Message Handling Callable Services	105
17. National Language Support and National Language Architecture Callable Services	105
18. Files Used in C/C++, COBOL, and PL/I Examples	109
19. Imbedding Files in Your Routines	110
20. Data Type Definitions for C/C++	114
21. Data Type Definitions for COBOL	115
22. Data Type Definitions for PL/I	116
23. National Language Codes	188
24. S/370 Interrupt Code Descriptions	216
25. HEAP Attributes Based on the Setting of the options Parameter	240
26. Sample Output of CEEDATE	258
27. Sample Output of CEEDATM	266
28. Defaults Currency and Picture Strings Based on COUNTRY Setting	547
29. Picture Character Terms Used in Picture Strings for Date and Time Services	551
30. Examples of Picture Strings Recognized by Date and Time Services	552
31. Japanese Eras Used by Date/Time Services When <JJJJ> Specified	552

About this document

This document supports z/OS (5694–A01) and z/OS.e™ (5655–G52).

IBM z/OS Language Environment (also called Language Environment) provides common services and language-specific routines in a single run-time environment for C, C++, COBOL, Fortran (z/OS only; no support for z/OS UNIX System Services or CICS®), PL/I, and assembler applications. It offers consistent and predictable results for language applications, independent of the language in which they are written.

Language Environment is the prerequisite run-time environment for applications generated with the following IBM compiler products:

- z/OS XL C/C++ (feature of z/OS)
- z/OS C/C++
- OS/390 C/C++
- C/C++ for MVS/ESA™
- C/C++ for z/VM
- AD/Cycle® C/370™
- VisualAge for Java, Enterprise Edition for OS/390
- Enterprise COBOL for z/OS
- Enterprise COBOL for z/OS and OS/390
- COBOL for OS/390 & VM
- COBOL for MVS & VM (formerly COBOL/370)
- Enterprise PL/I for z/OS
- Enterprise PL/I for z/OS and OS/390
- VisualAge PL/I
- PL/I for MVS & VM (formerly PL/I MVS™ & VM)
- VS FORTRAN and FORTRAN IV (in compatibility mode)

Although not all compilers listed are currently supported, Language Environment supports the compiled objects that they created.

Restrictions: The following restrictions apply to z/OS.e:

- The following compilers are not licensed for use on z/OS.e:
 - COBOL
 - PL/I
 - Fortran
- The following subsystems are not licensed for use on z/OS.e:
 - CICS
 - IMS™
- Execution of applications written in the following languages is not functionally supported on z/OS.e:
 - COBOL (except for precompiled COBOL DB2® stored procedures and other precompiled COBOL applications using the Language Environment preinitialization interface)
 - Fortran
- The following are not functional and/or not licensed for use on z/OS.e:
 - Language Environment Library Routine Retention (LRR)
 - Language Environment compatibility preinitialization for C and PL/I

- Customers are not permitted to use lower levels of Language Environment on z/OS.e.

Language Environment supports, but is not required for, an interactive debug tool for debugging applications in your native z/OS environment. The IBM interactive Debug Tool is available with the latest releases of the COBOL and PL/I compiler products.

Debug Tool is also available as a standalone product. Debug Tool Utilities and Advanced Functions is also available. For more information, see www.ibm.com/software/awdtools/debugtool/.

Language Environment supports, but is not required for, VS FORTRAN Version 2 compiled code (z/OS only).

Language Environment consists of the common execution library (CEL) and the run-time libraries for C/C++, COBOL, Fortran, and PL/I.

For more information on VisualAge for Java, Enterprise Edition for OS/390, program number 5655-JAV, see the product documentation.

This publication provides application programmers with a detailed description of each Language Environment run-time option and callable service, as well as information on how to use them. It also provides programming examples that illustrate how each callable service can be used in routines written in Language Environment-conforming high-level languages (HLLs) and assembler language. Before using Language Environment, you should be familiar with the HLLs in which your applications are written. You should also understand the operating systems and any subsystems in which you plan to run Language Environment applications. The first usage of every term listed in the glossary is indicated by *italics*. You can find the definitions for these terms in *z/OS Language Environment Concepts Guide*.

Using your documentation

The publications provided with Language Environment are designed to help you:

- Manage the run-time environment for applications generated with a Language Environment-conforming compiler.
- Write applications that use the Language Environment callable services.
- Develop interlanguage communication applications.
- Customize Language Environment.
- Debug problems in applications that run with Language Environment.
- Migrate your high-level language applications to Language Environment.

Language programming information is provided in the supported high-level language programming manuals, which provide language definition, library function syntax and semantics, and programming guidance information.

Each publication helps you perform different tasks, some of which are listed in Table 1 on page xix. All books are available in printable (PDF) and BookManager softcopy formats. For a complete list of publications that you may need, see “How to specify run-time options” on page 9.

Table 1. How to Use z/OS Language Environment Publications

To ...	Use ...
Evaluate Language Environment	<i>z/OS Language Environment Concepts Guide</i>
Plan for Language Environment	<i>z/OS Language Environment Concepts Guide</i> <i>z/OS Language Environment Run-Time Application Migration Guide</i>
Install Language Environment	<i>z/OS Program Directory</i>
Customize Language Environment	<i>z/OS Language Environment Customization</i>
Understand Language Environment program models and concepts	<i>z/OS Language Environment Concepts Guide</i> <i>z/OS Language Environment Programming Guide</i> <i>z/OS Language Environment Programming Guide for 64-bit Virtual Addressing Mode</i>
Find syntax for Language Environment run-time options and callable services	<i>z/OS Language Environment Programming Reference</i>
Develop applications that run with Language Environment	<i>z/OS Language Environment Programming Guide</i> and your language programming guide
Debug applications that run with Language Environment, diagnose problems with Language Environment	<i>z/OS Language Environment Debugging Guide</i>
Get details on run-time messages	<i>z/OS Language Environment Run-Time Messages</i>
Develop interlanguage communication (ILC) applications	<i>z/OS Language Environment Writing Interlanguage Communication Applications</i> and your language programming guide
Migrate applications to Language Environment	<i>z/OS Language Environment Run-Time Application Migration Guide</i> and the migration guide for each Language Environment-enabled language

Where to find more information

Please see *z/OS Information Roadmap* for an overview of the documentation associated with z/OS, including the documentation available for z/OS Language Environment.

Using LookAt to look up message explanations

LookAt is an online facility that lets you look up explanations for most of the IBM messages you encounter, as well as for some system abends and codes. Using LookAt to find information is faster than a conventional search because in most cases LookAt goes directly to the message explanation.

You can use LookAt from these locations to find IBM message explanations for z/OS® elements and features, z/VM®, VSE/ESA™, and Clusters for AIX® and Linux™:

- The Internet. You can access IBM message explanations directly from the LookAt Web site at www.ibm.com/servers/eserver/zseries/zos/bkserv/lookat/.
- Your z/OS TSO/E host system. You can install code on your z/OS or z/OS.e systems to access IBM message explanations using LookAt from a TSO/E command line (for example: TSO/E prompt, ISPF, or z/OS UNIX® System Services).

- Your Microsoft® Windows® workstation. You can install LookAt directly from the *z/OS Collection* (SK3T-4269) or the *z/OS and Software Products DVD Collection* (SK3T-4271) and use it from the resulting Windows graphical user interface (GUI). The command prompt (also known as the DOS > command line) version can still be used from the directory in which you install the Windows version of LookAt.
- Your wireless handheld device. You can use the LookAt Mobile Edition from www.ibm.com/servers/eserver/zseries/zos/bkserv/lookat/lookatm.html with a handheld device that has wireless access and an Internet browser (for example: Internet Explorer for Pocket PCs, Blazer or Eudora for Palm OS, or Opera for Linux handheld devices).

You can obtain code to install LookAt on your host system or Microsoft Windows workstation from:

- A CD-ROM in the *z/OS Collection* (SK3T-4269).
- The *z/OS and Software Products DVD Collection* (SK3T-4271).
- The LookAt Web site (click **Download** and then select the platform, release, collection, and location that suit your needs). More information is available in the LOOKAT.ME files available during the download process.

Using IBM Health Checker for z/OS

IBM Health Checker for z/OS is a z/OS component that installations can use to gather information about their system environment and system parameters to help identify potential configuration problems before they impact availability or cause outages. Individual products, z/OS components, or ISV software can provide checks that take advantage of the IBM Health Checker for z/OS framework. This book refers to checks or messages associated with this component.

For additional information about checks and about IBM Health Checker for z/OS, see *IBM Health Checker for z/OS: User's Guide*. Starting with z/OS V1R4, z/OS users can obtain the IBM Health Checker for z/OS from the z/OS Downloads page at www.ibm.com/servers/eserver/zseries/zos/downloads/.

SDSF also provides functions to simplify the management of checks. See *z/OS SDSF Operation and Customization* for additional information.

Information updates on the web

For the latest information updates that have been provided in PTF cover letters and Documentation APARs for z/OS and z/OS.e, see the online document at:

publibz.boulder.ibm.com/cgi-bin/bookmgr_OS390/BOOKS/ZIDOCMST/CCONTENTS

This document is updated weekly and lists documentation changes before they are incorporated into z/OS publications.

Summary of changes

Summary of changes for SA22-7562-08 z/OS Version 1 Release 8

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-07, which supports z/OS Version 1 Release 7.

New information

- Chapter 2, “Using the Language Environment run-time options,” on page 11 contains a new run-time option, DYNDUMP.
- The STORAGE run-time option includes CLEAR as a value for the *dsa_alloc_value*.
- Chapter 4, “Language Environment callable services,” on page 107 includes several new callable services. They are:
 - CEE3AB2
 - CEE3INF
 - CEE3PR2
 - CEEENV

Changed information

- The AUTOCVT parameter of the FILETAG run-time option has been updated with new information.
- Parameter updates have been made to the TRACE run-time option.
- The usage notes have been updated for the USRHDLR run-time option.
- Chapter 4, “Language Environment callable services,” on page 107 includes updates to the CEE3ABD, CEE3PRM, and CEEMGET callable services

Deleted information

- Support for msys for Setup has been removed, so all references have been removed from this publication.
- PARMLIB information has been removed from this publication. It is available in *z/OS Language Environment Customization*.

This book contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

You may notice changes in the style and structure of some content in this book — for example, headings that use uppercase for the first letter of initial words only, and procedures that have a different look and format. The changes are ongoing improvements to the consistency and retrievability of information in our books.

Summary of changes for SA22-7562-07 z/OS Version 1 Release 7

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-06, which supports z/OS Version 1 Release 6.

New information

- Two new sections, "Setting default options with the PARMLIB member" and "Using the CEEOPTS DD statement" on page 9, have been added to Chapter 1, "Language Environment run-time option reference tables and general information," on page 3.
- Chapter 4, "Language Environment callable services," on page 107 contains information about using new structures for COBOL and PL/I applications.

Changed Information

- Parameter updates have been made to the THREADSTACK64 run-time option.
- The HEAPCHK and USRHDLR options have been updated with clarifications.
- The STACK64 and THREADSTACK64 options have been updated with size information.
- The CEE3LNG callable service has been updated.
- The CEE3MCS callable service has been updated with Euro considerations and new examples.
- COBOL consideration for the CEE3SRP callable service have been updated.
- CEEFTDS, CEELCNV, and CEEQDTC contain new feedback codes.
- CEEFTDS has been updated with new conversion characters, %F, %g, %G, and %z.
- CEELCNV has new version information and an updated example.
- The CEEMRCE callable service has updated examples.
- The country codes in Appendix A have been updated.
- References to OpenEdition have been replaced with z/OS UNIX System Services or z/OS UNIX.

As part of an ongoing effort, several of the run-time options in Chapter 2, "Using the Language Environment run-time options," on page 11 have been updated to improve the consistency and retrievability of the information.

Summary of changes for SA22-7562-05 and SA22-7562-06 z/OS Version 1 Release 6

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-04, which supports z/OS Version 1 Release 5.

New Information

- A reference table for AMODE 64 options has been added to Chapter 1, "Language Environment run-time option reference tables and general information," on page 3.
- Run-time options supporting AMODE 64 applications have been added to Chapter 2, "Using the Language Environment run-time options," on page 11. These are:
 - HEAP64
 - HEAPPOOLS64
 - IOHEAP64
 - LIBHEAP64
 - STACK64
 - THREADSTACK64
- Several run-time options in Chapter 2, "Using the Language Environment run-time options," on page 11 include parameters that allow them to be used for AMODE 64 applications.

- A section describing storage statistics for AMODE 64 applications has been added to Appendix C, “Controlling storage allocation,” on page 553.

Changed Information

- The publication has been divided into 3 parts to help make the information easier to retrieve.
- The reference table for AMODE 31 options has been updated in Chapter 1, “Language Environment run-time option reference tables and general information,” on page 3.
- Overall descriptions of several run-time options have been updated.

Deleted Information

- Support for RTLS has been removed, along with references to the SCEERTLS data set.
- Examples of storage reports and options reports have been moved to *z/OS Language Environment Debugging Guide* to avoid redundancy.

As part of an ongoing effort, several of the run-time options in Chapter 2, “Using the Language Environment run-time options,” on page 11 have been updated to improve the consistency and retrievability of the information.

Summary of changes for SA22-7562-04 z/OS Version 1 Release 5

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-03, which supports z/OS Version 1 Release 4.

New Information

- The HEAPCHK run-time option was updated to include the *pool call depth* suboption. The *call level* suboption was renamed to *call depth*.
- The HEAPPOOLS run-time option was updated with a 64 bit maximum size.

Changed Information

- The ENVAR run-time option in Chapter 2, “Using the Language Environment run-time options,” on page 11 has been updated to include the `putenv()` function and to more fully explain how the option works.
- Updates were made to the ERRCOUNT run-time option.
- Updates were made to the AUTOCVT suboption of the FILETAG run-time option.
- Updates were made to the HEAP run-time option.
- The options report in “RPTOPTS” on page 63 has been updated.
- The storage reports in “RPTSTG” on page 64 have been updated.
- Updates were made to the TERMTHDACT run-time option.
- Updates were made to the CEE3DMP callable service.
- Updates were made to the CEEMOUT callable service.

As part of an ongoing effort, several of the run-time options in Chapter 2, “Using the Language Environment run-time options,” on page 11 have been updated to improve the consistency and retrievability of the information.

**Summary of changes
for SA22-7562-03
z/OS Version 1 Release 4**

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-02, which supports z/OS Version 1 Release 3.

New Information

- Information has been added to indicate that this book supports z/OS.e.

Changed Information

- The bit manipulation routines have been added to Chapter 1, “Language Environment run-time option reference tables and general information,” on page 3.
- Updates were made to the FILETAG run-time option.
- The options report in “RPTOPTS” on page 63 has been updated.
- The storage reports in “RPTSTG” on page 64 have been updated.

Moved Information

- “How to read syntax diagrams” has been moved to Chapter 2, “Using the Language Environment run-time options,” on page 11.
- The bit manipulation routines have been moved out of “Math services” on page 507 into Chapter 5, “Bit manipulation routines,” on page 501.

Deleted Information

- The CBLOPTS run-time option has been removed. It remains in *z/OS Language Environment Customization*.
- The appendix on Managed System Infrastructure for Setup (msys for Setup) has been removed.
- The NONIPTSTACK | NONONIPTSTACK run-time option have been removed because it is no longer supported. It was replaced by the THREADSTACK option.

**Summary of changes
for SA22-7562-02
z/OS Version 1 Release 3**

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-01, which supports z/OS Version 1 Release 2.

New Information

- Added information about the vendor heap manager (VHM) to the HEAPPOOLS and RPTSTG run-time options.
- Added product number to the CEEGPID callable service.
- Added information to the RTEREUS run-time option.
- An appendix on Managed System Infrastructure for Setup (msys for Setup) has been added.
- An appendix with z/OS product accessibility information has been added.

You may notice changes in the style and structure of some content in this book — for example, headings that use uppercase for the first letter of initial words only, and procedures that have a different look and format. The changes are ongoing improvements to the consistency and retrievability of information in our books.

**Summary of changes
for SA22-7562-01
z/OS Version 1 Release 2**

The book contains information previously presented in *z/OS Language Environment Programming Reference*, SA22-7562-00, which supports z/OS Version 1 Release 1.

New Information

- A change of the output parameter CEE_Version_ID for CEEGPID as a four-byte hex number in the form PPVVRMM. For New Product Language Environment, the product number is 4.
- A new suboption has been added to the TERMTHDACT that will cause Language Environment to write the CEEDUMP on the CICS dump data set via an interface provided by CICS.
- A new FILETAG run-time option has been added.

Changed Information

- Changes to the run-time option defaults were made in Chapter 1, “Language Environment run-time option reference tables and general information,” on page 3 and Chapter 2, “Using the Language Environment run-time options,” on page 11.

This book contains terminology, maintenance, and editorial changes, including changes to improve consistency and retrievability.

**Summary of changes
for SA22-7562-00
z/OS Version 1 Release 1**

This book contains information also presented in *OS/390 Language Environment for OS/390 & VM Programming Reference*. Some additional function is provided by APAR:

- APAR PQ38324 — A new GENOPTS option has been added to CEE3DMP. This new option generates a run-time options report and places it at the end of the enclave information whenever the TRACE, UATRACE, DUMP and UADUMP options are invoked.
- APAR PQ39927 and PQ39636— A new sub-option *reg_stor_amount* has been added to the TERMTHDACT run-time option. This new sub-option allows the user to control the the amount of storage to be dumped when a CEEDUMP is produced. The amount can range from 0 (no storage dumped) to 256 bytes. The number specified will be rounded up to the nearest multiple of 32.

Part 1. Language Environment Run-Time Options

Chapter 1. Language Environment run-time option reference tables and general information

This chapter includes quick reference tables for each of the Language Environment run-time options and information to help you read syntax diagrams and specify the run-time options. The tables list the location of the options and briefly state their function.

For detailed descriptions, refer to their respective chapters in this book.

Quick reference tables for AMODE 31 run-time options

The following tables are a quick reference of the Language Environment run-time options for AMODE 31 applications.

Table 2. Run-Time Options Quick Reference - AMODE 31

Run-Time Options	Function	Page
ABPERC	Percolates a specifiedabend.	11
ABTERMENC	Sets the enclave termination behavior for an enclave ending with an unhandled condition of severity 2 or greater.	12
AIXBLD NOAIXBLD	Invokes the access method services (AMS) for VSAM indexed and relative data sets to complete the file and index definition procedures for COBOL routines.	13
ALL31	Indicates whether an application does or does not run entirely in AMODE(31).	14
ANYHEAP	Controls allocation of library heap storage not restricted to below the 16M line.	16
ARGPARSE	Specifies whether arguments on the command line are to be parsed in the usual C format.	17
AUTOTASK	Specifies whether Fortran Multitasking Facility is to be used by your program and the number of tasks that are allowed to be active.	18
BELOWHEAP	Controls allocation of library heap storage below the 16M line.	19
CBLOPTS	Specifies the format of the argument string on application invocation when the main program is COBOL.	20
CBLPSHPOP	Controls whether CICS PUSH HANDLE and CICS POP HANDLE commands are issued when a COBOL subprogram is called.	20
CBLQDA	Controls COBOL QSAM dynamic allocation.	21
CHECK	Indicates whether “checking errors” within an application should be detected.	22
COUNTRY	Specifies the default formats for date, time, currency symbol, decimal separator, and the thousands separator based on a country.	22
DEBUG NODEBUG	Activates the COBOL batch debugging features specified by the “debugging lines” or the USE FOR DEBUGGING declarative.	24
DEPTHCONDLMT	Limits the extent to which conditions can be nested.	24

Table 2. Run-Time Options Quick Reference - AMODE 31 (continued)

Run-Time Options	Function	Page
DYNDUMP	Provides a way to obtain IPCS readable dumps of user applications that would ordinarily be lost due to the absence of a SYSMDUMP, SYSUDUMP, or SYSABEND DD statement	26
ENV	Specifies the operating system that your C application runs under.	28
ENVAR	Sets the initial values for the environment variables.	29
ERRCOUNT	Specifies how many conditions of severity 2, 3, and 4 can occur per thread before an enclave terminates abnormally.	31
ERRUNIT	Identifies the unit number to which run-time error information is to be directed.	32
EXECOPS	Specifies whether run-time options can be specified on the command line.	32
FILEHIST	FILEHIST specifies whether to allow the file definition of a file referred to by a ddname to be changed during run time.	33
FILETAG	FILETAG ensures control of untagged HFS files and standard streams terminal files when set up for conversion, and for control of certain open functions which tag new or empty HFS files.	34
FLOW NOFLOW	Controls the FLOW output produced by OS/VS COBOL programs.	36
HEAP	Controls allocation of the user heap.	36
HEAPCHK	Specifies that user heap storage can be inspected for damage and request a heap storage diagnostics report.	40
HEAPOOLS	Specifies that (Quick) heap storage manager can be used.	41
INFOMSGFILTER	Allows the user to eliminate unwanted informational messages.	44
INQPCOPN NOINQPCOPN	INQPCOPN controls whether the OPENED specifier on an INQUIRE by unit statement can be used to determine whether a preconnected unit has had any I/O statements directed to it.	45
INTERRUPT	Causes attentions recognized by the host operating system to be recognized by Language Environment.	46
LIBSTACK	Controls the allocation of the thread's library stack storage.	49
MSGFILE	Specifies the <i>ddname</i> of the run-time diagnostics file.	50
MSGQ	Specifies the number of ISI blocks allocated on a per-thread basis during execution.	53
NATLANG	Specifies the national language to use for the run-time environment.	54
OCSTATUS NOOCSTATUS	Controls whether the OPEN and CLOSE status specifiers are verified.	55
PC	Specifies that Fortran static common blocks are not shared among load modules.	56
PLIST	Specifies the format of the invocation arguments received by your C application when it is invoked.	57
PLTASKCOUNT	Controls the maximum number of tasks active at one time while you are running PL/I MTF applications.	58
POSIX	Specifies whether the enclave can run with the POSIX semantics.	59

Table 2. Run-Time Options Quick Reference - AMODE 31 (continued)

Run-Time Options	Function	Page
PROFILE	Controls the use of an optional profiler which collects performance data for the running application.	60
PRTUNIT	Identifies the unit number used for PRINT and WRITE statements that do not specify a unit number.	60
PUNUNIT	Identifies the unit number used for PUNCH statements that do not specify a unit number.	61
RDRUNIT	Identifies the unit number used for READ statements that do not specify a unit number.	61
REDIR	Specifies whether redirections for stdin, stderr, and stdout are allowed from the command line.	62
RECPAD	Specifies whether a formatted input record is padded with blanks.	62
RPTOPTS	Specifies that a report of the run-time options in use by the application be generated.	63
RPTSTG	Specifies that a report of the storage used by the application be generated at the end of execution.	64
RTEREUS NORTEREUS	Initializes the run-time environment to be reusable when the first COBOL program is invoked.	66
SIMVRD NOSIMVRD	Specifies whether your COBOL programs use a VSAM KSDS to simulate variable length relative organization data sets.	67
STACK	Controls the allocation and management of stack storage.	68
STORAGE	Controls the contents of storage that is allocated and freed.	72
TERMTHDACT	Sets the level of information produced due to an unhandled error of severity 2 or greater.	74
TEST NOTEST	Specifies that a debug tool is to be given control according to the suboptions specified.	81
THREADHEAP	Controls the allocation and management of thread-level heap storage.	83
THREADSTACK	Controls the allocation of thread-level stack storage for both the upward and downward-growing stack.	85
TRACE	Determines whether Language Environment run-time library tracing is active.	88
TRAP	Specifies how Language Environment routines handle abends and program interrupts.	90
UPSI	Sets the eight UPSI switches on or off.	92
USRHDLR	Registers user condition handlers.	93
VCTRSVE	Specifies whether any language in an application uses the vector facility when user-written condition handlers are called.	94
XPLINK	Controls the initialization of the XPLINK environment.	95
XUFLOW	Specifies whether an exponent underflow causes a program interrupt.	97

Quick reference tables for AMODE 64 run-time options

The following tables are a quick reference of the Language Environment run-time options for AMODE 64 applications.

Table 3. Run-Time Options Quick Reference - AMODE 64

Run-Time Options	Function	Page
ARGPARSE	Specifies whether arguments on the command line are to be parsed in the usual C format.	17
DYNDUMP	Provides a way to obtain IPCS readable dumps of user applications that would ordinarily be lost due to the absence of a SYSMDUMP, SYSUDUMP, or SYSABEND DD statement.	26
ENVAR	Sets the initial values for the environment variables.	29
EXECOPS	Specifies whether run-time options can be specified on the command line.	32
FILETAG	FILETAG ensures control of untagged HFS files and standard streams terminal files when set up for conversion, and for control of certain open functions which tag new or empty HFS files.	34
HEAP64	Controls allocation of the user heap.	38
HEAPCHK	Specifies that user heap storage can be inspected for damage and request a heap storage diagnostics report.	40
HEAPOOLS64	Specifies that (Quick) heap storage manager can be used.	43
INFOMSGFILTER	Allows the user to eliminate unwanted informational messages.	44
IOHEAP64	Controls allocation of I/O heap storage.	47
LIBHEAP64	Controls allocation of library heap storage.	48
NATLANG	Specifies the national language to use for the run-time environment.	54
POSIX	Specifies whether the enclave can run with the POSIX semantics.	59
PROFILE	Controls the use of an optional profiler which collects performance data for the running application.	60
REDIR	Specifies whether redirections for stdin, stderr, and stdout are allowed from the command line.	62
RPTOPTS	Specifies that a report of the run-time options in use by the application be generated.	63
RPTSTG	Specifies that a report of the storage used by the application be generated at the end of execution.	64
STACK64	Controls the allocation and management of stack storage.	71
STORAGE	Controls the contents of storage that is allocated and freed.	72
TERMTHDACT	Sets the level of information produced due to an unhandled error of severity 2 or greater.	74
TEST NOTEST	Specifies that a debug tool is to be given control according to the suboptions specified.	81
THREADSTACK64	Controls the allocation of thread-level stack storage for both the upward and downward-growing stack.	87
TRACE	Determines whether Language Environment run-time library tracing is active.	88
TRAP	Specifies how Language Environment routines handle abends and program interrupts.	90

How to read syntax diagrams

This section describes how to read syntax diagrams. It defines syntax diagram symbols, items that may be contained within the diagrams (keywords, variables, delimiters, operators, fragment references, operands) and provides syntax examples that contain these items.

Syntax diagrams pictorially display the order and parts (options and arguments) that comprise a command statement. They are read from left to right and from top to bottom, following the main path of the horizontal line.

Symbols

The following symbols may be displayed in syntax diagrams:

Symbol	Definition
▶▶—	Indicates the beginning of the syntax diagram.
—▶	Indicates that the syntax diagram is continued to the next line.
▶—	Indicates that the syntax is continued from the previous line.
—▶▶	Indicates the end of the syntax diagram.

Syntax items

Syntax diagrams contain many different items. Syntax items include:

- Keywords - a command name or any other literal information.
- Variables - variables are italicized, appear in lowercase, and represent the name of values you can supply.
- Delimiters - delimiters indicate the start or end of keywords, variables, or operators. For example, a left parenthesis is a delimiter.
- Operators - operators include add (+), subtract (-), multiply (*), divide (/), equal (=), and other mathematical operations that may need to be performed.
- Fragment references - a part of a syntax diagram, separated from the diagram to show greater detail.
- Separators - a separator separates keywords, variables or operators. For example, a comma (,) is a separator.

Note: If a syntax diagram shows a character that is not alphanumeric (for example, parentheses, periods, commas, equal signs, a blank space), enter the character as part of the syntax.






Keywords, variables, and operators may be displayed as required, optional, or default. Fragments, separators, and delimiters may be displayed as required or optional.

Item type	Definition
Required	Required items are displayed on the main path of the horizontal line.
Optional	Optional items are displayed below the main path of the horizontal line.
Default	Default items are displayed above the main path of the horizontal line.

Syntax examples

The following table provides syntax examples.

Table 4. Syntax examples

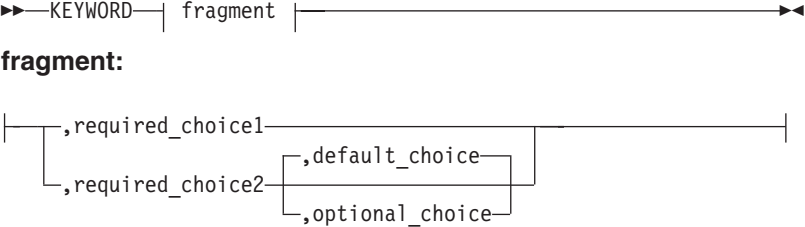Item	Syntax example
Required item.	
Required items appear on the main path of the horizontal line. You must specify these items.	
Required choice.	
A required choice (two or more items) appears in a vertical stack on the main path of the horizontal line. You must choose one of the items in the stack.	
Optional item.	
Optional items appear below the main path of the horizontal line.	
Optional choice.	
An optional choice (two or more items) appears in a vertical stack below the main path of the horizontal line. You may choose one of the items in the stack.	
Default.	
Default items appear above the main path of the horizontal line. The remaining items (required or optional) appear on (required) or below (optional) the main path of the horizontal line. The following example displays a default with optional items.	
Variable.	
Variables appear in lowercase italics. They represent names or values.	
Repeatable item.	
An arrow returning to the left above the main path of the horizontal line indicates an item that can be repeated.	
A character within the arrow means you must separate repeated items with that character.	
An arrow returning to the left above a group of repeatable items indicates that one of the items can be selected, or a single item can be repeated.	
Fragment.	 fragment:
The fragment symbol indicates that a labelled group is described below the main syntax diagram. Syntax is occasionally broken into fragments if the inclusion of the fragment would overly complicate the main syntax diagram.	

How to specify run-time options

When specifying run-time options, use commas to separate any suboptions of those options. If you do not specify a suboption, you must still include the comma to indicate the omission of the suboption. For example: `STACK(, ,ANYWHERE,FREE, ,)`. Trailing commas, however, are not required. `STACK(, ,ANYWHERE,FREE)` is valid. If you do not specify any suboptions, they are ignored. Either of the following is valid: `STACK` or `STACK()`.

If you run applications that are invoked by one of the `exec` family of functions, such as a program executed under the z/OS UNIX System Services shell, you can also use the `_CEE_RUNOPTS` environment variable to specify run-time options.

Refer to *z/OS Language Environment Programming Guide* for a detailed description of the various ways in which you can specify Language Environment run-time options and program arguments, and use `_CEE_RUNOPTS`.

Restriction: The double quotes character (") may not be part of the run-time options string for applications running under Turkish code page 1026. Use the single quote character (') instead.

Propagating run-time options with spawn and exec

When going from AMODE 31 to AMODE 64 and back through the `spawn` or `exec` functions, Language Environment rebuilds the `_CEE_RUNOPTS` environment variable as a way to propagate run-time options to the new program. In the situations where AMODE 31 specific options or AMODE 64 specific options would be passed across to the other mode, Language Environment ignores these options. No messages are issued. For example, when the `STACK` option is sent across from AMODE 31 to AMODE 64, it is ignored. This is because the AMODE 64 application uses the `STACK64` option. No attempt to convert the AMODE 31 option to the new AMODE 64 option is performed.

Using the CEEOPTS DD statement

Language Environment allows you to provide additional invocation-level run-time options using the `CEEOPTS DD` statement. The `CEEOPTS DD` can refer to an in-stream data set, regular sequential data set, or a member of a regular or extended partitioned data set. If specified, the data set must be available during initialization of the enclave so the options can be merged.

To specify the `CEEOPTS DD` statement, use the following syntax:

- For in-stream JCL:

```
//CEEOPTS DD *  
ALL31(OFF),STACK(, ,BELOW)
```
- For a sequential data set:

```
//CEEOPTS DD DSN=MY.CEEOPTS.DATASET,DISP=SHR
```
- For a partitioned data set:

```
//CEEOPTS DD DSN=MY.CEEOPTS.DATASET(MYOPTS),  
// DISP=SHR
```
- To ignore the DD statement:

```
//CEEOPTS DD DUMMY
```

Restrictions:

1. The CEEOPTS DD supports only DASD data sets that can be read with QSAM. An informational message is issued when an unsupported data set type is used.
2. Only the first 3K (excluding comment lines) of the CEEOPTS file are read. All other information is ignored.
3. The file must be in fixed-block or fixed format. Variable block format is not supported.
4. The CEEOPTS DD is ignored under CICS, LRR, SPC, and for an exec()ed program.

The syntax of the run-time options within the CEEOPTS DD statement is similar to the syntax used on the JCL PARM= parameter or under TSO.

- Each record in the CEEOPTS DD is concatenated to form one options string. No implicit space is added between lines.
- Options must be separated by commas or blanks and can span multiple lines.
- A trailing slash (/) is not valid to denote the end of the options string.
- Input lines that begin with an asterisk (*) in column 1 are treated as comments and ignored.
- The last 8 columns of each record are treated as sequential information and ignored.

Following is a sample of the syntax:

```
***** **** TOP OF FILE ***
000001 * This line is a comment
000002 ALL31(OFF),STACK(,BELOW)
000003 TRAP(ON,
000004   NOSPIE
000005 * This line is a comment within an option
000006 ),TERMTHDACT(
000007 UAIMM,
000008 CICSDDS,96)
***** *** END OF DATA ***
```

Usage Notes

- The Language Environment run-time options report identifies the options merged from the CEEOPTS DD source by using DD:CEE0PTS as an indicator. For an example of the options report, see *z/OS Language Environment Debugging Guide*.
- An option may be repeated in a parmlib member or can appear in multiple members when more than one member is specified. The last occurrence of the option is identified as the options source in the option report.
- Changing the system level default run-time options with the SET CEE or SETCEE command does not affect any currently initialized environments on the system. When applications go through Language Environment initialization, the new run-time option values are used for that application.

Chapter 2. Using the Language Environment run-time options

This chapter describes the Language Environment run-time options, their syntax, and their usage.

IBM-supplied default keywords appear **above** the main path or options path in the syntax diagrams. In the parameter list, IBM-supplied default choices are underlined. The minimum unambiguous abbreviation of each Language Environment option is also indicated in its syntax diagram with capital letters (for example, ABPerc indicates that ABP is the minimum abbreviation).

ABPERC

Derivation

ABnormal PERColation

ABPERC percolates an abend whose code you specify. This provides Language Environment condition handling semantics for all abends except the one specified.

Restriction: TRAP(ON) must be in effect for ABPERC to have an effect.

When you run with ABPERC and encounter the specified abend:

- User condition handlers are not enabled.
- Under z/OS UNIX, POSIX signal handling semantics are not enabled for the abend.
- No storage report or run-time options report is generated.
- No Language Environment messages or Language Environment formatted dump output is generated.
- The assembler user exit is not driven for enclave termination.
- The abnormal termination exit, if there is one, is not driven.
- Files opened by HLLs are not closed by Language Environment, so records might be lost.
- Resources acquired by Language Environment are not freed.
- A debugging tool, if one is active, is not notified of the error.

Tip: You can also use the CEEBXITA assembler user exit to specify a list of abend codes for Language Environment to percolate. For more information about CEEBXITA, see *z/OS Language Environment Programming Guide*

Non-CICS default: ABPERC(NONE)

CICS default: ABPERC is ignored under CICS.

ABPERC

Syntax

►► ABPerc (NONE
abcode) ►►

NONE Specifies that all abends are handled according to Language Environment condition handling semantics.

abcode

Specifies the abend code to percolate. The *abcode* can be specified as:

Shhh A system abend code, where *hhh* is the hex system abend code

Udddd A user abend code, where *dddd* is a decimal user abend code. Any 4-character string can also be used as *dddd*.

z/OS UNIX consideration

- ABPERC percolates an abend regardless of the thread in which it occurs.

Usage notes

- Language Environment ignores ABPERC(S0Cx). In this instance, no abend is percolated, and Language Environment condition handling semantics are in effect.
- You can identify only one abend code with this option. However, an abend U0000 is interpreted in the same way as S000.

ABTERMENC

Derivation

ABnormal TERmination of the ENClave

ABTERMENC sets the enclave termination behavior for an enclave ending with an unhandled condition of severity 2 or greater.

Restriction: TRAP(ON) must be in effect for ABTERMENC to have an effect.

Non-CICS default: ABTERMENC(ABEND)

CICS default: ABTERMENC(ABEND)

Syntax

►► ABTermenc (ABEND
RETcode) ►►

ABEND

When an unhandled condition of severity 2 or greater is encountered, Language Environment issues an abend to end the enclave.

Default abend processing occurs as follows:

- Language Environment sets an abend code value that depends on the type of unhandled condition.
- Language Environment sets a reason code value that depends on the type of unhandled condition.
- Language Environment does not request a system dump.
- Language Environment issues an abend to terminate the task.

RETCODE

When an unhandled condition of severity 2 or greater is encountered, Language Environment issues a return code and reason code to end the enclave.

z/OS UNIX consideration

- In a multithreaded application with ABTERMENC(ABEND), Language Environment issues an abend on the task associated with the initial processing thread (IPT), regardless of which thread experienced the unhandled condition. All non-IPT threads are terminated normally. This means that the thread that encountered the unhandled condition is terminated normally if it is a non-IPT thread.

Usage notes

- You can use the assembler user exit, CEEAUE_ABND, to modify the behavior of this run-time option by setting the CEEAUE_ABND flag. See *z/OS Language Environment Programming Guide* for more information.
- To gather information about the unhandled condition, see “TERMTHDACT” on page 74.

For more information

- For information about return code calculation and abend codes, see *z/OS Language Environment Programming Guide*.

AIXBLD (COBOL Only)

Derivation


Alternate IndeX BuiLD

AIXBLD invokes the access method services (AMS) for VSAM indexed and relative data sets (KSDS and RRDS) to complete the file and index definition procedures for COBOL programs.

AIXBLD conforms to the ANSI 1985 COBOL standard.

Non-CICS default: NOAIXBLD

CICS default: AIXBLD is ignored under CICS.

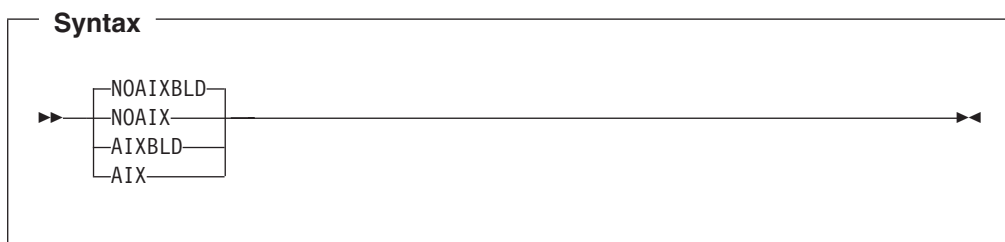**NOAIXBLD|NOAIX**

Does not invoke the access method services for VSAM indexed and relative data sets. NOAIXBLD can be abbreviated NOAIX.

AIXBLD|AIX

Invokes the access method services for VSAM indexed and relative data sets. AIXBLD can be abbreviated AIX.

z/OS UNIX consideration

- If you also specify the MSGFILE run-time option, the access method services messages are directed to the MSGFILE *ddname* or to the default SYSOUT.

Performance consideration

Running your program under AIXBLD requires more storage, which can degrade performance. Therefore, use AIXBLD only during application development to build alternate indices. Use NOAIXBLD when you have already defined your VSAM data sets.

For more information

- See *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide* for more details.
- See “MSGFILE” on page 50 for information about the MSGFILE run-time option.

ALL31**Derivation**

ALL AMODE 31

ALL31 specifies whether an application can run entirely in AMODE 31 or whether the application has one or more AMODE 24 routines.

Guideline: ALL31 should have the same setting for all enclaves in a process. Language Environment does not support the invocation of a nested enclave requiring ALL31(OFF) from an enclave running with ALL31(ON) in non-CICS environments.

Non-CICS default: ALL31(ON)

CICS default: ALL31(ON)

Syntax**ON**

If the initial routine of the Language Environment application is AMODE 31, this setting indicates that no other routines in the application will be AMODE 24.

If the initial routine of the Language Environment application is AMODE 24, ALL31 is dynamically switched to OFF.

When ALL31(ON) remains in effect:

- AMODE switching across calls to Language Environment common run-time routines is minimized. For example, no AMODE switching is performed on calls to Language Environment callable services.
- Language Environment allocates storage for the common anchor area (CAA) and other control blocks in unrestricted storage.
- COBOL EXTERNAL data is allocated in unrestricted storage.

OFF

Indicates that one or more routines of a Language Environment application are AMODE 24.

When ALL31(OFF) is in effect:

- Language Environment uses more storage below the 16M line.
- AMODE switching across calls to Language Environment common run-time routines is performed. For example, AMODE switching is performed on calls to Language Environment callable services.
- Language Environment allocates storage for the common anchor area (CAA) and other control blocks in storage below the 16M line.
- COBOL EXTERNAL data is allocated in storage below the 16M line.

Restriction: If you use the default setting ALL31(ON), you must also use the setting STACK(„BELOW,,“). AMODE 24 routines require stack storage below the 16M line.

z/OS UNIX considerations

- In a multithreaded environment, the ALL31 option applies to all threads in a process.
- In a multithreaded environment, the thread start routine specified in the C pthread_create() function call is invoked in AMODE 31.

Usage notes

- **Restrictions:** You must specify ALL31(OFF) if your COBOL applications contain one of the following programs:
 - VS COBOL II NORES
 - OS/VS COBOL (non-CICS)
 - If the Language Environment environment was initialized using ILBOSTP0
- PL/I considerations— For PL/I MTF applications, Language Environment provides AMODE switching. Therefore, the first routine of a task can be in AMODE 24.

- Fortran considerations—Use ALL31(ON) if all of the compile units in the enclave have been compiled with VS FORTRAN Version 1 or Version 2 and there are no requirements for 24-bit addressing mode. Otherwise, use ALL31(OFF).
- XPLINK considerations—When an application is running in an XPLINK environment (that is, either the XPLINK(ON) run-time option was specified, or the initial program contained at least one XPLINK compiled part), the ALL31 run-time option is forced to ON. No AMODE 24 routines are allowed in an enclave that uses XPLINK. No message is issued to indicate this action. If a Language Environment run-time options report is generated using the RPTOPTS run-time option, the ALL31 option is reported as "Override" under the LAST WHERE SET column.
- **Guideline:** ALL31 should have the same setting for all enclaves in a process. Language Environment does not support the invocation of a nested enclave requiring ALL31(OFF) from an enclave running with ALL31(ON) in non-CICS environments.

Performance Consideration

If your application consists entirely of AMODE 31 routines, it will run faster and use less below-the-line storage with ALL31(ON) than with ALL31(OFF).

For More Information


- See "STACK" on page 68 for information about the STACK run-time option.
- See "XPLINK" on page 95 for information about the XPLINK run-time option.

ANYHEAP

The ANYHEAP run-time option controls the allocation of unrestricted library heap storage (anywhere heap). Storage that is unrestricted can be located anywhere in 31-bit addressable storage.

Non-CICS default: ANYHEAP(16K,8K,ANYWHERE,FREE)

CICS default: ANYHEAP(4K,4080,ANYWHERE,FREE)

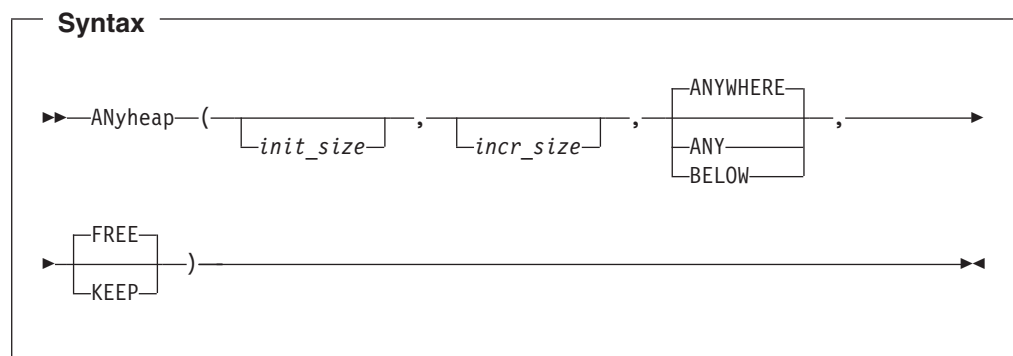

init_size

Determines the initial size of the anywhere heap. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr_size

Determines the minimum size of any subsequent increment to the

anywhere heap This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

ANYWHERE|ANY

Specifies that anywhere heap can be allocated anywhere in 31-bit addressable storage. If there is no storage available above the 16M line, storage is acquired below the 16 MB line.

BELOW

Specifies that anywhere heap is allocated below the 16M line.

FREE

Specifies that an anywhere heap increment is released when the last of the storage within that increment is freed.

KEEP

Specifies that an anywhere heap increment is **not** released when the last of the storage within that increment is freed.

CICS considerations

- If ANYHEAP(0) is specified, the initial anywhere heap segment is obtained on the first use and will be based on the increment size.
- The maximum initial and increment size for the anywhere heap is 1 gigabyte (1024M).
- The default increment size is 4080 bytes, rather than 4096 bytes, to accommodate the 16 byte CICS storage check zone. Without this accommodation, an extra page of storage is allocated (only when the storage allocation is below the 16 MB line). If you choose to change the increment size, it is recommended that you adjust for the 16 byte CICS storage check zone.

z/OS UNIX considerations

- In a multithreaded environment, the anywhere heap is shared by all threads in the process.
- When ALL31(ON) is in effect, Language Environment allocates thread-specific control blocks from the anywhere heap.

Performance consideration

You can improve performance with the ANYHEAP run-time option by specifying values that minimize the number of times the operating system allocates storage. See “RPTSTG” on page 64 for information on how to generate a report you can use to determine the optimum values for the ANYHEAP run-time option.

For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.

ARGPARSE | NOARGPARSE (C only)

Derivation

ARGument PARSE

ARGPARSE | NOARGPARSE

ARGPARSE specifies whether command line arguments to a C/C++ program are to be parsed. This option does not apply to non-C/C++ languages and can be specified with the `#pragma runopts` directive or the ARGPARSE or NOARGPARSE compiler option.

Restriction: You cannot set ARGPARSE during Language Environment installation.

Non-CICS default: ARGPARSE

CICS default: ARGPARSE is ignored under CICS.

AMODE 64 default: ARGPARSE

Syntax

The diagram shows a horizontal line with a double arrow at the right end. A bracket on the left side of the line groups two options: ARGPARSE and NOARGPARSE. The line continues to the right after the bracket.

ARGPARSE

Specifies that arguments given on the command line are to be parsed and given to the `main()` function in the usual C argument format (`argv`, and `argc`).

NOARGPARSE

Specifies that arguments given on the command line are not parsed but are passed to the `main()` function as one string. Therefore, `argc` has a value of 2, and `argv[1]` contains a pointer to the command line string.

Usage notes

- You must specify ARGPARSE for the REDIR run-time option to have an effect.

For more information

- See “REDIR | NOREDIR (C Only)” on page 62 for a description of REDIR.

AUTOTASK | NOAUTOTASK (Fortran only)

AUTOTASK specifies whether Fortran multitasking facility (MTF) is to be used by your program and the number of tasks that are allowed to be active.

Non-CICS default: NOAUTOTASK

CICS default: AUTOTASK is ignored under CICS.

Syntax

The diagram shows a horizontal line with a double arrow at the right end. A bracket on the left side of the line groups two options: NOAUTOTask and AUTOTask. Below the AUTOTask option, there is a sub-bracket containing the text `(—loadmod—,—numtasks—)`. The line continues to the right after the main bracket.

NOAUTOTASK

Disables the MTF and nullifies the effects of previous specifications of AUTOTASK parameters.

loadmod

The name of the load module that contains the concurrent subroutines that run in the subtasks created by MTF.

numtasks

The number of subtasks created by MTF. This value can range from 1 through 99.

BELOWHEAP

The BELOWHEAP run-time option controls the allocation of restricted library heap storage (below heap). Storage that is restricted must be located below the 16M line (24-bit addressable storage).

Non-CICS default: BELOWHEAP(8K,4K,FREE)

CICS default: BELOWHEAP(4K,4080,FREE)

Syntax

```

  ──▶ BELOWHEAP ( [init_size] , [incr_size] , [FREE/KEEP] ) ──▶
  
```

init_size

Determines the minimum initial size of the below heap storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr_size

Determines the minimum size of any subsequent increment to the area below the 16M line, and is specified in *n*, *nK*, or *nM* bytes of storage. This value is rounded up to the nearest multiple of 8 bytes.

FREE Specifies that storage allocated to BELOWHEAP increments is released when the last of the storage is freed.

KEEP Specifies that storage allocated to BELOWHEAP increments is **not** released when the last of the storage within that increment is freed.

CICS consideration

- The default increment size is 4080 bytes, rather than 4096 bytes, to accommodate the 16 byte CICS storage check zone. Without this accommodation, an extra page of storage is allocated (only when the storage allocation is below the 16 MB line). If you choose to change the increment size, it is recommended that you adjust for the 16 byte CICS storage check zone.

z/OS UNIX considerations

- In a multithreaded environment, the below heap is shared by all threads in the process.

BELOWHEAP

- When ALL31(OFF) is in effect, Language Environment allocates thread-specific control blocks from the below heap.

Usage notes

- If BELOWHEAP(0) is specified, the initial below heap segment is obtained on the first use and is based on the increment size.

Performance consideration

You can improve performance with the BELOWHEAP run-time option by specifying values that minimize the number of times the operating system allocates storage. See “RPTSTG” on page 64 for information on how to generate a report you can use to determine the optimum values for the BELOWHEAP run-time option.

For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.

CBLOPTS (COBOL only)

Derivation <u>CO</u> <u>BOL</u> <u>OPT</u> <u>ION</u> <u>S</u>

CBLOPTS specifies the format of the parameter string on application invocation when the main program is COBOL. CBLOPTS determines whether run-time options or program arguments appear first in the parameter string.

Since you can specify this option only in CEEUOPT, CEEROPT or CEEDOPT at initialization, see *z/OS Language Environment Customization* for details.

CBLPSHPOP (COBOL only)

Derivation <u>CO</u> <u>BOL</u> <u>PUSH</u> <u>POP</u>

CBLPSHPOP controls whether CICS PUSH HANDLE and CICS POP HANDLE commands are issued when a COBOL subroutine is called.

CBLPSHPOP is ignored in non-CICS environments.

Tip: Specify CBLPSHPOP(ON) to avoid compatibility problems when calling COBOL subroutines that contain CICS CONDITION, AID, or ABEND condition handling commands.

You can set the CBLPSHPOP run-time option on an enclave basis using CEEUOPT.

Non-CICS default: CBLPSHPOP is ignored.

CICS default: CBLPSHPOP(ON)

Syntax

```

  >> CBLPshpop ( [ ON ] [ OFF ] ) ----->>
  
```

- ON** Automatically issues the following when a COBOL subroutine is called:
- An EXEC CICS PUSH HANDLE command as part of the routine initialization.
 - An EXEC CICS POP HANDLE command as part of the routine termination.
- OFF** Does not issue CICS PUSH HANDLE and CICS POP HANDLE commands on a call to a COBOL subroutine.

Performance consideration

- If your application calls COBOL subroutines under CICS, performance is better with CBLPSHPOP(OFF) than with CBLPSHPOP(ON).

For more information

- For more information about CEEUOPT, see *z/OS Language Environment Customization*.
- To determine where to locate information about CICS commands, see *CICS Master Index*.

CBLQDA (COBOL only)**Derivation**

COBOL_QSAM_Dynamic_Allocation

CBLQDA controls COBOL QSAM dynamic allocation on an OPEN statement.

Non-CICS default: CBLQDA(OFF)

CICS default: CBLQDA is ignored under CICS.

Syntax

```

  >> CBLQda ( [ OFF ] [ ON ] ) ----->>
  
```

- OFF** Specifies that COBOL QSAM dynamic allocation is not permitted.
- ON** Specifies that COBOL QSAM dynamic allocation is permitted. ON conforms to the 1985 COBOL standard.

Usage notes


- CBLQDA(OFF) is the recommended default because it prevents a temporary data set from being created in case there is a misspelling in your JCL. If you specify CBLQDA(ON) and have a misspelling in your JCL, Language Environment creates a temporary file, writes to it, and then z/OS deletes it. You receive a return code of 0, but no output.
- CBLQDA does not affect dynamic allocation for the message file specified in MSGFILE or the Language Environment formatted dump file (CEEDUMP) .

CHECK (COBOL only)

If your COBOL application has been compiled with the SSRANGE compile option, specifying the CHECK(ON) run-time option enables range checking of each index, subscript, and reference modification.

Non-CICS default: CHECK(ON)

CICS default: CHECK(ON)

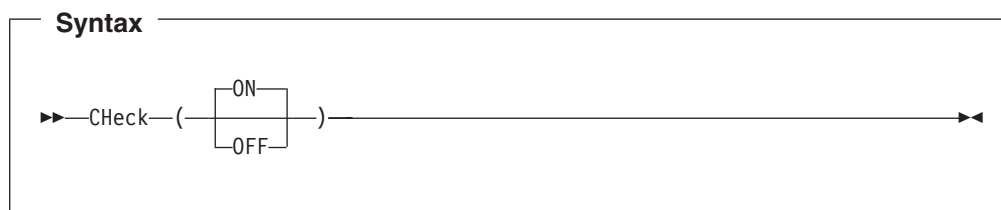

ON Specifies that run-time range checking is performed.

OFF Specifies that run-time range checking is not performed.

Usage notes

- CHECK(ON) has no effect if the NOSSRANGE COBOL compile option was specified.

Performance consideration

If your COBOL program was compiled with the SSRANGE compile option, and you are not testing or debugging an application, performance improves when you specify CHECK(OFF).

COUNTRY

Specifying a country_code with the COUNTRY run-time option determines:

- date and time formats
- the currency symbol
- the decimal separator
- the thousands separator

COUNTRY affects only the Language Environment NLS services, not the Language Environment locale callable services.

Tip: You can set the country value using the COUNTRY run-time option or the CEE3CTY callable service.

Non-CICS default: COUNTRY(US)

CICS default: COUNTRY(US)

Syntax

```
COUNTRY( country_code )
```

country_code

A 2-character code that indicates to Language Environment the country on which to base the default settings. Table 28 on page 547 contains a list of valid country codes.

Usage notes

- If you specify an unsupported *country_code*, Language Environment accepts the value and issues an informational message.

If an unsupported *country_code* is specified on the COUNTRY run-time option and one of the services listed in “National Language Support callable services” on page 105 is called with the optional *country_code* parameter omitted, the called service returns its specified default value.

- Language Environment provides locales used in C and C++ to establish default formats for the locale-sensitive functions and locale callable services, such as date and time formatting, sorting, and currency symbols. The COUNTRY setting does not affect these locale-sensitive functions and locale callable services.

To change the locale, you can use the `setlocale()` library function or the CEESETL callable service. These affect only C/C++ locale-sensitive functions and Language Environment locale callable services, not the COUNTRY run-time option.

To ensure that all settings are correct for your country, use COUNTRY and either CEESETL or `setlocale()`.

The settings of CEESETL or `setlocale()` do not affect the setting of the COUNTRY run-time option. COUNTRY affects only Language Environment NLS and date and time services. `setlocale()` and CEESETL affect only C/C++ locale-sensitive functions and Language Environment locale callable services.

- The COUNTRY setting affects the format of the date and time in the reports generated by the RPTOPTS and RPTSTG run-time options

For more information


- For more information about the CEE3CTY callable service, see “CEE3CTY—Set default country” on page 131.
- For more information about the RPTOPTS run-time option, see “RPTOPTS” on page 63.
- For more information about the RPTSTG run-time option, see “RPTSTG” on page 64.
- For a list of countries and their codes, see Appendix A, “IBM-supplied country code defaults,” on page 547.
- For more information about the CEESETL callable service, see “CEESETL—Set locale operating environment” on page 475.
- For more information on `setlocale()`, see *z/OS XL C/C++ Programming Guide*.

DEBUG (COBOL only)

DEBUG activates the COBOL batch debugging features specified by the USE FOR DEBUGGING declarative.

Non-CICS default: NODEBUG

CICS default: NODEBUG

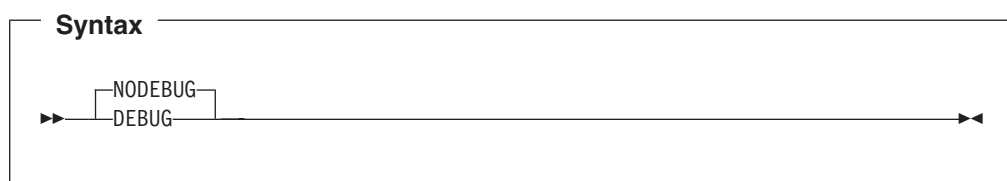

NODEBUG

Suppresses the COBOL batch debugging features.

DEBUG

Activates the COBOL batch debugging features.

You must have the WITH DEBUGGING MODE clause in the environment division of your application in order to compile the debugging sections.

Usage notes

- For information on specifying this option in CEEDOPT (CEEEOPT), CEEROPT or CEEUOPT, see *z/OS Language Environment Customization*. Use DEBUG and NODEBUG only on the command line.

Performance consideration

Because DEBUG gives worse run-time performance than NODEBUG, you should use it only during application development or debugging.

For more information

- See *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide* for more details on the USE FOR DEBUGGING declarative.

DEPTHCONDLMT

Derivation

DEPTH of nested CONDition LiMiT

DEPTHCONDLMT specifies the extent to which conditions can be nested. Figure 1 on page 25 illustrates the effect of DEPTHCONDLMT(3) on condition handling. The initial condition and two nested conditions are handled in this example. The third nested condition is not handled.

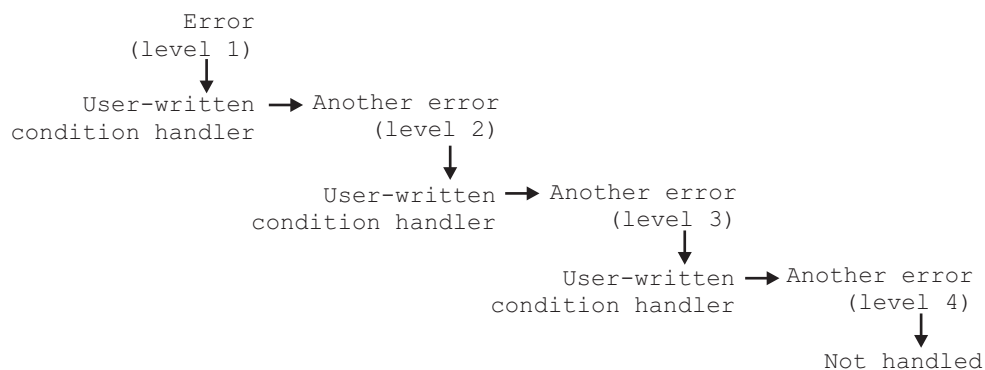


Figure 1. Effect of DEPTHCONDLMT(3) on Condition Handling

Non-CICS default: DEPTHCONDLMT(10)

CICS default: DEPTHCONDLMT(10)

Syntax

```

  ►► DEPTHCONDLMT ( limit ) ►►

```

limit An integer of 0 or greater value. It is the depth of condition handling allowed. An unlimited depth of condition handling is allowed if you specify 0.

A limit value of 1 specifies handling of the initial condition, but does not allow handling of nested conditions that occur while handling a condition. With a limit value of 5, for example, the initial condition and four nested conditions are processed. In this case there can be no further nesting of conditions.

If the number of nested conditions exceeds the limit, the application ends with abend 4087.

z/OS UNIX consideration

- The DEPTHCONDLMT option sets the limit for how many nested synchronous conditions are allowed for a thread. Asynchronous signals do not affect DEPTHCONDLMT.

Usage notes

- PL/I consideration—DEPTHCONDLMT(0) provides PL/I compatibility.
- PL/I MTF consideration—In a PL/I MTF application, DEPTHCONDLMT sets the limit for how many nested synchronous conditions are allowed for a PL/I task. If the number of nested conditions exceeds the limit, the application ends abnormally.

For more information

- For more information on nested conditions, see *z/OS Language Environment Programming Guide*.

DYNDUMP

Derivation

DYNamic Dump

The DYNDUMP run-time option provides a way to obtain dynamic dumps of user applications that would ordinarily be lost due to the absence of a SYSMDUMP, SYSUDUMP, or SYSABEND DD statement.

The dynamic dump is written when:

- Certain types of ABENDs occur. You can select whether a U4039 ABEND or other U40xx ABEND types can cause a dump to be collected.
- The first suboption defines the high level qualifier of the dynamic dump data set name.
- The second suboption controls when dynamic dumps are taken for U4039 ABENDS.
- The third suboption controls when dynamic dumps are taken for other U40xx ABENDS.


Restriction: The dump is written to a z/OS data set. It cannot be part of a z/OS UNIX file system.

Non-CICS Default: DYNDUMP(*userid,NODYNAMIC,TDUMP)

CICS default: DYNDUMP is ignored.

AMODE 64 default: DYNDUMP=(*USERID,NODYNAMIC,TDUMP)

Syntax



hlq

is a high level qualifier for the dynamic dump data set to be created. This is concatenated with a time stamp consisting of the Julian day and the time of the dump. The job name or PID can also be part of the name if the combined length of *hlq* and the time stamp is 35 characters or less.

hlq is limited to 26 characters including dot (.) separators.

hlq allows two keywords:

*USERID

tells Language Environment to use the user ID associated with the job step task as the high level qualifier for the dynamic dump data set.

*TSOPREFIX

tells Language Environment to use the TSO/E prefix.

Restriction: The prefix is only valid in a TSO/E environment. If the prefix is not available, the user ID is used.

The data set name is limited to 44 characters. If the combined length of *hlq* and the time stamp is 35 characters or less, the job name or PID is added to the data set name.

If the system is using multilevel security, the SECLABEL is used as the second qualifier. If *hlq* contains multiple qualifiers, only the first is used, followed by the SECLABEL. The format of the data set name is:

- When the application is not exec()ed and not multilevel security:

`hlq.Djjj.Thhmsst.jobname`

- When the application is exec()ed and not multilevel security:

`hlq.Djjj.Thhmsst.Ppppppp`

- When the application is multilevel security and not exec()ed:

`hlq.MLS-level.Djjj.Thhmsst.jobname`

- When the application is both multilevel security and exec()ed:

`hlq.MLS-level.Djjj.Thhmsst.Ppppppp`

For U4039 ABENDS

The following suboptions are used for U4039 ABENDS only:

DYNAMIC

Language Environment creates a dynamic dump automatically when the application has not already specified one of the dump ddnames, (for example, SYSUDUMP).

NODYNAMIC

Language Environment does not create a dynamic dump if no dump DD names are specified.

FORCE

Language Environment always creates a dynamic dump even if other dump DD names have been specified. The SYSnnnnn DD card is ignored if it exists. FORCE should not be used as the default.

BOTH

Language Environment creates a dynamic dump and, if a SYSnnnnn DD name exists, a dump is also written to the DD. BOTH should not be used as the default.

For U40xx ABENDS

The following suboptions are used for other U40xx ABENDS only. Existing SYSnnnnn DD statements are also honored.

TDUMP

Language Environment creates a dynamic dump automatically.

NOTDUMP

Language Environment does not create a dynamic dump.

Usage Notes

• **Recommendations:**

- Set up an *hlq* to which everyone can write.
- Do not use FORCE or BOTH as the default for the U4039 ABENDS.
- The DYNDUMP run-time option is ignored under CICS.
- When an ABEND occurs during Language Environment initialization, the dynamic dump is not created if run-time options have not been processed yet.

DYNDUMP

- When the dynamic dump fails, messages are written to the operator's console or the job log (for batch). These are written by the IEATDUMP system service, by Language Environment, or by RACF.
- When an ABEND has been issued with the NODUMP option, no dump is created.
- The job name is taken from the &JOBNAME system symbol.
 - A dump for a TSO application uses the user ID of the &JOBNAME.
 - For a batch job, &JOBNAME is taken from the JOB card in the JCL.
 - In the shell, &JOBNAME is the user ID with a suffix.

Examples

- DYNDUMP(smith, force, notdump)
A dynamic dump is generated only for ABEND code U4039. Other SYSnnnnn DD cards are ignored. Other ABENDs might cause a dump to be created if a SYSnnnnn DD card exists. The dynamic dump data set name will be similar to SMITH.D050412.T112245.JOB11.
- DYNDUMP(smith,DYNAMIC,TDUMP)
A dynamic dump is created if no SYSnnnnn is specified and the ABEND code is U4039. The data set name will be similar to SMITH.D051231.T235900.JOBZ2.
- DYNDUMP(*TSOPREFIX,NODYNAMIC,TDUMP)
A dynamic dump is generated only for ABEND code U40xx. The data set name will be similar to *TSOPREFIX.D051214.T234560.JOBZ2.
- DYNDUMP(*USERID,NODYNAMIC,TDUMP)
A dynamic dump for a U4039 ABEND is taken to smith.D051214.T234512.JOBZ3.

ENV (C only)

Derivation <u>ENV</u> ironment

ENV specifies the operating system for your C application. z/OS XL C++ users can get the same behavior by using the z/OS XL C++ compiler option TARGET(IMS) to specify ENV(IMS).

Restriction: This option does not apply to non-C languages and can be specified only with the C #pragma runopts directive. You cannot set ENV during Language Environment installation.

Non-CICS default: The ENV option differs from other run-time options in that it does not have a standard default. The default depends on the system (CMS, IMS, or MVS) in which compilation occurs.

CICS default: ENV is ignored under CICS.

Syntax

CMS Specifies that the C application runs in a CMS environment.

IMS Specifies that the C application runs in an IMS environment.

Tip: You do not need to specify the ENV option if your application is invoked under IMS but does not actually use IMS facilities.

MVS Specifies that the C application runs in an MVS environment.

z/OS UNIX consideration

- In a multithreaded environment, the ENV option is shared by all threads in the process.

ENVAR

Derivation

ENvironmental VARiables

ENVAR sets the initial values for the environment variables that can later be accessed or changed using the C functions `getenv()`, `putenv`, `setenv`, and `clearenv`.

The set of environment variables established by the end of run-time option processing reflects all the various sources where environment variables are specified, rather than just the one source with the highest precedence. However, if a setting for the same environment variable is specified in more than one source, the setting with the highest precedence is used.

The `system()` function can be used to create a new environment. Environment variables in effect at the time of the POSIX `system()` call are copied to the new environment. The copied environment variables are treated the same as those found in the ENVAR run-time option on the command level.


When you specify the RPTOPTS run-time option, the output for the ENVAR run-time option contains a separate entry for each source where ENVAR was specified with the environment variables from that source.

Non-CICS default: `ENVAR("")`

CICS default: `ENVAR("")`

AMODE 64 default: `ENVAR("")`

Syntax

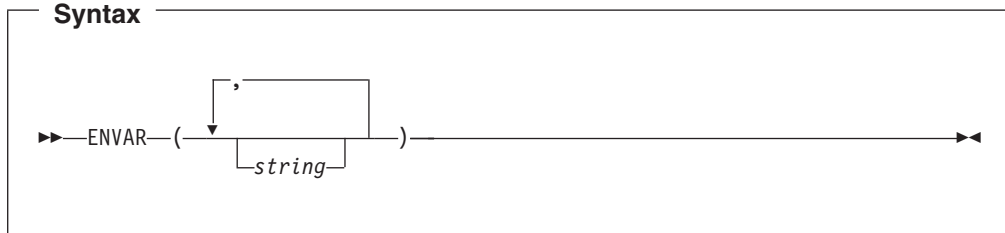

string Is specified as *name=value*, where *name* and *value* are sequences of characters that do not contain null bytes or equal signs. The string *name* is an environment variable, and *value* is its value.

Blanks are significant in both the *name=* and the *value* characters.

You can enclose *string* in either single or double quotation marks to distinguish it from other strings.

You can specify multiple environment variables, separating the *name=value* pairs with commas. Quotation marks are required when specifying multiple variables.

z/OS UNIX consideration

- In a multithreaded environment, the environment variables are shared by all threads in the process.

Usage notes

- **Restrictions:**
 - The entire value of the ENVAR operand, whether a single string or multiple strings, cannot exceed 250 characters.
 - *string* cannot contain DBCS characters.
 - If ENVAR is specified as part of the _CEE_RUNOPTS environment variable, it is ignored.
 - The ENVAR option functions independently of the POSIX run-time option setting.
 - C/C++ consideration—An application can access the environment variables using C function `getenv()` or the POSIX variable *environ*, which is defined as:

```
extern char **environ;
```

Guideline: You should access environment variables through the `getenv()` function, especially in a multithread environment. `getenv()` serializes access to the environment variables.

Environment variables that are passed to the `exec` or `spawn` family of functions replace those established by the ENVAR option in the new environment.

For more information

- For more information about the RPTOPTS run-time option, see “RPTOPTS” on page 63.
- For more information on `getenv()`, `putenv()`, `setenv()`, `clearenv()`, `system()`, and the `exec` and `spawn` family of functions, see *z/OS XL C/C++ Run-Time Library Reference*.

- For more information on the order of precedence of run-time option sources, see *z/OS Language Environment Customization*.

ERRCOUNT

Derivation

ERRor COUNTER

ERRCOUNT specifies how many conditions of severity 2, 3, or 4 can occur per thread before the enclave terminates abnormally. When the number specified in ERRCOUNT is exceeded, Language Environment ends with ABEND U4091 RC=B.

Non-CICS default: ERRCOUNT(0)

CICS default: ERRCOUNT(0)

Syntax

►►ERRcount—(—number—)——►►

number

An integer of 0 or greater value that specifies the number of severity 2, 3, and 4 conditions allowed for each thread. An unlimited number of conditions is allowed if you specify 0. If the number of conditions exceeds the limit, the application ends with abend 4091 RC=B.

z/OS UNIX consideration

- Synchronous signals that are associated with a condition of severity 2, 3, or 4 affect ERRCOUNT. Asynchronous signals do not affect ERRCOUNT.

Usage notes

- Language Environment does not count severity 0 or 1 conditions toward ERRCOUNT.
- ERRCOUNT only applies when conditions are handled by a user condition handler, signal catcher, PL/I on-unit, or a language-specific condition handler. Any unhandled condition of severity 2, 3, or 4 causes the enclave to terminate.
- COBOL consideration—The COBOL run-time library separately counts its severity 1 (warning) messages. When the limit of 256 IGZnnnnW messages is reached, the COBOL run-time library will issue message IGZ0041W, which indicates that the limit of warning messages has been reached. Any further COBOL warning messages are suppressed and processing continues.
- PL/I consideration—You should use ERRCOUNT(0) in a PL/I environment to avoid unexpected termination of your application. Some conditions, such as ENDPAGE, can occur many times in an application application.
- PL/I MTF consideration—In a PL/I MTF application, ERRCOUNT sets the threshold for the total number severity 2, 3, and 4 synchronous conditions that can occur for each task.
- C++ consideration—C++ throw does not affect ERRCOUNT.

ERRCOUNT

For more information

- For more information in condition handling, see the *z/OS Language Environment Programming Guide*.

ERRUNIT (Fortran only)

Derivation

ERRor UNIT

ERRUNIT identifies the unit number to which run-time error information is to be directed. This option is provided for compatibility with the VS Fortran version 2 runtime.

Non-CICS default: ERRUNIT(6)

CICS default: ERRUNIT is ignored under CICS.

Syntax

►►ERRUnit—(number)◄◄

number

A number in the range 0-99.

Usage notes

- The Language Environment message file and the file connected to the Fortran error message unit are the same.

EXECOPS | NOEXECOPS (C only)

EXECOPS specifies whether you can enter run-time options on the command line.

Restriction: This option does not apply to non-C languages and can be specified only with the C #pragma runopts directive. You cannot set EXECOPS during Language Environment installation.

Non-CICS default: EXECOPS

CICS default: This option is ignored under CICS.

AMODE 64 default: EXECOPS

Syntax

►► EXECOPS
NOEXECOPS ◄◄

EXECOPS

Specifies that you can enter run-time options on the command line. Language Environment parses the argument string to separate run-time options from application arguments. The run-time options are interpreted by Language Environment and the application arguments are passed to the application.

NOEXECOPS

Specifies that you cannot enter run-time options on the command line. Language Environment passes the entire argument string to the application.

For more information

- For more information about the format of the argument string and how it's parsed, see *z/OS Language Environment Programming Guide*.

FILEHIST (Fortran only)**Derivation**

FILE HISTory

FILEHIST specifies whether to allow the file definition of a file referred to by a ddname to be changed during run time. This option is intended for use with applications called by Fortran that reallocate Fortran's supplied DD names.

Non-CICS default: FILEHIST

CICS default: FILEHIST is ignored under CICS.

Syntax

►► Filehist
NOFilehist _____ ►►

FILEHIST

Causes the history of a file to be used in determining its existence. It checks to see whether:

- The file was ever internally opened (in which case it exists)
- The file was deleted by a CLOSE statement (in which case it does not exist).

NOFILEHIST

Causes the history of a file to be disregarded in determining its existence.

If you specify NOFILEHIST, you should consider:

- If you change file definitions during run-time, the file is treated as if it were being opened for the first time.
- Before the file definition can be changed, the existing file must be closed.
- If you do not change file definitions during run-time, you must use STATUS='NEW' to re-open an empty file that has been closed with STATUS='KEEP', because the file does not appear to exist to Fortran.

FILETAG (C/C++ only)

Derivation FILE TAGging

FILETAG controls automatic text conversion and automatic file tagging for HFS files. It activates the automatic file tagging, on the first write, of new or empty z/OS UNIX file system files open with `fopen()` or `freopen()`, or upon the first I/O to a pipe created with `popen()`.

Guideline: You should be familiar with the concept of file tagging, autoconversion, and the program and file CCSIDs to use the run-time option properly. See *z/OS XL C/C++ Programming Guide* for more information.

Non-CICS default: FILETAG(NOAUTOCVT,NOAUTOTAG)

CICS default: FILETAG is ignored under CICS.

AMODE 64 default: FILETAG(NOAUTOCVT,NOAUTOTAG)

Syntax

```

  >> FILETAG ( [ NOAUTOCVT ] [ AUTOCVT ] , [ NOAUTOTAG ] [ AUTOTAG ] ) >>

```

NOAUTOCVT

Disables automatic text conversion as described below.

AUTOCVT

Enables automatic text conversion for untagged UNIX file system files opened using `fopen()` or `freopen()`. The conversion for an untagged file will be from the program CCSID to the EBCDIC CCSID as specified by the `_BPXK_CCIDS` environment variable. If the environment variable is unset, a default CCSID pair is used. See *z/OS XL C/C++ Programming Guide* for more information on the `_BPXK_CCIDS` environment variable.

By default, automatic conversion for untagged UNIX file system files applies only to files opened in text mode. An untagged file opened in binary mode is not converted automatically. You can control this by using the `_EDC_AUTOCVT_BINARY` environment variable.

- If it is unset or set to NO, automatic conversion applies only to files opened in text mode.
- If it is set to YES, automatic conversion applies to files opened in either binary mode or text mode.

For more information on the `_EDC_AUTOCVT_BINARY` environment variable, see *z/OS XL C/C++ Programming Guide*.

This suboption also indicates that the standard streams should be enabled for automatic text conversion to the EBCDIC IBM-1047 codepage when they refer to an untagged terminal file (tty).

This suboption does not affect untagged UNIX file system files that are automatically tagged by the AUTOTAG suboption. A UNIX file system file that is automatically tagged is already enabled for automatic text conversion.

Requirement: The automatic text conversion is performed only if one of the following is also true:

- The `_BPXK_AUTOCVT` environment variable value is set to ON.
- The `_BPXK_AUTOCVT` environment variable is unset and `AUTOCVT(ON)` has been specified in the active `BPXPRMxx` member on your system.

For more information on the `_BPXK_AUTOCVT` environment variable, see *z/OS XL C/C++ Programming Guide*.

NOAUTOTAG

Disables the automatic tagging of new or empty HFS files.

AUTOTAG

Enables automatic file tagging, on the first write, of new or empty HFS files opened with `fopen()`, `freopen()`, or `popen()`.

Usage notes

- **Guidelines:**
 - You should avoid the following:
 - Setting this run-time option in the installation-wide defaults (CEEDOPT).
 - Setting this run-time option using `_CEE_RUNOPTS` in a default profile for the UNIX shell users.
 - Exporting `_CEE_RUNOPTS` that specifies this run-time option. It can cause unexpected behaviors for the unknowing user or application.
 - The application programmer should define this run-time option with the assumption that the application is coded to behave based upon the option's setting.
 - The application programmer should specify this run-time option at compile time using `#pragma runopts` or at bind using a `CEEUOPT CSECT` that has been previously created.
 - The application user should not override this run-time option because it can change the expected behavior of the application.
- The default CCSID pair is (1047,819), where 1047 indicates the EBCDIC IBM-1047 codepage and 819 indicates the ASCII ISO8859-1 codepage.
- Automatic text conversion is enabled for the standard streams only when the application has been `exec()`ed, for example, when the UNIX shell gives control to a program entered on the command line, and the standard stream file descriptors are already open, untagged and associated with a `tty`.
- For the UNIX shell-owned standard streams that are redirected at program execution time, the shell includes added environment variables that control whether the redirected streams are tagged. See *z/OS UNIX System Services Command Reference* for more information.
- Automatic tagging for an HFS file is done by the system at first write. The CCSID used for the tag is the program CCSID of the current thread. Both text and binary files are tagged.
- When `FILETAG(,AUTOTAG)` is in effect, `fopen()` or `freopen()` of an HFS file fails if it cannot determine whether the file exists or if it cannot determine the size.


FLOW (COBOL only)

FLOW controls the FLOW output produced by OS/VS COBOL programs.

Restriction: You cannot set FLOW during Language Environment installation.

Non-CICS default: NOFLOW

CICS default: NOFLOW

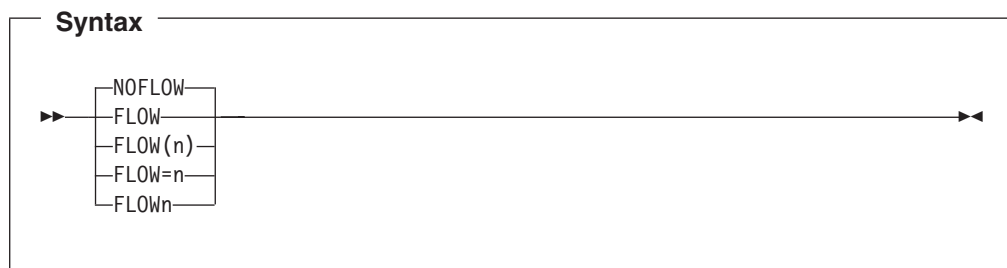

NOFLOW

Suppresses the OS/VS COBOL FLOW output.

FLOW Allows the OS/VS COBOL FLOW output.

n Specifies the number of procedures traced; this can be any integer from 1 to 99, inclusive.

HEAP


HEAP controls the allocation of user heap storage and specifies how that storage is managed.

Heaps are storage areas containing user-controlled dynamically allocated variables or data. Examples of these are:

- C data allocated as a result of the `malloc()`, `calloc()`, and `realloc()` functions
- COBOL WORKING-STORAGE data items
- PL/I variables with the storage class `CONTROLLED`, or the storage class `BASED`
- Data allocated as a result of a call to the CEEGTST Language Environment callable service

Non-CICS default: HEAP(32K,32K,ANYWHERE,KEEP,8K,4K)

CICS default: HEAP(4K,4080,ANYWHERE,KEEP,4K,4080)

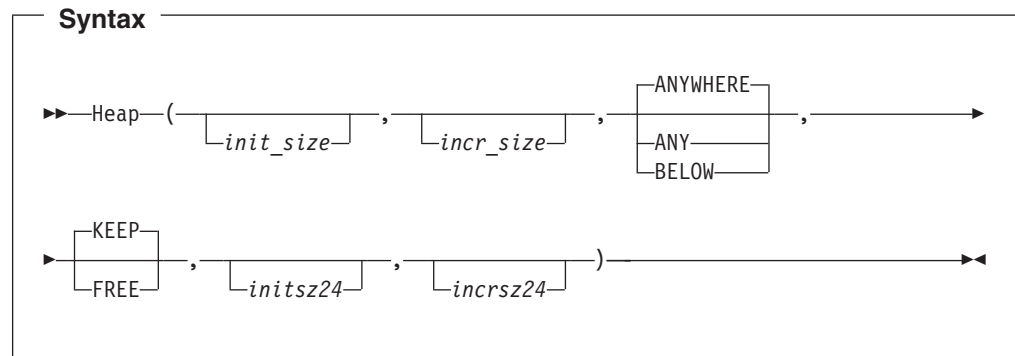*init_size*

Determines the initial allocation of heap storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr_size

Determines the minimum size of any subsequent increment to the user heap storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

ANYWHERE|ANY

Specifies that user heap storage can be allocated anywhere in storage. If there is no available storage above the line, storage is acquired below the 16 MB line.

BELOW

Specifies that user heap storage is allocated below the 16M line in storage.

Restriction: The HEAPPOOLS option is ignored when the BELOW suboption is specified.

KEEP

Specifies that an increment to user heap storage is not released when the last of the storage within that increment is freed.

FREE

Specifies that an increment to user heap storage is released when the last of the storage within that increment is freed.

initsz24

Determines the minimum initial size of user heap storage that is obtained below the 16M line for AMODE 24 applications that specify ANYWHERE in the HEAP run-time option. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incrsz24

Determines the minimum size of any subsequent increment to user heap storage that is obtained below the 16M line for for AMODE 24 applications that specify ANYWHERE in the HEAP run-time option. This value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

HEAP

CICS considerations

- If `HEAP(,ANYWHERE,,)` is in effect, the maximum size of a heap segment is 1 gigabyte (1024 MB).
- The default increment size under CICS is 4080 bytes, rather than 4096 bytes, to accommodate the 16 bytes CICS storage check zone. Without this accommodation, an extra page of storage is allocated when the storage allocation is below the 16 MB line.

Guideline: If you choose to change the increment size, you should adjust for the 16 byte CICS storage check zone.

z/OS UNIX consideration

- In a multithreaded environment, user heap storage is shared by all threads in the process.

Usage notes

- Applications running in AMODE 24 that request heap storage get the storage below the 16M line regardless of the setting of `ANYWHERE` | `BELOW`.
- COBOL consideration—You can use the `HEAP` option to provide function similar to the VS COBOL II space management tuning table.
- PL/I consideration—For PL/I, the only case in which storage is allocated above the line is when all of the following conditions exist:
 - The user routine requesting the storage is running in 31-bit addressing mode.
 - `HEAP(,ANY,,)` is in effect.
 - The main routine runs in AMODE 31.
- PL/I MTF consideration—In a PL/I MTF application, `HEAP` specifies the heap storage allocation and management for a PL/I main task.

Performance consideration

You can improve performance with the `HEAP` run-time option by specifying values that minimize the number of times the operating system allocates storage. See “`RPTSTG`” on page 64 for information on how to generate a report you can use to determine the optimum values for the `HEAP` run-time option.

For more information

- For more information about Language Environment heap storage, see *z/OS Language Environment Programming Guide*.
- For more information about the `CEECRHP` callable service, see “`CEECRHP—Create new additional heap`” on page 239.
- For more information about the `CEEGTST` callable service, see “`CEEGTST—Get heap storage`” on page 351.
- For more information about the `RPTSTG` run-time option, see “`RPTSTG`” on page 64.


HEAP64 (AMODE 64 only)

`HEAP64` controls the allocation of user heap storage for AMODE 64 applications and specifies how that storage is managed.

Heaps are storage areas containing user-controlled dynamically allocated variables or data. An example is C data allocated as a result of the `malloc()`, `calloc()`, and `realloc()` functions.

AMODE 64 default: **HEAP64(1M,1M,KEEP,32K,32K,KEEP,4K,4K,FREE)**

Syntax

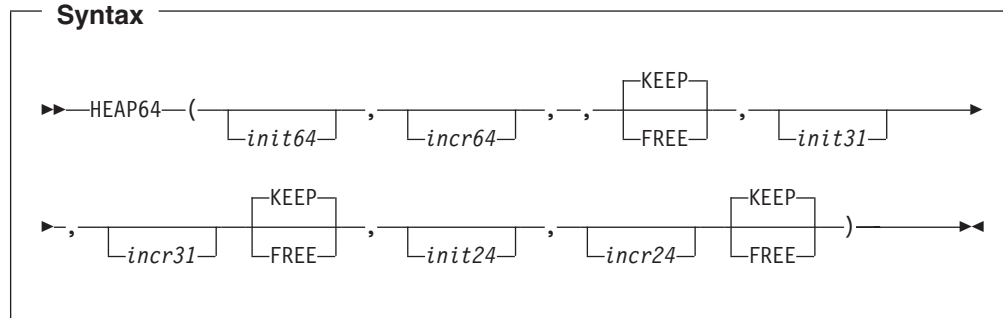

init64 Determines the initial allocation of heap storage obtained above the 2G bar. Specify this value as *nM* bytes of storage. If a value of 0 or less is specified, the default is used.

incr64 Determines the minimum size of any subsequent increment to the user heap storage obtained above the 2G bar. Specify this value as *nM* bytes of storage. If a value less than 0 is specified, the default is used.

KEEP Specifies that an increment to user heap storage is not released when the last of the storage within that increment is freed.

FREE Specifies that an increment to user heap storage is released when the last of the storage within that increment is freed.

init31 Determines the minimum initial size of user heap storage that is obtained above the 16M line and below the 2G bar. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr31 Determines the minimum size of any subsequent increment to user heap storage that is obtained above the 16M line and below the 2G bar. This value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

init24 Determines the minimum initial size of user heap storage that is obtained below the 16M line. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr24 Determines the minimum size of any subsequent increment to user heap storage that is obtained below the 16M line. This value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

z/OS UNIX consideration

- In a multithreaded environment, user heap storage is shared by all threads the process.

Performance consideration

You can improve performance with the HEAP64 run-time option by specifying values that minimize the number of times the operating system allocates storage. See "RPTSTG" on page 64 for information on how to generate a report you can use to determine the optimum values for the HEAP64 run-time option.

For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.
- For more information about the RPTSTG run-time option, see “RPTSTG” on page 64.

HEAPCHK

Derivation

HEAP storage CHeckKing

HEAPCHK performs diagnostic tests against the user heap.

Non-CICS default: HEAPCHK(OFF,1,0,0,0)

CICS default: HEAPCHK(OFF,1,0,0,0)

AMODE 64 default: HEAPCHK(OFF,1,0,0,0)

Syntax

```

▶▶HEAPChk—( OFF
               ON
             ,
             frequency , delay , call depth , pool call depth )
▶▶

```

OFF Indicates that no heap checking or tracing is done regardless of the values of the remaining sub-options.

ON Indicates that heap checking or tracing is activated based on the values of the remaining sub-options.

frequency

The frequency at which the user heap is checked for damage to the heap control information. It is specified as *n*, *nK* or *nM*. A value of one (1) is the default and causes the heap to be checked at each call to a Language Environment heap storage management service. A value of *n* causes the user heap to be checked at every *n*th call to a Language Environment heap storage management service. A value of zero results in no check for damage to the user heap.

delay A value that causes a delay before user heap is checked for damage, and is specified in *n*, *nK* or *nM*. A value of zero (0) is the default and causes the heap checking to begin with the first call to a Language Environment heap storage management service. A value of *n* causes the heap checking to begin following the *n*th call to a Language Environment heap storage management service.

call depth

Specifies the depth of calls displayed in the traceback for the heap storage diagnostics report. A value of zero is the default that turns heap storage diagnostics reporting off.

The heap storage diagnostics report consists of a set of tracebacks. Each traceback is a snapshot of the stack (to a specified call depth) for each request to obtain user heap storage that has not had a corresponding free request.

Guideline: Use a value of 10 to ensure an adequate call depth is displayed so that you can identify the storage leak.

pool call depth

Specifies the depth of calls displayed in the traceback for the trace of each heap pools GET or FREE for the heap storage diagnostics report. A value of zero is the default that turns heap pools GET or FREE storage diagnostics reporting off.

Guideline: Use a value of 10 to ensure an adequate call depth is displayed so that you can identify the storage leak.

Usage notes

- When user heap damage is detected, Language Environment immediately issues an ABEND U4042 RC=0. To obtain a system dump of this abend, ensure that a SYSMDUMP DD is available. No CEEDUMP is produced.
- If HEAPCHK(ON) is used with STORAGE(,heap_free_value), all free areas of the heap are also checked.
- To request only a heap storage diagnostics report, you must specify a zero for frequency and a number *n* greater than zero for call depth. For example (HEAPCHK(ON,0,0,10)).
- Under normal termination conditions, if the call depth is greater than zero and the frequency is set to zero, the heap storage diagnostics report is written to the CEEDUMP report, independent of the TERMTHDACT setting.
- You can also generate a heap storage diagnostics report by calling CEE3DMP with the BLOCKS option.
- **Guideline:** Since HEAPCHK does not validate individual cells within a cell pool, you should specify HEAPPOOLS(OFF) when running HEAPCHK to diagnose storage overlays in the heap.

Performance consideration

- Specifying HEAPCHK(ON) can result in a performance degradation due to the user heap diagnostic testing that is performed.

For more information

- For more information about creating and using the heap storage diagnostics report, see *z/OS Language Environment Debugging Guide*.

HEAPPOOLS (C/C++ only)

Derivation

HEAP storage POOLS

The HEAPPOOLS run-time option is used to control an optional user heap storage management algorithm, known as heap pools. This algorithm is designed to improve the performance of multithreaded C/C++ applications with a high frequency of calls to malloc(), calloc(), realloc(), free(), and operators new and delete. When active, heap pools virtually eliminates contention for user heap storage.

HEAPPOOLS


Non-CICS default:

HEAPPOOLS(OFF,8,10,32,10,128,10,256,10,1024,10,2048,10,0,10,0,10,0,10,0,10,0,10)

CICS default:

HEAPPOOLS(OFF,8,10,32,10,128,10,256,10,1024,10,2048,10,0,10,0,10,0,10,0,10,0,10)

Syntax



OFF Specifies that the heap pools algorithm is not used.

ON Specifies that the heap pools algorithm is used.

cell size

Specifies the size of the cells in a heap pool, specified as *n* or *nK*. The cell size must be a multiple of 8, with a maximum of 65536 (64k).

percentage

The size of this heap pool and any of its extents is determined by multiplying this percentage by the *init_size* value that was specified in the HEAP run-time option. The percentage must be in a range from 1 to 90.

Usage notes

- Cell pool sizes should be specified in ascending order.
- To use less than twelve heap pools, specify 0 for the cell size after the last heap pool to be used. For example if four heap pools are desired, use 0 for the fifth cell size when setting the HEAPPOOLS run-time option.
- If the percentage of the HEAP run-time option *init size* values does not allow for at least one cell, the system automatically adjusts the percentage to enable four cells to be allocated.
- The sum of the percentages may be more or less than 100 percent.
- Each heap pool is allocated as needed. The allocation of a heap pool can result in the allocation of a heap increment to satisfy the request.
- The FREE sub-option on the HEAP run-time option has no effect on any heap segment in which a heap pool resides. Each cell in a heap pool can be freed, but the heap pool itself is only released back to the system at enclave termination. To avoid wasting storage, see the heap pool tuning tips specified in *z/OS Language Environment Programming Guide*.
- The HEAPPOOLS run-time option has no effect when BELOW is specified as the location on the HEAP run-time option.
- Mixing of the storage management AWIs (CEEGETST(), CEEFRST() and CEECZST()) and the C/C++ intrinsic functions (malloc(), calloc(), realloc() and free()) are not supported when operating on the same storage address. For example, if you request storage using CEEGETST(), then you may not use free() to release the storage.
- The HEAPCHK run-time option does not validate individual heap pool cells.

- Use of a vendor heap manager (VHM) overrides the use of the HEAPPOOLS run-time option.

Performance considerations

- To improve the effectiveness of the heap pools algorithm, use the storage report numbers generated by the RPTSTG run-time option as an aid in determining optimum cell sizes, percentages, and the initial heap size.
- Use caution when using cells larger than 2K. Large gaps between cell sizes can lead to a considerable amount of storage waste. Properly tuning cell sizes with the help of RPTSTG is necessary to control the amount of virtual storage needed by the application.


HEAPPOOLS64 (C/C++ and AMODE 64 only)

Derivation
HEAP storage POOLS

The HEAPPOOLS64 run-time option is used to control an optional user heap storage management algorithm, known as heap pools, for AMODE 64 applications. This algorithm is designed to improve the performance of multithreaded C/C++ applications with a high frequency of calls to malloc(), calloc(), realloc(), free(), and operators new and delete. When active, heap pools virtually eliminates contention for user heap storage.

AMODE 64 default: HEAPPOOLS64(OFF,8,4000,32,2000,128,700,256,350,1024,100,2048,50,3072,50,4096,50,8192,25,16384,10,32768,5,65536,5)

Syntax

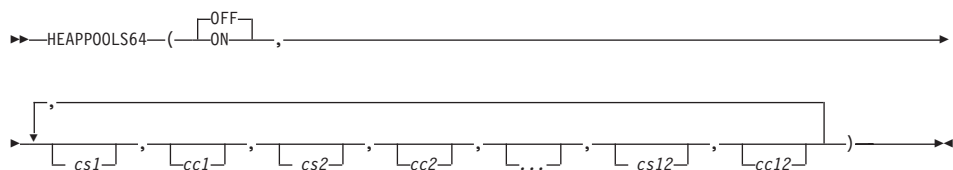

OFF Specifies that user heap checking is inactive.

ON Specifies that user heap checking is active.

cs1 — cs12

Specifies the size of the cells in a heap pool, specified as n or nK. The cell size must be a multiple of 8, with a maximum of 65536 (64k). The minimum cell count is 4.

cc1 — cc12

Specifies the number of cells of the corresponding size to be allocated initially.

Usage notes

- Cell pool sizes should be specified in ascending order.

HEAPPOOLS64

- To use less than twelve heap pools, specify 0 for the cell size after the last heap pool to be used. For example if four heap pools are desired, use 0 for the fifth cell size when setting the HEAPPOOLS64 run-time option.
- Each heap pool is allocated as needed. The allocation of a heap pool can result in the allocation of a heap increment to satisfy the request.
- The HEAPCHK run-time option does not validate individual heap pool cells.

Performance considerations

- To improve the effectiveness of the heap pools algorithm, use the storage report numbers generated by the RPTSTG run-time option as an aid in determining optimum cell sizes, percentages, and the initial heap size.
- Use caution when using cells larger than 2K. Large gaps between cell sizes can lead to a considerable amount of storage waste. Properly tuning cell sizes with the help of RPTSTG is necessary to control the amount of virtual storage needed by the application.

For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.

INFOMSGFILTER

Derivation

INFOrmational MeSsaGe FILTER


INFOMSGFILTER allows you to activate a filter that eliminates unwanted informational messages. During normal operations, informational messages are sometimes written to the Language Environment message file. If these messages are routed to your terminal, you need to clear them often. If the messages are saved to a data set, they take up disk space and could make it difficult to browse the output for a specific message.

Informational messages are not limited to Language Environment (CEE) messages. They may also be written, using the CEEMSG interface, by other IBM program products or user-written applications.

Non-CICS default: INFOMSGFILTER(OFF,,,))

CICS default: INFOMSGFILTER(OFF,,,))

AMODE 64 default: INFOMSGFILTER(OFF,,,))

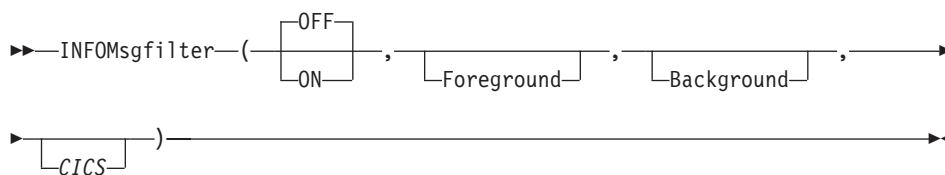Syntax

OFF Turns off message filtering for all environments.

ON Turns on the message filtering for the specified environments.

Foreground

Selecting this keyword causes message filtering to be turned on for the following environments:

- TSO
- z/OS UNIX

Background

Selecting this keyword causes message filtering to be turned on for the following environments:

- MVS Batch

CICS Selecting this keyword causes message filtering to be turned on in the CICS environment. This is ignored for AMODE 64 applications

INQPCOPN (Fortran only)

Derivation

INQuire the Pre-Conected units that are OPeNed

INQPCOPN controls whether the OPENED specifier on an INQUIRE by unit statement can be used to determine whether a preconnected unit has had any I/O statements directed to it.

Non-CICS default: INQPCOPN

CICS default: INQPCOPN is ignored under CICS.

Syntax**INQPCOPN**

Causes the running of an INQUIRE by unit statement to provide the value *true* in the variable or array element given in the OPENED specifier if the unit is

INQPCOPN

connected to a file. This includes the case of a preconnected unit, which can be used in an I/O statement without running an OPEN statement, even if no I/O statements have been run for that unit.

NOINQPCOPN

Causes the running of an INQUIRE by unit statement to provide the value *false* for the case of a preconnected unit for which no I/O statements other than INQUIRE have been run.

INTERRUPT

INTERRUPT causes attention interrupts to be recognized by Language Environment. When you cause an interrupt, Language Environment can give control to your application or to a debug tool.

Non-CICS default: INTERRUPT(OFF)

CICS default: INTERRUPT is ignored under CICS.

Syntax



OFF Specifies that Language Environment does not recognize attention interrupts.

ON Specifies that Language Environment recognizes attention interrupts.

z/OS UNIX consideration

- In a multithreaded application, only one thread in the enclave is affected for a particular attention interrupt.

Usage notes


- PL/I consideration—Language Environment supports the PL/I method of polling code. Note that the PL/I routine must be compiled with the INTERRUPT compiler option in order for the INTERRUPT run-time option to have an effect.
- PL/I MTF consideration—To receive the attention interrupt, the PL/I program must be compiled with the INTERRUPT compiler option, and the INTERRUPT run-time option must be in effect.
- PL/I MTF consideration—The INTERRUPT option applies to the enclave. However, only one thread in the enclave is affected for a particular attention interrupt.
- If you have specified the TEST(ERROR) or TEST(ALL) run-time option, the interrupt causes the debug tool to gain control. See “TEST | NOTEST” on page 81 for more information about the TEST run-time option.

IOHEAP64 (AMODE 64 only)

IOHEAP64 controls the allocation of I/O heap storage for AMODE 64 applications and specifies how that storage is managed. Language Environment uses this storage when performing I/O for AMODE 64 applications.

AMODE 64 default: IOHEAP64(1M,1M,FREE,12K,8K,FREE,4K,4K,FREE)

Syntax

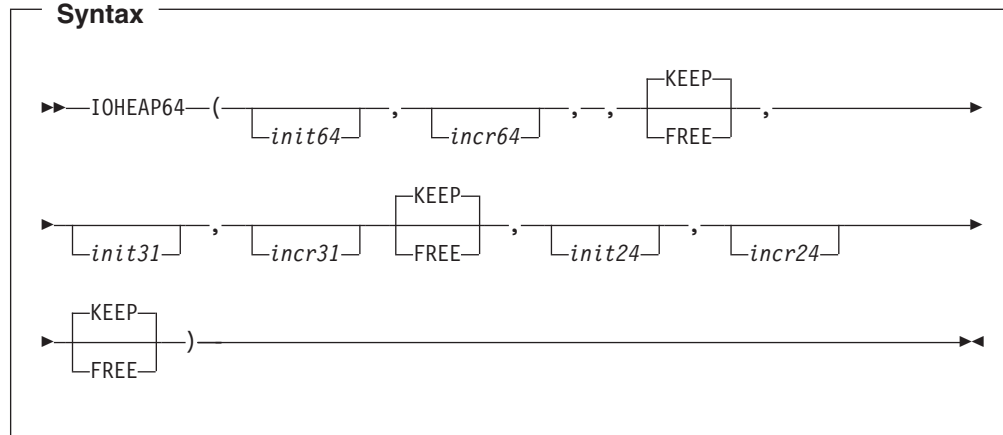

init64 Determines the initial allocation of I/O heap storage obtained above the 2G bar. Specify this value as *nM* bytes of storage. If a value of 0 or less is specified, the default is used.

incr64 Determines the minimum size of any subsequent increment to the I/O heap storage obtained above the 2G bar. Specify this value as *nM* bytes of storage. If a value less than 0 is specified, the default is used.

KEEP Specifies that an increment to I/O heap storage is not released when the last of the storage within that increment is freed.

FREE Specifies that an increment to I/O heap storage is released when the last of the storage within that increment is freed.

init31 Determines the minimum initial size of I/O heap storage that is obtained above the 16M line and below the 2G bar. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr31 Determines the minimum size of any subsequent increment to I/O heap storage that is obtained above the 16M line and below the 2G bar. This value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

init24 Determines the minimum initial size of I/O heap storage that is obtained below the 16M line. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr24 Determines the minimum size of any subsequent increment to I/O heap storage that is obtained below the 16M line. This value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

Performance consideration

You can improve performance with the IOHEAP64 run-time option by specifying values that minimize the number of times the operating system allocates storage. See “RPTSTG” on page 64 for information on how to generate a report you can use to determine the optimum values for the IOHEAP64 run-time option.


For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.
- For more information about the RPTSTG run-time option, see “RPTSTG” on page 64.

LIBHEAP64 (AMODE 64 only)

The LIBHEAP64 run-time option controls the allocation of heap storage used by Language Environment for AMODE 64 applications. Storage that is unrestricted can be located anywhere in 64-bit addressable storage.

AMODE 64 default: LIBHEAP64(1M,1M,FREE,16K,8K,FREE,8K,4K,FREE)

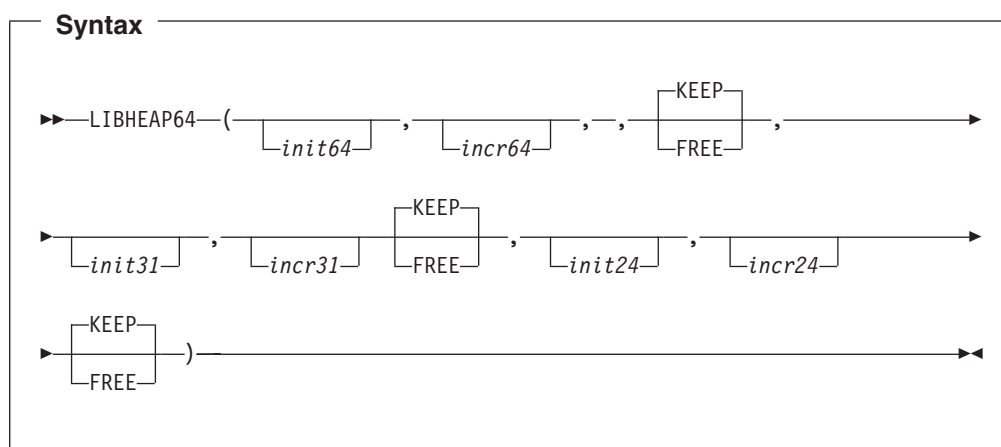

init64 Determines the initial allocation of library heap storage obtained above the 2G bar. Specify this value as *nM* bytes of storage. If a value of 0 or less is specified, the default is used.

incr64 Determines the minimum size of any subsequent increment to the library heap storage obtained above the 2G bar. Specify this value as *nM* bytes of storage. If a value less than 0 is specified, the default is used.

KEEP Specifies that an increment to library heap storage is not released when the last of the storage within that increment is freed.

FREE Specifies that an increment to library heap storage is released when the last of the storage within that increment is freed.

init31 Determines the minimum initial size of library heap storage that is obtained above the 16M line and below the 2G bar. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr31 Determines the minimum size of any subsequent increment to library heap storage that is obtained above the 16M line and below the 2G bar. This

value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

init24 Determines the minimum initial size of library heap storage that is obtained below the 16M line. This value can be specified as *n*, *nK*, or *nM* number of bytes. If 0 is specified, the initial storage is obtained on the first use and is based on the increment size. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

incr24 Determines the minimum size of any subsequent increment to library heap storage that is obtained below the 16M line. This value can be specified as *n*, *nK*, or *nM* number of bytes. The amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

Performance consideration

You can improve performance with the LIBHEAP64 run-time option by specifying values that minimize the number of times the operating system allocates storage. See “RPTSTG” on page 64 for information on how to generate a report you can use to determine the optimum values for the LIBHEAP64 run-time option.

For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.

LIBSTACK

Derivation

LIBrary STACK storage

LIBSTACK controls the allocation of the thread's library stack storage. This stack is used by Language Environment routines that require save areas below the 16M line.

Non-CICS default: LIBSTACK(4K,4K,FREE)

CICS default: LIBSTACK(32,4080,FREE)

Syntax

```

▶▶LIBStack—( init_size , incr_size , FREE  
KEEP )▶▶

```

init_size

Determines the minimum size of the initial library stack storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. Language Environment allocates the storage rounded up to the nearest multiple of 8 bytes.

incr_size

Determines the minimum size of any subsequent increment to the library stack. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The

LIBSTACK

actual amount of allocated storage is the larger of 2 values— *incr_size* or the requested size—rounded up to the nearest multiple of 8 bytes.

If you specify 0 as *incr_size*, Language Environment gets only the amount of storage needed at the time of the request, rounded up to the nearest multiple of 8 bytes.

- FREE** Specifies that Language Environment releases storage allocated to LIBSTACK increments when the last of the storage in the library stack is freed. The initial library stack segment is not released until the thread ends.
- KEEP** Specifies that Language Environment does not release storage allocated to LIBSTACK increments when the last of the storage is freed.

CICS consideration

- The default increment size under CICS is 4080 bytes, rather than 4096 bytes, to accommodate the 16 byte CICS storage check zone. Without this accommodation, an extra page of storage is allocated.

z/OS UNIX consideration

- The LIBSTACK option sets the library stack characteristics on each thread.

Usage notes

- Language Environment does not acquire the initial library stack segment until the first program that requires LIBSTACK runs.

Performance consideration

You can improve performance with the LIBSTACK run-time option by specifying values that minimize the number of times the operating system allocates storage. See “RPTSTG” on page 64 for information on how to generate a report you can use to determine the optimum values for the LIBSTACK run-time option.

For more information

- See “RPTSTG” on page 64 for more information about the RPTSTG run-time option.
- For more information about using the storage reports generated by the RPTSTG run-time option to tune the stacks, see *z/OS Language Environment Programming Guide*.

MSGFILE


Derivation <u>MeSsaGe FILE</u>

MSGFILE specifies the *ddname* and attributes of the data set (message file) where Language Environment directs the following output:

- All Language Environment messages
- Reports generated by the RPTOPTS and RPTSTG run-time options
- Output produced by the CEEMSG and CEEMOUT callable services

Non-CICS default: MSGFILE(SYSOUT,FBA,121,0,NOENQ)

CICS default: MSGFILE is ignored under CICS.

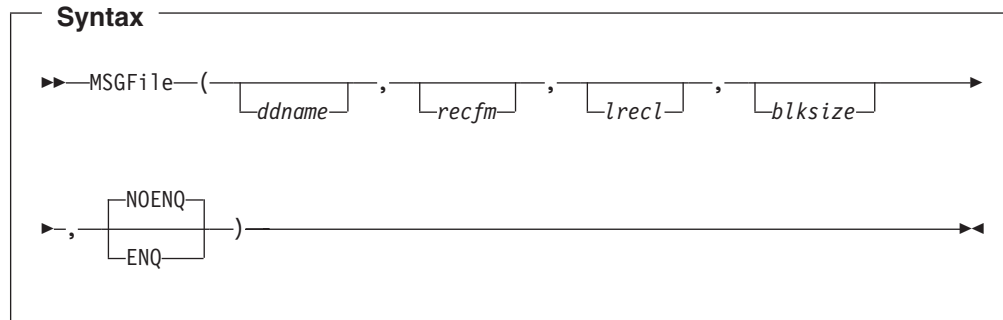

ddname

The *ddname* of the message file where Language Environment directs the information listed above.

recfm The record format (RECFM) for the message file. *recfm* is used when this information is not available either in a data set definition or in the label of an existing data set. The following record formats are acceptable: F, FA, FB, FBA, FBS, FBSA, U, UA, V, VA, VB, and VBA.

lrecl The record length (LRECL) for the message file. *lrecl* is used when this information is not available either in a data set definition or in the label of an existing data set. *lrecl* is expressed as bytes of storage.

The *lrecl* cannot exceed *blksize*. For variable-length record formats, the *lrecl* is limited to *blksize* minus 4.

blksize

The block size (BLKSIZE) for the message file. *blksize* is used when this information is not available either in a data set definition or in the label of an existing data set. *blksize* is expressed as bytes of storage and cannot exceed 32760.

NOENQ

Specifies that no serialization is performed on *ddname*.

ENQ

Specifies that serialization is performed on the *ddname* specified in case multiple Language Environment environments are running in the same address space and sharing the same message file.

CICS consideration

- MSGFILE output under CICS is directed to a transient data queue named CESE.

z/OS UNIX consideration

- When multiple threads write to the message file, the output is interwoven by line. To group lines of output, the application must serialize its own output.
- If the message file is allocated (whether POSIX or z/OS), Language Environment directs the output to this file. If the current message file is not allocated, and the application calls `fork()/exec()`, `spawn()`, or `spawnp()`, Language Environment checks whether file descriptor 2 (fd2) exists.
 - If fd2 exists, Language Environment uses it.

- If fd2 does not exist, Language Environment dynamically allocates the message file to the POSIX file system and attempts to open the file SYSOUT in the current working directory. If there is no current directory, SYSOUT is opened in the directory /tmp.

Usage notes

- **Guideline:** Under most circumstances, the NOENQ sub-option is sufficient and provides better performance. The ENQ sub-option is only needed when multiple Language Environment environments are running in the same address space and share the same message file.

An instance when ENQ might be needed is a batch job that uses ATTACH to create sub-tasks. Each of the sub-tasks is potentially a distinct Language Environment environment, all running with the same default MSGFILE parameters. In this example, each of these environments shares the same message file.

To avoid conflicts while writing to the shared message file, use the ENQ sub-option. Using a different *ddname* for each environment can remove the need to use the ENQ sub-option.

- Compiler options, such as the COBOL OUTDD compiler option, can affect whether your run-time output goes to MSGFILE *ddname*.
- If there is no *blksize* in the MSGFILE run-time option, in a data set definition, or in the label of an existing data set, the block size is determined as follows:
 - If *recfm* specifies unblocked fixed-length format records (F or FA) or undefined-format records (U or UA), *blksize* is the same as *lrecl*.
 - If *recfm* specifies unblocked variable-length format records (V or VA), *blksize* is *lrecl* plus 4.
 - If *recfm* specifies blocked records (FB, FBA, FBS, FBSA, VB, or VBA) for a DASD device on z/OS, Language Environment uses a *blksize* of 0 so the system can determine the optimum *blksize*.
 - If *recfm* specifies blocked fixed-length format records (FB, FBA, FBS, or FBSA) for a terminal, *blksize* is the same as *lrecl*.
 - If *recfm* specifies blocked variable-length format records (VB or VBA) for a terminal, *blksize* is *lrecl* plus 4.
 - For all other cases, *blksize* is calculated to provide the largest number of records per block, up to 100 records per block, that does not exceed the maximum *blksize* of 32760.
- Language Environment does not diagnose combinations of *recfm*, *lrecl*, and *blksize* that are not valid but the system can detect an error condition on the first attempt to write to the message file.
- Language Environment does not check the validity of the MSGFILE *ddname*. A *ddname* that is not valid generates an error condition on the first attempt to write to the message file.
- C/C++ consideration—C output directed to `stderr` and `perror()` messages go to the MSGFILE destination.
- PL/I consideration—Run-time messages in PL/I programs are directed to the message file instead of to the PL/I SYSPRINT STREAM PRINT file.
User-specified output is directed to the PL/I SYSPRINT STREAM PRINT file. To direct this output to the message file, specify MSGFILE(SYSPRINT).
- Fortran consideration—To get the same message file function as with VS Fortran, specify MSGFILE(FTnnF001,UA,133) where *nn* is the unit number of the error unit. For more information, see Fortran Run-Time Migration Guide.

For more information

- For more information about the RPTOPTS and RPTSTG run-time options, see “RPTOPTS” on page 63 and “RPTSTG” on page 64.
- For more information about the CEEMSG and CEEMOUT callable services, see “CEEMSG—Get, format, and dispatch a message” on page 426 and “CEEMOUT—Dispatch a message” on page 403.
- For details on how HLL compiler options affect messages, see information on HLL I/O statements and message handling in *z/OS Language Environment Programming Guide*.
- For examples of getting and formatting messages, including HLL run-time output, see “CEEMSG—Get, format, and dispatch a message” on page 426.
- For more information about perror() and stderr see C message output information in *z/OS Language Environment Programming Guide*.
- For more information about the CESE transient data queue, see *z/OS Language Environment Programming Guide*.

MSGQ

Derivation

MeSsaGe Queue

MSGQ specifies the number of instance specific information (ISI) blocks that Language Environment allocates on a per thread basis for use by the application. The ISI block contains information for Language Environment to use when identifying and reacting to conditions, providing access to q_data tokens, and assigning space for message inserts used with user-created messages. When an insufficient number of ISI blocks are available, Language Environment uses the least recently used ISI block.

Non-CICS default: MSGQ(15)

CICS default: MSGQ is ignored under CICS.

Syntax

```

▶▶ MSGQ ( [ number ] )

```

number

An integer that specifies the number of ISI blocks to maintain on a per thread basis.

Usage notes

- PL/I MTF consideration—In a PL/I MTF application, MSGQ sets the number of message queues allowed for each task.
- The CEEECMI callable service allocates storage for ISI blocks if necessary. For information about using the CEEECMI callable service, see “CEEECMI—Store and load message insert data” on page 232.

For more information

- For more information about the ISI blocks, see *z/OS Language Environment Programming Guide*.

NATLANG

Derivation

NATional LANGuage

NATLANG specifies the initial national language Language Environment uses for the run-time environment, including error messages, month names, and day of the week names. Message translations are provided for Japanese and for uppercase and mixed-case U.S. English. NATLANG also determines how the message facility formats messages.

Non-CICS default: NATLANG(ENU)

CICS default: NATLANG(ENU)

AMODE 64 default: NATLANG(ENU)

Syntax



ENU A 3-character ID specifying mixed-case U.S. English.

Message text consists of SBCS characters and includes both uppercase and lowercase letters.

UEN A 3-character ID specifying uppercase U.S. English.

Message text consists of SBCS characters and includes only uppercase letters.

JPN A 3-character ID specifying Japanese.

Message text can contain a mixture of SBCS and DBCS characters.

Usage notes

- **Restriction:** CEE3LNG and CEESETL are not available to AMODE 64 applications.
- You can use the CEE3LNG callable service to set the national language.
- If you specify a national language that is not available on your system, Language Environment uses the IBM-supplied default ENU (mixed-case U.S. English).
- Language Environment writes storage reports, option reports, and dump output in mixed-case U.S. English only.
- Language Environment provides locales used in C/C++ to establish default formats for the locale-sensitive functions and locale callable services, such as

date and time formatting, sorting, and currency symbols. To change the locale, you can use the `setlocale()` library function or the CEESETL callable service.

The settings of CEESETL or `setlocale()` do not affect the setting of the NATLANG run-time option. NATLANG affects the Language Environment NLS and date and time services. `setlocale()` and CEESETL affect only C/C++ locale-sensitive functions and Language Environment locale callable services.

To ensure that all settings are correct for your country, use NATLANG and either CEESETL or `setlocale()`.

- PL/I MTF consideration—NATLANG affects every task in the application. The SET function of CEE3LNG is supported for the relinked OS PL/I or PL/I for MVS & VM MTF applications only.

For more information

- For more information about the CEE3LNG callable service, see “CEE3LNG—Set national language” on page 181.
- For more information about the CEESETL callable service, see “CEESETL—Set locale operating environment” on page 475.
- For more information on `setlocale()`, see *z/OS XL C/C++ Programming Guide*.

OCSTATUS (Fortran only)

Derivation

Open Close STATUS

OCSTATUS controls the verification of file existence and whether a file is actually deleted based on the STATUS specifier on the OPEN and CLOSE statement, respectively.

Non-CICS default: OCSTATUS

CICS default: OCSTATUS is ignored under CICS.

Syntax

OCSTATUS

Specifies that file existence is checked with each OPEN statement to verify that the status of the file is consistent with STATUS='OLD' and STATUS='NEW'. It also specifies that file deletion occurs with each CLOSE statement with STATUS='DELETE' for those devices which support file deletion. Preconnected files are included in these verifications. OCSTATUS consistency checking applies to DASD files, PDS members, VSAM files, MVS labeled tape files, and dummy files only. For dummy files, the consistency checking occurs only if the file was previously opened successfully in the current program.

In addition, when a preconnected file is disconnected by a CLOSE statement, an OPEN statement is required to reconnect the file under OCSTATUS. Following the CLOSE statement, the INQUIRE statement parameter OPENED indicates that the unit is disconnected.

NOOCSTATUS

Bypasses file existence checking with each OPEN statement and bypasses file deletion with each CLOSE statement.

If STATUS='NEW', a new file is created; if STATUS='OLD', the existing file is connected.

If STATUS='UNKNOWN' or 'SCRATCH', and the file exists, it is connected; if the file does not exist, a new file is created.

In addition, when a preconnected file is disconnected by a CLOSE statement, an OPEN statement is *not* required to reestablish the connection under NOOCSTATUS. A sequential READ, WRITE, BACKSPACE, REWIND, or ENDFILE will reconnect the file to a unit. Before the file is reconnected, the INQUIRE statement parameter OPENED will indicate that the unit is disconnected; after the connection is reestablished, the INQUIRE statement parameter OPENED will indicate that the unit is connected.

PC (Fortran only)

Derivation

Private Common blocks

PC controls whether Fortran status common blocks are shared among load modules.

Non-CICS default: NOPC

CICS default: PC is ignored under CICS.

Syntax

```

  >>-----<<
      | NOPC |
      |-----|
      |  PC  |
  
```

NOPC Specifies that Fortran static common blocks with the same name but in different load modules all refer to the same storage. NOPC applies only to static common blocks referenced by compiled code produced by any of the following compilers and that were **not** compiled with the PC compiler option:

- VS FORTRAN Version 2 Release 5
- VS FORTRAN Version 2 Release 6

PC Specifies that Fortran static common blocks with the same name but in different load modules do not refer to the same storage.

PLIST (C only)

Derivation Parameter LIST

PLIST specifies the format of the invocation parameters your C application receives when you invoke it.

Guideline: Although the CICS, CMS, IMS, MVS, and TSO suboptions of PLIST are supported for compatibility, you should use the HOST or OS suboptions of PLIST.

Restrictions:

- This option does not apply to non-C languages and can be specified only with the C #pragma runopts directive.
- You cannot set PLIST during Language Environment installation.

Non-CICS default: PLIST(HOST)

CICS default: PLIST is ignored under CICS.

Syntax



HOST The parameter list is a character string. The string is located differently under various systems as follows:

- CMS
 - If invoked by OSRUN, use the string presented in an MVS-like format located by the pointer held in R1.
 - If not invoked by OSRUN, use the CMS extended parameter list.
- TSO
 - If a command processor parameter list (CPPL) is detected, get the string from the command buffer.
 - If a CPPL is not detected, assume a halfword-prefixed string in the MVS format.
- MVS
 - Use the halfword-prefixed string.

CICS The parameter list received by your C application is assumed to be in a CICS format.

CMS The parameter list received by your C application is assumed to be in a CMS extended parameter list format.

IMS The parameter list received by your C application is assumed to be in an IMS format.

PLIST

- MVS** The parameter list received by your C application is assumed to be in an MVS format.
- OS** The parameter list received by your C application is assumed to be in an OS style.
- TSO** The parameter list received by your C application is assumed to be in a CPPL format.

Usage notes

- The behavior of C applications with PLIST(HOST) in effect is the same for C++.
- When using the pre-Language Environment-conforming C interface for pre-initialization, it is necessary to specify PLIST(MVS) in order to flag preinitialized routines.
- IMS considerations—If your C application runs under IMS, the suboption of PLIST that you specify depends on the version of the C compiler you used. If you compiled your application with Version 2.1 (or earlier) of the C compiler, specify the PLIST(IMS) suboption. If your C++ application runs under IMS, you should specify the z/OS XL C++ compiler option PLIST(OS).
- z/OS UNIX consideration—The PLIST option applies only to the main routine of the initial thread.

PLITASKCOUNT (PL/I only)

Derivation

PL/I TASK COUNTER

PLITASKCOUNT controls the maximum number of tasks that can be active at one time while you are running PL/I MTF applications. PLITASKCOUNT(20) provides behavior compatible with the PL/I ISASIZE(,20) option.

Non-CICS default: PLITASKCOUNT(20)

CICS default: PLITASKCOUNT is ignored under CICS.

Syntax

►► PLITaskcount—(tasks)—►►

tasks A decimal integer that is the maximum number of tasks allowed in a PL/I MTF application at any one time during execution. The total tasks include the main task and subtasks created directly or indirectly from the main task.

Usage notes

- A value of zero (0) assumes the IBM-supplied default of 20.
- If *tasks* or the IBM-supplied default of 20 exceeds the z/OS UNIX installation default of the maximum number of threads, Language Environment assumes the z/OS UNIX installation default.

- If a request to create a task would put the number of currently active tasks over the allowable limit, condition IBM0566S is signalled and the task is not created.

POSIX

Derivation

Portable Operating System Interface - X

POSIX specifies whether the enclave can run with the POSIX semantics.

POSIX is an application characteristic that is maintained at the enclave level. After you have established the characteristic during enclave initialization, you cannot change it.

Non-CICS default: POSIX(OFF)

CICS default: POSIX is ignored under CICS

AMODE 64 default: POSIX(ON)

Syntax



OFF Indicates that the application is not POSIX-enabled.

ON Indicates that the application is POSIX-enabled.

Usage notes

- When you set POSIX to ON, you can use functions that are unique to POSIX, such as `pthread_create()`.
- POSIX(ON) applies to z/OS but explicitly excludes CICS. If you set POSIX to ON while an application is running under CICS, you receive a warning message, POSIX is set OFF, and the application continues to run. You can specify POSIX(ON) for both DB2 and IMS applications.
- When you set POSIX to ON while an application is running under CICS, you receive a warning message, POSIX is set OFF, and the application continues to run.
- One of the effects of POSIX(ON) is the enablement of POSIX signal handling semantics, which interact closely with the Language Environment condition handling semantics.
- ANSI C programs can access the z/OS UNIX Hierarchical File System (HFS) on MVS independent of the POSIX setting. Where ambiguities exist between ANSI and POSIX semantics, the POSIX run-time option setting indicates the POSIX semantics to follow.
- Within nested enclaves, only one enclave can have the POSIX option set to ON. All other nested enclaves must have the POSIX option set to OFF. When a

POSIX

second nested enclave tries to specify the run-time option POSIX(ON) within one Language Environment process, Language Environment ends with abend U4093, reason code 172.

For more information

- For more information on POSIX functions that have a kernel dependency or a POSIX ON dependency, see *z/OS XL C/C++ Run-Time Library Reference*.

PROFILE

PROFILE controls the use of an optional PROFILER to collect performance data for the running application.

Restriction: An application cannot run with both the TEST and PROFILE options in effect. If both are specified, an informational message is generated and Language Environment forces the PROFILE option OFF.

Non-CICS default: PROFILE(OFF,"")

CICS default: PROFILE(OFF,"")

AMODE 64 default: PROFILE(OFF,"")

Syntax

```
➡ PROFILE ( [ OFF | ON ] , [ string ] ) ➡
```

OFF Indicates that the profile facility is inactive.

ON Indicates that the profile facility is active.

string Profile options that Language Environment passes to the profiler installed. You can enclose the string in either single or double quotation marks.

The maximum length of the string is 250 bytes when specified on program invocation or from a compiler directive.

For more information

- For a detailed description of the setup and use of the IBM z/OS XL C/C++ PROFILER, see *z/OS UNIX System Services User's Guide*.

PRTUNIT (Fortran only)

Derivation

PRinT UNIT

PRTUNIT identifies the unit number used for PRINT and WRITE statements that do not specify a unit number.

Non-CICS default: PRTUNIT(6)

CICS default: PRTUNIT is ignored under CICS.

Syntax

```

▶▶PRTunit—(—number—)————▶▶

```

number

A valid unit number in the range 0-99. You can establish your own default number at installation time.

PUNUNIT (Fortran only)

Derivation

PUNch UNIT

PUNUNIT identifies the unit number used for PUNCH statements that do not specify a unit number.

Non-CICS default: PUNUNIT(7)

CICS default: PUNUNIT is ignored under CICS.

Syntax

```

▶▶PUNunit—(—number—)————▶▶

```

number

A valid unit number in the range 0-99. You can establish your own default number at installation time.

RDRUNIT (Fortran only)

Derivation

ReaDeR UNIT

RDRUNIT identifies the unit number used for READ statements that do not specify a unit number.

Non-CICS default: RDRUNIT(5)

CICS default: RDRUNIT is ignored under CICS.

Syntax

```

  >>RDRunit-(number)-

```

number

A valid unit number in the range 0-99. You can establish your own default number at installation time.

RECPAD (Fortran only)
Derivation

RECord PADding

RECPAD specifies whether a formatted input record is padded with blanks.

Non-CICS default: NORECpad

CICS default: RECPAD is ignored under CICS.

Syntax

```

  >>[NORECpad][RECPad]

```

Usage notes

- The PAD specifier of the OPEN statement can be used to indicate padding for individual files.

REDIR | NOREDIR (C Only)
Derivation

REDIRection


REDIR specifies whether you can redirect stdin, stdout, and stderr from the command line.

Restriction: This option can only be specified with the #pragma runopts directive or the REDIR and NOREDIR compiler options.

Non-CICS default: REDIR

CICS default: REDIR is ignored under CICS.

AMODE 64 default: REDIR

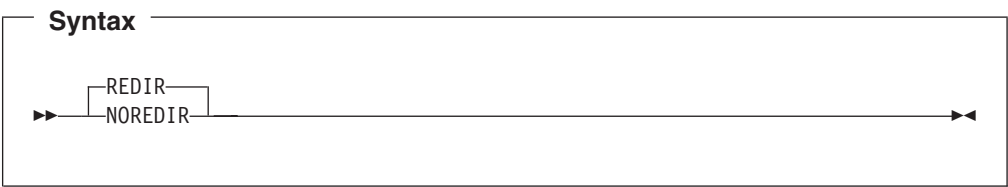

REDIR
Specifies that you can redirect stdin, stdout, and stderr from the command line.
REDIR applies only if ARGPARSE is also specified or defaulted.

NOREDIR
Specifies that you cannot redirect stdin, stdout, and stderr from the command line.

For more information

- See “ARGPARSE | NOARGPARSE (C only)” on page 17 for a description of ARGPARSE.

RPTOPTS




RPTOPTS generates, after an application has run, a report of the run-time options in effect while the application was running. RPTOPTS(ON) lists the declared run-time options in alphabetical order. The report lists the option names and shows where each option obtained its current setting. Language Environment writes options reports only in mixed-case U.S. English.

For an example and complete description of the options report, see *z/OS Language Environment Debugging Guide*.

Non-CICS default: RPTOPTS(OFF)

CICS default: RPTOPTS(OFF)

AMODE 64 default: RPTOPTS(OFF)

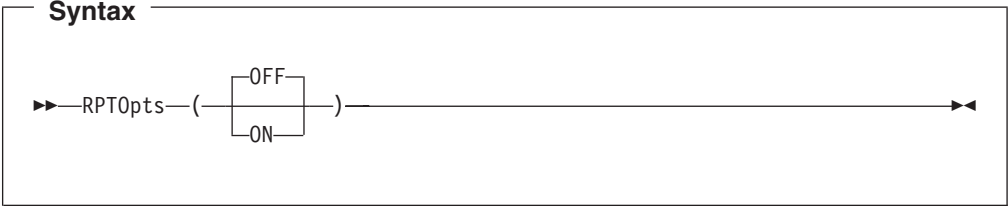

OFF
Does not generate a report of the run-time options in effect while the application was running.

ON
Generates a report of the run-time options in effect while the application was running.

RPTOPTS

Usage notes

- For AMODE 64 applications, Language Environment writes the options report to stderr.
- RPTOPTS does not generate the options report if your application ends abnormally.
- In a non-CICS environment, Language Environment directs the report to the *ddname* specified in the MSGFILE run-time option. Under CICS, with RPTOPTS(ON), Language Environment writes the options report to the CESE queue when the transaction ends successfully.

Performance consideration

This option increases the time it takes for the application to run. Therefore, use it only as an aid to application development.

For more information

- See “MSGFILE” on page 50 for more information about the MSGFILE run-time option.
- For an example and complete description of the options report, see *z/OS Language Environment Debugging Guide*.

RPTSTG

Derivation

RePorT SToraGe

RPTSTG generates, after an application has run, a report of the storage the application used. Language Environment writes storage reports only in mixed-case U.S. English.

You can use the storage report information to help you set the ANYHEAP, BELOWHEAP, HEAP, HEAP64, HEAPPOOLS, HEAPPOOLS64, IOHEAP64, LIBHEAP64, LIBSTACK, STACK, STACK64, THREADHEAP, THREADSTACK, and THREADSTACK64 run-time options for the best storage tuning.

For an example and complete description of the storage report, see *z/OS Language Environment Debugging Guide*.

Non-CICS default: RPTSTG(OFF)

CICS default: RPTSTG(OFF)

AMODE 64 default: RPTSTG(OFF)

Syntax

►► RPTStg—() —————►►

- OFF** Does not generate a report of the storage used while the application was running.
- ON** Generates a report of the storage used while the application was running.

CICS consideration

- The phrases “Number of segments allocated” and “Number of segments freed” represent, on CICS, the number of EXEC CICS GETMAIN and EXEC CICS FREEMAIN requests, respectively.

z/OS UNIX consideration

- The RPTSTG option applies to storage utilization for the enclave, including thread-level information on stack utilization, and heap storage used by multiple threads.

Usage notes

- For AMODE 64 applications, Language Environment writes the storage report to `stderr`.
- RPTOPTS does not generate the options report if your application ends abnormally.
- When a vendor heap manager (VHM) is active, the Language Environment Storage Report will have a text line indicating that the user heap for C/C++ part of the enclave is managed separately. The VHM is expected to write its own storage report to the `stderr` stream.
- RPTSTG does not generate a storage report if your application terminates abnormally.
- RPTSTG includes PL/I task-level information on stack and heap usage.
- The phrases “Number of segments allocated” and “Number of segments freed” represent the number of GETMAIN and FREEMAIN requests, respectively.

Performance consideration

This option increases the time it takes for an application to run. Therefore, use it only as an aid to application development.

The storage report generated by RPTSTG(ON) shows the number of system-level calls to obtain storage that were required while the application was running. To improve performance, use the storage report numbers generated by the RPTSTG option as an aid in setting the initial and increment size for stack and heap. This reduces the number of times that the Language Environment storage manager makes requests to acquire storage. For example, you can use the storage report numbers to set appropriate values in the HEAP *init_size* and *incr_size* fields for allocating storage.

For more information

- For more information about tuning your application with storage numbers, see *z/OS Language Environment Programming Guide*.
- For more information about the MSGFILE run-time option, see “MSGFILE” on page 50.
- For an example and complete description of the storage report, see *z/OS Language Environment Debugging Guide*.

RTEREUS (COBOL only)

Derivation

Run Time Environment REUSE

RTEREUS implicitly initializes the run-time environment to be reusable when the main program for the thread is a COBOL program. This option is valid only when used with CEEDOPT, CEEUOPT, CEEROPT or the assembler user exit.

Non-CICS default: NORTEREUS

CICS default: RTEREUS is ignored under CICS.

Syntax

NORTEREUS

Does not initialize the run-time environment to be reusable when the first COBOL program is invoked.

RTEREUS

Initializes the run-time environment to be reusable when the first COBOL program is invoked.

Usage notes

- **Restriction:** Enterprise COBOL programs compiled with the THREAD compiler option does not run with RTEREUS(ON).
- **Guideline:** Avoid using RTEREUS(ON) as an installation default. If you do use RTEREUS, use it for specific applications only.
- Under Language Environment, RTEREUS(ON) is only supported in a single enclave environment unless you modify the behavior using the IGZERREO CSECT. With the IBM supplied default setting for COBOL's reusable environment, applications that create multiple enclaves will terminate with error message IGZ0168S. Multiple enclaves can be created by applications that use SVC LINK or CMSCALL to invoke application programs. One example is when an SVC LINK is used to invoke an application program under ISPF that is using ISPF services (such as CALL 'ISPLINK' and ISPF SELECT).
- If a Language Environment reusable environment is established (using RTEREUS), any attempts to run a C or PL/I main program under Language Environment will fail. For example, when running on ISPF with RTEREUS(ON):
 - The first program invoked by ISPF is a COBOL program. A Language Environment reusable environment is established.
 - At some other point, ISPF invokes a PL/I or C program. The initialization of the PL/I or C program fails.
- If a large number of COBOL programs run (using RTEREUS) under the same MVS task, you can encounter out-of-region abends. This is because all storage acquired by Language Environment to run COBOL programs is kept in storage until the MVS task ends or the Language Environment environment is terminated.

- Language Environment storage and run-time options reports are not produced by Language Environment (using RTEREUS) unless a STOP RUN is issued to end the enclave.
- Use RTEREUS and NORTEREUS only on the command line.
- IMS consideration—RTEREUS is not recommended for use under IMS.
- The IGZERREO CSECT affects the handling of program checks in the non-Language Environment-enabled driver that repeatedly invokes COBOL programs. It also affects the behavior of running COBOL programs in a nested enclave when a reusable environment is active.

Performance consideration

You must change STOP RUN statements to GOBACK statements to gain the benefits of RTEREUS. STOP RUN terminates the reusable environment. If you specify RTEREUS and use STOP RUN, Language Environment recreates the reusable environment on the next invocation of COBOL. Doing this repeatedly degrades performance, because a reusable environment takes longer to create than does a normal environment.

The IGZERREO CSECT affects the performance of running with RTEREUS.

Language Environment also offers preinitialization support in addition to RTEREUS.

For more information

- For more information about CEEUOPT, CEEROPT or CEEDOPT, see *z/OS Language Environment Customization*.
- For more information about IGZERREO, see *z/OS Language Environment Customization*.
- See *z/OS Language Environment Programming Guide* for more information about preinitialization.

SIMVRD (COBOL only)

Derivation

SIMulate Variable length Relative organization Data sets

SIMVRD specifies whether your COBOL programs use a VSAM KSDS to simulate variable-length relative organization data sets.

Non-CICS default: NOSIMVRD

CICS default: SIMVRD is ignored under CICS.

Syntax

```

  >> [NOSIMVRD]
     [SIMVRD]
  <<

```

NOSIMVRD

Do not use a VSAM KSDS to simulate variable-length relative organization.

SIMVRD

Use a VSAM KSDS to simulate variable-length relative organization.

For more information

- See *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide* for more details.


STACK

STACK controls the allocation of the thread's stack storage for both the upward and downward- growing stacks. Typical items residing in the upward-growing stack are C or PL/I automatic variables, COBOL LOCAL-STORAGE data items, and work areas for run-time library routines.

The downward-growing stack is allocated only in an XPLINK environment.

Non-CICS default: STACK(128K,128K,ANYWHERE,KEEP,512K,128K)

CICS default: STACK(4K,4080,ANYWHERE,KEEP,4K,4080)

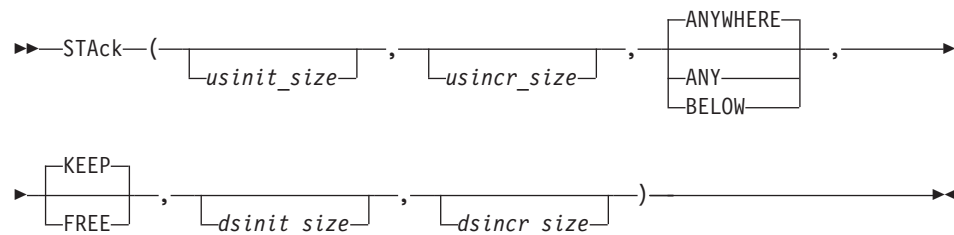Syntax***usinit_size***

Determines the initial allocation of the upward-growing stack storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

usinit_size can be preceded by a minus sign. In environments other than CICS, if you specify a negative number Language Environment uses all available storage minus the amount specified for the initial stack storage.

A size of "0" or "-0" requests half of the largest block of contiguous storage in the region below the 16 MB line.

usincr_size

Determines the minimum size of any subsequent increment to the upward-growing stack storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is the larger of two values— *usincr_size* or the requested size—rounded up to the nearest multiple of 8 bytes.

If you specify *usincr_size* as 0, only the amount of the storage needed at the time of the request, rounded up to the nearest multiple of 8 bytes, is obtained.

The requested size is the amount of storage a routine needs for a stack frame.

Example: In this example:

- *usincr_size* is specified as 8K
- the requested size is 9000 bytes
- the currently allocated stack storage has less than 9000 bytes available

As a result, Language Environment allocates enough storage to hold the 9000 byte request.

If the requested size is smaller than 8K, Language Environment allocates 8K of stack storage.

ANYWHERE|ANY

Specifies that stack storage can be allocated anywhere in storage. If there is no available storage above the line, storage is acquired below the 16 MB line.

BELOW

Specifies that stack storage is allocated below the 16M line in storage.

KEEP

Specifies that an increment to stack storage is not released when the last of the storage within that increment is freed.

FREE

Specifies that an increment to stack storage is released when the last of the storage within that increment is freed.

dsinit_size

Determines the initial allocation of the downward-growing stack storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 16 bytes.

dsincr_size

Determines the minimum size of any subsequent increment to the downward-growing stack storage. This value can be specified as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is the larger of two values— *dsincr_size* or the requested size—rounded up to the nearest multiple of 16 bytes.

CICS consideration

- **dsinit_size** and **dsincr_size** sub-options are ignored under CICS.
- The maximum initial and increment size for CICS above 16 MB is 1 gigabyte (1024 MB).
- The minimum for the initial size is 4K.
- STACK(0), STACK (-0), and STACK (-n) are all interpreted as STACK(4K) under CICS.
- The default increment size under CICS is 4080 bytes, rather than 4096 bytes, to accommodate the 16 bytes CICS storage check zone. Without this accommodation, an extra page of storage is allocated when the storage allocation is below the 16 MB line.

z/OS UNIX consideration

- The STACK option specifies the characteristics of the user stack for the initial thread. In particular, it gets the initial size of the user stack for the initial thread. The characteristics that indicate *incr_size*, ANYWHERE, and KEEP | FREE apply to any thread created using `pthread_create`. Language Environment gets the initial stack size from the threads attribute object specified in the `pthread_create`

STACK

function. The default size to be set in the thread's attribute object is obtained from the STACK run-time option's initial size.

Guideline: The default setting for STACK under z/OS UNIX is STACK=(12K,12K,ANYWHERE,KEEP,512K,128K).

Usage notes

- Applications running with ALL31(OFF) must specify STACK(,BELOW,,) to ensure that stack storage is addressable by the application.
- When an application is running in an XPLINK environment, the STACK run-time option is forced to STACK(,ANY,,). Only the third suboption of the STACK run-time option is changed by this action, to indicate that stack storage can be allocated anywhere in storage. No message will be issued to indicate this action. In this case, if a Language Environment run-time options report is generated using the RPTOPTS run-time option, the STACK option will be reported as "Override" under the LAST WHERE SET column.
- The *dsinit_size* and *dsincr_size* values are not the actual amounts of storage obtained. The actual size of the storage obtained is 4K larger (8K if a 4K page alignment cannot be guaranteed) to accommodate the guard page.
- PL/I consideration—PL/I automatic storage above the 16 MB line is supported under control of the Language Environment STACK option. When the Language Environment stack is above, PL/I temporaries (dummy arguments) and parameter lists (for reentrant/recursive blocks) also reside above.

The stack frame size for an individual block is constrained to 16 MB. Stack frame extensions are also constrained to 16 MB. Therefore, the size of an automatic aggregate, temporary variable, or dummy argument cannot exceed 16 MB. Violation of this constraint might have unpredictable results.

If an OS PL/I application does not contain any edited stream I/O and if it is running with AMODE 31, you can relink it with Language Environment to use STACK(,ANY,,). Doing so is particularly useful under CICS to help relieve below-the-line storage constraints.

- PL/I MTF consideration—The STACK option allocates and manages stack storage for the PL/I main task only.

Performance consideration

You can improve performance with the STACK run-time option by specifying values that minimize the number of times the operating system allocates storage. See "RPTSTG" on page 64 for information on how to generate a report you can use to determine the optimum values for the STACK run-time option.

For more information

- See "ALL31" on page 14 for more information about the ALL31 run-time option.
- See "RPTSTG" on page 64 for more information about the RPTSTG run-time option.
- For more information about using the storage reports generated by the RPTSTG run-time option to tune the stacks, see *z/OS Language Environment Debugging Guide*.
- See "XPLINK" on page 95 for more information about the XPLINK run-time option.

STACK64 (AMODE 64 only)

STACK64 controls the allocation of the thread's stack storage for AMODE 64 applications.

Storage required for the common anchor area (CAA) and other control blocks is allocated separately from, and prior to, the allocation of the initial stack segment and the initial heap.

AMODE 64 default: STACK64(1M,1M,128M)

Syntax

```

STACK64(
  initial,
  increment,
  maximum
)

```

initial Determines the size of the initial stack segment. The storage is contiguous. This value is specified as *nM* bytes of storage.

increment

Determines the minimum size of any subsequent increment to the downward-growing stack area. This value is specified as *nM* bytes of storage. The actual amount of allocated storage is the larger of two values— *increment* or the requested size—rounded up to the nearest 1MB.

If you specify *increment* as 0, only the amount of the storage needed at the time of the request, rounded up to the nearest multiple of 1MB, is obtained.

The requested size is the amount of storage a routine needs for a stack frame.

maximum

Specifies the maximum stack size. This value is specified as *nM* bytes of storage. When the maximum size is less than the initial size, *initial* is used as the maximum stack size.

Usage notes

- The 1MB guard page is not included in any of the sizes
- The maximum stack segment is the maximum of STACK64 initial and maximum sizes.

Performance consideration

You can improve performance with the STACK64 run-time option by specifying values that minimize the number of times the operating system allocates storage. See “RPTSTG” on page 64 for information on how to generate a report you can use to determine the optimum values for the STACK64 run-time option.

For more information

- See “RPTSTG” on page 64 for more information about the RPTSTG run-time option.
- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.

- For more information about using the storage reports generated by the RPTSTG run-time option to tune the stacks, see *z/OS Language Environment Debugging Guide*.

STORAGE

STORAGE controls the initial content of storage when allocated and freed. It also controls the amount of storage that is reserved for the out-of-storage condition. If you specify one of the parameters in the STORAGE run-time option, all allocated storage processed by that parameter is initialized to the specified value. Otherwise, it is left uninitialized.

You can use the STORAGE option to identify uninitialized application variables, or prevent the accidental use of previously freed storage. STORAGE is also useful in data security. For example, storage containing sensitive data can be cleared when it is freed.

Non-CICS default: STORAGE(NONE,NONE,NONE,0K)

CICS default: STORAGE(NONE,NONE,NONE,0K)

AMODE 64 default: STORAGE(NONE,NONE,NONE,)

Syntax

```
STORAGE( [heap_alloc_value], [heap_free_value],
         [dsa_alloc_value], [reserve_size] )
```

heap_alloc_value

The initialized value of any heap storage allocated by the storage manager. You can specify *heap_alloc_value* as:

- A single character enclosed in quotes. If you specify a single character, every byte of heap storage allocated by the storage manager is initialized to that character's EBCDIC equivalent. For example, if you specify 'a' as the *heap_alloc_value*, heap storage is initialized to X'818181...81' or 'aaa...a'.
- Two hex digits without quotes. If you specify two hex digits, every byte of the allocated heap storage is initialized to that value. For example, if you specify FE as the *heap_alloc_value*, heap storage is initialized to X'FEFEFE...FE'. A *heap_alloc_value* of 00 initializes heap storage to X'0000...00'.
- **NONE** If you specify **NONE**, the allocated heap storage is not initialized.

heap_free_value

The value of any heap storage freed by the storage manager is overwritten. You can specify *heap_free_value* as:

- A single character enclosed in quotes. For example, a *heap_free_value* of 'f' overwrites freed heap storage to X'868686...86'; 'B' overwrites freed heap storage to X'C2C2C2...C2'.

- Two hex digits without quotes. A *heap_free_value* of FE overwrites freed heap storage with X'FEFEFE...FE'.
- **NONE** If you specify **NONE**, the freed heap storage is not initialized.

dsa_alloc_value

The initialized value of stack frames from the Language Environment stack. A stack frame is dynamically-acquired storage that is composed of a standard register save area and the area available for automatic storage.

If specified, all Language Environment stack storage, including automatic variable storage, is initialized to *dsa_alloc_value*. Stack frames allocated outside the Language Environment stack are never initialized.

You can specify *dsa_alloc_value* as:

- A single character enclosed in quotes. If you specify a single character, any dynamically acquired stack storage allocated by the storage manager is initialized to that character's EBCDIC equivalent. For example, if you specify 'A' as the *dsa_alloc_value*, stack storage is initialized to X'C1C1C1...C1'. A *dsa_alloc_value* of 'F' initializes stack storage to X'C6C6C6...C6', 'd' to X'848484...84'.
- Two hex digits without quotes. If you specify two hex digits, any dynamically-acquired stack storage is initialized to that value. For example, if you specify FE as the *dsa_alloc_value*, stack storage is initialized to X'FEFEFE...FE'. A *dsa_alloc_value* of 00 initializes stack storage to X'00', FF to X'FFFFFF...FF'.
- **CLEAR** If you specify **CLEAR**, any unused portion of the initial upward growing stack segment is initialized to binary zeroes, just before the main procedure gains control. This value has no effect on any stack increments or on the XPLINK or AMODE 64 downward growing stack.
- **NONE** If you specify **NONE**, the stack storage is not initialized.

reserve_size

The amount of storage for the Language Environment storage manager to reserve in the event of an out-of-storage condition. You can specify the *reserve_size* value as *n*, *nK*, or *nM* bytes of storage. The amount of storage is rounded to the nearest multiple of 8 bytes.

Restriction: This option is ignored in a 64-bit environment.

If you specify *reserve_size* as 0, no reserve segment is allocated.

The default *reserve_size* is 0, so no reserve segment is allocated. If you do not specify a reserve segment and your application exhausts storage, the application terminates with abend 4088 and a reason code of 1024.

If you specify a *reserve_size* that is greater than 0 on a non-CICS system, Language Environment does not immediately abend when your application runs out of storage. Instead, when the stack overflows, Language Environment uses the reserve stack as the new segment and signals a CEEOPD out of storage condition. This allows a user-written condition handler to gain control for this signal and release storage. If the reserve stack segment overflows while this is happening, Language Environment terminates with abend 4088 and reason code of 1004. The reserve stack segment is not freed until thread termination. It is acquired from 31-bit storage if the STACK(,ANY,,) runtime option is set or 24-bit storage when STACK(,BELOW,,) is requested. If a determination is made to activate the reserve stack, the reserve size should be set to a minimum of 32K to support Language Environment condition handling and messaging internal routines as well as the user condition handler. When using the reserve

NOENTRY CONDITION TRACEBACK THREAD(ALL) NOBLOCK NOSTORAGE
 NOVARIABLES NOFILES STACKFRAME(ALL) PAGESIZE(60)
 FNAME(CEEDUMP) GENOPTS

The following options are passed for DUMP and UADUMP:

THREAD(ALL) NOENTRY TRACEBACK FILES VARIABLES BLOCK STORAGE
 STACKFRAME(ALL) PAGESIZE(60) FNAME(CEEDUMP) CONDITION
 GENOPTS


If a message is printed, based upon the TERMTHDACT(MSG) run-time option, the message is for the active condition immediately prior to the termination imminent step. In addition, if that active condition is a promoted condition (was not the original condition), the original condition's message is printed.

If the TRACE run-time option is specified with the DUMP suboption, a dump containing the trace table, at a minimum, is produced. The contents of the dump depend on the values set in the TERMTHDACT run-time option.

Non-CICS default: TERMTHDACT(TRACE,CESE,96)

CICS default: TERMTHDACT(TRACE,CESE,96)

AMODE 64 default: TERMTHDACT(TRACE,,96)

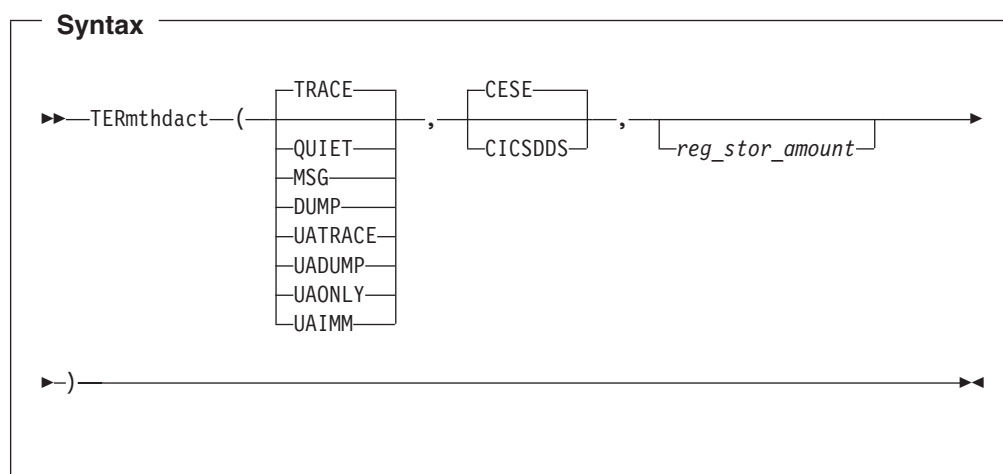

TRACE

Specifies that when a thread terminates due to an unhandled condition of severity 2 or greater, Language Environment generates a message indicating the cause of the termination and a trace of the active routines on the activation stack.

QUIET

Specifies that Language Environment does not generate a message when a thread terminates due to an unhandled condition of severity 2 or greater.

MSG

Specifies that when a thread terminates due to an unhandled condition of severity 2 or greater, Language Environment generates a message indicating the cause of the termination.

DUMP

Specifies that when a thread terminates due to an unhandled condition of severity 2 or greater, Language Environment generates a message

indicating the cause of the termination, a trace of the active routines on the activation stack, and a Language Environment dump.

UATRACE

Specifies that when a thread terminates due to an unhandled condition of severity 2 or greater, Language Environment generates a message indicating the cause of the termination, a trace of the active routines on the activation stack, and a U4039 system dump of the user address space. Under CICS, you will get a CICS transaction dump. Under non-CICS, if the appropriate DD statement is used, you will get a system dump of your user address space.

UADUMP

Specifies that when a thread terminates due to an unhandled condition of severity 2 or greater, Language Environment generates a message indicating the cause of the termination, a trace of the active routines on the activation stack, a Language Environment dump, and a U4039 system dump of the user address space. Under non-CICS, if the appropriate DD statement is used, you will get a system dump of your user address space. Under CICS, you will get a CICS transaction dump.

UAONLY

Specifies that when a thread terminates due to an unhandled condition of severity 2 or greater, Language Environment generates a U4039 system dump of the user address space. Under non-CICS, if the appropriate DD statement is used, you will get a system dump of your user address space. Under CICS, you will get a CICS transaction dump.

UAIMM

Specifies to Language Environment that prior to condition management processing, for abends and program interrupts that are conditions of severity 2 or higher, Language Environment will immediately request the operating system to generate a system dump of the original abend/program interrupt of the user address space. Due to an unhandled condition of severity 2 or greater, Language Environment generates a U4039 system dump of the user address space. Under non-CICS, if the appropriate DD statement is used, you will get a system dump of your user address space. After the dump is taken by the operating system, Language Environment condition manager can continue processing. If the thread terminates due to an unhandled condition of Severity 2 or higher, then Language Environment will terminate as if TERMTHDACT(QUIET) was specified.

Note: For software-raised conditions or signals, UAIMM behaves the same as UAONLY.

CESE Specifies that Language Environment dump output will be written to the CESE QUEUE as it has always been.

Restriction: This option is ignored in a 64-bit environment.

CICSDDS

Specifies that Language Environment dump output will be written to the new CICS transaction dump that contains both CICS and CEEDUMP data.

Restriction: This option is ignored in a 64-bit environment.

reg_stor_amount

Controls the amount of storage to be dumped around registers. This

amount can be in the range from 0 to 256 bytes. The amount specified will be rounded up to the nearest multiple of 32. The default amount is 96 bytes.

CICS consideration

- All TERMTHDACT output is written to the data queue based on the setting of CESE or CICSDDS.

Table 5 on page 78 for help in understanding the results of the different options that are available.

TERMTHDACT

Table 5. Condition Handling of 0C_x ABENDS

Options	TERMTHDACT(option,CESE,)	TERMTHDACT(option,CICSDDS,)
QUIET	- No output. - ASRA or user ABEND issued.	- No output. - ASRA or user ABEND issued.
MSG	- Message written to CESE queue or MSGFILE. - ASRA or user ABEND issued.	- Message written to CESE queue or MSGFILE. - ASRA or user ABEND issued.
TRACE	- Message written to CESE queue. - Traceback written to CESE queue. - ASRA or user ABEND issued.	- Message written to CESE or MSGFILE. - Traceback included in CICS transaction dump for this ABEND. - ASRA or user ABEND issued.
DUMP	- Message written to CESE queue. - Traceback written to CESE queue. - CEEDUMP to CESE queue. - ASRA or user ABEND issued.	Invalid sub-option combination. Not supported.
UATRACE	- Message written to CESE queue. - Traceback included in CICS transaction dump for this ABEND. - U4039 transaction dump in CICS dump data set. - ASRA or user ABEND issued.	- Message written to CESE queue. - Traceback written to CESE queue. - U4039 transaction dump in CICS dump data set. - ASRA or user ABEND issued.
UADUMP	- Message written to CESE queue. - Traceback written to CESE queue. - CEEDUMP written to CESE queue. - U4039 transaction dump in CICS dump data set. - ASRA or user ABEND issued.	Invalid sub-option combination. Not supported.
UAONLY	U4039 transaction dump in CICS dump data set.	No changes in behavior for CICSDDS.
UAIMM	U4039 transaction dump in CICS dump data set.	No changes in behavior for CICSDDS.

Note: Program checks end in ASRx (most commonly ASRA) CICS abend with a CICS dump in the dump data set. Abends end with the abend code provided on the EXEC CICS ABEND command with a CICS dump in the dump data set if the NODUMP option was NOT specified.

Table 6. Handling of Software Raised Conditions

Options	TERMTHDACT(option,CESE,)	TERMTHDACT(option,CICSDDS,)
QUIET	- No output. - U4038 abend issued with CANCEL and NODUMP options.	- No output. - U4038 abend issued with CANCEL and NODUMP options.
MSG	- Message written to CESE queue or MSGFILE. - U4038 abend issued.	- Message written to CESE queue or MSGFILE. - U4038 abend issued.
TRACE	- Message written to CESE queue or MSGFILE. - Traceback written to CESE queue. - U4038 abend issued.	- Message written to CESE queue or MSGFILE. - Traceback written to CESE queue. - U4038 abend issued.

Table 6. Handling of Software Raised Conditions (continued)

Options	TERMTHDACT(option,CESE,)	TERMTHDACT(option,CICSDDS,)
DUMP	• Message written to CESE queue or MSGFILE. • Traceback written to CESE queue. • CEEDUMP written to CESE queue. • U4038 abend issued.	• Invalid sub-option combination. Not supported.
UATRACE	• Message written to CESE queue or MSGFILE. • Traceback written to CESE queue. • U4039 transaction dump in CICS dump data set. • U4038 abend issued.	• Message written to CESE queue or MSGFILE. • Traceback written to CESE queue. • U4039 transaction dump in CICS dump data set. • U4038 abend issued.
UADUMP	• Message written to CESE queue or MSGFILE. • Traceback written to CESE queue. • CEEDUMP written to CESE queue. • U4039 transaction dump in CICS dump data set. • U4038 abend issued.	• Invalid sub-option combination. Not supported.
UAONLY	• U4039 transaction dump in CICS dump data set. • U4038 abend issued.	• No changes in behavior for CICSDDS.
UAIMM	• U4039 transaction dump in CICS dump data set. • U4038 abend issued.	• Incorrect sub-option combination. Not supported.

Note:

- CICS is told about software raised error conditions for DUMP and TRACE.
- When assembling a CEECOPT, CEEROPT, or CEEUOPT, the CICSDDS option cannot be issued with DUMP or UADUMP. This results in a RC=8, CEEXOPT issues the following message, and the setting is forced to TRACE:
8,The TERMTHDACT level setting of DUMP
8,conflicts with the CICSDDS suboption.
8,A level of TRACE or less must be used with CICSDDS.
8,The TERMTHDACT level suboption
8,was set to TRACE.
- Language Environment requests a CICS transaction dump via the U4039 abend.
- See *z/OS Language Environment Run-Time Messages* for more complete details regarding the U4039 abend.
- Running with something like TERMTHDACT(TRACE,CICSDDS) in the CEECOPT or CEEROPT and then creating a CEEUOPT without specifying the second operand (for example, TERMTHDACT(DUMP)) results in the CICS dump data set as the output destination and the following message occurs in the CESE queue:
CEE3627I The following messages pertain to the programmer default run-time options.
CEE3775W A conflict was detected between the TERMTHDACT suboptions CICSDDS and DUMP.
The TERMTHDACT level setting has been set to TRACE.

and the traceback is written to the CICS transaction dump data set.

Usage notes

- A run-time options report will be generated and placed at the end of the enclave information whenever the TRACE, UATRACE, DUMP and UADUMP options are invoked.
- PL/I considerations—After a normal return from a PL/I ERROR ON-unit or from a PL/I FINISH ON-unit, Language Environment considers the condition unhandled. If a GOTO is not performed and the resume cursor is not moved, the thread terminates. The TERMTHDACT setting guides the amount of information that is produced. The message is not presented twice.
- PL/I MTF considerations—
 - TERMTHDACT applies to a task when the task terminates abnormally due to an unhandled condition of severity 2 or higher that is percolated beyond the initial routine's stack frame.
 - When a task ends with a normal return from an ERROR ON-unit and other tasks are still active, a dump is not produced even when the TERMTHDACT option DUMP, UADUMP, UAONLY, or UAIMM is specified.
 - All active subtasks created from the incurring task also terminate abnormally, but the enclave can continue to run.
- z/OS UNIX consideration—The TERMTHDACT option applies when a thread terminates abnormally. Abnormal termination of a single thread causes termination of the entire enclave. If an unhandled condition of severity 2 or higher percolates beyond the first routine's stack frame, the enclave terminates abnormally.

If an enclave terminates due to a POSIX default signal action, TERMTHDACT applies only to conditions that result from program checks or abends.

If running under an z/OS UNIX shell and Language Environment generates a system dump, a core dump is generated to a file based on the kernel environment variable, `_BPXKDUMP`.

- `_CEE_DMPTARG`

The environment variable `_CEE_DMPTARG` will be used to allow a sysout class for a dynamically allocated CEEDUMP.

You can set the `_CEE_DMPTARG` value string from an z/OS UNIX shell by:

- using the `export` command
- using the C functions `setenv()` or `putenv()`
- using the `ENVAR` run-time option.

Format of the environment variable is:

`_CEE_DMPTARG=value`

where value is a null-terminated character string defined as one of the following values:

`SYSOUT(x)`—where x defines a sysout class that Language Environment will set dynamically allocating the CEEDUMP.

For example you could specify: `_CEE_DMPTARG=SYSOUT(A)`

To set the `_CEE_DMPTARG` value from an z/OS UNIX shell, you could issue the `export` command and specify the following run-options, for example:

```
export _CEE_DMPTARG=SYSOUT(A).
```

WHEN _CEE_DMPTARG is not set, then the sysout class will default to SYSOUT(*) for the dynamically allocated CEEDUMP. If the dynamic allocation for the specified SYSOUT class specified by _CEE_DMPTARG should fail, the default, SYSOUT(*) will be used.

For more information

- See “TRACE” on page 88, for more information about the TRACE run-time option.
- For more information about the CEE3DMP service and its parameters, see “CEE3DMP—Generate dump” on page 138.
- See *z/OS Language Environment Programming Guide* for more information about the TERMTHDACT run-time option and condition message.
- For More Information about CESE, see *z/OS Language Environment Programming Guide*.


TEST | NOTEST

TEST specifies the conditions under which a debug tool (such as the Debug Tool supplied with z/OS) assumes control when the user application is being initialized. Parameters of the TEST and NOTEST run-time options are merged as one set of parameters.

Non-CICS default: NOTEST(ALL,*,PROMPT,INSPREF)

CICS default: NOTEST(ALL,*,PROMPT,INSPREF)

AMODE 64 default: NOTEST(ALL,*,PROMPT,INSPREF)

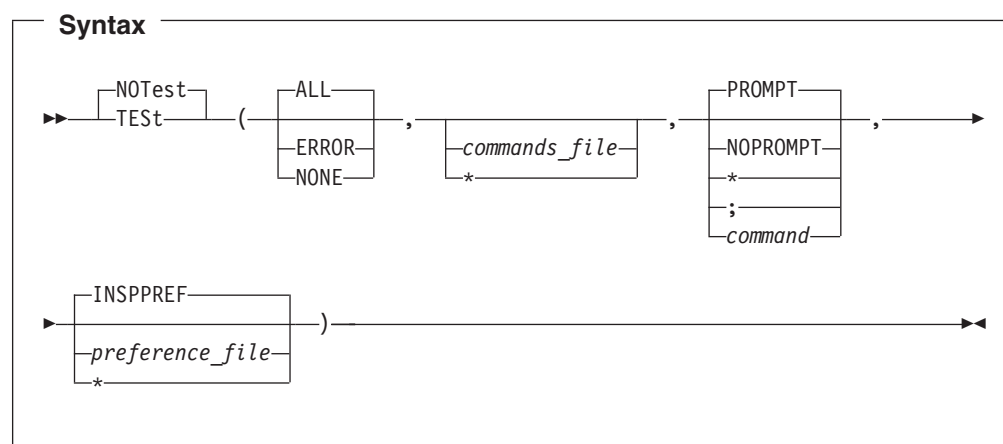

ALL Specifies that any of the following causes the debug tool to gain control even without a defined AT OCCURRENCE for a particular condition or AT TERMINATION:

- The ATTENTION function
- Any Language Environment condition of severity 1 or above
- Application termination

ERROR

Specifies that only one of the following causes the debug tool to gain control without a defined AT OCCURRENCE for a particular condition or AT TERMINATION:

- The ATTENTION function

- Any Language Environment-defined error condition of severity 2 or higher
- Application termination

NONE Specifies that no condition causes the debug tool to gain control without a defined AT OCCURRENCE for a particular condition or AT TERMINATION.

commands_file

A valid *ddname*, data set name (MVS), or file name (CMS), specifying the primary commands file for this run. If you do not specify this parameter all requests for commands go to the user terminal.

You can enclose *commands_file* in single or double quotes to distinguish it from the rest of the TEST | NOTEST suboption list. It can have a maximum length of 80 characters. If the data set name provided could be interpreted as a *ddname*, it must be preceded by a slash (/). The slash and data set name must be enclosed in quotes.

A primary commands file is required when running in a batch environment.

* (asterisk—in place of *commands_file*)

Specifies that no *commands_file* is supplied. The terminal, if available, is used as the source of the debug tool commands.

PROMPT

Specifies that the debug tool is invoked at Language Environment initialization.

NOPROMPT

Specifies that the debug tool is not invoked at Language Environment initialization.

* (asterisk—in place of PROMPT/NOPROMPT)

Specifies that the debug tool is not invoked at Language Environment initialization; equivalent to NOPROMPT.

; (semicolon—in place of PROMPT/NOPROMPT)

Specifies that the debug tool is invoked at Language Environment initialization; equivalent to PROMPT.

command

A character string that specifies a valid debug tool command. The command list can be enclosed in single or double quotes to distinguish it from the rest of the TEST parameter list; it cannot contain DBCS characters. Quotes are needed whenever the command list contains embedded blanks, commas, semicolons, or parentheses. The list can have a maximum of 250 characters.

INSPREF

Specifies the default setting for *preference_file*.

preference_file

A valid *ddname*, data set name (MVS), or file name (CMS), specifying the preference file to be used. A preference file is a type of commands file that you can use to specify settings for your debugging environment. It is analogous to creating a profile for a text editor, or initializing a terminal session.

You can enclose *preference_file* in single or double quotes to distinguish it from the rest of the TEST parameter list. It can have a maximum of 80 characters.

If a specified data set name could be interpreted as a *ddname*, it must be preceded by a slash (/). The slash and data set name must be enclosed in quotes.

- * (asterisk—in place of *preference_file*)
Specifies that no *preference_file* is supplied.

Usage notes

- You can specify parameters on the NOTEST option. If NOTEST is in effect when the application gains control, it is interpreted as TEST(NONE,,*,). If Debug Tool is initialized using a CALL CEETEST or equivalent, the initial test level, the initial *commands_file*, and the initial *preference_file* are taken from the NOTEST run-time option setting.
- z/OS UNIX consideration—Language Environment honors the initial command string before the main routine runs on the initial thread.
The test level (ALL, ERROR, NONE) applies to the enclave.
Language Environment honors the preference file when the debug tool is initialized, regardless of which thread first requests the debug tool services.

Performance consideration

To improve performance, use this option only while debugging.

For more information

- See Debug Tool publications for details and examples of the TEST run-time option as it relates to Debug Tool.

THREADHEAP

Derivation <u>THREAD</u> level <u>HEAP</u> storage

THREADHEAP controls the allocation and management of thread-level heap storage. Separate heap segments are allocated and freed for each thread based on the THREADHEAP specification.


For PL/I MTF applications, controlled and based variables declared in a subtask are allocated from heap storage specified by THREADHEAP. Variables in the main task are allocated from heap storage specified by HEAP.

Library use of heap storage in a substack is allocated from the enclave-level heap storage specified by the ANYHEAP and BELOWHEAP options.

Non-CICS default: THREADHEAP(4K,4K,ANY,KEEP)

CICS default: THREADHEAP is ignored under CICS.

THREADHEAP

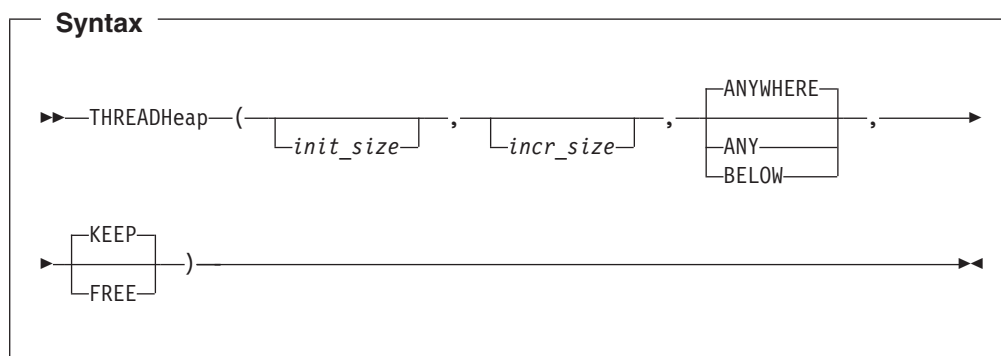

init_size

The minimum initial size of thread heap storage, and is specified in *n*, *nK*, or *nM*. Storage is acquired in multiples of 8 bytes.

A value of zero (0) causes an allocation of 4K.

incr_size

The minimum size of any subsequent increment to the noninitial heap storage is specified in *n*, *nK*, or *nM*. The actual amount of allocated storage is the larger of two values, *incr_size* or the requested size, rounded up to the nearest multiple of 8 bytes.

If you specify *incr_size* as 0, only the amount of the storage needed at the time of the request (rounded up to the nearest 8 bytes) is obtained.

ANYWHERE|ANY

Specifies that the heap storage can be allocated anywhere in storage. If there is no available storage above the line, storage is acquired below the 16 MB line.

The only valid abbreviation of ANYWHERE is ANY.

BELOW

Specifies that the heap storage must be allocated below the 16M line.

KEEP

Specifies that storage allocated to THREADHEAP increments is not released when the last of the storage in the thread heap increment is freed.

FREE

Specifies that storage allocated to THREADHEAP increments is released when the last of the storage in the thread heap increment is freed.

CICS consideration

- Even though this option is ignored under CICS, the default increment size under CICS has changed from 4K (4096 bytes) to 4080 bytes, to accommodate the 16 bytes CICS storage check zone.

Usage notes

- If the requesting routine is running in 24-bit addressing mode and THREADHEAP(,ANY,) is in effect, THREADHEAP storage is allocated below the 16M line based upon the HEAP(,,,initasz24,incrsz24) settings.
- PL/I MTF considerations—The thread-level heap is allocated only in applications that use the PL/I MTF. For PL/I MTF applications, controlled and based variables specified in subtasks are located in the thread-level heap.

If the main program is running in 24-bit addressing mode and `THREADHEAP(,ANY,)` is in effect, heap storage is allocated below the 16M line. The only case in which storage is allocated above the line is when all of the following conditions exist:

- The user routine requesting the storage is running in 31-bit addressing mode.
- `HEAP(,ANY,,)` is in effect.
- The main routine is running in 31-bit addressing mode.
- When running PL/I with `POSIX(ON)` in effect, `THREADHEAP` is used for allocating heap storage for PL/I base variables declared in non-IPTs. Storage allocated to all `THREADHEAP` segments is freed when the thread terminates.
- `THREADHEAP(4K,4K,ANYWHERE,KEEP)` provides behavior compatible with the PL/I `TASKHEAP` option.
- The initial thread heap segment is never released until the thread terminates.
- `THREADHEAP` has no effect on C/C++ or Fortran for z/OS MTF applications.

THREADSTACK

Derivation

THREAD level STACK storage


`THREADSTACK` controls the allocation of the thread's stack storage for both the upward and downward-growing stacks, except the initial thread in a multithreaded application.

If the thread attribute object does not provide an explicit stack size, then the allocation values can be inherited from the `STACK` option or specified explicitly on the `THREADSTACK` option.

Non-CICS default: `THREADSTACK(OFF,4K,4K,ANYWHERE,KEEP,128K,128K)`

CICS default: `THREADSTACK` is ignored under CICS.

Syntax

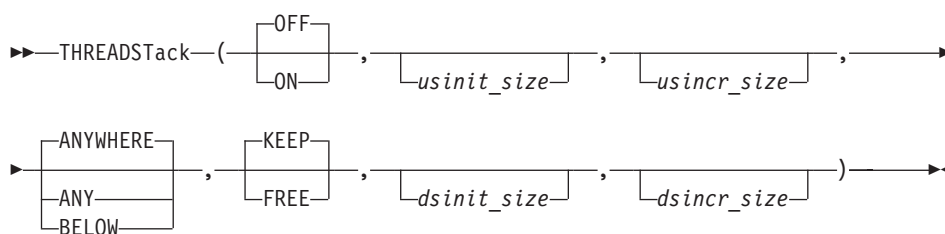

OFF Indicates that the allocation suboptions of the `STACK` run-time option are used for thread stack allocation. Any other suboption specified with `THREADSTACK` is ignored.

ON Controls the stack allocation for each thread, except the initial thread, in a multithreaded environment.

usinit_size

Determines the size of the initial upward-growing stack segment. The

storage is contiguous. You specify the *usinit_size* value as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 8 bytes.

usinit_size can be preceded by a minus sign. In environments other than CICS, if you specify a negative number Language Environment uses all available storage minus the amount specified for the initial stack segment.

A size of "0" or "-0" requests half of the largest block of contiguous storage in the region below the 16 MB line.

usincr_size

Determines the minimum size of any subsequent increment to the upward-growing stack area. You can specify this value as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is the larger of two values— *usincr_size* or the requested size—rounded up to the nearest multiple of 8 bytes

If you specify *usincr_size* as 0, only the amount of the storage needed at the time of the request, rounded up to the nearest multiple of 8 bytes, is obtained.

The requested size is the amount of storage a routine needs for a stack frame. For example, if the requested size is 9000 bytes, *usincr_size* is specified as 8K, and the initial stack segment is full, Language Environment gets a 9000 byte stack increment from the operating system to satisfy the request. If the requested size is smaller than 8K, Language Environment gets an 8K stack increment from the operating system.

ANYWHERE | ANY

Specifies that stack storage can be allocated anywhere in storage. On systems that support bimodal addressing, storage can be allocated either above or below the 16M line. If there is no storage available above the line, Language Environment acquires storage below the line. On systems that do not support bimodal addressing (for example, when VM/ESA is initial program loaded in 370 mode) Language Environment ignores this option and places the stack storage below 16M.

BELOW

Specifies that the stack storage must be allocated below the 16M line in storage that is accessible to 24-bit addressing.

KEEP

Specifies that storage allocated to stack increments is not released when the last of the storage in the stack increment is freed.

FREE

Specifies that storage allocated to stack increments is released when the last of the storage in the stack is freed. The initial stack segment is never released until the enclave terminates.

dsinit_size

Determines the size of the initial downward-growing stack segment. The storage is contiguous. You specify the *init_size* value as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is rounded up to the nearest multiple of 16 bytes.

dsincr_size

Determines the minimum size of any subsequent increment to the downward-growing stack area. You can specify this value as *n*, *nK*, or *nM* bytes of storage. The actual amount of allocated storage is the larger of two values-- *incr_size* or the requested size--rounded up to the nearest multiple of 16 bytes.

Usage notes

- The *dsinit_size* and *dsincr_size* values are the amounts of storage that can be used for downward-growing stack frames (plus the stack header, approximately 20 bytes). The actual size of the storage getmained will be 4K (8K if a 4K page alignment cannot be guaranteed) larger to accommodate the guard page.
- The downward-growing stack is only initialized in a XPLINK supported environment, that is, batch, TSO, z/OS UNIX, and only when a XPLINK application is active in the enclave. Otherwise the suboptions for the downward-growing stack are ignored.
- All storage allocated to THREADSTACK segments are freed when the thread terminates.
- The initial stack segment of the thread is never released until the thread terminates, regardless of the KEEP/FREE state.
- You can specify sub-options with THREADSTACK(OFF,...), but they are ignored. If you override the THREADSTACK(OFF,...) suboption with THREADSTACK(ON) and you omit suboptions, then the suboptions you specified with THREADSTACK(OFF,...) remain in effect. If you respecify THREADSTACK(OFF,...) with different suboptions, they override the defaults.
- PL/I MTF consideration—THREADSTACK(ON,4K, 4K, BELOW, KEEP,,) provides PL/I compatibility for stack storage allocation and management for each subtask in the application.
- PL/I considerations—For multitasking or multithreaded environments, the stack size for a subtask or non-Initial Process Thread (non-IPT) is taken from the THREADSTACK option unless THREADSTACK(OFF) is specified. THREADSTACK(OFF) specifies that the values in the STACK option be used.
- In the multithreaded environment, you can explicitly specify the stack size in the thread attribute object; it will be used instead of the value specified with THREADSTACK or STACK.
- The THREADSTACK option replaces the **NONIPTSTACK** and **NONONIPTSTACK** options.

THREADSTACK64 (AMODE 64 only)

Derivation

THREAD level STACK storage

THREADSTACK64 controls the allocation of the thread's stack storage for AMODE 64 applications, except for the initial thread in a multithreaded environment.

AMODE 64 default: THREADSTACK64(OFF,1M,1M,128M)

Syntax

```

▶▶—THREADSTACK64—(—

|     |
|-----|
| OFF |
| ON  |

—,—initial—,—increment—,—maximum—▶▶
▶—),—▶▶

```

THREADSTACK64

- OFF** Indicates that the allocation suboptions of the STACK64 run-time option are used for thread stack allocation. Any other suboption specified with THREADSTACK64 is ignored.
- ON** Controls the stack allocation for each thread, except the initial thread, in a multithreaded environment.
- initial* Determines the size of the initial stack segment. The storage is contiguous. This value is specified as *nM* bytes of storage.
- increment*
Determines the minimum size of any subsequent increment to the stack area. This value is specified as *nM* bytes of storage. The actual amount of allocated storage is the larger of two values— *increment* or the requested size—rounded up to the nearest multiple of 1MB.
- If you specify *increment* as 0, only the amount of the storage needed at the time of the request, rounded up to the nearest multiple of 1MB, is obtained.
- The requested size is the amount of storage a routine needs for a stack frame.
- maximum*
Specifies the maximum stack size. This value is specified as *nM* bytes of storage. When the maximum size is less than the initial size, *initial* is used as the maximum stack size.

Usage notes

- The 1MB guard page is not included in any of the sizes.
- The maximum thread stack segment is the maximum of THREADSTACK64 initial and maximum sizes.

For more information

- For more information about heap storage and heap storage tuning with storage report numbers, see *z/OS Language Environment Programming Guide*.

TRACE


TRACE controls run-time library tracing activity, the size of the in-storage trace table, the type of trace events to record, and it determines whether a dump containing, at a minimum, the trace table should be unconditionally taken when the application terminates. When you specify TRACE(ON), user-requested trace entries are intermixed with Language Environment trace entries in the trace table.

Under normal termination conditions, if TRACE is active and you specify DUMP, only the trace table is written to the dump report, independent of the TERMTHDACT setting. Only one dump is taken for each termination. Under abnormal termination conditions, the type of dump taken (if one is taken) depends on the value of the TERMTHDACT run-time option and whether TRACE is active and the DUMP suboption is specified.

Non-CICS default: TRACE(OFF,4K,DUMP,LE=0)

CICS default: TRACE(OFF,4K,DUMP,LE=0)

AMODE 64 default: TRACE(OFF,,DUMP,LE=0)

Syntax

OFF Indicates that the tracing facility is inactive.

ON Indicates that the tracing facility is active.

table_size

Determines the size of the tracing table as specified in bytes (*nK* or *nM*). The upper limit is 16M - 1 (1666777215 bytes).

Restriction: This option is ignored in a 64-bit environment and the size is set to 1M.

DUMP Requests that a Language Environment-formatted dump (containing the trace table) be taken at program termination regardless of the setting of the TERMTHDACT run-time option.

NODUMP

Requests that a Language Environment-formatted dump not be taken at program termination.

LE=0 Specifies that no trace events be recorded.

LE=1 Specifies that entry to and exit from Language Environment member libraries be recorded (such as, in the case of C, entry and exit of the `printf()` library function).

LE=2 Specifies that mutex init/destroy and locks/unlocks from Language Environment member libraries be recorded.

LE=3 Activates both the entry/exit trace and the mutex trace.

LE=20 Specifies that XPLINK/non-XPLINK transition should be recorded.

Usage notes

- PL/I MTF consideration—The `TRACE(ON,,,LE=2)` setting provides the following trace table entries for PL/I MTF support:
 - Trace entry 100 occurs when a task is created.
 - Trace entry 101 occurs when a task that contains the tasking `CALL` statements is terminated.
 - Trace entry 102 occurs when a task that does not contain the tasking `CALL` statements is terminated.
- When running PL/I with `POSIX(ON)` in effect, no PL/I-specific trace information is provided.
- When you specify `LE=20`:
 - AMODE 64 applications have no transitions.
 - Transitions across `OS_UPSTACK` linkage are not recorded.
- When `TRACE(OFF)` is specified, Language Environment activates tracing when a `pthread_create()` is done and a debugger is being used.

TRACE

COBOL does not provide any Trace Table Entries.

For more information

- For more information about the dump contents, see “TERMTHDACT” on page 74.
- For more information about using the tracing facility, see *z/OS Language Environment Debugging Guide*.

TRAP

TRAP specifies how Language Environment programs handle abends and program interrupts.

TRAP(ON) must be in effect for the ABTERMENC run-time option to have effect.

This option is similar to the STAE | NOSTAE run-time option currently offered by COBOL, C, and PL/I, and the SPIE | NOSPIE option offered by C and PL/I:

Table 7. TRAP Run-Time Option Settings


If...	then...
a single option is specified in input,	TRAP is set according to that option, TRAP(OFF) for NOSTAE or NOSPIE, TRAP(ON) for STAE or SPIE.
both options are specified in input,	TRAP is set ON unless both options are negative. TRAP is set OFF if both options are negative.
STAE is specified in one #pragma runopts statement, and NOSPIE in another,	the option in the last #pragma runopts determines the setting of TRAP.
multiple instances of STAE NOSTAE are specified,	TRAP is set according to the last instance only. All others are ignored.
multiple instances of SPIE NOSPIE are specified,	TRAP is set according to the last instance only. All others are ignored.
an options string has TRAP(ON) or TRAP(OFF) together with SPIE NOSPIE, and/or STAE NOSTAE,	the TRAP setting takes preference over all others.

CEESGL is unaffected by this option.

Non-CICS default: TRAP(ON,SPIE)

CICS default: TRAP(ON,SPIE)

AMODE 64 default: TRAP(ON,SPIE)

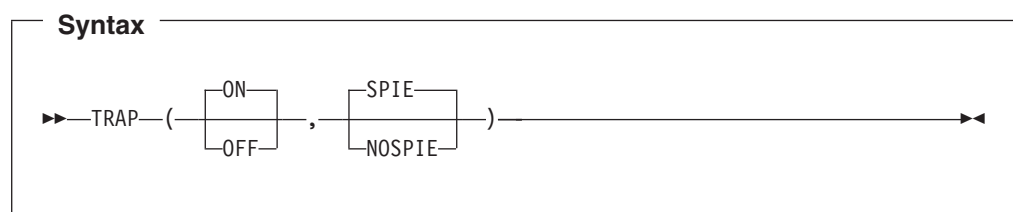

ON Fully enables the Language Environment condition handler.

OFF Prevents language condition handlers or handlers registered by CEEHDLR from being notified of abends or program checks; prevents application of POSIX signal handling semantics for abends and program checks.

SPIE SPIE specifies that Language Environment issue an ESPIE macro to handle program interrupts. The SPIE sub-option is ignored when specified with the OFF sub-option.

NOSPIE

NOSPIE specifies that Language Environment will NOT issue the ESPIE macro. When you specify the ON sub-option, Language Environment will handle program interrupts and abends via an ESTAE. The NOSPIE sub-option is ignored when specified with the OFF sub-option.

Due to the restrictions and side-effects when running TRAP(OFF) stated in the usage notes below, IBM highly recommends running TRAP(ON,SPIE) in all environments.

CICS consideration

- Since Language Environment never sets a SPIE or STAE, the SPIEINOSPIE sub-option is ignored on CICS.

Usage notes

- Use TRAP(OFF) only when you need to analyze a program exception before Language Environment handles it.
- When you specify TRAP(OFF) in a non-CICS environment, an ESPIE is not issued, but an ESTAE is issued. Language Environment does not handle conditions raised by program interrupts or abends initiated by SVC 13 as Language Environment conditions, and does not print messages for such conditions.
- Running with TRAP(OFF) (for exception diagnosis purposes) can cause many side effects, because Language Environment uses condition handling internally and requires TRAP(ON). When you run with TRAP(OFF), you can get side effects even if you do not encounter a software-raised condition, program check, or abend. If you do encounter a program check or an abend with TRAP(OFF) in effect, the following side effects can occur:
 - The ABTERMENC run-time option has no effect.
 - The ABPERC run-time option has no effect.
 - Resources acquired by Language Environment are not freed.
 - Files opened by HLLs are not closed by Language Environment, so records might be lost.
 - The abnormal termination exit is not driven for enclave termination.
 - The assembler user exit is not driven for enclave termination.
 - User condition handlers are not enabled.
 - The debugger is not notified of the error.
 - No storage report or run-time options report is generated.
 - No Language Environment messages or Language Environment dump output is generated.
 - In z/OS UNIX, POSIX signal handling semantics are not enabled for the abend.
 - The enclave terminates abnormally if such conditions are raised.

TRAP

- The COBOL ON SIZE error clause may be disabled for COMPUTE statements.
- TRAP(ON) must be in effect when you use the CEEBXITA assembler user exit for enclave initialization to specify a list of abend codes that Language Environment percolates.
- C++ consideration—TRAP(ON) must be in effect in order for the z/OS C++ try/throw/catch condition handling mechanisms to work.
- When TRAP(ON) is in effect, and the abend code is in the CEEAUE_CODES list in CEEBXITA, Language Environment percolates the abend. Normal Language Environment condition handling is never invoked to handle these abends. This feature is useful when you do not want Language Environment condition handling to intervene for certain abends or when you want to prevent invocation of the abnormal termination exit for certain abends, such as when IMS issues a user ABEND code 777.
- When TRAP(ON,NOSPIE) is specified in a non-CICS environment, Language Environment will handle program interrupts and abends via an ESTAE. This feature is useful when you do not want Language Environment to issue an ESPIE macro.

When TRAP(OFF), (TRAP(OFF,SPIE) or TRAP(OFF,NOSPIE) is specified and there is a program interrupt, the user exit for termination is not driven.
- z/OS UNIX consideration—The TRAP option applies to the entire enclave and all threads within.

For more information

- See “ABTERMENC” on page 12 for more information about the ABTERMENC run-time option.
- See “CEESGL—Signal a condition” on page 481 for more information about the CEESGL callable service.
- For more information about the CEEHDLR callable service, see “CEEHDLR—Register User-written condition handler” on page 356.
- See *z/OS Language Environment Programming Guide*, for more information about the CEEBXITA assembler user exit.

UPSI (COBOL only)

Derivation

User Programmable Status Indicator

UPSI sets the eight UPSI switches on or off for applications that use COBOL programs.

Non-CICS default: UPSI(00000000)

CICS default: UPSI(00000000)

Syntax

►►—UPSI—(nnnnnnnn)—◄◄

nnnnnnnn

n represents one UPSI switch between 0 and 7, the leftmost *n* representing the first switch. Each *n* can either be 0 (off) or 1 (on).

CICS consideration

- The default under CICS is UPSI=(00000000).

Usage notes

- Specify this option in CEEDOPT(CEECOPT), CEEROPT or CEEUOPT with a string of eight binary flags; for example: UPSI(00000000). Use UPSI, not followed by a string, only on the command line.

For more information

- For more information on how COBOL programs access the UPSI switches, see *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide*.

USRHDLR | NOUSRHDLR

Derivation

USeR condition HanDLeR

USRHDLR registers a user condition handler at stack frame 0, allowing you to register a user condition handler without having to include a call to CEEHDLR in your application and then recompile the application.

Non-CICS default: NOUSRHDLR

CICS default: NOUSRHDLR()

Syntax

```

➔ [NOUsrhd1r] [Usrhd1r] ( [lname] , [lname2] ) ➔

```

NOUSRHDLR

Does not register a user condition handler without recompiling an application to include a call to CEEHDLR.

USRHDLR

Registers a user condition handler without recompiling an application to include a call to CEEHDLR.

lname

The name of a load module (or an alias name of a load module) that contains the user condition handler that is to be registered at stack frame 0. This parameter is optional.

lname2

The name of a load module (or an alias name of a load module) that contains

the user condition handler that is to be registered to get control after the enablement phase and before any other user condition handler. This parameter is optional.

CICS consideration

- When specifying USRHDLR under CICS, *Imname* and *Imname2* must be defined in the CICS PPT.

Usage notes

- The user condition handler specified by the USRHDLR run-time option must be in a separate load module rather than be link-edited with the rest of the application.
- The user condition handler *Imname* is invoked for conditions that are still unhandled after being presented to condition handlers for the main program.
- The user condition handler *Imname2* is invoked for each condition after the condition completes the enablement phase but before any other registered user condition handlers are given control.
- You can use a user condition handler registered with the USRHDLR run-time option to return any of the result codes allowed for a user condition handler registered with the CEEHDLR callable service.
- A condition that is percolated or promoted by a user condition handler registered to handle conditions at stack frame 0 using the USRHDLR run time option is not presented to any other user condition handler.
- The loading of the user condition handlers *Imname* and *Imname2* occurs only when that user condition handler needs to be invoked the first time.
- If the load of either *Imname* or *Imname2* fails, an error message is issued.
- To turn off one of the sub-options previously specified by USRHDLR (*Imname* or *Imname2*), specify the option with either empty single quotes or empty double quotes. For example, to turn off the *Imname2* sub-option after it had been previously specified, use either `USRHDLR(Imname, '')` or `USRHDLR(Imname, "")`.

For more information

- For information on registering a user condition handler and its interfaces, see “CEEHDLR—Register User-written condition handler” on page 356.

VCTRSAVE

Derivation

VeCToR environment to be SAVEd

VCTRSAVE specifies whether any language in the application uses the vector facility when user-written condition handlers are called.

Non-CICS default: VCTRSAVE(OFF)

CICS default: VCTRSAVE is ignored under CICS.

Syntax

```

  >> Vctrsave ( [ OFF ] ) >>
                |
                ON
  
```

- OFF** No language in the application uses the vector facility when user-provided condition handlers are called.
- ON** A language in the application uses the vector facility when user-provided condition handlers are called.

CICS consideration

- VCTRSAVE is ignored under CICS.

Usage notes

- z/OS UNIX consideration—The VCTRSAVE option applies to the entire enclave and all threads within the enclave.

Performance consideration

When a condition handler plans to use the vector facility (that is, run any vector instructions), the entire vector environment has to be saved on every condition and restored on return to the application code. You can avoid this extra work by specifying VCTRSAVE(OFF) when you are not running an application under vector hardware.

XPLINK**Derivation**

eXtra Performance LINKage

The XPLINK run-time option controls the initialization of the XPLINK environment. XPLINK resources such as the downward-growing stack and the C/C++ run time library are committed only when it is known that an XPLINK program will receive control. If the initial program in the enclave contains at least one function that was compiled using XPLINK conventions, then XPLINK resources will be committed during Language Environment initialization as if XPLINK(ON) had been specified. If the initial program is purely non-XPLINK, then no XPLINK resources will be committed. If it is known that an XPLINK function will be called at some point during the execution of the application, (for example, by calling a DLL function that has been compiled XPLINK), then XPLINK(ON) must be specified so the necessary XPLINK resources are available.

You cannot set XPLINK during Language Environment installation (CEEDOPT/CEEROPT) or from the CEEBXITA Assembler User Exit Interface. You can only specify XPLINK on application invocation (command line interface or _CEE_RUNOPTS environment variable), or as an application default (CEEUOPT, C/C++ #pragma runopts, or PLIXOPT).

Non-CICS default: XPLINK(OFF)

CICS default: XPLINK is ignored under CICS.

Syntax



OFF Specifies that no programs containing XPLINK-compiled functions will be run. XPLINK resources will not be committed.

ON Specifies that at some time during the execution of an application, an XPLINK-compiled function may be called. XPLINK resources will be committed so that when this occurs, the XPLINK function can properly execute.

Usage notes

The XPLINK(ON) run-time option is provided for application compatibility. It should be specified only for applications that:

- have a non-XPLINK main(),
- use XPLINK resources during their execution (for example, calls to an XPLINK function in a DLL), and have been tested to run in an XPLINK environment (that is, they don't use any resources or subsystems that are restricted in an XPLINK environment) Blindly running a non-XPLINK application in an XPLINK environment by specifying the XPLINK(ON) run-time option could result in performance degradation or application abends.

For these reasons, the XPLINK(ON) application should only be specified for individual applications that require it. That is why you cannot set XPLINK(ON) as the installation default (eg. in CEEDOPT), and why you should not export_CEE_RUNOPTS from the UNIX System Services shell containing the XPLINK(ON) run-time option.

- If the XPLINK run-time option is not specified and the initial program contains at least one XPLINK-compiled part, then the XPLINK run-time option will be forced to (ON). No message will be issued to indicate this action.
- When an application is running in an XPLINK environment (that is, either the XPLINK(ON) run-time option was specified, or the initial program contained at least one XPLINK compiled part), the ALL31 run-time option will be forced to ON. No AMODE 24 routines are allowed in an enclave that uses XPLINK. No message will be issued to indicate this action. If a Language Environment run-time options report is generated using the RPTOPTS run-time option, the ALL31 option will be reported as "Override" under the LAST WHERE SET column.
- When an application is running in an XPLINK environment (that is, either the XPLINK(ON) run-time option was specified, or the initial program contained at least one XPLINK compiled part), the STACK run-time option will be forced to STACK(,ANY). Only the third suboption is changed by this action to indicate that STACK storage can be allocated anywhere in storage. No message will be issued to indicate this action. If a Language Environment run-time options report is generated using the RPTOPTS run-time option, the STACK option will be reported as "Override" under the LAST WHERE SET column.

Performance Considerations

- When XPLINK(ON) is in affect, resources required for the execution of an XPLINK-compiled function are committed. This includes, for example, allocation of a downward-growing stack segment. If no XPLINK functions are invoked, then these are resources that are not available to an XPLINK function.
- If the application contains C or C ++ and XPLINK(ON) is specified, then the XPLINK-compiled version of the C Run-Time Library is loaded, which will run on the downward-growing stack. When non-XPLINK functions call C RTL functions in this environment, a swap from the upward-growing stack to the downward-growing stack will occur. This results in additional overhead that could cause performance degradation. Applications that make heavy use of the C RTL from non-XPLINK callers should be aware of this, and if necessary for performance reasons, either run in a pure non-XPLINK environment with XPLINK(OFF), or convert as much of the application to XPLINK as possible and run with XPLINK(ON).
- Applications that consist only of non-XPLINK functions (ex. COBOL, PL/I) should not specify the XPLINK(ON) run-time option, as just turning this on in these applications will result in a performance degradation.

XUFLOW

Derivation

eXponent Under FLOW

XUFLOW specifies whether an exponent underflow causes a program interrupt. An exponent underflow occurs when a floating point number becomes too small to be represented.

The underflow setting is determined at enclave initialization and is updated when new languages are introduced into the application (via fetch or dynamic call, for example). Otherwise, it does not vary while the application is running.

Language Environment preserves the language semantics for C/C++ and COBOL regardless of the XUFLOW setting. Language Environment preserves the language semantics for PL/I only when XUFLOW is set to AUTO or ON. Language Environment does not preserve the language semantics for PL/I when XUFLOW is set to OFF.

An exponent underflow caused by a C/C++ or COBOL program does not cause a condition to be raised.

Non-CICS default: XUFLOW(AUTO)

CICS default: XUFLOW(AUTO)

Syntax

AUTO An exponent underflow causes or does not cause a program interrupt dynamically, based upon the HLLs that make up the application. Enablement is determined without user intervention.

XUFLOW(AUTO) causes condition management to process underflows only in those applications where the semantics of the application languages require it. Normally, XUFLOW(AUTO) provides the best efficiency while meeting language semantics.

ON An exponent underflow causes a program interrupt.

XUFLOW(ON) causes condition management to process underflows regardless of the mix of languages; therefore, this setting might be less efficient in applications that consist of languages not requiring underflows to be processed by condition management.

OFF An exponent underflow does not cause a program interrupt; the hardware takes care of the underflow.

When you set XUFLOW to OFF, the hardware processes exponent underflows. This is more efficient than condition handling to process the underflow.

Usage notes

- PL/I consideration—When setting XUFLOW to OFF, be aware that the semantics of PL/I require the underflow to be signaled.
- z/OS UNIX consideration—The XUFLOW option applies to the entire enclave and all threads within.

Language run-time option mapping

Language Environment provides one set of run-time options for applications. These options are processed at the enclave level and allow you to control many aspects of the Language Environment environment.

Most options are applicable to all Language Environment-conforming languages. In addition, although Language Environment assists migration by mapping current HLL options to Language Environment's options, the run-time options of a particular HLL product might change in the Language Environment-enabled version. However, Language Environment has attempted to maintain run-time options consistently across language products while minimizing required changes within each product.

Tables of pre-Language Environment, HLL-specific options and their Language Environment equivalents are provided in the *z/OS Language Environment Run-Time Application Migration Guide*. The mapping is performed automatically by Language Environment except where noted.

Part 2. Language Environment callable services

Chapter 3. Quick reference tables for Language Environment services

Restriction: Language Environment callable services are not supported for AMODE 64 applications.

The following tables are a quick reference of the Language Environment callable services and math services. They list the location of the services and briefly state their function.

For detailed descriptions of these services, refer to their respective chapters in this book.

Bit manipulation routines

Table 8. Bit Manipulation Routines

Callable Service	Function	Page
CEESICLR	Bit clear	501
CEESISSET	Bit set	501
CEESISHF	Bit shift	502
CEESITST	Bit test	502

Condition handling callable services

Table 9. Condition Handling Callable Services

Callable Service	Function	Page
CEE3CIB	Returns a pointer to a condition information block (CIB) associated with a given condition token.	126
CEE3GRN	Gets the name of the most current Language Environment-conforming routine in which a condition occurred.	159
CEE3GRO	Returns the offset within a failing routine of the most recent condition.	167
CEE3SPM	Queries and modifies the enablement of Language Environment hardware conditions.	213
CEE3SRP	Sets the resume point at the next instruction in the calling routine to be used by CEEMRCE.	221
CEEDCOD	Decodes an existing condition token.	273
CEEENV	Processes environment variables based on the function codes passed as input.	291
CEEGQDT	Provides a mechanism by which application code can retrieve the <i>q_data_token</i> from the Instance Specific Information (ISI).	340
CEEHDLR	Registers a user condition handler for the current stack frame.	356
CEEHDLU	Unregisters a user-written condition handler for the current stack frame.	366
CEEITOK	Computes the initial condition token for the current condition information block.	379

Table 9. Condition Handling Callable Services (continued)

Callable Service	Function	Page
CEEMRCE	Resumes execution of a user routine at the location established by CEE3SRP.	407
CEEMRCR	Moves the resume cursor to a position relative to the current position of the handle cursor.	414
CEENCOD	Dynamically constructs a condition token.	432
CEESGL	Raises, or signals, a condition to the condition manager.	481

Date and time callable services

Table 10. Date and Time Callable Services

Callable Service	Function	Page
CEECBLDY	Converts a string representing a date to a COBOL integer format.	227
CEEDATE	Converts a number representing a Lilian date to a date written in character format.	251
CEEDATM	Converts a number representing the number of seconds since 00:00:00 14 October 1582 to character format.	258
CEEDAYS	Converts a string representing a date to a Lilian format.	266
CEEDYWK	Calculates the day of the week on which a Lilian date falls.	285
CEEGMT	Computes the current Greenwich Mean Time (GMT) as both a Lilian date and as the number of seconds since 00:00:00 14 October 1582.	326
CEEGMTO	Computes values to the calling routine that represent the difference between the local system time and Greenwich Mean Time.	330
CEEISEC	Converts separate binary integers representing year, month, day, hour, minute, second, and millisecond to a number representing the number of seconds since 00:00:00 14 October 1582.	372
CEELOCT	Gets the current local time in three formats.	392
CEEQCEN	Queries the century within which Language Environment assumes two-digit year values lie.	439
CEESCEN	Sets the century in which Language Environment assumes two-digit year values lie.	453
CEESECI	Converts a number representing the number of seconds since 00:00:00 14 October 1582 to seven separate binary integers representing year, month, day, hour, minute, second, and millisecond.	462
CEESECS	Converts a string representing a timestamp into a number representing the number of seconds since 00:00:00 14 October 1582.	467

Dynamic storage callable services

Table 11. Dynamic Storage Callable Services

Callable Service	Function	Page
CEE3RPH	Sets the heading displayed at the top of the storage or options reports that are generated when you specify the RPTSTG(ON) or RPTOPTS(ON) run-time options.	210
CEE3RHP	Creates additional heaps.	239
CEE3ZST	Changes the size of a previously allocated storage element, while preserving its contents.	244
CEEDSHP	Discards an entire heap that you created previously with a call to CEE3RHP.	280
CEE3FRST	Frees storage previously allocated by CEE3GTST.	313
CEE3GTST	Allocates storage from a heap whose ID you specify.	351

General callable services

Table 12. General Callable Services

Callable Service	Function	Page
CEE3DMP	Generates a Language Environment formatted dump of the run-time environment and member language libraries.	138
CEE3INF	Returns to the calling routine information about the system, subsystem, environment, member languages, and version of Language Environment associated with the enclave.	174
CEE3PRM	Returns to the calling routine the argument string that was specified at program invocation.	204
CEE3PR2	Returns to the calling routine the argument string and its associated length that was specified at program invocation.	201
CEE3USR	Sets or queries one of two 4-byte fields known as the user area fields.	222
CEE3PID	Retrieves the version of Language Environment currently in use.	334
CEERAN0	Generates a sequence of uniform pseudo-random numbers between 0.0 and 1.0 using the multiplicative congruential method with a user-specified seed.	450
CEETEST	Invokes a tool for debugging.	494

Initialization and termination services

Table 13. Initialization and Termination Services

Callable Service	Function	Page
CEE3ABD	Stops the enclave with an abend. The abend can be issued either with or without clean-up.	117
CEE3AB2	Stops the enclave with an abend and a reason code. The abend can be issued either with or without clean-up.	122
CEE3GRC	Gets the enclave return code.	146
CEE3SRC	Sets the enclave return code.	220

Locale callable services

Table 14. Locale Callable Services

Callable Service	Function	Page
CEEFMON	Formats monetary strings.	304
CEEFTDS	Formats time and date into a character string.	319
CEELCNV	Queries locale numeric conventions.	385
CEEQDTC	Queries locale date and time conventions and returns the specified format information.	442
CEEQRYL	Queries the active locale environment.	448
CEESCOL	Compares the collation weights of two strings.	458
CEESETL	Sets the locale operating environment.	475
CEESTXF	Transforms string characters into collation weights.	487

Math services

Table 15. Math Services

Math Service	Function	Page
CEESxABS	Absolute value	507
CEESxACS	Arccosine	508
CEESxASN	Arcsine	509
CEESxATH	Hyperbolic arctangent	510
CEESxATN	Arctangent	511
CEESxAT2	Arctangent of two arguments	512
CEESxCJG	Conjugate complex	512
CEESxCOS	Cosine	513
CEESxCOSH	Hyperbolic cosine	515
CEESxCTN	Cotangent	516
CEESxDIM	Positive difference	518
CEESxDVD	Division	519
CEESxERC	Error function complement	519
CEESxERF	Error function	520
CEESxEXP	Exponential (base e)	521
CEESxGMA	Gamma function	522
CEESxIMG	Imaginary part of complex	523
CEESxINT	Truncation	524
CEESxLGM	Log gamma function	525
CEESxLG1	Logarithm base 10	526
CEESxLG2	Logarithm base 2	527
CEESxLOG	Logarithm base e	528
CEESxMLT	Floating-point complex multiplication	529
CEESxMOD	Modular arithmetic	529
CEESxNIN	Nearest integer	531

Table 15. Math Services (continued)

Math Service	Function	Page
CEESxNWN	Nearest whole number	531
CEESxSGN	Transfer of sign	532
CEESxSIN	Sine	533
CEESxSNH	Hyperbolic sine	535
CEESxSQT	Square root	536
CEESxTAN	Tangent	537
CEESxTNH	Hyperbolic tangent	539
CEESxXPx	Exponential (**)	539

Message handling callable services

Table 16. Message Handling Callable Services

Callable Service	Function	Page
CEECMI	Stores message insert data.	232
CEEMGET	Retrieves a message corresponding to a condition token returned from a callable service.	396
CEEMOUT	Writes a specified message to the message string file.	403
CEEMSG	Retrieves a message corresponding to a condition token received and writes it to the message file.	426

National Language Support callable services

Table 17. National Language Support and National Language Architecture Callable Services

Callable Service	Function	Page
CEE3CTY	Changes or queries the current national country setting.	131
CEE3LNG	Changes or queries the current national language.	181
CEE3MCS	Gets the default currency symbol for a country specified in <i>country_code</i> .	189
CEE3MDS	Gets the default decimal separator for the country specified in <i>country_code</i> .	193
CEE3MTS	Gets the default thousands separator for the country that you specify in <i>country_code</i>	197
CEEFMDA	Gets the default date picture string for a country specified in <i>country_code</i> .	297
CEEFMDT	Gets the default date and time picture strings for the country specified in <i>country_code</i> .	300
CEEFMTM	Gets the default time picture string for the country specified in <i>country_code</i> .	310

Chapter 4. Language Environment callable services

Restriction: Language Environment services are not supported for AMODE 64 applications.

This chapter provides syntax and examples of Language Environment callable services, which you can invoke from applications generated with the following IBM compiler products:

- IBM z/OS XL C/C++
- C/C++ for MVS/ESA
- IBM SAA AD/Cycle C/370
- Enterprise COBOL for z/OS
- Enterprise PL/I for z/OS
- IBM COBOL for OS/390 & VM
- IBM COBOL for MVS & VM
- IBM PL/I for MVS & VM

You can invoke Language Environment callable services from assembler programs using the CEEENTRY and associated macros. While you cannot call these services directly from Fortran programs, you can use the Fortran routines AFHCEEN and AFHCEEFF to invoke most of these services. (See *Fortran Run-time Migration Guide*.) You can use the other languages to perform these services on behalf of a Fortran program.

Notes:

1. Customers using this book may not have pre-Language Environment run-time libraries.
2. You can use DYNAMIC calls from VS COBOL II programs to Language Environment Date/Time callable services. You can not use DYNAMIC calls from VS COBOL II programs to other Language Environment callable services. You can not use STATIC calls from VS COBOL II programs to any Language Environment callable services.
3. A Language Environment callable service used by application programmers can also be called an application writer interface (AWI).

Language Environment callable services provide functions that pre-Language Environment run-time libraries might not provide. You can use these services alone or with Language Environment run-time options, which customize your run-time environment.

For guidelines about writing your own callable services, see *z/OS Language Environment Programming Guide*.

Locating callable service information

This chapter contains the following sections to help you use the Language Environment callable services:

- “General usage notes for callable services” on page 108
- “Invoking callable services” on page 109
- “Data type definitions” on page 114
- “Callable services” on page 117

NOTE

For a list of Language Environment callable services, see Chapter 1, “Language Environment run-time option reference tables and general information,” on page 3.

General usage notes for callable services

- You can invoke callable services from any Language Environment-conforming HLL except where otherwise noted.
- You might receive feedback codes from services other than the one you are invoking. This is because the callable services invoke other callable services that might return a feedback code.
- Callable services that are intended to be available on any platform that Language Environment supports are prefixed with CEE. Callable services defined only for S/370 are prefixed with CEE3.
- Routines that invoke callable services do not need to be in 31-bit addressing mode. 31-bit addressing mode switching is performed implicitly without any action required by the calling routine, if you specify the ALL31(OFF) run-time option (see “ALL31” on page 14).

However, if AMODE switching occurs and your program makes many calls to Language Environment callable services, the switching time can slow down your application. Run with AMODE(31), if possible, to avoid unnecessary mode switching.

- Under Language Environment, all parms are passed by reference, indirectly. The code in Figure 2 and Figure 3 might cause unpredictable results:

```
CALL CEEDATE USING X,Y,Z.  **Invalid**
```

Figure 2. An Invalid COBOL CALL that Omits the fc Parameter

```
DCL CEEDATE ENTRY OPTIONS(ASM);  
CALL CEEDATE(x,y,z);          /* invalid */
```

Figure 3. An Invalid PL/I CALL that Omits the fc Parameter

Figure 4 and Figure 5 on page 109 illustrate valid calls. The COBOL examples are valid only for COBOL for MVS & VM Release 2 or later.

```
CALL CEEDATE USING X,Y,Z,OMITTED.  
CALL CEEDATE USING X,Y,Z,FC.
```

Figure 4. Valid COBOL CALLs that Use the Optional fc Parameter

```

DCL CEEDATE ENTRY(*,*,*,* OPTIONAL) OPTIONS(ASM);
CALL CEEDATE(x,y,z,*);    /* valid */
CALL CEEDATE(x,y,z,fc);   /* valid */

```

Figure 5. Valid PL/I CALLs that Use the Optional fc Parameter

Invoking callable services

You can invoke Language Environment callable services from assembler routines, HLL-generated object code, HLL library routines, other Language Environment library routines, and user-written HLL calls. When you want to access Language Environment library routines, you can use the same type of user-written HLL calls and functions you currently use for your HLL applications.

This section provides syntax and examples to help you request callable services from C/C++, COBOL, and PL/I.

Header, copy, or include files

Many of the programming examples in this chapter imbed header, copy, or include files. (Whether you call the files header files, copy files, or include files depends on the language you are using.) These files can save you time by providing declarations for symbolic feedback codes and Language Environment callable services that you would otherwise need to code in your program. They can also help you reduce errors by verifying correct usage of Language Environment callable services at compile time.

The names and descriptions of the files imbedded in the callable service examples in this chapter are provided in Table 18.

Table 18. Files Used in C/C++, COBOL, and PL/I Examples

File Name	Description
ceedcct.h	C declarations for Language Environment symbolic feedback codes
leawi.h	Declarations of Language Environment callable services and OMIT_FC, which is used to explicitly omit the <i>fc</i> parm, for routines written in C/C++
CEEIGZCI	Declarations for condition information block
CEEIGZCT	Declarations for Language Environment symbolic feedback codes
CEEIGZLC	Locale category constants LC-ALL, LC-COLLATE, LC-CTYPE, LC-MESSAGES, LC-MONETARY, LC-NUMERIC, LC-TIME, and version_info structure.
CEEIGZTD	TD-STRUCT structure needed for CEEFTDS calls
CEEIGZNM	NM-STRUCT structure needed for CEELCNV calls
CEEIGZN2	NM-STRUCT structure needed for ISO/IEC 9899:1999 (C99) support of CEELCNV calls

Table 18. Files Used in C/C++, COBOL, and PL/I Examples (continued)

File Name	Description
CEEIGZDT	DTCONV structure needed for CEEQDTC calls
CEEIGZD2	DTCONV structure needed for C99 support of CEEQDTC calls
CEEIBMAW	Language Environment callable service declarations for routines written in PL/I
CEEIBMCI	Declarations for condition information block
CEEIBMCT	Declarations for Language Environment symbolic feedback codes
CEEIBMLC	Locale category constants LC-ALL, LC-COLLATE, LC-CTYPE, LC-MESSAGES, LC-MONETARY, LC-NUMERIC, LC-TIME, and version_info structure.
CEEIBMTD	TD-STRUCT structure needed for CEEFTDS calls
CEEIBMNM	NM-STRUCT structure needed for CEELCNV calls
CEEIBMN2	NM-STRUCT structure needed for C99 support of CEELCNV calls
CEEIBMDT	DTCONV structure needed for CEEQDTC calls
CEEIBMD2	DTCONV structure needed for C99 support of CEEQDTC calls
CEEFORCT	Fortran declarations for Language Environment symbolic feedback codes

Notes:

- A symbolic feedback code is a symbolic representation of a condition token.
- PL/I routines that imbed CEEIBMAW require the MACRO compiler option.
- COBOL does not require declarations of external programs; therefore, you do not need declarations of Language Environment callable services for programs written in COBOL.
- CEEIBMxx parts support PL/I applications.
- CEEIGZxx parts support COBOL applications.

On z/OS, these files are contained in the Language Environment SCEESAMP partitioned data set, except for `leawi.h`, which is contained in the SCIEH.H partitioned data set.

You can imbed these files using the statement appropriate for the language your routine is written in, as shown in Table 19:

Table 19. Imbedding Files in Your Routines

To imbed a file in a...	Use...
C/C++ routine	<code>#include</code> statement
COBOL program	<code>COPY</code> statement
PL/I routine	<code>%include</code> statement

Examples of these statements are shown in the following sections on syntax.

Sample programs

Sample C/C++, COBOL, and PL/I programs are provided for most of the callable services described in this chapter. No sample Fortran programs are provided because you cannot invoke Language Environment callable services from Fortran programs. However, you can use other languages to perform these services on behalf of a Fortran program. These sample programs are also provided online with the Language Environment product for your convenience. On MVS, the sample routines are located in the SCEESAMP partitioned data set.

C/C++ syntax

In C or C++, use the following syntax to invoke a Language Environment callable service with a feedback code in effect:

Syntax

```
►►—ceexxxx—(parm1, parm2, ...parmn, fc);—————►◄
```

Note: "..." is "and so on," not the C ellipsis operator.

Use the following syntax to invoke callable services with an omitted feedback code parameter:

Syntax

```
►►—CEExxxx—(parm1, parm2, ...parmn, NULL);—————►◄
```

See “Parameter list for invoking callable services” on page 113 for a description of this syntax.

Language Environment callable services always have a return type of *void* and should be prototyped as such.

Input strings for callable services are **not** NULL terminated in C/C++.

You can use the SCIEH.H file `leawi.h` to declare Language Environment callable services, in conjunction with a C/C++ call to a Language Environment callable service, as shown below:

```
#include <leawi.h>
int main(void)
{
    CEExxxx(parm1, parm2, ... parmn, fc);
}
```

Figure 6. Sample Callable Services Invocation Syntax for C/C++

To help in checking the success of your applications, Language Environment provides FBCHECK in the `ceedcct.h` file. FBCHECK compares a feedback code against a condition token you supply to determine whether you receive the feedback code you should.

COBOL syntax

In COBOL, use the following syntax to invoke Language Environment callable services:

Syntax

```
►►CALL "CEExxxx" USING — parm1, parm2, ...parmn, fc————◄◄
```

You can call Language Environment services either statically or dynamically from COBOL applications.

The Language Environment callable services are architected as low maintenance stubs that branch to the actual run-time routine that performs the service. Static CALL to these stubs is the preferred choice for best performance. This avoids the overhead of a COBOL dynamic call without the usual maintainability disadvantage of a more robust statically link-edited routine.

See “Parameter list for invoking callable services” on page 113 for a description of this syntax.

You can use the SCEESAMP file CEEIGZCT to declare symbolic Language Environment feedback codes, in conjunction with a COBOL call to a Language Environment callable service to return a feedback code, as shown below:

```
COPY CEEIGZCT.  
CALL "CEExxxx" USING parm1, parm2, ... parmn, fc
```

Figure 7. Sample Callable Services Invocation Syntax for COBOL

COBOL for MVS & VM Release 2 or later also allows you to omit arguments. In place of the argument, use the OMITTED parameter, as shown below. See Figure 2 on page 108 and Figure 4 on page 108 for an example of omitting parameters in COBOL.

Syntax

```
►►CALL "CEExxxx" USING — parm1, parm2, ...parmn, OMITTED————◄◄
```

PL/I syntax

In PL/I, use the following syntax to invoke a Language Environment callable service with a feedback code in effect:

Syntax

```
▶▶CALL CEExxxx—(parm1, parm2, ...parmn, *);▶▶
```

PL/I also allows you to omit arguments. In place of the argument, code an asterisk (*), as shown below:

Syntax

```
▶▶CALL CEExxxx—(*, *, ...*, );▶▶
```

Note that you cannot invoke callable services as function references.

See “Parameter list for invoking callable services” for a description of this syntax.

The value of register 15 upon return from any Language Environment callable service is undefined. Use of `OPTIONS(RETCODE)` is not recommended, because a subsequent use of the `PLIRETV` built-in function returns an undefined value.

If you code your own declarations for the Language Environment callable services, be sure to specify all required arguments in the `CALL` statement. Figure 3 on page 108 illustrates a call in which the feedback code to `CEEDATE` has been incorrectly omitted.

You can use the `SCEESAMP` file `CEEIBMAW` to declare Language Environment callable services, in conjunction with a PL/I call to a Language Environment callable service, as shown below:

```
%INCLUDE CEEIBMAW;  
CALL CEExxxx(parm1, parm2, ... parmn, fc);
```

Figure 8. Sample Callable Services Invocation Syntax for PL/I

Parameter list for invoking callable services

This section describes the syntax and parameters you need to invoke Language Environment callable services.

CEExxxx

The name of the callable service.

By including a reference to a header file in your code, you can avoid declaring each callable service as an external entry. See “Header, copy, or include files” on page 109 for these file names.

parm1 parm2 ... parm_n

Optional or required parameters passed to or returned from the called service.

Some callable service parameters are optional in C/C++ and PL/I only. If you do not want to pass the parm or you do not want the return value, you can omit the parm, using the appropriate syntax to indicate the parm is omitted.

fc A feedback code that indicates the result of the service. *fc* can be omitted when you use C/C++, PL/I, and COBOL (COBOL for MVS & VM Release 2 or later).

If you specify *fc* as an argument, feedback information in the form of a condition token is returned to the calling routine. The condition token indicates whether the service completed successfully or whether a condition was encountered while the service was running. In Language Environment you can decode the condition token so that it can be acted on.

If you omit *fc* as an argument, using the appropriate syntax to indicate *fc* is omitted, the condition is signaled if the service was not successful.

Because callable services call other services, these other services might generate feedback codes.

Data type definitions

Parameters in Language Environment are defined as specific data types, such as:

- Fullword binary integer
- Short floating-point hexadecimal
- Long floating-point hexadecimal
- Fixed-length character string with a predefined length
- Entry variable
- Character string with a halfword prefix indicating its current length

Table 20, Table 21 on page 115, and Table 22 on page 116 contain data type definitions and their descriptions for C/C++, COBOL, and PL/I, respectively.

C/C++ data type definitions

The table below includes data type definitions and their descriptions for C/C++:

Table 20. Data Type Definitions for C/C++

Data Type	Description	C/C++
INT2	A 2-byte signed integer	signed short
INT4	A 4-byte signed integer	signed int
FLOAT4	A 4-byte single-precision floating-point number	float
FLOAT8	An 8-byte double-precision floating-point number	double
FLOAT16	A 16-byte extended-precision floating-point number	long double
COMPLEX8	Short floating-point complex hex number: an 8-byte complex number, whose real and imaginary parts are each 4-byte single-precision floating-point numbers	Not available
COMPLEX16	Long floating-point complex hex number: a 16-byte complex number, whose real and imaginary parts are each 8-byte double-precision floating-point numbers	Not available

Table 20. Data Type Definitions for C/C++ (continued)

Data Type	Description	C/C++
COMPLEX32	Extended floating-point hex number: a 32-byte complex number, whose real and imaginary parts are each 16-byte extended-precision floating-point numbers	Not available
POINTER	A platform-dependent address pointer	void *
CHAR n	A string (character array) of length n	char[n]
VSTRING	A halfword length-prefixed character string (for input); fixed-length 80-character string (for output)	<pre>struct _VSTRING(_INT2 short length; char string[1];)string-in; char string_out[80];</pre>
FEED_BACK	A mapping of the condition token (fc)	Case 1: <pre>typedef struct { short tok_sev ; short tok_msgno ; int tok_case :2, tok_sever:3, tok_ctrl :3 ; char tok_facid[3]; int tok_isi ; } _FEEDBACK ;</pre> Case 2: <pre>typedef struct { short tok_sev ; short tok_msgno ; int tok_class_code :2, tok_cause_code:3, tok_ctrl :3 ; char tok_facid[3]; int tok_isi ; } _FEEDBACK ;</pre>
CEE_ENTRY	An HLL-dependent entry constant	FUNCTION POINTER

COBOL data type definitions

The table below includes data type definitions and their descriptions for COBOL:

Table 21. Data Type Definitions for COBOL

Data Type	Description	COBOL
INT2	A 2-byte signed integer	PIC S9(4) USAGE IS BINARY
INT4	A 4-byte signed integer	PIC S9(9) USAGE IS BINARY
FLOAT4	A 4-byte single-precision floating-point number	COMP-1
FLOAT8	An 8-byte double-precision floating-point number	COMP-2
FLOAT16	A 16-byte extended-precision floating-point number	Not available
COMPLEX8	Short floating-point complex hex number: an 8-byte complex number, whose real and imaginary parts are each 4-byte single-precision floating-point numbers	Not available

Table 21. Data Type Definitions for COBOL (continued)

Data Type	Description	COBOL
COMPLEX16	Long floating-point complex hex number: a 16-byte complex number, whose real and imaginary parts are each 8-byte double-precision floating-point numbers	Not available
COMPLEX32	Extended floating-point hex number: a 32-byte complex number, whose real and imaginary parts are each 16-byte extended-precision floating-point numbers	Not available
POINTER	A platform-dependent address pointer	USAGE IS POINTER
CHAR n	A string (character array) of length n	PIC X(n)
VSTRING	A halfword length-prefixed character string (for input); fixed-length 80-character string (for output)	01 STRING-IN. 02 LEN PIC S9(4) USAGE IS BINARY. 02 TXT PIC X(N). 01 STRING-OUT PIC X(80).
FEED_BACK	A mapping of the condition token (fc)	Case 1: 01 FC 02 SEV PIC S9(4) USAGE IS BINARY. 02 MSGNO PIC S9(4) USAGE IS BINARY. 02 FLGS PIC X(1). 02 FACID PIC X(3). 02 ISI PIC X(4). Case 2: 01 FC 02 CLASS-CODE PIC 9(4) USAGE IS BINARY. 02 CAUSE-CODE PIC 9(4) USAGE IS BINARY. 02 FLGS PIC X(1). 02 FACID PIC X(3). 02 ISI PIC X(4).
CEE_ENTRY	An HLL-dependent entry constant	USAGE IS PROCEDURE-POINTER

PL/I data type definitions

The table below includes data type definitions and their descriptions for PL/I:

Table 22. Data Type Definitions for PL/I

Data Type	Description	PL/I
INT2	A 2-byte signed integer	REAL FIXED BINARY (15,0)
INT4	A 4-byte signed integer	REAL FIXED BINARY (31,0)
FLOAT4	A 4-byte single-precision floating-point number	REAL FLOAT BINARY (21) or REAL FLOAT DECIMAL (6)
FLOAT8	An 8-byte double-precision floating-point number	REAL FLOAT BINARY (53) or REAL FLOAT DECIMAL (16)
FLOAT16	A 16-byte extended-precision floating-point number	REAL FLOAT DECIMAL (33) or REAL FLOAT BINARY (109)
COMPLEX8	Short floating-point complex hex number: an 8-byte complex number, whose real and imaginary parts are each 4-byte single-precision floating-point numbers	COMPLEX FLOAT DECIMAL (6)

Table 22. Data Type Definitions for PL/I (continued)

Data Type	Description	PL/I
COMPLEX16	Long floating-point complex hex number: a 16-byte complex number, whose real and imaginary parts are each 8-byte double-precision floating-point numbers	COMPLEX FLOAT DECIMAL (16)
COMPLEX32	Extended floating-point hex number: a 32-byte complex number, whose real and imaginary parts are each 16-byte extended-precision floating-point numbers	COMPLEX FLOAT DECIMAL (33)
POINTER	A platform-dependent address pointer	POINTER
CHAR n	A string (character array) of length n	CHAR(n)
VSTRING	A halfword length-prefixed character string (for input); fixed-length 80-character string (for output)	DCL string_in CHAR(n) VARYING; DCL string_out CHAR(80);
FEED_BACK	A mapping of the condition token (fc)	Case 1: DCL 1 FEEDBACK BASED, 3 SEVERITY FIXED BINARY (15), 3 MSGNO FIXED BINARY (15), 3 FLAGS, 5 CASE BIT (2), 5 SEVERITY BIT (3), 5 CONTROL BIT (3), 3 FACID CHAR (3), 3 ISI FIXED BINARY (31); Case 2: DCL 1 FEEDBACK BASED, 3 CLASS_CODE FIXED BINARY (15), 3 CAUSE_CODE FIXED BINARY (15), 3 FLAGS, 5 CASE BIT (2), 5 SEVERITY BIT (3), 5 CONTROL BIT (3), 3 FACID CHAR (3), 3 ISI FIXED BINARY (31);
CEE_ENTRY	An HLL-dependent entry constant	ENTRY

Callable services

Following are the Language Environment callable services and examples of how to use them in C/C++, COBOL, and PL/I.

CEE3ABD—Terminate enclave with an abend

CEE3ABD requests that Language Environment terminate the enclave with an abend. The issuing of the abend can be either with or without clean-up. There is no return from this service, nor is there any condition associated with it.

Syntax

```
►► CEE3ABD (—abcode—, —clean-up—) ◀◀
```

abcode(input)

A fullword integer, no greater than 4095, specifying the abend code that is issued. Under CICS, this fullword integer is converted to EBCDIC.

clean-up(input)

Indicates whether the abend should result in clean-up of the enclave's resources. The acceptable values for *clean-up* are as follows:

Value	Meaning
0	Issue the abend without clean-up
1	Issue the abend with normal enclave termination processing
2	Issue the abend with enclave termination processing honoring the TERMTHDACT run-time option for taking a system dump of the user address space but suppressing the CEEDUMP
3	Issue the abend with enclave termination processing suppressing both the CEEDUMP and system dump if requested by the TERMTHDACT run-time option
4	Issue the abend with enclave termination processing honoring the TERMTHDACT run-time option for taking a CEEDUMP but suppressing the system dump
5	Issue the abend with enclave termination processing forcing a system dump of the user address space and suppressing the CEEDUMP

If an illegal value for *clean-up* is passed, the abend is issued without clean-up.

If *clean-up* is 0, no Language Environment dump is generated. A system dump, however, is requested when issuing the abend. Under CICS, a transaction dump is taken. To get a dump under CMS, specify FILEDEF SYSABEND PRINTER or FILEDEF SYSUDUMP PRINTER.

If *clean-up* is 0, Language Environment condition handling is disabled for the current enclave and termination activities are not performed. Event handlers are not driven; Debug Tool is not invoked; user exits are not invoked; and user-written condition handlers are not invoked.

When *clean-up* is 1, the abend is processed in the same manner as if it were a non-Language Environment abend. Its processing is affected by the ABPERC and TRAP options, the filedef abends percolated in the assembler user exit, and other elements of the environment related to abend processing. In particular, the condition handler can intercept the abend and give the application a chance to handle the abend. If the condition remains unhandled, normal termination activities are performed: information such as a Language Environment dump is produced, depending on the setting of the TERMTHDACT option; event handlers are driven; Debug Tool is invoked; and user exits are invoked. Assembler user exit settings control whether the application actually terminates with an abend.

When *clean-up* is 2, it follows the abend processing as when *clean-up* is 1 except the CEEDUMP is suppressed.

When *clean-up* is 3, it follows the abend processing as when *clean-up* is 1, however CEEDUMP and system dumps are both suppressed

When *clean-up* is 4, it follows the abend processing as when *clean-up* is 1, however only the system dumps are suppressed.

When *clean-up* is 5, it follows the abend processing as when *clean-up* is 1, however forcing a system dump to be taken and suppressing the CEEDUMP.

z/OS UNIX considerations

- In a multithreaded environment, CEE3ABD applies to the enclave.
- When ALL31(ON) is in effect, Language Environment allocates thread-specific control blocks from the anywhere heap.

Usage notes

1. **Recommendation:** Language Environment abend codes are usually in the range of 4000 (X'FA0') to 4095 (X'FFF'). You should use the range of 0 to 3999 to avoid confusion with Language Environment abend codes. The value specified for the abend code is passed directly to the ABEND macro without further verification.
2. When TRAP(OFF) is specified, CEE3ABD behaves in a similar manner to *clean-up* 0.
3. In a non-CICS environment, a system dump of the user address space is taken only if a SYSMDUMP, SYSUDUMP, or SYSABEND DD card is present.
4. Users can look at CEE3AB2 to include user reason codes separately from abend codes.

For more information

- For more information about the ABPERC run-time option, see “ABPERC” on page 11.
- For more information about the TRAP run-time option, see “TRAP” on page 90.
- For more information about the TERMTHDACT run-time option, see “TERMTHDACT” on page 74.
- For more information about the CEE3AB2 callable service, see “CEE3AB2—Terminate enclave with an abend and reason code” on page 122.

Examples

```

/*Module/File Name: EDC3ABD */
/*****
/*
/* Licensed Materials - Property of IBM
/*
/* 5688-198 (C) Copyright IBM Corp. 1991, 1995
/* All rights reserved
/*
/* US Government Users Restricted Rights - Use,
/* duplication or disclosure restricted by GSA
/* ADP Schedule Contract with IBM Corp.
/*
/*
*****/

#include <leawi.h>

int main(void) {
    _INT4 code, timing;

    code = 0xdead; /* Abend code to issue */
    timing = 0;

    CEE3ABD(&code,&code);
}

```

Figure 9. C/C++ Example of CEE3ABD

```

CBL LIB,QUOTE
*****
*
* IBM Language Environment
*
* Licensed Materials - Property of IBM
*
* 5694-A01 5688-198
* (C) Copyright IBM Corp. 1991, 1997
* All Rights Reserved
*
* US Government Users Restricted Rights - Use,
* duplication or disclosure restricted by GSA
* ADP Schedule Contract with IBM Corp.
*
*****
*Module/File Name: IGZT3ABD
*****
** CBL3ABD - Call CEE3ABD to terminate the **
**          enclave with an abend          **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3ABD.

DATA DIVISION.
WORKING-STORAGE SECTION.
01  ABDCODE          PIC S9(9) BINARY.
01  TIMING           PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLMGET.

*****
** 3415 is the abend code to be issued,    **
** a timing of zero requests an abend      **
** without clean-up                        **
*****
        MOVE 3415 TO ABDCODE.
        MOVE 0 TO TIMING.
        CALL "CEE3ABD" USING ABDCODE , TIMING.

        GOBACK.

```

Figure 10. COBOL Example of CEE3ABD

```

*PROCESS MACRO;
/*****
/*
/* Licensed Materials - Property of IBM
/*
/* 5688-198 (C) Copyright IBM Corp. 1993, 1995
/* All rights reserved
/*
/* US Government Users Restricted Rights - Use,
/* duplication or disclosure restricted by GSA
/* ADP Schedule Contract with IBM Corp.
/*
/*
*****/
/*Module/File Name: IBM3ABD
/*****
/**
/** Function: CEE3ABD - terminate enclave with an
/**          abend
/**
/** In this example, CEE3ABD is called with a
/** timing value of 1. This requests an abend that
/** is deferred until clean-up takes place.
/**
/**
*****/
PLI3ABD: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL ABDCODE REAL FIXED BINARY(31,0);
    DCL TIMING  REAL FIXED BINARY(31,0);

    ABDCODE = 3333; /* Choose code to abend with
    TIMING = 1;     /* Specify 1, for an abend with
                   /*      clean-up

    /* Call CEE3ABD to request an abend 3333 with
    /*      clean-up
    CALL CEE3ABD ( ABDCODE, TIMING );

END PLI3ABD;

```

Figure 11. PL/I Example of CEE3ABD

CEE3AB2—Terminate enclave with an abend and reason code

CEE3AB2 requests that Language Environment terminate the enclave with an abend and user defined reason code. The issuing of the abend can be either with or without clean-up, with the type of dumps the user requires. There is no return from this service, nor is there any condition associated with it.

Syntax

►►—CEE3AB2—(—*abcode*—,—*reasoncode*—,—*clean-up*—)————►►

abcode(input)

A fullword integer, no greater than 4095, specifying the abend code that is issued. Under CICS, this fullword integer is converted to EBCDIC.

reasoncode(input)

A fullword integer, specifying the reason code that is issued by the user. If no reason code is specified, the reason code is 0.

clean-up(input)

Indicates whether the abend should result in clean-up of the enclave's resources. The acceptable values for *clean-up* are as follows:

Value	Meaning
0	Issue the abend without clean-up
1	Issue the abend with normal enclave termination processing
2	Issue the abend with enclave termination processing honoring the TERMTHDACT run-time option for taking a system dump of the user address space but suppressing the CEEDUMP
3	Issue the abend with enclave termination processing suppressing both the CEEDUMP and system dump if requested by the TERMTHDACT run-time option
4	Issue the abend with enclave termination processing honoring the TERMTHDACT run-time option for taking a CEEDUMP but suppressing the system dump
5	Issue the abend with enclave termination processing forcing a system dump of the user address space and suppressing the CEEDUMP

If an illegal value for *clean-up* is passed, the abend is issued without clean-up.

If *clean-up* is 0, no Language Environment dump is generated. A system dump, however, is requested when issuing the abend. Under CICS, a transaction dump is taken. To get a dump under CMS, specify FILEDEF SYSABEND PRINTER or FILEDEF SYSUDUMP PRINTER.

If *clean-up* is 0, Language Environment condition handling is disabled for the current enclave and termination activities are not performed. Event handlers are not driven; Debug Tool is not invoked; user exits are not invoked; and user-written condition handlers are not invoked.

When *clean-up* is 1, the abend is processed in the same manner as if it were a non-Language Environment abend. Its processing is affected by the ABPERC and TRAP options, the filedef abends percolated in the assembler user exit, and other elements of the environment related to abend processing. In particular, the condition handler can intercept the abend and give the application a chance to handle the abend. If the condition remains unhandled, normal termination activities are performed: information such as a Language Environment dump is produced, depending on the setting of the TERMTHDACT option; event handlers are driven; Debug Tool is invoked; and user exits are invoked. Assembler user exit settings control whether the application actually terminates with an abend.

When *clean-up* is 2, it follows the abend processing as when *clean-up* is 1 except the CEEDUMP is suppressed.

When *clean-up* is 3, it follows the abend processing as when *clean-up* is 1, however CEEDUMP and system dumps are both suppressed

When *clean-up* is 4, it follows the abend processing as when *clean-up* is 1, however only the system dumps are suppressed.

When *clean-up* is 5, it follows the abend processing as when *clean-up* is 1, however forcing a system dump to be taken and suppressing the CEEDUMP.

z/OS UNIX consideration

- In a multithreaded environment, CEE3AB2 applies to the enclave.

Usage notes

1. **Recommendation:** Language Environment abend codes are usually in the range of 4000 (X'FA0') to 4095 (X'FFF'). You should use the range of 0 to 3999 to avoid confusion with Language Environment abend codes. The value specified for the abend code is passed directly to the ABEND macro without further verification.
2. When TRAP(OFF) is specified, CEE3AB2 behaves in a similar manner to *clean-up* 0.
3. In a non-CICS environment, a system dump of the user address space is taken only if a SYSMDUMP, SYSUDUMP, or SYSABEND DD card is present.

For more information

- For more information about the ABPERC run-time option, see “ABPERC” on page 11.
- For more information about the TRAP run-time option, see “TRAP” on page 90.
- For more information about the TERMTHDACT run-time option, see “TERMTHDACT” on page 74.
- For more information about the ABEND macro, see *z/OS MVS Programming: Authorized Assembler Services Reference SET-WTO*.
- For more information about the CEE3ABD callable service, see “CEE3ABD—Terminate enclave with an abend” on page 117.

Examples

```

/*Module/File Name: EDC3AB2    */
/*****/
/*                                */
/* THIS EXAMPLE CALLS CEE3AB2 TO TERMINATE THE ENCLAVE WITH AN ABEND */
/* AFTER CLEAN-UP TAKES PLACE. USER COULD ALSO SPECIFY THEIR OWN    */
/* REASON CODE.                                                    */
/*                                */
/*****/

#include <leawi.h>

int main(void) {

    _INT4 code,reason,cleanup;

    code = 1234; /* Abend code to issue */
    reason = 9; /* User defined reason code*/
    cleanup = 3; /* Specify 3, for an ABEND with cleanup & with no dumps*/
    CEE3AB2(&code,&reason,&cleanup);

```

Figure 12. C/C++ Example of CEE3AB2

```

CBL LIB,QUOTE
*****
*
* IBM Language Environment
*
* Licensed Materials - Property of IBM
*
* 5694-A01
* (C) Copyright IBM Corp. 2005
* All Rights Reserved
*
* US Government Users Restricted Rights - Use,
* duplication or disclosure restricted by GSA
* ADP Schedule Contract with IBM Corp.
*
*****
*Module/File Name: IGZTAB2
*****
** Function: CEE3AB2 - Terminate enclave **
**           with an abend and user defined **
**           reason code **
**
** In this example, CEE3AB2 is called to **
** terminate the enclave with an abend and **
** a user defined reason code along with **
** Language Environment cleanup **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3AB2.

DATA DIVISION.
WORKING-STORAGE SECTION.

```

Figure 13. COBOL Example of CEE3AB2

```

*PROCESS MACRO;
/*****
/*                                     */
/* Licensed Materials - Property of IBM */
/*                                     */
/* 5694-A01 (C) Copyright IBM Corp. 2005 */
/* All rights reserved */
/*                                     */
/* US Government Users Restricted Rights - Use, */
/* duplication or disclosure restricted by GSA */
/* ADP Schedule Contract with IBM Corp. */
/*                                     */
*****/
/*Module/File Name: IBM3AB2 */
/*****
/**                                     **/
/** Function: CEE3AB2 - Terminate enclave with abend and user **/
/**                                     **/
/**                                     **/
/** In this example, CEE3AB2 is called to terminate the enclave **/
/** with an abend and user defined reason code along with **/
/** Language Environment cleanup **/
/**                                     **/
*****/

PLI3AB2: PROCEDURE OPTIONS (MAIN) REORDER;

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL ABDCODE REAL FIXED BINARY(31,0);
DCL RESCODE REAL FIXED BINARY(31,0);
DCL TIMING REAL FIXED BINARY(31,0);

ABDCODE = 3333; /* Choose code to abend with */
RESCODE = 9; /* User defined reason code */
TIMING = 4; /* Specify 4, for an abend with */
/* cleanup and no dumps */

/*****
/* Call CEE3AB2 to request an abend 3333 */
/* reason code 9 with cleanup */
*****/

CALL CEE3AB2 ( ABDCODE, RESCODE, TIMING );

END PLI3AB2;

```

Figure 14. PL/I Example of CEE3AB2

CEE3CIB—Return pointer to condition information block

CEE3CIB returns a pointer to a condition information block (CIB) associated with a given condition token. Use this service only during condition handling.

For PL/I and COBOL applications, Language Environment provides called header, COPY, or include files (in SCEESAMP) that map the CIB. For C/C++ applications, the macros are in the header file `leawi.h` (in SCEEH.H).

The CIB contains detailed information about the condition and provides input to your application's condition handlers, which can then respond more effectively to a given condition.

Syntax

```

▶▶ CEE3CIB ( [ cond_token ] , cib_ptr , fc ) ▶▶

```

cond_token

The condition token passed to a user-written condition handler. If you do not specify this parameter, Language Environment returns the address of the most recently-raised condition.

cib_ptr

The address of the CIB associated with the condition token.

fc

A 12-byte feedback code, optional in some languages, that indicates the results of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE35S	1	3260	No condition was active when a call to a condition management routine was made.
CEE35U	1	3262	An invalid condition token was passed. The condition token did not represent an active condition.

Usage notes

- Because the CIB is used only for synchronous signals, you should not use CEE3CIB in signal catchers that are driven for asynchronous signals.
- After the condition handling functions return control to your application, *cib_ptr* is no longer valid.
- z/OS UNIX consideration—In multithread applications, CEE3CIB returns the CIB associated with the current token on only the current thread.

For more information

- For more information about the CEE3CIB callable service, see *z/OS Language Environment Programming Guide*.

Examples

```

/*Module/File Name: EDC3CIB */

#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <string.h>
#include <ceedcct.h>

#ifdef __cplusplus
    extern "C" {
#endif
    void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
    }
#endif

int main(void) {

    _FEEDBACK fc;
    _ENTRY routine;
    _INT4 token;
    int x,y,z;

    /* set the routine structure to point to the handler */
    /* and use CEEHDLR to register the user handler */

    token = 99;
    routine.address = (_POINTER)&handler;;
    routine.nesting = NULL;

    CEEHDLR(&routine,&token,&fc);

```

Figure 15. C/C++ Example of EDC3CIB (Part 1 of 2)

```

/* verify that CEEHDLR was successful */
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEEHDLR failed with message number %d\n",
        fc.tok_msgno);
    exit(2999);
}
x = 5;
y = 0;
z = x / y;
}

/*****
/* handler is a user condition handler */
*****/
void handler(_FEEDBACK *fc, _INT4 *token, _INT4 *result,
    _FEEDBACK *newfc) {

    _CEECIB *cib_ptr;
    _FEEDBACK cibfc;

    CEE3CIB(fc, &cib_ptr, &cibfc);

/* verify that CEE3CIB was successful */
if ( _FBCHECK ( cibfc , CEE000 ) != 0 ) {
    printf("CEE3CIB failed with message number %d\n",
        cibfc.tok_msgno);
    exit(2999);
}

printf("%s \n",(*cib_ptr).cib_eye);
printf("%d \n",cib_ptr->cib_cond.tok_msgno);
printf("%s \n",cib_ptr->cib_cond.tok_facid);
*result = 10;
}

```

Figure 15. C/C++ Example of EDC3CIB (Part 2 of 2)

```

CBL LIB,QUOTE
*Module/File Name: IGZT3CIB
*****
**                                **
** CBL3CIB - Register a condition handler **
**          that will call CEE3CIB to get **
**          a Condition Information Block **
**          (CIB) for the condition.    **
**                                **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3CIB.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE PROCEDURE-POINTER.
01 TOKEN                      PIC S9(9) BINARY.
01 FC                         PIC X(12).
PROCEDURE DIVISION.
PARA-CBL3CIB.
    SET ROUTINE TO ENTRY "HANDLER".
    CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.

    GOBACK.
END PROGRAM CBL3CIB.

CBL LIB,QUOTE
IDENTIFICATION DIVISION.
PROGRAM-ID. HANDLER.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 CIB-PTR POINTER.
01 FC                      PIC S9(9) BINARY.
LINKAGE SECTION.
*****
** Include the mapping of the CIB **
*****
COPY CEEIGZCI.
01 CURCOND                  PIC X(12).
01 TOKEN                    PIC S9(9) BINARY.
01 RESULT                   PIC S9(9) BINARY.
01 NEWCOND                  PIC X(12).
PROCEDURE DIVISION USING CURCOND, TOKEN,
                        RESULT, NEWCOND.

PARA-HANDLER.
    CALL "CEE3CIB" USING CURCOND, CIB-PTR, FC.
    SET ADDRESS OF CEECIB TO CIB-PTR.
    DISPLAY "In Handler".
    DISPLAY CIB-EYE.
    DISPLAY CIB-TOK-MSGNO.
    DISPLAY CIB-TOK-FACID.

    GOBACK.
END PROGRAM HANDLER.

```

Figure 16. COBOL Example of CEE3CIB

```

*PROCESS OPT(0), MACRO;
/* Module/File Name: IBM3CIB */
/*****
/** */
/** Function: CEE3CIB - example of CEE3CIB */
/**      invoked from PL/I ON-unit */
/** */
/*****

IBM3CIB: PROCEDURE OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;
%INCLUDE CEEIBMCI;

DECLARE
  CIB_PTR      POINTER,
  01 FC,                /* Feedback token */
  03 MsgSev     REAL FIXED BINARY(15,0),
  03 MsgNo      REAL FIXED BINARY(15,0),
  03 Flags,
  05 Case       BIT(2),
  05 Severity   BIT(3),
  05 Control    BIT(3),
  03 FacID      CHAR(3),      /* Facility ID */
  03 ISI        /* Instance-Specific Information */
                  REAL FIXED BINARY(31,0),
  divisor      FIXED BINARY(31) INITIAL(0);

ON ZERODIVIDE BEGIN;

  CALL CEE3CIB(*, CIB_PTR, FC);
  IF FBCHECK( FC, CEE000 ) THEN DO;
    PUT SKIP LIST('Found ' || CIB_PTR->CIB_EYE ||
      ' for message #' || CIB_PTR->CIB_TOK_MSGNO
      || ' from ' || CIB_PTR->CIB_TOK_FACID );
    END;
  ELSE DO;
    DISPLAY( 'CEE3CIB failed with msg '
      || FC.MsgNo );
    END;

  END /* ON ZeroDivide */;

  divisor = 15 / divisor /* signals ZERODIVIDE */;

END IBM3CIB;

```

Figure 17. PL/I Example of CEE3CIB

CEE3CTY—Set default country

CEE3CTY sets the default country. A calling routine can change or query the current national country setting. The country setting affects the date format, the time format, the currency symbol, the decimal separator, and the thousands separator.

The current national country setting also affects the format of the date and time in the reports generated by the RPTOPTS and RPTSTG run-time options.

CEE3CTY also affects the default symbols for the NLS and date and time callable services.

CEE3CTY affects only the Language Environment NLS and date and time services, not the Language Environment locale callable services or C locale-sensitive functions.

The current default country setting, as well as previous default settings that have not been discarded, are stored on the stack on a LIFO (last in, first out) basis. The current default country setting is always on the top of the stack.

There are two methods of changing the default country setting with CEE3CTY:

- Specify the new default country setting and place it on top of the stack using a *function* value of 1 (SET). This discards the previous default setting.
- Specify the new default country setting and place it on top of the stack using a *function* value of 3 (PUSH). This pushes the previous default setting down on the stack so that you can later retrieve it by discarding the current setting.

To illustrate the second method, suppose you live in the United States and the code for the United States is specified as the default at installation. If you want to use the French defaults for a certain application, you can use CEE3CTY to PUSH France as the default country setting; then when you want the defaults for the United States, you can POP France from the top of the stack, making the United States the default setting.

Syntax

►—CEE3CTY—(—*function*—,—*country_code*—,—*fc*—)—————►

function (input)

A fullword binary integer specifying the service to be performed.

The possible values for *function* are:

1—SET	Establishes the <i>country_code</i> parameter as the current country. The top of the stack is, in effect, replaced with <i>country_code</i> .
2—QUERY	Returns the current country code on the top of the stack to the calling routine. The current code is returned in the <i>country_code</i> parameter.
3—PUSH	Pushes the <i>country_code</i> parameter onto the top of the country code stack, making it the current country code. Previous country codes on the stack are retained on a LIFO basis, which makes it possible to return to a prior country code at a later time.
4—POP	Pops the current country code. The last country code that was affected by a PUSH now becomes the current <i>country_code</i> . On return to the calling routine, the <i>country_code</i> parameter contains the discarded country code. If the stack contains only one country code, the code cannot be popped because the stack would be empty after the call. Therefore, no action is taken and a feedback code indicating such is returned to the calling routine.

country_code (input/output)

A 2-character fixed-length string. *country_code* is not case-sensitive. Table 28 on page 547 contains a list of valid country codes. It is used in the following ways for the different *functions*:

If <i>function</i> is specified as:	then <i>country_code</i> :
1 or 3	Contains the desired 2-character country code. In this case, it is an input parameter. Table 28 on page 547 contains a list of valid country codes.
2	Returns the current 2-character country code on top of the stack. In this case, it is an output parameter.
4	Returns the discarded 2-character country code. In this case, it is an output parameter.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3BV	2	3455	Only one country code was on the stack when a POP request was made to CEE3CTY. The current country code was returned in the
CEE3C0	3	3456	The country code <i>country-code</i> for the PUSH or SET function for CEE3CTY was invalid. No operation was performed.
CEE3C1	3	3457	The function <i>function</i> specified for CEE3CTY was not recognized. No operation was performed.

Usage notes

- The default setting for *country_code* is already on the stack when you start a program. You do not have to PUSH it there.
- The bytes X'0E' and X'0F' representing shift-out and shift-in codes are not affected by any *country_code* setting.
- C/C++ consideration—Language Environment provides locales used in C and C++ to establish default formats for the locale-sensitive functions and locale callable services, such as date and time formatting, sorting, and currency symbols. To change the locale, you can use the `setlocale()` library function or the CEESETL callable service.

The settings of CEESETL or `setlocale()` do not affect the setting of the CEE3CTY callable service. CEE3CTY affects only Language Environment NLS and date and time services. `setlocale()` and CEESETL affect only C/C++ locale-sensitive functions and Language Environment locale callable services.

To ensure that all settings are correct for your country, use CEE3CTY and either CEESETL or `setlocale()`.

- z/OS UNIX consideration—CEE3CTY applies to the enclave. Every thread in the enclave has the same country setting.

For more information

- For more information about the RPTOPTS and RPTSTG run-time options, see “RPTOPTS” on page 63 and “RPTSTG” on page 64.
- For a list of the default settings for a specified country, see Table 28 on page 547.
- For more information about the COUNTRY run-time option, refer to “COUNTRY” on page 22.
- For more information on setlocale(), see *z/OS XL C/C++ Programming Guide*.

Examples

```

/*Module/File Name: EDC3CTY   */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4 function;
    _CHAR2 country;

    /* query the current country setting */
    function = 2; /* function 2 is query */
    CEE3CTY(&function, country, &fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3CTY failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }

    /* if the current country is not Canada then set */
    /* it to Canada */
    if (memcmp(country, "CA", 2) != 0) {
        memcpy(country, "CA", 2);
        function = 1; /* function 1 is set */
        CEE3CTY(&function, country, &fc);

        if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
            printf("CEE3CTY failed with message number %d\n",
                   fc.tok_msgno);
            exit(2999);
        }
    }
}

```

Figure 18. C/C++ Example of CEE3CTY

```

CBL LIB,QUOTE
*Module/File Name: IGZT3CTY
*****
**                                     **
** Function: CEE3CTY - set default country **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3CTY.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 FUNCTN          PIC S9(9) BINARY.
01 COUNTRY         PIC X(2).
01 FC.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity    PIC S9(4) BINARY.
            04 Msg-No     PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code  PIC S9(4) BINARY.
            04 Cause-Code  PIC S9(4) BINARY.
        03 Case-Sev-Ctl   PIC X.
        03 Facility-ID    PIC XXX.
    02 I-S-Info          PIC S9(9) BINARY.

PROCEDURE DIVISION.

```

Figure 19. COBOL Example of CEE3CTY (Part 1 of 2)

```
      PARA-3CTYQRY.
      *****
      ** Call CEE3CTY with the QUERY function,
      **    and display current country code.
      *****
      MOVE 2 TO FUNCTN.
      CALL "CEE3CTY" USING FUNCTN, COUNTRY, FC.
      IF CEE000 of FC THEN
          DISPLAY "THE CURRENT COUNTRY CODE IS "
              COUNTRY
      ELSE
          DISPLAY "CEE3CTY(query) failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

      PARA-3CTYSET.
      *****
      ** If the current country code is not the US,
      ** call CEE3CTY with the SET function to make
      ** it the US. Display result.
      *****
      IF ( COUNTRY IS NOT = "US" ) THEN
          MOVE 1 TO FUNCTN
          MOVE "US" TO COUNTRY
          CALL "CEE3CTY" USING FUNCTN,
              COUNTRY, FC
          IF CEE000 of FC THEN
              DISPLAY "THE NEW COUNTRY CODE IS ",
                  COUNTRY
          ELSE
              DISPLAY "CEE3CTY(set) failed with msg "
                  Msg-No of FC UPON CONSOLE
              STOP RUN
          END-IF
      END-IF.

      GOBACK.
```

Figure 19. COBOL Example of CEE3CTY (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBM3CTY */
/*****
**
** Function: CEE3CTY - set current country */
**
** In this example, a call is made to the query */
** function of CEE3CTY to return the current */
** default country setting. This is then */
** printed out. If the current country code is */
** not 'US', then it is set to 'US' and printed. */
**
*****/
PLI3CTY: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL FUNCTN REAL FIXED BINARY(31,0);
DCL COUNTRY CHARACTER ( 2 );
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

FUNCTN = 2; /* Specify 2 for the query function */

/* Call CEE3CTY with the query function to */
/* return the current country setting */
CALL CEE3CTY ( FUNCTN, COUNTRY, FC );

/* If CEE3CTY ran successfully, print the */
/* current country */
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'The current country code is "'
        || COUNTRY || '".' );
    END;
ELSE DO;
    DISPLAY( 'CEE3CTY failed with msg '
        || FC.MsgNo );
    STOP;
    END;

```

Figure 20. PL/I Example of CEE3CTY (Part 1 of 2)

```

/* If the current default country is not the US, */
/*   set it to the US                               */
IF COUNTRY ^= 'US' THEN DO;
  FUNCTN = 1; /* Specify 1 for the set function */
  COUNTRY = 'US'; /* Specify country code for US*/
  CALL CEE3CTY ( FUNCTN, COUNTRY, FC );

  /* If CEE3CTY ran successfully print the      */
  /*   current country                               */
  IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'The new country code is "'
      || COUNTRY || '".' );
    END;
  ELSE DO;
    DISPLAY( 'CEE3CTY failed with msg '
      || FC.MsgNo );
    STOP;
    END;

  END;

END PLI3CTY;

```

Figure 20. PL/I Example of CEE3CTY (Part 2 of 2)

CEE3DMP—Generate dump

CEE3DMP generates a dump of Language Environment and the member language libraries. Sections of the dump are selectively included, depending on options specified with the *options* parameter. When an error occurs that would cause a CEEDUMP to be taken, and this is a POSIX application, Language Environment writes this dump to the current directory. Output from CEE3DMP is written to one of the following (in top down order):

- The directory found in `_CEE_DMPTARG`, if found.
- The current working directory, if this is not the root (`/`), and if the directory is writeable.
- The directory found in environment variable `TMPDIR` (if the temporary directory is not `/TMP`).
- `/TMP`

(See the *Fname* suboption of CEE3DMP on page 143 for more information about the dump output filename.)

Dumps are written only in mixed-case U.S. English. If longer than 60 characters, the dump title is truncated to 60 characters in order to match the record size of the dump file. Only nested enclaves within a single process are supported.

CEE3DMP establishes a condition handler that captures all conditions that occur during dump processing. It terminates the section of the dump in progress when a condition occurs and inserts the following line into the dump:

```
Exception occurred during dump processing at nnnnnnnn
```

`nnnnnnnn` is the instruction address at the time of the exception. After this line is inserted in the report, dump processing continues for other member languages until CEE3DMP is complete.

If an abend occurs, or if any other condition occurs or is raised, the condition manager attempts to handle it. If the condition remains unhandled, and it is of

sufficient severity, the condition manager might, based on whether the TERMTHDACT TRACE or DUMP suboption is specified, invoke dump services and then terminate the program. You do not have to call CEE3DMP to use the dump services. Any routine can use them. To support this case, dump services are invoked as follows:

- The title is 'Condition processing resulted in the unhandled condition' to indicate why the dump was produced.
- The dump options are 'TRACE COND THR(ALL) BLOCKS STOR NOENTRY' for dump output and 'TRACE COND THR(ALL) NOBLOCK NOSTOR NOENTRY' for trace output.

Reprinting of section title and control block name at the top of each page is suppressed. Only the main title 'CEE3DMP: ...' is reprinted.

The IBM-supplied default settings for the CEE3DMP options are:

```
TRACEBACK THREAD(CURRENT) FILES VARIABLES NOBLOCKS
NOSTORAGE STACKFRAME(ALL) PAGESIZE(60) FNAME(CEEDUMP)
CONDITION ENTRY
```

Syntax

```
►► CEE3DMP (—title—, —options—, —fc—) ————— ◄◄
```

title (input)

An 80-byte fixed-length character string containing a title printed at the top of each page of the dump.

options

A 255-byte fixed-length character string enclosed in single quotes containing options describing the type, format, and destination of dump information.

Options are declared as a string of keywords separated by blanks or commas. Some options have suboptions that follow the option keyword and are contained in parentheses. The options can be specified in any order, but the last option declaration is honored if there is a conflict between it and any preceding options.

The following options are recognized by Language Environment:

ENCLave(ALL | CURrent | n)

Dumps the current enclave, a fixed number of enclaves, or all enclaves associated with the current process. **n** is an integer ranging from 1 to $2^{31}-1$, inclusive, that indicates the maximum number of enclaves that should be dumped. ENCLAVE(CURRENT) and ENCLAVE(1) are equivalent.

THRead(ALL | CURrent)

Dumps the current thread (the thread that invoked this service) or all threads associated with the current enclave.

When you specify THREAD(ALL) and more than one thread is running, the library quiesces all threads before writing the dump. Therefore, the state of the library changes from the time the dump is requested to the time the dump is written.

TRACEback

Includes a traceback of all routines on the call chain. The traceback shows

transfers of control from either calls or exceptions. The traceback extends backwards to the main program of the current thread.

PL/I transfers of control into BEGIN-END blocks or ON-units are considered calls.

NOTRACEback

Does not include a traceback.

FILES

Includes attributes of all open files and the buffer contents used by the files. The particular attributes displayed are defined by the member languages.

File buffers are dumped when FILE and STORAGE are specified. File control blocks are dumped when FILE and BLOCKS are specified.

NOFILES

Does not include file attributes of open files.

VARIABLES

Includes a symbolic dump of all variables, arguments, and registers.

Variables include arrays and structures. Register values are those saved in the stack frame at the time of call. There is no way to print a subset of this information.

Variables and arguments are printed only if the symbol tables are available. A symbol table is generated when a program is compiled with the options shown below for each HLL, except for PL/I, which does not support the VARIABLE option.

Language	Compile-Time Option
C	TEST(SYM)
C++	TEST
COBOL	TEST or TEST(h,SYM)

The variables, arguments, and registers are dumped, beginning with the routine that called CEE3DMP. The dump proceeds up the chain for the number of routines specified by the STACKFRAME option. See below for a description of the STACKFRAME option.

NOVARIABLES

Does not include a dump of variables, arguments, and registers.

BLOCKS

Dumps the control blocks used in Language Environment and member language libraries.

Global control blocks, as well as control blocks associated with routines on the call chain, are printed. Control blocks are printed for the routine that called CEE3DMP. The dump proceeds up the call chain for the number of routines specified by the STACKFRAME option (see below). Control blocks for files are also dumped if the FILES option was specified. See the FILES option above for more information.

If the TRACE run-time option is set to ON, the trace table is dumped when BLOCKS is specified.

If the heap storage diagnostics report is requested via the HEAPCHK run-time option, the report is displayed when BLOCKS is specified.

NOBLOCKS

Suppresses the dump of control blocks.

STORage

Dumps the storage used by the program.

The storage is displayed in hexadecimal and character format. Global storage, as well as storage associated with each routine on the call chain, is printed. Storage is dumped for the routine that called CEE3DMP, which proceeds up the call chain for the number of routines specified by the STACKFRAME option. Storage for all file buffers is also dumped if the FILES option was specified (see above).

NOSTORage

Suppresses storage dumps.

REGSTor

Controls the amount of storage (reg_stor_amount) that is dumped around registers. reg_stor_amount indicates storage in bytes to be dumped around each register and must be in the range of 0 to 256. The number is rounded up to the nearest multiple of 32. The default is REGSTOR(96).

Restriction: You must specify REGSTor(0) as a CEE3DMP option if a dump storage around registers is not required.

StackFrame(n|ALL)

Specifies the number of stack frames dumped from the call chain.

If STACKFRAME(ALL) is specified, all stack frames are dumped. No stack frame storage is dumped if STACKFRAME(0) is specified.

The particular information dumped for each stack frame depends on the VARIABLE, BLOCK, and STORAGE option declarations specified for CEE3DMP. The first stack frame dumped is the one associated with the routine that called CEE3DMP, followed by its caller, and proceeding backwards up the call chain.

PAGEsize(n)

Specifies the number of lines on each page of the dump.

This value must be greater than 9. A value of 0 indicates that there should be no page breaks in the dump. The default setting is PAGESIZE(60).

FNAME(ddname)

Specifies the ddname of the file to which the dump report is written.

The ddname supplied in this option must be a valid ddname for the system on which the application is running. CEE3DMP does not check the ddname for validity, nor does CEE3DMP translate or modify the ddname. Supplying an invalid ddname can result in unpredictable behavior.

The default ddname CEEDUMP is used if this option is not specified.

CONDition

Specifies that for each active condition on the call chain, the following information is dumped from the CIB:

- The address of the CIB.
- The message associated with the current condition token.
- The message associated with the original condition token, if different from the current one.
- The location of the error.
- The machine state at the time the condition manager was invoked, if an abend or hardware condition occurred.

- The abend code and reason code, if the condition occurred as a result of an abend.
- Language-specific error information.

The information supplied by Language Environment-conforming languages differs. PL/I supplies DATAFIELD, ONCHAR, ONCOUNT, ONFILE, ONKEY, and ONSOURCE built-in function (BIF) values, which are shown in the context of the condition raised.

This option does not apply to asynchronous signals.

NOCONDition

Does not dump condition information for active conditions on the call chain.

ENTRY

Includes in the dump a description of the routine that called CEE3DMP and the contents of the registers on entry to CEE3DMP.

NOENTRY

Does not include in the dump a description of the routine that called CEE3DMP and the contents of the registers on entry to CEE3DMP.

GENOpts

Includes in the dump a run-time options report like that generated by the use of the RUNOPTS run-time option.

NOGENOpts

Does not include in the dump a run-time options report like that generated by the use of the RPTOPTS run-time option.

fc (output)

A 12-byte feedback token code that indicates the result of a call to CEE3DMP. If specified as an argument, feedback information, in the form of a condition token, is returned to the calling routine. If not specified, and the requested operation was not successfully completed, the condition is signaled to the condition manager.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE30U	2	3102	Invalid CEE3DMP options or suboptions were found and ignored.
CEE30V	3	3103	An error occurred in writing messages to the dump file.

Usage notes

- CICS consideration—Only ENCLAVE(CURRENT) and ENCLAVE(1) are supported on CICS.
- VM considerations—All values for the ENCLAVE option are supported on VM for nested enclaves created by the C system() function. Only ENCLAVE(CURRENT) and ENCLAVE(1) are supported on CMS for nested enclaves created by SVC LINK, CMSCALL or PL/I FETCH and CALL of a fetchable main.
- MVS consideration—On MVS, all values for the ENCLAVE option are supported.
- z/OS UNIX consideration—CEE3DMP applies to the enclave.

When you call CEE3DMP in a multithread environment, the current thread or all threads might be dumped. Enclave- and process-related storage (along with

storage related to threads other than the current thread) might have changed in value from the time the dump request was issued.

If the CEEDUMP DD has a PATH= parameter, the dump is directed to the hierarchic file system (HFS) file specified.

If your application is running under z/OS UNIX System Services and is either running in an address space created by using the fork() function or is invoked by one of the exec family of functions, the dump is written to the HFS. Language Environment writes the dump to a file in your current working directory, unless that directory is the root directory, in which case the dump is written to a file in the directory /tmp..

The name of this file changes with each dump and uses the following format:

/path/Fname.Date.Time.Pid

path	The current working directory
Fname	The name specified in the FNAME parameter on the call to CEE3DMP (default is CEEDUMP)
Date	The date the dump is taken, appearing in the format YYYYMMDD (such as 19940325 for March 25, 1994)
Time	The time the dump is taken, appearing in the format HHMMSS (such as 175501 for 05:55:01 PM)
Pid	The process ID the application is running in when the dump is taken

For more information

- See “TERMTHDACT” on page 74 for more information about the TERMTHDACT run-time option.
- For more information on generating dumps, see *z/OS Language Environment Debugging Guide*.

Examples

```

/*Module/File Name: EDC3DMP */

#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <string.h>
#include <ceedcct.h>

#define OPT_STR "THREAD(CURRENT) TRACEBACK FILES"

int main(void) {

    _CHAR80 title =
        "This is the title of the dump report";
    _CHAR255 options;
    FILE *f;
    _FEEDBACK fc;

    memset(options,' ',sizeof(options));
    memcpy(options,OPT_STR,sizeof(OPT_STR)-1);

    f = fopen("my.file","wb");
    fprintf(f,"my file record 1\n");

    CEE3DMP(title,options,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3DMP failed with msgno %d\n",
            fc.tok_msgno);
        exit(2999);
    }
}

```

Figure 21. C/C++ Example of CEE3DMP

```

CBL LIB,QUOTE
*Module/File Name: IGZT3DMP
*****
**
** CBL3DMP - Call CEE3DMP to generate a dump **
**
** In this example, a call to CEE3DMP is made **
** to request a dump of the run-time **
** environment. Several options are specified **
** to customize the dump. **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3DMP.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 DMPTITL          PIC X(80).
01 OPTIONS          PIC X(255).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity      PIC S9(4) BINARY.
   04 Msg-No        PIC S9(4) BINARY.
   03 Case-2-Condition-ID
   REDEFINES Case-1-Condition-ID.
   04 Class-Code    PIC S9(4) BINARY.
   04 Cause-Code    PIC S9(4) BINARY.
   03 Case-Sev-Ctl  PIC X.
   03 Facility-ID   PIC XXX.
   02 I-S-Info      PIC S9(9) BINARY.
PROCEDURE DIVISION.
*****
** Specify title to appear on each page of the
** dump report.
** Specify options that will request that a
** traceback be provided, but no variables,
** stack frames, condition information, or
** registers be dumped.
*****
PARA-CBL3DMP.
  MOVE "This is the dump report title."
    TO DMPTITL.
  MOVE "TRACE NOVAR SF(0) NOCOND NOENTRY"
    TO OPTIONS.
  CALL "CEE3DMP" USING DMPTITL, OPTIONS, FC.
  IF NOT CEE000 of FC THEN
    DISPLAY "CEE3DMP failed with msg "
      Msg-No of FC UPON CONSOLE
  STOP RUN
END-IF.

GOBACK.

```

Figure 22. COBOL Example of CEE3DMP

```

*PROCESS MACRO;
/* Module/File Name: IBM3DMP */
/*****
**
** Function: CEE3DMP - generate dump
**
** In this example, a call to CEE3DMP is made to
** request a dump of the run-time environment.
** Several options are specified, to customize
** the dump.
**
*****/
PLI3DMP: PROC OPTIONS(MAIN);
    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL DMPTITL CHAR(80);
    DCL OPTIONS CHARACTER ( 255 );
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    /* Specify a string to be printed at the top of
    /* each page of dump */

    DMPTITL = 'This is the title for the dump report.';

    /* Request that a traceback be provided, but
    /* no variables, stack frames, condition
    /* information, or registers be dumped */

    OPTIONS = 'TRACE NOVAR SF(0) NOCOND NOENTRY';

    /* Call CEE3DMP with options to customize dump */
    CALL CEE3DMP ( DMPTITL, OPTIONS, FC );
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST( 'Successfully produced dump with'
            || ' title "' || DMPTITL || '"' );
        PUT SKIP LIST( ' and options: ' || OPTIONS );
        END;
    ELSE DO;
        DISPLAY( 'CEE3DMP failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLI3DMP;

```

Figure 23. PL/I Example of CEE3DMP

CEE3GRC—Get the enclave return code

CEE3GRC retrieves the current value of the user enclave return code. Use CEE3GRC in conjunction with CEE3SRC to get and then set user enclave return codes.

Syntax

```
►► CEE3GRC (—return_code—, —fc—) ◄◄
```

return_code (output)

The enclave return code.

fc (output)

A feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

Usage notes

- z/OS UNIX consideration—CEE3GRC is not supported in multithread applications.
- PL/I MTF consideration—CEE3GRC is not supported in PL/I MTF applications.
- PL/I consideration—When running PL/I with POSIX(ON), CEE3GRC is not supported.

For more information

- See “CEE3SRC—Set the enclave return code” on page 220 for more information about the CEE3SRC callable service.
- See *z/OS Language Environment Programming Guide* for more information about the CEE3GRC and CEE3SRC callable services.

Examples

```

/*Module/File Name: EDC3GRC */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

/*****
/**
/** Function: CEEHDLR - Register user condition
/**          handler
/**          : CEE3GRC - Get enclave return code
/**
/* 1. Register the user-written condition handler
/*  CESETRC.
/* 2. Call CERCDIV, which performs a divide-by-zero.
/* 3. CESETRC is entered, sets the enclave return
/*  code to 999998 and resumes.
/* 4. The main routine regains control and
/*  retrieves the enclave return code
*****/

void CERCDIV(int);
/*****
Declaration of user-written condition handler
*****/
#ifdef __cplusplus
extern "C" {
#endif
void CESETRC(_FEEDBACK *, _INT4*, _INT4 *, _FEEDBACK *);
#ifdef __cplusplus
}
#endif

main()
{
    _INT4 idivisor = 0;
    _INT4 enclave_RC;
    _FEEDBACK feedback, new_feedback;
    _ENTRY pgmptr;
    _INT4 token;

    /*****
    The condition handler CESETRC is registered
    *****/
    pgmptr.address = (_POINTER)&CESETRC;;
    pgmptr.nesting = NULL;
    token = 97;
    CEEHDLR(&pgmptr, &token, &feedback);

```

Figure 24. C/C++ main() Routine that Calls CEEHDLR and CEE3GRC (Part 1 of 2)

```

/*****
A divide-by-zero is accomplished by calling CERCDIV.
*****/
CERCDIV(idivisor); /* this causes a zero divide */

/*****
Call CEE3GRC and check that enclave return code was set.
*****/
CEE3GRC(&enclave_RC, &feedback);
if ( _FBCHECK ( feedback , CEE000 ) != 0 ) {
    printf("CEE3GRC failed with message number %d\n",
        feedback.tok_msgno);
    exit(2999);
}

if (enclave_RC != 999998)
    printf ("Error setting enclave return code");
}

```

Figure 24. C/C++ main() Routine that Calls CEEHDLR and CEE3GRC (Part 2 of 2)

```

/*Module/File Name: EDC3SRC */
/*****
/**
/** Function: CEE3SRC - Set the enclave return code. */
/*
/* This is the user-written condition handler */
/* registered by CEGETRC. It invokes CEE3SRC to set */
/* the enclave return code to 999998 */
/* when a divide-by-zero condition is encountered. */
/**
*****/
#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <ceedcct.h>
#define RESUME 10
#define PERCOLATE 20
/*****

#ifdef __cplusplus
extern "C" void CESETRC (_FEEDBACK *, _INT4 *,
    _INT4 *, _FEEDBACK *);
#endif

void CESETRC (_FEEDBACK *cond, _INT4 *input_token,
    _INT4 *result, _FEEDBACK *new_cond)
{
    _INT4 enclave_RC;
    _FEEDBACK feedback;

    if ( _FBCHECK ( *cond , CEE349 ) == 0 )
    {
        enclave_RC = 999998;
        CEE3SRC(&enclave_RC, &feedback);
        *result = RESUME;
    }
    else
    {
        *result = PERCOLATE;
    }
}

```

Figure 25. C/C++ User-Written Condition Handler that Sets a User Enclave Return Code

```
/*Module/File Name: EDCDIV    */
#include <stdio.h>
#include <string.h>
/*****
/* This is a divide-by-zero routine. It divides
/* an input integer by a constant.
/*
*****/

void CERCDIV (int Integer)

{
    int num;
    num = 1/Integer;
}
```

Figure 26. C/C++ Subroutine that Generates the Divide-by-Zero Condition

```

CBL LIB,QUOTE,C,RENT,OPTIMIZE,NODYNAM
*Module/File Name: IGZT3GRC
*****
**                                     **
** CBL2GRC - Call the following Lang. Env. svcs: **
**                                     **
**      : CEEHDLR - register user condition **
**              handler **
**      : CEE3GRC - get enclave return code **
**                                     **
** 1. Registers user condition handler CESETRC. **
** 2. Program then calls CERCDIV which performs **
**    a divide by zero operation. **
** 3. CESETRC gets control and set the enclave **
**    return code to 999998 and resumes. **
** 4. Regains control and retrieves the enclave **
**    return code. **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID.    CBL3GRC.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 TOKEN          PIC X(4).
01 IDIVISOR        PIC S9(9)
                   BINARY VALUE ZERO.
01 ENCLAVE-RC      PIC S9(9) BINARY.
**
** Declares for condition handling
**
01 PGMPTR          USAGE IS PROCEDURE-POINTER.
01 FBCODE.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
       03 Case-1-Condition-ID.
           04 Severity    PIC S9(4) BINARY.
           04 Msg-No      PIC S9(4) BINARY.
       03 Case-2-Condition-ID
           REDEFINES Case-1-Condition-ID.
           04 Class-Code  PIC S9(4) BINARY.
           04 Cause-Code  PIC S9(4) BINARY.
       03 Case-Sev-Ctl    PIC X.
       03 Facility-ID     PIC XXX.
   02 I-S-Info           PIC S9(9) BINARY.

PROCEDURE DIVISION.

```

Figure 27. COBOL Main Routine that Calls CEEHDLR and CEE3GRC (Part 1 of 2)

```

0001-BEGIN-PROCESSING.
*****
** Register user condition handler CESETRC using
**   CEEHDLR
*****
      SET PGMPTR TO ENTRY  "CESETRC".
      MOVE 97 TO TOKEN
      CALL "CEEHDLR" USING PGMPTR, TOKEN, FBCODE.
      IF NOT CEE000 OF FBCODE THEN
          DISPLAY "CEEHDLR failed with msg "
              Msg-No of FBCODE UPON CONSOLE
          STOP RUN
      END-IF.

*****
** Call CERCDIV to cause a divide by zero
**   condition
*****
      CALL "CERCDIV" USING IDIVISOR.

*****
** Call CEE3GRC to get the enclave return code
*****
      CALL "CEE3GRC" USING ENCLAVE-RC, FBCODE.
      IF NOT CEE000 OF FBCODE THEN
          DISPLAY "CEEHDLR failed with msg "
              Msg-No of FBCODE UPON CONSOLE
          STOP RUN
      END-IF.

      IF (ENCLAVE-RC = 999998) THEN
          DISPLAY "Enclave return code "
              "set and retrieved."
      ELSE
          DISPLAY "*** Unexpected enclave return "
              "code of " ENCLAVE-RC " encountered"
      END-IF.

      GOBACK.
End program CBL3GRC.

```

Figure 27. COBOL Main Routine that Calls CEEHDLR and CEE3GRC (Part 2 of 2)

```

CBL C,RENT,OPTIMIZE,NODYNAM,LIB,QUOTE
*Module/File Name: IGZT3SRC
*****
**                                     **
** DRV3SRC - Drive sample program for CEE3SRC. **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRV3SRC.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE          PROCEDURE-POINTER.
01 DENOMINATOR      PIC S9(9) BINARY.
01 NUMERATOR        PIC S9(9) BINARY.
01 RATIO            PIC S9(9) BINARY.
01 TOKEN            PIC S9(9) BINARY VALUE 0.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity         PIC S9(4) BINARY.
04 Msg-No           PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code       PIC S9(4) BINARY.
04 Cause-Code       PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

REGISTER-HANDLER.
*****
** Register handler
*****
    SET ROUTINE TO ENTRY "CBL3SRC".
    CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 OF FC THEN
        DISPLAY "CEEHDLR failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

RAISE-CONDITION.
*****
** Cause a zero-divide condition.
*****
    MOVE 0 TO DENOMINATOR.
    MOVE 1 TO NUMERATOR.
    DIVIDE NUMERATOR BY DENOMINATOR
        GIVING RATIO.

```

Figure 28. COBOL Condition Handler that Sets a User Enclave Return Code and Resumes when a Divide-by-Zero Condition Occurs (Part 1 of 3)

```

UNREGISTER-HANDLER.
*****
** UNregister handler
*****
    CALL "CEEHDLU" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
            Msg-No of FC UPON CONSOLE
    END-IF.

    STOP RUN.
END PROGRAM DRV3SRC.

*****
**
** CBL3SRC - Call CEE3SRC to set the enclave
**                      return code
**
** This is an example of a user-written
** condition handler that sets a user
** enclave return code and resumes when
** a divide-by-zero condition occurs.
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3SRC.

DATA DIVISION.

WORKING-STORAGE SECTION.
01 ENCLAVE-RC          PIC S9(9) BINARY.
01 FEEDBACK.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity    PIC S9(4) BINARY.
            04 Msg-No     PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code  PIC S9(4) BINARY.
            04 Cause-Code  PIC S9(4) BINARY.
        03 Case-Sev-Ctl   PIC X.
        03 Facility-ID    PIC XXX.
    02 I-S-Info          PIC S9(9) BINARY.

```

Figure 28. COBOL Condition Handler that Sets a User Enclave Return Code and Resumes when a Divide-by-Zero Condition Occurs (Part 2 of 3)

```

LINKAGE SECTION.
01 TOKEN                      PIC X(4).
01 RESULT-CODE                PIC S9(9) BINARY.
88 RESUME                     VALUE +10.
88 PERCOLATE                   VALUE +20.
01 CURRENT-CONDITION.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity                   PIC S9(4) BINARY.
04 Msg-No                     PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code                 PIC S9(4) BINARY.
04 Cause-Code                 PIC S9(4) BINARY.
03 Case-Sev-Ctl               PIC X.
03 Facility-ID                PIC XXX.
02 I-S-Info                   PIC S9(9) BINARY.
01 NEW-CONDITION.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity                   PIC S9(4) BINARY.
04 Msg-No                     PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code                 PIC S9(4) BINARY.
04 Cause-Code                 PIC S9(4) BINARY.
03 Case-Sev-Ctl               PIC X.
03 Facility-ID                PIC XXX.
02 I-S-Info                   PIC S9(9) BINARY.

PROCEDURE DIVISION USING CURRENT-CONDITION,
                      TOKEN, RESULT-CODE,
                      NEW-CONDITION.

HANDLE-CONDITION.
*****
** Check for divide-by-zero condition (CEE349)
*****
    IF CEE349 of CURRENT-CONDITION THEN
        MOVE 761 TO ENCLAVE-RC
        CALL "CEE3SRC" USING ENCLAVE-RC,
                           FEEDBACK
    IF NOT CEE000 of FEEDBACK THEN
        DISPLAY "CEE3SRC failed with msg "
               Msg-No of FEEDBACK UPON CONSOLE
    END-IF
END-IF.
SET PERCOLATE TO TRUE

GOBACK.

END PROGRAM CBL3SRC.

```

Figure 28. COBOL Condition Handler that Sets a User Enclave Return Code and Resumes when a Divide-by-Zero Condition Occurs (Part 3 of 3)

```

CBL LIB,QUOTE,C,RENT,OPTIMIZE,NODYNAM
*Module/File Name: IGZTDIV
*****
**
**Function      :
**
**      A divide by zero is attempted. This
** induces the invocation of user condition
** handler CESETRC registered in program
** CEGETRC.
**
**      :
*****
IDENTIFICATION DIVISION.
PROGRAM-ID.    CERCDIV.

DATA DIVISION.
WORKING-STORAGE SECTION.
01  TO-DIVIDE      PIC S9(9) BINARY VALUE 1.
LINKAGE SECTION.
01  IDIVISOR       PIC S9(9) BINARY.

PROCEDURE DIVISION USING IDIVISOR.

*****
** divide a constant by IDIVISOR.
**
*****
    DIVIDE IDIVISOR INTO TO-DIVIDE.

    GOBACK.
End program CERCDIV.

```

Figure 29. COBOL Subroutine that Generates a Divide-by-Zero

```

*Process lc(101),opt(0),s,map,list,stmt,a(f),ag,macro ;
/*Module/File Name: IBMDIV */
/*****
/** */
/** Function: CEE3SRC - Set the enclave return code */
/**          : CEE3GRC - Get the enclave return code */
/* */
/* 1. A user ZERODIVIDE ON-unit is established by */
/*    CESETRC. */
/* 2. A sub-program, sdivide, is called and causes */
/*    a ZERODIVIDE condition to occur. */
/* 3. The ON-unit for ZERODIVIDE is entered. */
/*    The ON-unit calls CEE3GRC to get the current */
/*    enclave return code. It increments the return */
/*    code by 4444, and sets the enclave return */
/*    code to this new value. */
/* 4. On completion, the program prints the enclave */
/*    return code. */
/*****
CESETRC: Proc Options(Main)      ;

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL Enclave_RC REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

```

Figure 30. PL/I Example that Sets and Retrieves the User Enclave Return Code when a Divide-by-Zero is Generated (Part 1 of 2)

```

/*****
/* A ZERODIVIDE ON-unit is established */
*****/
on zerodivide begin;
  call CEE3GRC (Enclave_RC, fc);
  IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'Original Enclave RC was '
      || Enclave_RC );
  END;
ELSE DO;
  DISPLAY( 'CEE3GRC failed with msg '
    || FC.MsgNo );
  STOP;
END;
Enclave_RC = Enclave_RC + 4444;
call CEE3SRC (Enclave_RC, fc);
IF FBCEK( FC, CEE000) THEN DO;
  PUT SKIP LIST( 'New Enclave RC is '
    || Enclave_RC );
END;
ELSE DO;
  DISPLAY( 'CEE3SRC failed with msg '
    || FC.MsgNo );
  STOP;
END;
goto resume;
end;
/*****
/* Call sdivide to cause a ZERODIVIDE condition. */
*****/
call sdivide;
resume:
  put skip edit('Enclave return code is ',
    Enclave_RC) (A, F(10));

/*****
/* The sdivide routine causes a ZERODIVIDE condition*/
*****/
sdivide: proc;
  dcl int fixed bin (15,0);
  dcl int_2 fixed bin (15,0) init(5);
  dcl int_3 fixed bin (15,0) init(0);
  int = int_2 / int_3;
end sdivide;

End cesetrc;

```

Figure 30. PL/I Example that Sets and Retrieves the User Enclave Return Code when a Divide-by-Zero is Generated (Part 2 of 2)

CEE3GRN—Get name of routine that incurred condition

CEE3GRN gets the name of the most current Language Environment-conforming routine where a condition occurred. If there are nested conditions, the most recently signaled condition is used.

Syntax

►► CEE3GRN (—name—, —fc—) ◀◀

CEE3GRN

name (output)

A fixed-length 80-character string (VSTRING), that contains the name of the routine that was executing when the condition was raised. *name* is left-justified within the field and right-padded with blanks. If there are nested conditions, the most recently activated condition is used to determine *name*.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE35S	1	3260	No condition was active when a call to a condition management routine was made.

Usage notes

- **z/OS UNIX consideration**—In multithread applications, CEE3GRN gets the name of the routine that incurred the condition on the current thread.

Examples

```

/*Module/File Name: EDC3GRN  */

#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

#ifdef __cplusplus
extern "C" {
#endif
void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
}
#endif

int main(void) {

    _FEEDBACK fc,condtok;
    _ENTRY routine;
    _INT4 token,qdata;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;

    /* .
     .
     . */
    /* register condition handler */
    token = 99;
    routine.address = (_POINTER)&handler;;
    routine.nesting = NULL;
    CEEHDLR(&routine,&token,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEHDLR failed with message number %d\n",
            fc.tok_msgno);
        exit (2999);
    }

    /* .
     .
     . */

    /* set up any condition sev 2 or higher */
    c_1 = 3;
    c_2 = 99;
    cond_case = 1;
    sev = 3;
    control = 0;
    memcpy(facid,"ZZZ",3);
    isi = 0;

```

Figure 31. C/C++ Example of CEE3GRN (Part 1 of 2)

```

CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
        facid,&isi,&condtok,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEENCOD failed with message number %d\n",
        fc.tok_msgno);
    exit(2999);
}

/* signal condition */
CEESGL(&condtok,&qdata,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEESGL failed with message number %d\n",
        fc.tok_msgno);
    exit (2999);
}
}

void handler(_FEEDBACK *fc, _INT4 *token, _INT4 *result,
             _FEEDBACK *newfc) {

    _CHAR80 name;
    _FEEDBACK grnfc;

    /* get name of the routine that signal the      */
    /* condition                                     */
    CEE3GRN(name,&grnfc);
    if ( _FBCHECK ( grnfc , CEE000 ) != 0 ) {
        printf("CEESGL failed with message number %d\n",
            grnfc.tok_msgno);
        exit (2999);
    }

    printf("the routine that called this condition");
    printf(" handler is:\n %.80s\n",name);
    *result = 10;
    return;
}

```

Figure 31. C/C++ Example of CEE3GRN (Part 2 of 2)

```

CBL LIB,QUOTE,NOOPT
*Module/File Name: IGZT3GRN
*****
**                                     **
** DRV3GRN - Drive sample program for CEE3GRN. **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRV3GRN.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE          PROCEDURE-POINTER.
01 DENOMINATOR      PIC S9(9) BINARY.
01 NUMERATOR        PIC S9(9) BINARY.
01 RATIO            PIC S9(9) BINARY.
01 TOKEN            PIC S9(9) BINARY VALUE 0.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity         PIC S9(4) BINARY.
04 Msg-No           PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code       PIC S9(4) BINARY.
04 Cause-Code       PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

```

Figure 32. COBOL Example of CEE3GRN (Part 1 of 4)

```

REGISTER-HANDLER.
*****
** Register handler
*****
    SET ROUTINE TO ENTRY "CBL3GRN".
    CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLR failed with msg "
            Msg-No of FC UPON CONSOLE
    STOP RUN
    END-IF.

RAISE-CONDITION.
*****
** Cause a zero-divide condition.
*****
    MOVE 0 TO DENOMINATOR.
    MOVE 1 TO NUMERATOR.
    DIVIDE NUMERATOR BY DENOMINATOR
        GIVING RATIO.

UNREGISTER-HANDLER.
*****
** UNregister handler
*****
    CALL "CEEHDLU" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
            Msg-No of FC UPON CONSOLE
    END-IF.

    STOP RUN.
    END PROGRAM DRV3GRN.

*****
**
** CBL3GRN - Call CEE3GRN to get the name of
**           the routine that incurred
**           the condition.
**
*****

```

Figure 32. COBOL Example of CEE3GRN (Part 2 of 4)


```

IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3GRN.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 RNAME                      PIC X(80).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
       03 Case-1-Condition-ID.
           04 Severity      PIC S9(4) BINARY.
           04 Msg-No       PIC S9(4) BINARY.
       03 Case-2-Condition-ID
           REDEFINES Case-1-Condition-ID.
           04 Class-Code   PIC S9(4) BINARY.
           04 Cause-Code  PIC S9(4) BINARY.
       03 Case-Sev-Ctl    PIC X.
       03 Facility-ID     PIC XXX.
   02 I-S-Info           PIC S9(9) BINARY.
LINKAGE SECTION.
01 TOKEN                  PIC S9(9) BINARY.
01 RESULT                 PIC S9(9) BINARY.
88 RESUME                 VALUE 10.
01 CURCOND.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
       03 Case-1-Condition-ID.
           04 Severity      PIC S9(4) BINARY.
           04 Msg-No       PIC S9(4) BINARY.
       03 Case-2-Condition-ID
           REDEFINES Case-1-Condition-ID.
           04 Class-Code   PIC S9(4) BINARY.
           04 Cause-Code  PIC S9(4) BINARY.
       03 Case-Sev-Ctl    PIC X.
       03 Facility-ID     PIC XXX.
   02 I-S-Info           PIC S9(9) BINARY.
01 NEWCOND.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
       03 Case-1-Condition-ID.
           04 Severity      PIC S9(4) BINARY.
           04 Msg-No       PIC S9(4) BINARY.
       03 Case-2-Condition-ID
           REDEFINES Case-1-Condition-ID.
           04 Class-Code   PIC S9(4) BINARY.
           04 Cause-Code  PIC S9(4) BINARY.
       03 Case-Sev-Ctl    PIC X.
       03 Facility-ID     PIC XXX.
   02 I-S-Info           PIC S9(9) BINARY.

```

Figure 32. COBOL Example of CEE3GRN (Part 3 of 4)

```
PROCEDURE DIVISION USING CURCOND, TOKEN,
                        RESULT, NEWCOND.
PARA-CBL3GRN.
  CALL "CEE3GRN" USING RNAME, FC.
  IF CEE000 of FC THEN
    DISPLAY "Name of routine which "
           "incurred the condition is: " RNAME
  ELSE
    DISPLAY "CEE3GRN failed with msg "
           "Msg-No of FC UPON CONSOLE
    STOP RUN
  END-IF.

PARA-HANDLER.
*****
** In user handler - resume execution
*****
  SET RESUME TO TRUE.

  GOBACK.

END PROGRAM CBL3GRN.
```

Figure 32. COBOL Example of CEE3GRN (Part 4 of 4)

```

*PROCESS OPT(0), MACRO;
/* Module/File Name: IBM3GRN */
/*****
/** */
/** Function: CEE3GRN - example of CEE3GRN */
/**      invoked from PL/I ON-unit */
/** */
/*****

IBM3GRN: PROCEDURE OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DECLARE
    RNAME      CHAR(80),
    01 FC,      /* Feedback token */
    03 MsgSev   REAL FIXED BINARY(15,0),
    03 MsgNo    REAL FIXED BINARY(15,0),
    03 Flags,
    05 Case     BIT(2),
    05 Severity BIT(3),
    05 Control  BIT(3),
    03 FacID    CHAR(3),      /* Facility ID */
    03 ISI      /* Instance-Specific Information */
                REAL FIXED BINARY(31,0),
    divisor     FIXED BINARY(31) INITIAL(0);

ON ZERODIVIDE BEGIN;

/* Call CEE3GRN to get the name of the routine */
/* that incurred the most recently signalled */
/* condition */

CALL CEE3GRN ( RNAME, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'The most recently signalled '
        || 'condition was incurred by ' || RNAME );
    END;
ELSE DO;
    DISPLAY( 'CEE3GRN failed with msg '
        || FC.MsgNo );
    END;

END /* ON ZeroDivide */;

divisor = 15 / divisor /* signals ZERODIVIDE */;

END IBM3GRN;

```

Figure 33. PL/I Example of CEE3GRN

CEE3GRO—Get offset of condition

The CEE3GRO service returns the offset within a failing routine of the most recent condition. If there are nested conditions, the most recently signaled condition is returned.

Syntax

►► CEE3GRO (—*cond_offset*—, —*fc*—) ◀◀

cond_offset (output)

An INT4 data type that, upon completion of this service, contains the offset within a failing routine of the most recent condition.

fc (output, optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE35S	1	3260	No condition was active when a call to a condition management routine was made.

Examples

```

CBL  LIB,QUOTE,NOOPT
      *Module/File Name: IGZT3GRO
      *****
      **
      ** DRV3GRO - Register a condition handler      **
      **           that calls CEE3GRO to determine  **
      **           the offset in the program that   **
      **           incurred the condition.          **
      **                                           **
      *****
      IDENTIFICATION DIVISION.
      PROGRAM-ID.  DRV3GRO.

      DATA DIVISION.
      WORKING-STORAGE SECTION.
      01  ROUTINE      PROCEDURE-POINTER.
      01  DENOMINATOR  PIC S9(9) BINARY.
      01  NUMERATOR    PIC S9(9) BINARY.
      01  RATIO        PIC S9(9) BINARY.
      01  TOKEN        PIC S9(9) BINARY VALUE 0.
      01  FC.
      02  Condition-Token-Value.
      COPY CEEIGZCT.
      03  Case-1-Condition-ID.
      04  Severity     PIC S9(4) BINARY.
      04  Msg-No       PIC S9(4) BINARY.
      03  Case-2-Condition-ID
      04  REDEFINES Case-1-Condition-ID.
      04  Class-Code   PIC S9(4) BINARY.
      04  Cause-Code   PIC S9(4) BINARY.
      03  Case-Sev-Ctl  PIC X.
      03  Facility-ID   PIC XXX.
      02  I-S-Info      PIC S9(9) BINARY.

      PROCEDURE DIVISION.

```

Figure 34. COBOL Example of CEE3GRO (Part 1 of 4)

```

REGISTER-HANDLER.
*****
** Register handler
*****
    SET ROUTINE TO ENTRY "CBL3GRO".
    CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLR failed with msg "
            Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

RAISE-CONDITION.
*****
** Cause a zero-divide condition
*****
    MOVE 0 TO DENOMINATOR.
    MOVE 1 TO NUMERATOR.
    DIVIDE NUMERATOR BY DENOMINATOR
        GIVING RATIO.

UNREGISTER-HANDLER.
*****
** Unregister handler
*****
    CALL "CEEHDLU" USING ROUTINE, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
            Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

    STOP RUN.
END PROGRAM DRV3GRO.

*****
**
** CBL3GRO - Call CEE3GRO to get the offset
**           in the routine that incurred
**           the condition.
**
*****

```

Figure 34. COBOL Example of CEE3GRO (Part 2 of 4)

```

IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3GRO.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROFFSET PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
LINKAGE SECTION.
01 TOKEN PIC S9(9) BINARY.
01 RESULT PIC S9(9) BINARY.
88 RESUME VALUE 10.
01 CURCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
01 NEWCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.

```

Figure 34. COBOL Example of CEE3GRO (Part 3 of 4)

```

PROCEDURE DIVISION USING CURCOND, TOKEN,
                        RESULT, NEWCOND.
PARA-CBL3GRO.
  CALL "CEE3GRO" USING ROFFSET, FC.
  IF CEE000 of FC THEN
    DISPLAY "Offset in routine which "
           "incurred the condition is: "
           ROFFSET
  ELSE
    DISPLAY "CEE3GRO failed with msg "
           "Msg-No of FC UPON CONSOLE
  END-IF.

PARA-HANDLER.
*****
** In user handler - resume execution
*****
  SET RESUME TO TRUE.

GOBACK.
END PROGRAM CBL3GRO.

```

Figure 34. COBOL Example of CEE3GRO (Part 4 of 4)

```

*Process lc(101),opt(0),s,map,list,stmt,a(f),ag;
*Process macro;
DRV3GRO: Proc Options(Main);

/*Module/File Name: IBM3GRO                                     */
/*****
**
** DRV3GRO - Register a condition handler that
**          calls CEE3GRO to determine
**          the offset in the routine that
**          incurred the condition.
**
**
*****/

%include CEEIBMCT;
%include CEEIBMAW;
declare 01 FBCODE      feedback;
declare DENOMINATOR    real fixed binary(31,0);
declare NUMERATOR      real fixed binary(31,0);
declare RATIO          real fixed binary(31,0);
declare PLI3GRO        external entry;
declare U_PTR          pointer;
declare 01 U_DATA,
      03 U_CNTL      fixed binary(31,0),
      03 U_TOK      pointer;

U_PTR = addr(U_DATA);
U_CNTL = 0;

/* Set Resume Point                                     */

```

Figure 35. PL/I Example of CEE3GRO (Part 1 of 3)

```

Display('Setting resume point via CEE3SRP');
Call CEE3SRP(U_TOK,FBCODE);
Display('After call to CEE3SRP ... Resume point');
If U_CNTL = 0
  Do;
    Display('First time through...');

    /* Register User Handler */

    Display('Registering user handler');
    Call CEEHDLR(PLI3GRO, U_PTR, FBCODE);
    If FBCEK(FBCODE, CEE000) then
      Do;
        /* Cause a zero-divide condition */
        DENOMINATOR = 0;
        NUMERATOR = 1;
        RATIO = NUMERATOR/DENOMINATOR;
      End;
    Else
      Do;
        Display('CEEHDLR failec with msg');
        Display(MsgNo);
      End;
    End;
  Else
    Display('2nd time...User can do whatever');

  /* Unregister handler */

  Call CEEHDLU(PLI3GRO, FBCODE);
  If FBCEK (FBCODE, CEE000) Then
    Display('Main: unregistered PLI3GRO);
  Else
    Do;
      Display('CEEHDLU failed with msg ');
      Display(MsgNo);
    End;
  End DRV3GRO;

```

Figure 35. PL/I Example of CEE3GRO (Part 2 of 3)

```

*Process lc(101),opt(0),s,map,list,stmt,a(f),ag;
*Process macro;
PLI3GR0: Proc (PTR1,PTR2,PTR3,PTR4);
/*****
**
**  PLI3GR0 - Call CEE3GR0 to get the offset in
**            the routine that incurred the
**            condition.
**
*****/

%include CEEIBMCT;
%include CEEIBMAW;
declare (PTR1,PTR2,PTR3,PTR4) pointer;
declare 01 CURCOND based(PTR1) feedback;
declare TOKEN      pointer based(PTR2);
declare RESULT     fixed binary(31,0) based(PTR3);
declare 01 NEWCOND based(PTR4) feedback;
declare ROFFSET     real fixed binary(31,0);
declare 01 FBCODE   feedback;
declare 01 U_DATA   based(TOKEN),
           03 U_CNTL fixed binary(31,0),
           03 U_TOK  pointer;

Call CEE3GR0(ROFFSET,FBCODE);
If fbcheck (fbcode, cee000) Then
  Do;
    Display('Routine offset which incurred');
    Display('the condition is: ');
    Display(ROFFSET);
  End;
Else
  Do;
    Display('CEE3GR0 failed with msg ');
    Display(FBCODE.MsgNo);
  End;

/*****
** In user handler - resume execution
*****/

RESULT = 10;
Call CEEMRCE(U_TOK,FBCODE);
U_CNTL = 1;
Return;
End PLI3GR0;

```

Figure 35. PL/I Example of CEE3GR0 (Part 3 of 3)

CEE3INF—Query enclave information

CEE3INF queries and returns to the calling routine the information about the system/subsystem, the environment information, the member languages, and the version of Language Environment associated with this enclave.

Syntax

►►—CEE3INF—(—sys/subsys—,—env-info—,—member-id—,—gp-id—,—fc—)——►►

sys/subsys (input/output)

As input *sys/subsys* is considered to be an address to a fullword. As output the fullword is a 32-bit map representing the operating system or subsystem on which the enclave is currently running.

Bit	Meaning
0	Currently executing in the CICS environment
1	Currently executing in a CICS_PIPi environment
2-3	Reserved for other specific CICS environments
4	Currently executing in a TSO environment
5	Currently executing in a Batch environment
6	Currently executing in a z/OS UNIX environment
7-28	Reserved for future use
29	Currently executing on z/VSE
30	Currently executing on z/OS
31	Currently executing on z/OS.e

env-info(input/output)

As input *env-info* is considered to be an address to a fullword. As output the fullword is a 32-bit map representing the environments that are active in that enclave.

Bit	Meaning
0	Currently executing in a PIPi environment
1	Currently executing in a PIPi-Main environment
2	Currently executing in a PIPi-Sub environment
3	Currently executing in a PIPi-Subdp environment
4	Currently executing in a PICi environment
5	Currently executing in a nested enclave
6	LRR is active in the current enclave
7	Run-time reuse is active in the current environment
8	XPLINK(ON) is in effect in the current enclave
9	POSIX(ON) RTO in effect in the current enclave
10	At least one pthread has been created in this enclave
11	Currently executing on the IPT
12	Multithreaded fork is in effect in the current enclave
13-14	AMODE Init
	B'00' AMODE 24
	B'10' AMODE 31
15-31	Reserved for future use

member-id(input/output)

As input *member-id* is considered to be an address to a fullword. As output the fullword is a 32-bit map representing the member languages that are initialized in that enclave.

Bit	Meaning
0	Reserved
1	Reserved
2	Reserved
3	C/C++
4	Reserved
5	COBOL
6	Reserved
7	Fortran

CEE3INF

Bit	Meaning
8-9	Reserved
10	PL/I
11	Enterprise PL/I
12-14	Reserved
15	Reserved
16	Reserved
17-23	Reserved for future use
24-31	Current version number of CEE3INF. This is currently set to 0.

gpid(input/output)

A fullword integer representing the version of Language Environment that created this thread. This fullword can be interpreted as a four-byte hex number as follows:

IPPIVVIRRIMMI

Where:

PP product number

VV version

RR release

MM modification

fc (output)

A feedback code, optional in some languages, that indicates the result of this service.

The following feedback codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

Usage notes

- z/OS UNIX considerations—CEE3INF is allowed only in the thread.
- If you are not interested in any one of the parameters being passed, a 0 must be placed in the slot of those parameters. This indicates that no information is needed regarding that parameter.
- When the PIPI or nested enclave environment bit is on, a subsystem bit may not be set.

Examples

```

/*Module/File Name: EDC3INF    */
/*****
/*
/* THIS EXAMPLE CALLS CEE3INF TO GET INFORMATION OF THE CURRENT
/* ENCLAVE, LIKE THE SYSTEM/SUBSYSTEM, THE ENVIRONMENT INFORMATION,
/* THE MEMBER LANGUAGES USED AND THE VERSION OF LANGUAGE ENVIRONMENT.*/
/*
*****/

#include <leawi.h>
#include <string.h>
#include <ceedcct.h>

int main(void) {

    _INT4 sys_subsys,env_info,member_id,gpid;
    _FEEDBACK fc;

    /* Calling CEE3INF to get the information */
    CEE3INF(&sys_subsys,&env_info,&member_id,&gpid,fc);

    if ( _FBCHECK(fc,CEE000) != 0 ) {
        printf("CEE3INF failed with message number %d\n",
            fc.tok_msgno);
    }
    printf("System/Subsystem in hex %08x \n",sys_subsys);
    printf("Environment info in hex %08x \n",env_info);
    printf("Member languages in hex %08x \n",member_id);
    printf("GPID information in hex %08x \n",gpid);
    printf("\n");
}

```

Figure 36. C/C++ Example of CEE3INF

```

CBL LIB,QUOTE
*****
*
*   IBM Language Environment
*
*   Licensed Materials - Property of IBM
*
*   5694-A01
*   (C) Copyright IBM Corp. 2005
*   All Rights Reserved
*
*   US Government Users Restricted Rights - Use,
*   duplication or disclosure restricted by GSA
*   ADP Schedule Contract with IBM Corp.
*
*****
*Module/File Name: IGZTINF
*****
**
** Function: CEE3INF - Query enclave information
**
**
** This example calls CEE3INF to gather data about the current
** enclave like the system/subsystem, environment information,
** member languages, and Language Environment version number.
**
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3INF.

DATA DIVISION.
WORKING-STORAGE SECTION.
*****
** Define space for a Language Environment feedback
** code (12 total bytes).
** Include a copy of CEEIGZCT to get pre-defined
** Language Environment condition tokens.
*****
01 FC.
02 CONDITION-TOKEN-VALUE.
COPY CEEIGZCT.
03 CASE-1-CONDITION-ID.
04 SEVERITY PIC S9(4) BINARY.
04 MSG-NO PIC S9(4) BINARY.
03 CASE-SEV-CTL PIC X.
03 FACILITY-ID PIC XXX.
02 I-S-INFO PIC S9(9) BINARY.
*****
** Define some storage to be used by the Language
** Environment callable service.
*****
01 SYS-SUBSYS PIC S9(9) BINARY.
01 ENV-INFO PIC S9(9) BINARY.
01 MEM-ID PIC S9(9) BINARY.
01 GPID PIC S9(9) BINARY.
PROCEDURE DIVISION.
MAIN-PROG.
*
* *****
* ** Now call CEE3INF. It returns the results
* ** of the query on the environment and the
* ** feedback code.
* ** Report error and stop if CEE3INF fails.
* *****
CALL "CEE3INF" USING SYS-SUBSYS, ENV-INFO, MEM-ID,
GPID, FC.

IF CEE000 OF FC THEN
    DISPLAY "SYS-SUBSYS: " SYS-SUBSYS
    DISPLAY "ENV-INFO : " ENV-INFO
    DISPLAY "MEM-ID : " MEM-ID
    DISPLAY "GPID : " GPID
ELSE
    DISPLAY "CEE3INF FAILED WITH MSG "
    MSG-NO OF FC UPON CONSOLE
    STOP RUN
END-IF.
GOBACK.

```

I

```

*PROCESS MACRO;
/*****
/*
/* Licensed Materials - Property of IBM
/*
/* 5694-A01 (C) Copyright IBM Corp. 2005
/* All rights reserved
/*
/* US Government Users Restricted Rights - Use,
/* duplication or disclosure restricted by GSA
/* ADP Schedule Contract with IBM Corp.
/*
/*
*****/
/*Module/File Name: IBM3INF
*****/
/**
/** Function: CEE3INF - query enclave information
/**
/**
/** This example calls CEE3INF to gather data about the current
/** enclave like the system/subsystem, environment information,
/** member languages, and Language Environment version number.
/**
/**
*****/

PLI3INF: PROCEDURE OPTIONS (MAIN) REORDER;

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL SYSPRINT File Output Stream;

DCL SYS_SUB REAL FIXED BINARY(31,0),
ENV_INF REAL FIXED BINARY(31,0),
MEM_ID REAL FIXED BINARY(31,0),
GPID REAL FIXED BINARY(31,0);

/*****
/* Declare a Language Environment Feedback token.
/* 12 Total bytes of storage.
*****/
Declare 01 LE_Feedback_Code,
03 MsgSev REAL FIXED BINARY(15,0),
03 MsgNo REAL FIXED BINARY(15,0),
03 Flags,
05 Case BIT(2),
05 Severity BIT(3),
05 Control BIT(3),
03 FacID CHAR(3),
03 ISI REAL FIXED BINARY(31,0);

/*****
/* Local declares needed for Messaging Callable Services*
*****/
Declare Msg_dest REAL FIXED BINARY(31,0);
Declare Msg_String CHAR(255) VARYING;

Msg_dest = 2;

/*****
/* Call CEE3INF to request info about the
/* current enclave
*****/

CALL CEE3INF(SYS_SUB,ENV_INF,MEM_ID,GPID,LE_Feedback_Code);

/*****
/* Output the result.
*****/
Msg_String = 'System-Subsystem : ' || BIT(SYS_SUB);
Call CEEMOUT(Msg_String,Msg_Dest,LE_Feedback_Code);

Msg_String = 'Environment Information: ' || BIT(ENV_INF);
Call CEEMOUT(Msg_String,Msg_Dest,LE_Feedback_Code);

Msg_String = 'Member Languages : ' || BIT(MEM_ID);
Call CEEMOUT(Msg_String,Msg_Dest,LE_Feedback_Code);

```


CEE3LNG—Set national language

CEE3LNG sets the current national language. You can also use CEE3LNG to query the current national language. Changing the national language changes the languages in which error messages are displayed and printed, the names of the days of the week, and the names of the months.

The current national language setting, as well as previous national language settings that have not been discarded, are recorded on the stack on a LIFO (last in, first out) basis. The current national language setting is always on the top of the stack.

There are two methods of changing the default national language setting with CEE3LNG:

- Specify the new national language setting and place it on top of the stack using a *function* value of 1 (SET). This discards the previous default setting.
- Specify the new national language setting and place it on top of the stack using a *function* value of 3 (PUSH). This pushes the previous national language setting down on the stack so that you can later retrieve it by discarding the current setting.

To illustrate the second method, suppose you live in the United States and the code for the United States is specified as the default at installation. If you want to use the French defaults for a certain application, you can use CEE3LNG to PUSH France as the national language setting; then when you want the defaults for the United States, you can POP France from the top of the stack, making the United States the national language setting.

If you specify a *desired_language* not available on your system, the IBM-supplied default *desired_language* is used. In Language Environment, this is ENU (mixed-case U.S. English). CEEUOPT, CEEROPT and CEEDOPT can specify an unknown national language code. They give a return code of 4 and a warning message. If an invalid language is specified, the IBM-supplied default ENU (mixed-case U.S. English) is used.

You can also use the NATLANG run-time option to set the national language.

CEE3LNG affects only the Language Environment NLS and date and time services, not the Language Environment locale callable services or C locale-sensitive functions.

Syntax

```
►►—CEE3LNG—(—function—,—desired_language—,—fc—)—————►◄
```

function (input)

A fullword binary integer that specifies the service to perform. The possible values for *function* are:

- 1—SET** Establishes the *desired_language* specified in the call to CEE3LNG as the current language. In effect, it replaces the current language on the top of the stack with the *desired_language* that you specify.

When setting the national language, the *desired_language* is folded to uppercase. "enu" and "ENU", for example, are considered to be the same national language.

- 2—QUERY** Identifies the current language on the top of the stack to the calling routine by returning it in the *desired_language* parameter of CEE3LNG. The *desired_language* retained as the result of the QUERY function is in uppercase.
- 3—PUSH** Pushes the *desired_language* specified in the call to CEE3LNG on to the top of the language stack, making it the current language. Previous languages are retained on the stack on a LIFO basis, making it possible to return to a prior language at a later time.
- 4—POP** Pops the current language off the stack. The previous language that was pushed on to the stack now becomes the new current language. Upon return to the caller, the *desired_language* parameter contains the discarded language. If the stack contains only one language and would be empty after the call, no action is taken and a feedback code indicating such is returned.

desired_language (input/output)

A 3-character fixed-length string. The string is not case-sensitive and is used in the following ways for different *functions*:

If <i>function</i> is specified as:	Then <i>desired_language</i> :
1 or 3	Contains the desired national language identification. In this case, it is an input parameter. Table 23 on page 188 contains a list of national language identifiers. Note: Language Environment supports only these national languages: ENU Mixed-case U.S. English UEN Uppercase U.S. English JPN Japanese.
2	Returns the current language on top of the stack. In this case, it is an output parameter.
4	Returns the discarded national language. In this case, it is an output parameter.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3BQ	2	3450	Only one language was on the stack when a POP request was made to CEE3LNG. The current language was returned in the

Code	Severity	Message Number	Message Text
CEE3BR	3	3451	The desired language <i>desired-language</i> for the PUSH or SET function for CEE3LNG was invalid. No operation was performed.
CEE3BS	3	3452	The function <i>function</i> specified for CEE3LNG was not recognized. No operation was performed.

Usage notes

- PL/I MTF consideration—The CEE3LNG callable service is not supported in PL/I multitasking applications.
- PL/I consideration—When running PL/I with POSIX(ON), CEE3LNG is not supported.
- z/OS UNIX consideration
 - CEE3LNG applies to the enclave. Each enclave has a single current national language setting.
 - Language Environment provides z/OS UNIX-compliant locales as part of the C/C++ run-time library. The locales establish the cultural conventions for locale-sensitive functions in this run-time. The CEESETL callable service and other locale callable services depend on the loaded locale. To change the locale, you can use the `setlocale()` C/C++ library function or the CEESETL callable service. Locale values do not affect the settings used by the CEE3LNG callable service. For a complete list of locales, see *z/OS Language Environment Programming Guide*.
 - The CEE3LNG callable services, such as date and time formatting, sorting, and currency symbols are independent of the locale. CEE3LNG affects only Language Environment NLS and date and time services. Mixing CEE3LNG services and locale callable services might produce inconsistent results.

For more information

- See “NATLANG” on page 54 for more information about the NATLANG run-time option.
- For more information about the CEESETL callable service, see “CEESETL—Set locale operating environment” on page 475.
- For more information on `setlocale()`, see *z/OS XL C/C++ Programming Guide*.

Examples

```

/*Module/File Name: EDC3LNG */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4 function;
    _CHAR3 lang;

    /* Query the current language setting */
    function = 2; /* function 2 is query */
    CEE3LNG(&function,lang,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3LNG failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    /* if the current language is not mixed-case */
    /* American English set the current language to */
    /* mixed-case American English */
    if (memcmp(lang,"ENU",3) != 0) {
        memcpy(lang,"ENU",3);
        function = 1; /* function 1 is set */
        CEE3LNG(&function,lang,&fc);
        if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
            printf("CEE3LNG failed with message number %d\n",
                fc.tok_msgno);
            exit(2999);
        }
    }
}

```

Figure 39. C/C++ Example of CEE3LNG

```

CBL LIB,QUOTE
*Module/File Name: IGZT3LNG
*****
**
** CBL3LNG - Set national language
**
** In this example, CEE3LNG is called to query
** the current national language setting. If
** the setting is not mixed-case U.S. English,
** CEE3LNG is called to change the setting.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3LNG.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 FUNCTN          PIC S9(9) BINARY.
01 LANG            PIC X(3).
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity        PIC S9(4) BINARY.
04 Msg-No          PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code      PIC S9(4) BINARY.
04 Cause-Code      PIC S9(4) BINARY.
03 Case-Sev-Ctl    PIC X.
03 Facility-ID     PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.

PROCEDURE DIVISION.

```

Figure 40. COBOL Example of CEE3LNG (Part 1 of 2)

```

      PARA-3LNGQRY.
      *****
      ** Specify 2 for QUERY function.
      ** Call CEE3LNG to query the current
      **    national language setting
      *****
      MOVE 2 TO FUNCTN.
      CALL "CEE3LNG" USING FUNCTN, LANG, FC.
      IF CEE000 of FC THEN
          DISPLAY "Current National Language is: "
              LANG
      ELSE
          DISPLAY "CEE3LNG(query) failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

      PARA-3LNGSET.
      *****
      ** If the current national language is not
      **    mixed-case U.S. English, then call
      **    CEE3LNG with the SET function (1) to
      **    change the national language to mixed-case
      **    U.S. English
      *****
      IF ( LANG IS NOT = "ENU" ) THEN
          MOVE 1 TO FUNCTN
          CALL "CEE3LNG" USING FUNCTN, LANG, FC
          IF NOT CEE000 of FC THEN
              DISPLAY "CEE3LNG(set) failed with msg "
                  Msg-No of FC UPON CONSOLE
              STOP RUN
          END-IF
          DISPLAY "The national language has ",
              "been changed to mixed-case "
              "U.S. English (ENU)."
      END-IF.

      GOBACK.

```

Figure 40. COBOL Example of CEE3LNG (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBM3LNG */
/*****
/**
/** Function: CEE3LNG - set national language */
/**
/** In this example, CEE3LNG is called to query the */
/** current national language setting. If the */
/** setting is not mixed case American English, */
/** CEE3LNMG is called to change the setting to that*/
/**
*****/
PLI3LNG: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL FUNCTN REAL FIXED BINARY(31,0);
DCL LANG CHARACTER ( 3 );
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

FUNCTN = 2; /* Specify code to query current */
           /* national language */

/* Call CEE3LNG with function code 2 to query */
/* national language */

CALL CEE3LNG ( FUNCTN, LANG, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST('The current national language '
        || 'is ' || LANG );
    END;
ELSE DO;
    DISPLAY('CEE3LNG failed with msg ' || FC.MsgNo);
    STOP;
    END;

```

Figure 41. PL/I Example of CEE3LNG (Part 1 of 2)

```

/* If the current language is not mixed-case */
/*   American English, set it to mixed-case */
/*   American English */

IF LANG ^= 'ENU' THEN DO;
  FUNCTN = 1;
  CALL CEE3LNG ( FUNCTN, 'ENU', FC);
  IF ~ FBCHECK( FC, CEE000) THEN DO;
    DISPLAY( 'CEE3LNG failed with msg '
      || FC.MsgNo );
    STOP;
  END;
  CALL CEE3LNG ( 2, LANG, FC);
  IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST('The national language is now '
      || LANG );
  END;
ELSE DO;
  DISPLAY( 'CEE3LNG failed with msg '
    || FC.MsgNo );
  STOP;
END;

END /* Language is not ENU */;

END PLI3LNG;

```

Figure 41. PL/I Example of CEE3LNG (Part 2 of 2)

Table 23. National Language Codes

ID	National Language
AFR	Afrikaans
ARA	Arab countries
BGR	Bulgarian
CAT	Catalan
CHT	Traditional Chinese
CHS	Simplified Chinese
CSY	Czech
DAN	Danish
DEU	German
DES	Swiss German
ELL	Greek
ENG	U.K. English
ENU	U.S. English
ESP	Spanish
FIN	Finnish
FRA	French
FRB	Belgian French
FRC	Canadian French
FRS	Swiss French
HEB	Hebrew
HUN	Hungarian
ISL	Icelandic
ITA	Italian
ITS	Swiss Italian
JPN	Japanese
KOR	Korean

Table 23. National Language Codes (continued)

ID	National Language
NLD	Dutch
NLB	Belgian Dutch
NOR	Norwegian - Bokmal
NON	Norwegian - Nynorsk
PLK	Polish
PTG	Portuguese
PTB	Brazilian Portuguese
RMS	Rhaeto-Romanic
ROM	Romanian
RUS	Russian
SHC	Serbo-Croatian (Cyrillic)
SHL	Serbo-Croatian (Latin)
SKY	Slovakian
SQI	Albanian
SVE	Swedish
THA	Thai
TRK	Turkish
UEN	U.S. uppercase English
URD	Urdu

CEE3MCS—Get default currency symbol

CEE3MCS returns the default currency symbol for the country you specify with *country_code*. For a list of the default settings for a specified country, see Table 28 on page 547.

Syntax

```
►► CEE3MCS (—country_code—, —currency_symbol—, —fc—) ◀◀
```

country_code (input)

A 2-character fixed-length string representing one of the country codes found in Table 28 on page 547.

country_code is not case-sensitive. If no value is specified, the default country code, as set by the COUNTRY run-time option or the CEE3CTY callable service, is used.

currency_symbol (output)

A 4-character fixed-length string returned to the calling routine. It contains the default currency symbol for the country specified. The currency symbol is left-justified and padded on the right with blanks, if necessary.

fc (output)

A feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

Code	Severity	Message Number	Message Text
CEE3C6	2	3462	The currency symbol <i>currency_symbol</i> was truncated and was not defined in CEE3MCS.
CEE3C7	2	3463	The country code <i>country_code</i> was invalid for CEE3MCS. The default currency symbol <i>currency_symbol</i> was returned.

Usage notes

- If you specify a *country_code* that is not valid, the default currency symbol is 'X'9F404040'. In the United States, it is shown as a '\$' followed by three blanks.
- z/OS UNIX considerations—CEE3MCS applies to the enclave. Every enclave has a single current country setting that has a single currency symbol. Every thread in every enclave has the same default.
- Euro considerations—For countries in the European Union that have adopted the Euro as the legal tender, the currency symbol is represented as a hex string in the default country settings. The value is the code point for the Euro sign, taken from a typical code page for the given country. Of course, the actual graphical representation depends on the code page in use. See Table 28 on page 547 for a list of country settings.

Language Environment supports the Euro as the default currency symbol in the following countries: Austria, Belgium, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, the Netherlands, Portugal, and Spain. As more countries pass the economic and monetary union convergence criteria and adopt the Euro as the legal currency, the default currency symbol will replace the national currency symbol with the Euro sign.

For more information

- See “COUNTRY” on page 22 for an explanation of the COUNTRY run-time option.
- See “CEE3CTY—Set default country” on page 131 for an explanation of the CEE3CTY callable service.

Examples

```

/*Module/File Name: EDC3MCS */
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>
int main(void)
    _FEEDBACK fc;
    _CHAR2 country;
    _CHAR4 currency;
    /* get the default currency symbol for Canada */
    memcpy(country,"CA",2);
    CEE3MCS(country,currency,&fc);
    if (_FBCHECK ( fc, CEE000 ) != 0)
        printf("CEE3MCS failed with message number %d n",
            fc.tok_msgno);
    exit(2999);

    printf("The default currency symbol for Canada is:"
        " %.2s n",currency);

```

Figure 42. C/C++ Example of CEE3MCS

```

CBL LIB,QUOTE
*Module/File Name: IGZT3MCS
*****
**                                     **
** CBL3MCS - Call CEE3MCS to obtain the **
**          default currency symbol    **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3MCS.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 COUNTRY          PIC X(2).
01 CURSYM           PIC X(4).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
      03 Case-1-Condition-ID.
         04 Severity    PIC S9(4) BINARY.
         04 Msg-No      PIC S9(4) BINARY.
      03 Case-2-Condition-ID
         REDEFINES Case-1-Condition-ID.
         04 Class-Code  PIC S9(4) BINARY.
         04 Cause-Code  PIC S9(4) BINARY.
      03 Case-Sev-Ctl   PIC X.
      03 Facility-ID    PIC XXX.
   02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

PARA-CBL3MCS.
*****
** Specify country code for the US in the call
**    to CEE3MCS
*****
MOVE "US" TO COUNTRY.
CALL "CEE3MCS" USING COUNTRY, CURSYM, FC.

*****
** If CEE3MCS runs successfully, display result.
*****
IF CEE000 of FC THEN
    DISPLAY "The default currency symbol "
           "for the " COUNTRY " is: " CURSYM
ELSE
    DISPLAY "CEE3MCS failed with msg "
           Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 43. COBOL Example of CEE3MCS

```

*PROCESS MACRO;
/* Module/File Name: IBM3MCS */
/*****
/**                                     **/
/** Function: CEE3MCS - Obtain default currency **/
/**                                     **/
/**                                     **/
/**                                     **/
*****/
PLI3MCS: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;
DCL COUNTRY CHARACTER ( 2 );
DCL CURSYM CHARACTER ( 4 );
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

COUNTRY = 'US'; /* Specify country code for the */
/* United States */

/* Call CEE3MCS to return currency symbol for */
/* the United States */
CALL CEE3MCS ( COUNTRY, CURSYM, FC );

/* Print the default currency symbol for the US */
IF FBCHECK( FC, CEE000) THEN DO;
  PUT SKIP LIST(
    'The default currency symbol for the '
    || COUNTRY || ' is "' || CURSYM || '"');
  END;
ELSE DO;
  DISPLAY( 'CEE3MCS failed with msg '
    || FC.MsgNo );
  STOP;
END;

END PLI3MCS;

```

Figure 44. PL/I Example of CEE3MCS

CEE3MDS—Get default decimal separator

CEE3MDS returns the default decimal separator for the country specified by *country_code*. For a list of the default settings for a specified country, see Table 28 on page 547.

Syntax

```
►► CEE3MDS (—country_code—, —decimal_separator—, —fc—) ◀◀
```

country_code (input)

A 2-character fixed-length string representing one of the country codes found in Table 28 on page 547.

country_code is not case-sensitive. If no value is specified, the default country code, as set by the COUNTRY run-time option or the CEE3CTY callable service, is used.

decimal_separator (output)

A 2-character fixed-length string containing the default decimal separator for the country specified. The decimal separator is left-justified and padded on the right with a blank.

fc (output)

A 12-byte feedback code, optional in some languages, indicating the service result.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE3C4	2	3460	The decimal separator ' <i>decimal-separator</i> ' was truncated and was not defined in CEE3MDS.
CEE3C5	2	3461	The country code <i>country-code</i> was not valid for CEE3MDS. The default decimal separator ' <i>decimal-separator</i> ' was returned.

Usage notes

- If you specify a *country_code* that is not valid, the default decimal separator is a period (.).
- z/OS UNIX considerations—CEE3MDS applies to the enclave. Every enclave has a single current country setting that has a single decimal separator. Every thread in every enclave has the same default.

For more information

- See “COUNTRY” on page 22 for an explanation of the COUNTRY run-time option.
- See “CEE3CTY—Set default country” on page 131 for an explanation of the CEE3CTY callable service.

Examples

```

/*Module/File Name: EDC3MDS   */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {
    _FEEDBACK fc;
    _CHAR2 country,decimal;

    /* get the default decimal separator for Canada */
    memcpy(country,"CA",2);
    CEE3MDS(country,decimal,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3MDS failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* print out the default decimal separator */
    printf("The default decimal separator for");
    printf(" Canada is: %.2s\n",decimal);
}

```

Figure 45. C/C++ Example of CEE3MDS

```

CBL LIB,QUOTE
*Module/File Name: IGZT3MDS
*****
**                                     **
** CBL3MDS - Call CEE3MDS to get the   **
**          default decimal separator  **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3MDS.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 COUNTRY                PIC X(2).
01 DECSEP                 PIC X(2).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity            PIC S9(4) BINARY.
   04 Msg-No              PIC S9(4) BINARY.
   03 Case-2-Condition-ID
   REDEFINES Case-1-Condition-ID.
   04 Class-Code          PIC S9(4) BINARY.
   04 Cause-Code          PIC S9(4) BINARY.
   03 Case-Sev-Ctl        PIC X.
   03 Facility-ID         PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.

PROCEDURE DIVISION.

*****
** Specify the country code for the US in the
** call to CEE3MDS.
** If call was successful, print result.
*****
PARA-CBL3MDS.
  MOVE "US" TO COUNTRY.
  CALL "CEE3MDS" USING COUNTRY, DECSEP, FC.
  IF CEE000 of FC THEN
    DISPLAY "The default Decimal Separator "
           "for " COUNTRY " is " DECSEP ""
  ELSE
    DISPLAY "CEE3MDS failed with msg "
           Msg-No of FC UPON CONSOLE
    STOP RUN
  END-IF.

  GOBACK.

```

Figure 46. COBOL Example of CEE3MDS


```

*PROCESS MACRO;
/* Module/File Name: IBM3MDS */
/*****
/**
/** Function: CEE3MDS - get default decimal
/** separator
/**
*****/
PLI3MDS: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL COUNTRY CHARACTER ( 2 );
DCL DECSEP CHARACTER ( 2 );
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

COUNTRY = 'US'; /* Specify country code for
                /* the United States */

/* Call CEE3MDS to get default decimal
/* separator for the US
CALL CEE3MDS ( COUNTRY, DECSEP, FC );

/* Print the default decimal separator for
/* the US
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST(
        'The default decimal separator for the '
        || COUNTRY || ' is "' || DECSEP || '"' );
    END;
ELSE DO;
    DISPLAY( 'CEE3MDS failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLI3MDS;

```

Figure 47. PL/I Example of CEE3MDS

CEE3MTS—Get Default thousands separator

CEE3MTS returns the default thousands separator for the specified country with *country_code*.

Syntax

```
►► CEE3MTS (—country_code—, —thousands_separator—, —fc—) ◀◀
```

country_code (input)

A 2-character fixed-length string representing one of the country codes found in Table 28 on page 547.

country_code is not case-sensitive. If no value is specified, the default country code, as set by the COUNTRY run-time option or the CEE3CTY callable service, is used.

thousands_separator (output)

A 2-character fixed-length string representing the default thousands separator for the country specified. The thousands separator is left-justified and padded on the right with a blank.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE3C8	2	3464	The thousands separator ' <i>thousands-separator</i> ' was truncated and was not defined in CEE3MTS.
CEE3C9	2	3465	The country code <i>country-code</i> was not valid for CEE3MTS. The default thousands separator ' <i>thousands-separator</i> ' was returned.

Usage notes

- If you specify a *country_code* that is not valid, the default thousands separator is a comma (,).
- z/OS UNIX considerations—CEE3MTS applies to the enclave. Every enclave has a single current country setting that has a single thousands separator. Every thread in every enclave has the same default.

For more information

- For a list of the default settings for a specified country, see Table 28 on page 547.
- See “COUNTRY” on page 22 for an explanation of the COUNTRY run-time option.
- See “CEE3CTY—Set default country” on page 131 for an explanation of the CEE3CTY callable service.

Examples

```

/*Module/File Name: EDC3MTS   */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _CHAR2 country,thousand;

    /* get the default thousands separator for Canada */
    memcpy(country,"CA",2);
    CEE3MTS(country,thousand,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3MTS failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* print out the default thousands separator */
    printf("The default thousands separator for Canada");
    printf(" is:  %.2s\n",thousand);
}

```

Figure 48. C/C++ Example of CEE3MTS

```

CBL LIB,QUOTE
*Module/File Name: IGZT3MTS
*****
**                                     **
** CBL3MTS - Call CEE3MTS to obtain the **
**           default thousands separator **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3MTS.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 COUNTRY                PIC X(2).
01 THOUSEP                PIC X(2).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity            PIC S9(4) BINARY.
   04 Msg-No              PIC S9(4) BINARY.
   03 Case-2-Condition-ID
   REDEFINES Case-1-Condition-ID.
   04 Class-Code          PIC S9(4) BINARY.
   04 Cause-Code          PIC S9(4) BINARY.
   03 Case-Sev-Ctl        PIC X.
   03 Facility-ID         PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.

PROCEDURE DIVISION.

PARA-CBL3MTS.
*****
** Specify the country code for the US in the
** call to CEE3MTS.
*****
MOVE "US" TO COUNTRY.
CALL "CEE3MTS" USING COUNTRY, THOUSEP, FC.

*****
** If CEE3MTS runs successfully, display result
*****
IF CEE000 of FC THEN
    DISPLAY "The default Thousands Separator"
           " for " COUNTRY " is " THOUSEP ""
ELSE
    DISPLAY "CEE3MDS failed with msg "
           Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 49. COBOL Example of CEE3MTS

```

*PROCESS MACRO;
/* Module/File Name: IBM3MTS */
/*****
/**
/** Function: CEE3MTS - obtain default thousands */
/** separator */
/**
*****/
PLI3MTS: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL COUNTRY CHARACTER ( 2 );
DCL THOUSEP CHARACTER ( 2 );
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

COUNTRY = 'US'; /* Specify US as the country */
               /* code for the United States */

/* Call CEE3MTS to return default thousands */
/* separator for the US */
CALL CEE3MTS ( COUNTRY, THOUSEP, FC );

/* If CEE3MTS ran successfully print out result */
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST(
        'The default thousands separator for the '
        || COUNTRY || ' is "' || THOUSEP || '" );
    END;
ELSE DO;
    DISPLAY( 'CEE3MTS failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLI3MTS;

```

Figure 50. PL/I Example of CEE3MTS

CEE3PRM—Query parameter string

CEE3PRM queries and returns to the calling routine the parameter string specified at invocation of the program. The returned parameter string contains only program arguments. If no program arguments are available, a blank string is returned.

Syntax

►► CEE3PRM (—*char_parm_string*—,—*fc*—) ◀◀

char_parm_string (output)

An 80-byte fixed-length string passed by CEE3PRM.

On return from this service, the *char_parm_string* contains the parameter string specified at invocation of the program. If this parameter string is longer than 80 characters, it is truncated. If the parameter string is shorter than 80 characters, the returned string is padded with blanks. If the program argument passed to the service is absent, or is not a character string, *char_parm_string* is blank.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE311	1	3649	The parameter string returned from CEE3PRM exceeded the maximum length of 80 bytes and was truncated.

Usage notes

- C/C++ consideration—C/C++ users can use the `__osplist` to return a program argument longer than 80 characters.
- z/OS UNIX consideration—CEE3PRM is allowed only in the initial thread.
- You can use the CEE3PR2 callable service to return a program string that is longer than 80 characters.

For more information

- For more information about the CEE3PR2 callable service, see “CEE3PR2—Query parameter string long” on page 204.

Examples

```
/*Module/File Name: EDC3PRM */

#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <string.h>
#include <ceedcct.h>

int main() {
    _CHAR80 parm;
    _FEEDBACK fc;

    CEE3PRM(parm,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3PRM failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    printf("%.80s\n",parm);
}
```

Figure 51. C/C++ Example of CEE3PRM

```

CBL LIB,QUOTE
*Module/File Name: IGZT3PRM
*****
**
** CBL3PRM - Call CEE3PRM to query the
**           parameter string
**
** In this example, a call is made to
** CEE3PRM to return the parameter string
** that was specified at invocation of the
** program. The string is then displayed.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3PRM.

DATA DIVISION.
WORKING-STORAGE SECTION.
01  PARMSTR          PIC X(80).
01  FC.
    02  Condition-Token-Value.
    COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity      PIC S9(4) BINARY.
            04  Msg-No       PIC S9(4) BINARY.
        03  Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04  Class-Code    PIC S9(4) BINARY.
            04  Cause-Code    PIC S9(4) BINARY.
        03  Case-Sev-Ctl     PIC X.
        03  Facility-ID      PIC XXX.
    02  I-S-Info           PIC S9(9) BINARY.

PROCEDURE DIVISION.

PARA-CBL3PRM.
    CALL "CEE3PRM" USING PARMSTR, FC.
    IF CEE000 THEN
        DISPLAY "Program arguments specified: "
            " " PARMSTR " "
    ELSE
        DISPLAY "CEE3PRM failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

    GOBACK.

```

Figure 52. COBOL Example of CEE3PRM

```

*PROCESS MACRO;
/* Module/File Name: IBM3PRM */
/*****
/**                               */
/** Function: CEE3PRM - Query Parameter String */
/**                               */
*****/
PLI3PRM: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL PARMSTR CHAR(80);
    DCL 01 FC,                               /* Feedback token */
        03 MsgSev    REAL FIXED BINARY(15,0),
        03 MsgNo     REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case    BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID     CHAR(3),               /* Facility ID */
        03 ISI       /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    /* Call CEE3PRM to return the program arguments */
    /* specified at invocation of the program */
    CALL CEE3PRM ( PARMSTR, FC );

    /* There are no non-zero feedback codes to */
    /* check, so print result */
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST(
            'These program arguments were specified: '
            || PARMSTR || ' ');
        END;
    ELSE DO;
        DISPLAY( 'CEE3PRM failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLI3PRM;

```

Figure 53. PL/I Example of CEE3PRM

CEE3PR2—Query parameter string long

CEE3PR2 queries and returns to the calling routine the parameter string and its associated length specified at invocation of the program. The returned parameter string contains only program arguments. If no program arguments are available, a blank string is returned.

Syntax

►► CEE3PR2 (—*int_parm_length*—, —*char_parm_string*—, —*fc*—) ◀◀

int_parm_length (input/output)

A fullword integer that indicates the length of the parameter string.

- For input: If the value is less than or equal to 0, *int_parm_length* is a request for the length of the parameter string passed during program invocation. If the value is greater than 0, it is the actual size of the *char_parm_string* buffer passed by the caller.
- For output: CEE3PR2 returns the actual length of the parameter string passed during program invocation for any case, regardless of the input value in the *int_parm_length* field.

char_parm_string (input/output)

- For input: *char_parm_string* contains the address of a piece of storage that is obtained by the caller.

Note: This storage is used as a varying string. It must be 2 bytes longer than the length of the parameter string passed during program invocation.

- For output: The storage pointed to by this address contains a varying string that contains the parameter string passed during program invocation. The parameter string is truncated when the actual length of the parameter string passed during invocation exceeds *int_parm_length* minus 2.

fc (output)

A feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3K3	1	3715	The parameter string returned from CEE3PR2 was truncated due to insufficient storage space for the string provided by the caller.

Usage notes

- C/C++ consideration—C/C++ users can use the `__osplst` to return a program argument longer than 80 characters.
- z/OS UNIX consideration—CEE3PR2 is allowed only in the initial thread.
- CICS consideration—CEE3PR2 always returns a blank string.

For more information

- For more information about the CEE3PRM callable service, see “CEE3PRM—Query parameter string” on page 201.

Examples

```

/*Module/File Name: EDC3PR2    */
/*****
/*
/* THIS EXAMPLE CALLS CEE3PR2 TO RETRIEVE THE PARAMETER STRING THAT
/* WAS SPECIFIED AT THE INVOCATION OF THE PROGRAM AND ITS ASSOCIATED
/* LENGTH. BOTH THESE VALUES ARE THEN PRINTED.
/*
/*
*****/

#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <string.h>
#include <ceedcct.h>

struct mystring{
    unsigned short int length;
    char            string[298];
};
typedef struct mystring mystring;

int main() {

    int len;

    mystring parm;
    _FEEDBACK fc;

    /*Setting up the user defined space to store the retrieved string*/
    memset(&parm,0x00,sizeof(parm));
    len = sizeof(parm);

    /*Calling CEE3PR2 to retrieve the parameter string*/
    CEE3PR2(&len,&parm,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3PR2 failed with message number %d\n",
            fc.tok_msgno);
    }

    printf("Length field of the string : %d \n",len);
    printf("Parameter String is: %s\n",parm.string);

    return 0;
}

```

Figure 54. C/C++ Example of CEE3PR2

```

CBL LIB,QUOTE
*****
*
* IBM Language Environment
*
* Licensed Materials - Property of IBM
*
* 5694-A01
* (C) Copyright IBM Corp. 2005
* All Rights Reserved
*
* US Government Users Restricted Rights - Use,
* duplication or disclosure restricted by GSA
* ADP Schedule Contract with IBM Corp.
*
*****
*Module/File Name: IGZTPR2
*****
**
** CBL3PR2 - Call CEE3PR2 to query the
** parameter string
**
** In this example, a call is made to
** CEE3PR2 to return the parameter string
** that was specified at invocation of the
** program. The string is then displayed.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3PR2.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 PARMLEN PIC S9(9) BINARY.
01 PARMSTR.
02 STR1-LENGTH PIC S9(4) BINARY.
02 STR1-STRING.
03 STR1-CHAR PIC X
OCCURS 0 TO 256 TIMES
DEPENDENT ON STR1-LENGTH.
01 FC.
02 CONDITION-TOKEN-VALUE.
COPY CEEIGZCT.
03 CASE-1-CONDITION-ID.
04 SEVERITY PIC S9(4) BINARY.
04 MSG-NO PIC S9(4) BINARY.
03 CASE-SEV-CTL PIC X.
03 FACILITY-ID PIC XXX.
02 I-S-INFO PIC S9(9) BINARY.

PROCEDURE DIVISION.

PARA-CBL3PR2.
MOVE 258 TO PARMLEN
CALL "CEE3PR2" USING PARMLEN, PARMSTR, FC.
IF CEE000 THEN
    DISPLAY "Program arguments specified: '"
        STR1-STRING "'"
ELSE
    DISPLAY "CEE3PR2 FAILED WITH MSG "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

|

```

*PROCESS MACRO;
/*****
/*
/* Licensed Materials - Property of IBM
/*
/* 5694-A01 (C) Copyright IBM Corp. 2005
/* All rights reserved
/*
/* US Government Users Restricted Rights - Use,
/* duplication or disclosure restricted by GSA
/* ADP Schedule Contract with IBM Corp.
/*
/*
*****/
/*Module/File Name: IBM3PR2
*****/
**
** Function: CEE3PR2 - Query Parameter String
**
** This example calls CEE3PR2 to retrieve the arguments passed
** during the invocation of the program.
**
*****/

```

PLI3PR2: PROCEDURE OPTIONS (MAIN) REORDER;

```

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

```

DCL SYSPRINT File Output Stream;

```

DCL Parm_Len    FIXED BINARY(31,0),
    Parm_Str    CHAR(255) VARYING;

```

```

/*****
/* Declare a Language Environment Feedback token.
/* 12 Total bytes of storage.
*****/
Declare 01 LE_Feedback_Code,
        03 MsgSev    REAL FIXED BINARY(15,0),
        03 MsgNo     REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case    BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID     CHAR(3),
        03 ISI       REAL FIXED BINARY(31,0);

/*****
/* Local declares needed for Messaging Callable Services*/
*****/
Declare Msg_String    CHAR(255) VARYING;
Declare Output        PICTURE '99999';

Msg_dest = 2;

Parm_Len = 255;

/*****
/* Call CEE3PR2 to get the parameter string
*****/

```

CALL CEE3PR2(Parm_Len,Parm_Str,LE_Feedback_Code);

```

If ^ FBCHECK(LE_Feedback_Code, CEE000) Then Do;
    Msg_String = 'Truncation occurred';
    Call CEEMOUT(Msg_String,Msg_Dest,LE_Feedback_Code);
End;

```

Else Do;

```

/*****
/* Output the result.
*****/
Msg String = 'The returned parameter string is: ';

```

CEE3RPH—Set report heading

CEE3RPH sets the heading displayed at the top of the storage or options report generated when you specify the RPTSTG(ON) or RPTOPTS(ON) run-time options. For examples of these reports, see *z/OS Language Environment Debugging Guide*.

Syntax

```
►► CEE3RPH (—report_heading—,—fc—) ◄◄
```

report_heading (input)

An 80-character fixed-length string.

report_heading sets the identifying character string displayed at the top of the storage or options report. Language Environment uses only the first 79 bytes of *report_heading*; the last byte is ignored. *report_heading* can contain DBCS characters surrounded by X'0E' (shift-out) and X'0F' (shift-in).

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Feedback Code (fc)	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE3JK	0	3700	The storage and options report heading replaced a previous heading.

Usage notes

- PL/I considerations—CEE3RPH is designed to provide an equivalent function to the special PL/I variable PLIXHD.
- z/OS UNIX considerations—CEE3RPH applies to the enclave.

For more information

- See “RPTSTG” on page 64 for more information about the RPTSTG run-time option.
- See “RPTOPTS” on page 63 for more information about the RPTOPTS run-time option.
- See *PL/I for MVS & VM Programming Guide* for further information on PLIXHD.

Examples

```
/*Module/File Name: EDC3RPH */

#pragma runopts(RPTOPTS(ON))
#include <string.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _CHAR80 heading;

    /* initialize heading to blanks and then set the */
    /* heading */
    memset(heading, ' ',80);
    memcpy(heading,"User Defined Report Heading",27);

    /* set the report heading...do not need to check */
    /* feedback token because all return codes are */
    /* successful */
    CEE3RPH(heading,NULL);
    /* .
     *
     * . */
}
```

Figure 57. C/C++ Example of CEE3RPH

```

CBL LIB,QUOTE
*Module/File Name: IGZT3RPH
*****
**                                     **
** CBL3RPH - Call CEE3RPH to set report heading**
**                                     **
** In this example, a call is made to CEE3RPH **
** to set the report heading that appears at **
** the top of each page of the options report **
** (generated by RPTOPTS) and storage report **
** (generated by RPTSTG).                **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3RPH.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 RPTHEAD          PIC X(80).
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity        PIC S9(4) BINARY.
04 Msg-No          PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code      PIC S9(4) BINARY.
04 Cause-Code      PIC S9(4) BINARY.
03 Case-Sev-Ctl    PIC X.
03 Facility-ID     PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.

PROCEDURE DIVISION.

*****
** Specify user-defined report heading via CEE3RPH
*****
PARA-CBL3RPH.
    MOVE "My options and storage reports heading"
    TO RPTHEAD.
    CALL "CEE3RPH" USING RPTHEAD, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEE3RPH failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 58. COBOL Example of CEE3RPH

```

*PROCESS MACRO;
/* Module/File Name: IBM3RPH */
/*****
/**                               */
/** Function: CEE3RPH - set report heading */
/**                               */
*****/
PLI3RPH: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL RPTHEAD CHAR(80);
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    /* Define report heading */
    RPTHEAD = 'My storage report heading';

    /* Set report heading in call to CEE3RPH */
    CALL CEE3RPH ( RPTHEAD, FC );

    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST( 'Report heading now set to "'
            || RPTHEAD || '" ');
        END;
    ELSE DO;
        DISPLAY( 'CEE3RPH failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLI3RPH;

```

Figure 59. PL/I Example of CEE3RPH

CEE3SPM—Query and modify Language Environment hardware condition enablement

CEE3SPM queries and modifies the enablement of Language Environment hardware conditions. You can use the CEE3SPM service to:

- Alter the settings of the Language Environment conditions, using an *action* value of 1 (SET), to those specified by the caller.
- Query the current settings of the Language Environment conditions and return the settings to the caller.
- Push the current settings of the Language Environment conditions on to the condition stack using an *action* value of 3 (PUSH). This pushes the current setting down on the stack for later retrieval, and, in effect, places a copy of the current setting on top of the stack. It does not alter the current condition settings.

- Pop the pushed settings of the Language Environment conditions from the condition stack using an *action* value of 4 (POP). This reinstates the previous condition settings as the current condition settings.
- Push the current settings of the Language Environment conditions on to the Language Environment-managed condition stack and alter the settings of the Language Environment conditions to those supplied by the caller.

The enabled or disabled Language Environment conditions are:

fixed-overflow	When enabled, raises the fixed-overflow condition when an overflow occurs during signed binary arithmetic or signed left-shift operations.
decimal-overflow	When enabled, raises the decimal-overflow condition when one or more nonzero digits are lost because the destination field in a decimal operation is too short to contain the results.
underflow	When enabled, raises the underflow condition when the result characteristic of a floating-point operation is less than zero and the result fraction is not zero. For an extended-format floating-point result, the condition is raised only when the high-order characteristic underflows.
significance	When enabled, raises the significance condition when the resulting fraction in floating-point addition or subtraction is zero.

When you use the CEE3SPM callable service, maintenance of the condition stack is required. For example, one user-written condition handler can disable a hardware condition while another enables it. Therefore, do not assume that the program mask is at a given setting. The program mask is set differently based on different HLL requirements. You can find out what the current setting is by using the QUERY function of CEE3SPM.

Language Environment initialization sets conditions based on the languages in the initial load module. Each language present adds to the conditions that are enabled.

Some S/370 hardware interrupt codes and their matching Language Environment feedback codes appear in Table 24 on page 216.

Syntax

```
►► CEE3SPM(—action—,—cond_string—,—fc—)◄◄
```

action (input)

The action to be performed. *action* is specified as a fullword binary signed integer corresponding to one of the numbers in the following list:

1—SET	Alters the settings of the Language Environment conditions to those specified in the <i>cond_string</i> parameter.
2—QUERY	Queries the current settings of the Language

Environment conditions and return the settings in the *cond_string* parameter.

3—PUSH

Pushes the current settings of the Language Environment conditions on to the Language Environment-managed condition stack.

4—POP

Pops the pushed settings of the Language Environment conditions from the condition stack, discarding the current settings, and reinstating the previous condition settings as the current condition settings.

5—PUSH, SET

Pushes the current settings of the Language Environment conditions on to the Language Environment-managed condition stack and alters the settings of the Language Environment conditions to those supplied by the caller in the *cond_string* parameter.

cond_string (input/output)

A fixed-length string of 80 bytes containing a sequence of identifiers representing the requested settings for the Language Environment conditions that can be enabled and disabled.

A list of conditions enabled and disabled and their associated identifiers is given below:

Condition	Identifier
fixed-overflow	F (NOF for disablement)
decimal-overflow	D (NOD for disablement)
underflow	U (NOU for disablement)
significance	S (NOS for disablement)

An identifier with the 'NO' prefix is used to disable the condition it represents. An identifier without the 'NO' prefix is used to enable the condition that it represents. For example, the token 'F' is used to enable the fixed-overflow condition. The identifier 'NOF' is used to disable the fixed-overflow condition. The rightmost option takes effect in the event of a conflict. Identifiers are separated by blanks or commas.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE36V	4	3295	The condition string from CEE3SPM did not contain all of the settings, because the returned string was truncated.
CEE370	4	3296	Some of the data in the condition string from CEE3SPM could not be recognized.
CEE371	4	3297	The service completed successfully for recognized condition(s), unsuccessfully for unrecognized (unsupported) condition(s).

Code	Severity	Message number	Message text
CEE372	4	3298	A call to CEE3SPM attempted to PUSH settings onto a full stack.
CEE373	4	3299	A call to CEE3SPM attempted to POP settings off an empty stack.
CEE374	4	3300	The action parameter in CEE3SPM was not one of the digits 1 to 5.

Usage notes

- PL/I MTF consideration—In PL/I MTF applications, CEE3SPM affects only the calling task.
- C/C++ consideration—C/C++ ignores the fixed-overflow, decimal-overflow, underflow, and significance interrupts, no matter what you specify in CEE3SPM.
- COBOL consideration—COBOL ignores the fixed-overflow and decimal-overflow interrupts, no matter what you specify in CEE3SPM.
- z/OS UNIX consideration—In multithread applications, CEE3SPM affects only the calling thread.
- You cannot use CEE3SPM to enable the fixed-overflow, decimal-overflow, underflow or significance interrupts. You can, however, query the settings of CEE3SPM.

Table 24. S/370 Interrupt Code Descriptions

S/370 Interrupt Code	Description	Maskable	Symbolic Feedback Code	Message Number	Severity
0001	Operation exception	No	CEE341	3201	3
0002	Privileged operation exception	No	CEE342	3202	3
0003	Execute exception	No	CEE343	3203	3
0004	Protection exception	No	CEE344	3204	3
0005	Addressing exception	No	CEE345	3205	3
0006	Specification exception	No	CEE346	3206	3
0007	Data exception	No	CEE347	3207	3
0008	Fixed-point overflow exception	Yes	CEE348	3208	3
0009	Fixed-point divide exception	No	CEE349	3209	3
000A	Decimal-overflow exception	Yes	CEE34A	3210	3
000B	Decimal divide exception	No	CEE34B	3211	3
000C	Exponent-overflow exception	No	CEE34C	3212	3
000D	Exponent-underflow exception	Yes	CEE34D	3213	3
000E	Significance exception	Yes	CEE34E	3214	3
nn0F	Floating-point divide exception	No	CEE34F	3215	3

Examples

```

/*Module/File Name: EDC3SPM  */

/*****
/* This example queries the enablement of LE/370      */
/* hardware conditions.                               */
*****/
#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4 action;
    _CHAR80 cond_string;
    char *cond;

    /* query the current settings */
    action = 2;
    CEE3SPM(&action,cond_string,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3SPM query failed with message %\n",
            fc.tok_msgno);
        exit(2999);
    }
}

```

Figure 60. C/C++ Example of CEE3SPM

```

CBL LIB,QUOTE
*Module/File Name: IGZT3SPM
*****
**                                     **
** CBL3SPM - Call CEE3SPM to query and modify **
**           Lang. Environ. hardware condition **
**           enablement                       **
** In this example, a call is made to CEE3SPM **
** to check the setting of the program mask.  **
** See the parameter list of CEE3SPM to      **
** interpret what is returned as CONDSTR in  **
** this example.                             **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3SPM.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 ACTION          PIC S9(9) BINARY.
01 CONDSTR         PIC X(80).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity     PIC S9(4) BINARY.
   04 Msg-No       PIC S9(4) BINARY.
   03 Case-2-Condition-ID
   REDEFINES Case-1-Condition-ID.
   04 Class-Code   PIC S9(4) BINARY.
   04 Cause-Code   PIC S9(4) BINARY.
   03 Case-Sev-Ctl PIC X.
   03 Facility-ID  PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.

PROCEDURE DIVISION.

*****
** Specify 2 for the QUERY function.
** Pass ACTION in the call to CEE3SPM to return
** the condition string DISPLAY results.
*****
PARA-CBL3SPM.
  MOVE 2 TO ACTION.
  CALL "CEE3SPM" USING ACTION, CONDSTR, FC.
  IF CEE000 of FC THEN
    DISPLAY "The current setting of the ",
           "program mask is: " CONDSTR
  ELSE
    DISPLAY "CEE3SPM failed with msg "
           Msg-No of FC UPON CONSOLE
    STOP RUN
  END-IF.

  GOBACK.

```

Figure 61. COBOL Example of CEE3SPM

```

*PROCESS MACRO;
/* Module/File Name: IBM3SPM */
/*****
/**
/** Function: CEE3SPM - Query and Modify LE/370
/** Hardware Condition Enablement
/**
/** This example calls CEE3SPM to query the current
/** setting of the program mask. See the parameter
/** list of CEE3SPM to interpret what is returned
/** as CONDSTR in this example.
/**
/**
*****/
PLI3SPM: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL ACTION REAL FIXED BINARY(31,0);
DCL CONDSTR CHAR(80);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

/* Call CEE3SPM to query the current setting of
/* the program mask */

ACTION = 2; /* Specify action code 2 to query
/* the program mask */
CALL CEE3SPM ( ACTION, CONDSTR, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST(
        'The initial setting of the program mask is: '
        || CONDSTR );
    END;
ELSE DO;
    DISPLAY('CEE3SPM failed with msg ' || FC.MsgNo);
    STOP;
    END;

```

Figure 62. PL/I Example of CEE3SPM (Part 1 of 2)

```

/* Call CEE3SPM to enable specification exceptions. */

/* Specify action code 1 to SET the program mask. */
ACTION = 1;

/* Specify a program mask that allows specification */
/* exceptions (all others are unchanged) */
CONDSTR = 'S';

CALL CEE3SPM ( ACTION, CONDSTR, FC );
IF ¬ FBCEK( FC, CEE000) THEN DO;
    DISPLAY('CEE3SPM failed with msg ' || FC.MsgNo);
    STOP;
    END;

CALL CEE3SPM (2, CONDSTR, FC); /* Query settings */
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST(
        'The new setting of the program mask is: '
        || CONDSTR );
    END;
ELSE DO;
    DISPLAY('CEE3SPM failed with msg ' || FC.MsgNo);
    STOP;
    END;

END PLI3SPM;

```

Figure 62. PL/I Example of CEE3SPM (Part 2 of 2)

CEE3SRC—Set the enclave return code

CEE3SRC sets the user enclave return code. The value set is used in the calculation of the final enclave return code at enclave termination.

Syntax

►► CEE3SRC—(—*return_code*—,—*fc*—)◄◄

return_code (input)

An INT4 data type. The enclave return code to be set should be ≤ 999,999 and ≥ 0 to be in the Language Environment-preferred range. (The initial value is 0.)

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE0HA	1	0554	A value outside the preferred range of 0 through 999,999 was supplied. However, the value was still used as the enclave return code.

Usage note

- z/OS UNIX consideration—CEE3SRC is not supported in multithread applications.
- PL/I MTF consideration—For PL/I multitasking applications, the user return code value set during invocation of CEE3SRC affects the current task only. If a PL/I program causes an enclave to terminate, the value set by CEE3SRC at the associated task level is reflected in the final return code at enclave termination.
- PL/I consideration—When running PL/I with POSIX(ON), CEE3SRC is not supported.

For more information

- See *z/OS Language Environment Programming Guide*, for more information about the CEE3SRC callable service.

Examples

CEE3SRC is used with CEE3GRC—see the examples for CEE3GRC, “Examples” on page 148.

CEE3SRP—Set resume point

The CEE3SRP service sets the resume point at the next instruction in the calling routine. CEE3SRP works only in conjunction with the CEEMRCE service.

Syntax

►►CEE3SRP(—resume_token—,—fc—)◄◄

resume_token (output)

An INT4 data type that, upon completion of this service, contains a token that represents a machine state block, which Language Environment allocates from heap storage. Language Environment automatically frees the heap storage for the machine state block when the routine associated with the stack frame to which it points returns to its caller.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE390	3	3360	The stack frame was not found on the call chain.

Usage notes

- An example for Service Label under COBOL follows:
SET-RECOVERY-POINT-PARAGRAPH.
CALL 'CEE3SRP' USING RECOVERY-POINT FC.
SERVICE LABEL.
ERROR-PARAGRAPH.
* code to do post-error processing

- Use the CEE3SRP service only with the CEEMRCE service from within a user condition handler. The token returned by this service is used as input to the CEEMRCE service.
- Language Environment automatically frees the heap storage for the machine state block when the routine associated with the stack frame to which it points returns to its caller. Attempts to use the machine state block after it is freed result in unpredictable behavior.
- COBOL considerations
 - A Service Label compiler directive must be specified immediately after the call to CEE3SRP.
 - When a resume occurs and control resumes to the next instruction following the call to CEE3SRP, the COBOL RETURN-CODE special register contains an unpredictable value.

Examples

For examples of how to use CEE3SRP in combination with other CEEMRCE and CEEHDLR, see “CEEMRCE—Move resume cursor explicit” on page 407.

CEE3USR—Set or query user area fields

CEE3USR sets or queries one of two 4-byte fields known as the user area fields. The user area fields are associated with an enclave and are maintained on an enclave basis. A user area field can be used by vendor or application programs to store a pointer to a global data area or to keep a recursion counter.

Be careful not to confuse the Language Environment user area fields with the PL/I user area. The PL/I user area is a 4-byte field in the PL/I TCA and can be accessed only through assembler language. The PL/I user area continues to be supported for compatibility.

Language Environment initializes both user area fields to X'00000000' during enclave initialization.

Syntax

```
►►CEE3USR(—function_code—,—field_number—,—field_value—,—fc—)►►
```

function_code(input)

A fullword binary integer representing the function performed:

- 1—SET** User area field according to the value specified in *field_value*.
2—QUERY User area field; return current value in *field_value*.

field_number(input)

A fullword binary integer indicating the field to set or query. *field_number* must be specified as either 1 or 2.

field_value(input/output)

A fullword binary integer.

If *function_code* is specified as 1 (meaning SET user area field), *field_value* contains the value to be copied to the user area field.

If *function_code* is specified as 2 (meaning QUERY user area field), the value in the user area field is copied to *field_value*.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE3PS	3	3900	The function code passed to CEE3USR was not 1 or 2.
CEE3PT	3	3901	The field number passed to CEE3USR was not 1 or 2.

Usage note

- z/OS UNIX consideration—CEE3USR applies to the enclave.

Examples

```

/*Module/File Name: EDC3USR  */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <leawi.h>
#include <ceedcct.h>

typedef struct {
    int value1,value2,value3;
    char slot1_80";
} info_struct;

int main (void) {

    _INT4 function_code, field_number, field_value;
    _FEEDBACK fc;
    info_struct *info;

    info = (info_struct *)malloc(sizeof(info_struct));
    /* .
    .
    . */
    /* Set User field 1 to point to info_struct */
    function_code = 1;
    field_number = 1;
    field_value = (int)info;

    CEE3USR(&function_code,&field_number,&field_value,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3USR failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* .
    .
    . */
    /* get the value of field 2 */
    function_code = 2;
    field_number = 1;

    CEE3USR(&function_code,&field_number,&field_value,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEE3USR failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* .
    .
    . */
}

```

Figure 63. C/C++ Example of CEE3USR

```

CBL LIB,QUOTE
*Module/File Name: IGZT3USR
*****
**                                     **
** CBL3USR - Call CEE3USR to set or query user **
**           area fields                    **
**                                     **
** In this example, CEE3USR is called twice: **
** once to set the value of a user area, and **
** once to query it.                        **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL3USR.

DATA DIVISION.
WORKING-STORAGE SECTION.
01  FUNCODE          PIC S9(9) BINARY.
01  FIELDNO          PIC S9(9) BINARY.
01  INVALUE          PIC S9(9) BINARY.
01  FC.
02  Condition-Token-Value.
COPY CEEIGZCT.
03  Case-1-Condition-ID.
04  Severity         PIC S9(4) BINARY.
04  Msg-No           PIC S9(4) BINARY.
03  Case-2-Condition-ID
      REDEFINES Case-1-Condition-ID.
04  Class-Code       PIC S9(4) BINARY.
04  Cause-Code       PIC S9(4) BINARY.
03  Case-Sev-Ctl     PIC X.
03  Facility-ID      PIC XXX.
02  I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

*****
** Specify 1 for SET function.
** Specify field number 1 to set the value field
**   number 1.
** Specify 23 to make the value of field number 1
**   equal to 23.
*****
PARA-3USRSET.
MOVE 1 TO FUNCODE.
MOVE 1 TO FIELDNO.
MOVE 23 TO INVALUE.
CALL "CEE3USR" USING FUNCODE, FIELDNO,
                    INVALUE, FC.
IF NOT CEE000 of FC THEN
    DISPLAY "CEE3USR failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

```

Figure 64. COBOL Example of CEE3USR (Part 1 of 2)

```

*****
** Specify 2 for QUERY function.
** Specify field number 1 to query the value
**   of field number 1.
*****
PARA-3USRQRY.
  MOVE 2 TO FUNCODE.
  MOVE 1 TO FIELDNO.
  CALL "CEE3USR" USING FUNCODE, FIELDNO,
                      INVALUE, FC.
  IF CEE000 of FC THEN
    DISPLAY "User Area field " FIELDNO
      " is: " INVALUE
  ELSE
    DISPLAY "CEE3USR failed with msg "
      Msg-No of FC UPON CONSOLE
  STOP RUN
END-IF.

GOBACK.

```

Figure 64. COBOL Example of CEE3USR (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBM3USR */
/*****
**
** Function: CEE3USR - set/query user area fields **
**
** In this example, CEE3USR is called twice: once **
** to set the value of a user area, and once to **
** query it. **
*****/
PLI3USR: PROC OPTIONS(MAIN);

  %INCLUDE CEEIBMAW;
  %INCLUDE CEEIBMCT;

  DCL FUNCODE REAL FIXED BINARY(31,0);
  DCL FIELDNO REAL FIXED BINARY(31,0);
  DCL OUTVALUE REAL FIXED BINARY(31,0);
  DCL INVALUE REAL FIXED BINARY(31,0);
  DCL 01 FC, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
      05 Case BIT(2),
      05 Severity BIT(3),
      05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
      REAL FIXED BINARY(31,0);

  FUNCODE = 1; /* Specify 1 for the set function */
  FIELDNO = 1; /* Specify field 1 of two */
  INVALUE = 5; /* Value to put in field 1 */

```

Figure 65. PL/I Example of CEE3USR (Part 1 of 2)

```

/* Call CEE3USR to set user field 1 to 5 */
CALL CEE3USR ( FUNCODE, FIELDNO, INVALUE, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'LE/370 User field ' || FIELDNO
        || ' has been set to ' || INVALUE );
    END;
ELSE DO;
    DISPLAY( 'CEE3USR failed with msg '
        || FC.MsgNo );
    STOP;
    END;

/* Call CEE3USR to query the value of field 1 */

FUNCODE = 2; /* Specify 2 for query function */
FIELDNO = 1; /* Specify field 1 of two */

CALL CEE3USR ( FUNCODE, FIELDNO, OUTVALUE, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'LE/370 User field ' || FIELDNO
        || ' is currently set to ' || OUTVALUE );
    END;
ELSE DO;
    DISPLAY( 'CEE3USR failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLI3USR;

```

Figure 65. PL/I Example of CEE3USR (Part 2 of 2)

CEE3BLDY—Convert date to COBOL Integer format

CEE3BLDY converts a string representing a date into a COBOL Integer format, which is the number of days since 1 January 1601. This service is similar to CEEDAYS, except that it provides a string in COBOL Integer format, which is compatible with ANSI intrinsic functions. Use CEE3BLDY to access the century window of Language Environment and to perform date calculations with COBOL intrinsic functions for programs compiled with the INTDATE(ANSI) compiler option.

Call CEE3BLDY only from COBOL programs that use the returned value as input for COBOL intrinsic functions. You should not use the returned value with other Language Environment callable services, nor should you call CEE3BLDY from any non-COBOL programs. Unlike CEEDAYS, there is no inverse function for CEE3BLDY, because it is only for COBOL users who want to use the Language Environment century window service together with COBOL intrinsic functions for date calculations. The inverse function for CEE3BLDY is provided by the DATE-OF-INTEG and DAY-OF-INTEG intrinsic functions.

To handle dates earlier than 1601, add 4000 to each year, convert to Integer, calculate, subtract 4000 from the result, and then convert back to character format. By default, 2-digit years lie within the 100-year range starting 80 years prior to the system date. Thus, in 1995, all 2-digit years represent dates between 1915 and 2014, inclusive. You can change this default range by using the CEESCN callable service.

Syntax

```

▶▶ CEEGBLDY (—input_char_date—, —picture_string—, —output_ANSI_date—▶▶
▶, —) ▶▶

```

input_char_date (input)

A halfword length-prefixed character string (VSTRING) representing a date or timestamp, in a format conforming to that specified by *picture_string*.

The character string must contain between 5 and 255 characters, inclusive.

input_char_date can contain leading or trailing blanks. Parsing for a date begins with the first nonblank character (unless the picture string itself contains leading blanks, in which case CEEGBLDY skips exactly that many positions before parsing begins).

After parsing a valid date, as determined by the format of the date specified in *picture_string*, CEEGBLDY ignores all remaining characters. Valid dates range between and include 01 January 1601 to 31 December 9999.

See Table 29 on page 551 for a list of valid picture character terms that can be specified in *input_char_date*.

picture_string (input)

A halfword length-prefixed character string (VSTRING), indicating the format of the date specified in *input_char_date*.

Each character in the *picture_string* corresponds to a character in *input_char_date*. For example, if you specify MMDDYY as the *picture_string*, CEEGBLDY reads an *input_char_date* of 060288 as 02 June 1988.

If delimiters such as the slash (/) appear in the picture string, leading zeros can be omitted. For example, the following calls to CEEGBLDY:

```

MOVE '6/2/88' TO DATEVAL.
MOVE 'MM/DD/YY' TO PICSTR.
CALL CEEGBLDY USING DATEVAL, PICSTR, COBINTDATE, fc);

```

```

MOVE '06/02/88' TO DATEVAL.
MOVE 'MM/DD/YY' TO PICSTR.
CALL CEEGBLDY USING DATEVAL, PICSTR, COBINTDATE, fc);

```

```

MOVE '060288' TO DATEVAL.
MOVE 'MMDDYY' TO PICSTR.
CALL CEEGBLDY USING DATEVAL, PICSTR, COBINTDATE, fc);

```

```

MOVE '88154' TO DATEVAL.
MOVE 'YYDDD' TO PICSTR.
CALL CEEGBLDY USING DATEVAL, PICSTR, COBINTDATE, fc);

```

would each assign the same value, 148155 (02 June 1988), to COBINTDATE.

Whenever characters such as colons or slashes are included in the *picture_string* (such as HH:MI:SS YY/MM/DD), they count as placeholders but are otherwise ignored.

See Table 29 on page 551 for a list of valid picture character terms and Table 30 on page 552 for examples of valid picture strings.

If *picture_string* includes a Japanese Era symbol <JJJJ>, the YY position in *input_char_date* is replaced by the year number within the Japanese Era. For example, the year 1988 equals the Japanese year 63 in the Showa era. See Table 30 on page 552 for an additional example. See also Table 31 on page 552 for a list of Japanese Eras supported by CEEDATE.

If *picture_string* includes era symbol <CCCC> or <CCCCCCCC>, the YY position in *input_char_date* is replaced by the year number within the era. See Table 30 on page 552 for an additional example.

output_Integer_date (output)

A 32-bit binary integer representing the COBOL Integer date, the number of days since 31 December 1600. For example, 16 May 1988 is day number 141485.

If *input_char_date* does not contain a valid date, *output_Integer_date* is set to 0 and CEECLDY terminates with a non-CEE000 symbolic feedback code.

Date calculations are performed easily on the *output_Integer_date*, because *output_Integer_date* is an integer. Leap year and end-of-year anomalies do not affect the calculations.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2EB	3	2507	Insufficient data was passed to CEEDAYS or CEESECS. The Lilian value was not calculated.
CEE2EC	3	2508	The date value passed to CEEDAYS or CEESECS was not valid.
CEE2ED	3	2509	The era passed to CEEDAYS or CEESECS was not recognized.
CEE2EH	3	2513	The input date passed in a CEEISEC, CEEDAYS, or CEESECS call was not within the supported range.
CEE2EL	3	2517	The month value in a CEEISEC call was not recognized.
CEE2EM	3	2518	An incorrect picture string was specified in a call to a date/time service.
CEE2EO	3	2520	CEEDAYS detected non-numeric data in a numeric field, or the date string did not match the picture string.
CEE2EP	3	2521	The (<JJJJ>) or (<CCCC>) year-within-era value passed to CEEDAYS or CEESECS was zero.

Usage notes

- The probable cause for receiving message number 2518 is a picture string that contains a DBCS string that is not valid. You should verify that the data in the picture string is correct.
- z/OS UNIX consideration—In multithread applications, CEECLDY affects only the calling thread.

For more information

- See the INTDATE COBOL compiler installation option in *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide* for information about how to get ANSI integer values from COBOL Intrinsic Functions that are compatible with the Language Environment callable services CEEDAYS and CEEDATE.
- See “CEESCEN—Set the century window” on page 453 for more information about the CEESCEN callable service.
- See Table 29 on page 551 for a list of valid picture character terms that can be specified in *input_char_date*.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGZTCBLD
*****
**
** Function: Invoke CEEGBLDY callable service **
** to convert date to COBOL Integer format. **
** This service is used when using the **
** Lang. Environ. Century Window **
** mixed with COBOL Intrinsic Functions. **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDY.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 CHDATE.
   02 Vstring-length PIC S9(4) BINARY.
   02 Vstring-text.
   03 Vstring-char PIC X
      OCCURS 0 TO 256 TIMES
      DEPENDING ON Vstring-length
      of CHDATE.
01 PICSTR.
   02 Vstring-length PIC S9(4) BINARY.
   02 Vstring-text.
   03 Vstring-char PIC X
      OCCURS 0 TO 256 TIMES
      DEPENDING ON Vstring-length
      of PICSTR.
01 INTEGER PIC S9(9) BINARY.
01 NEWDATE PIC 9(8).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity PIC S9(4) BINARY.
   04 Msg-No PIC S9(4) BINARY.
   03 Case-2-Condition-ID
      REDEFINES Case-1-Condition-ID.
   04 Class-Code PIC S9(4) BINARY.
   04 Cause-Code PIC S9(4) BINARY.
   03 Case-Sev-Ctl PIC X.
   03 Facility-ID PIC XXX.
   02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.

```

Figure 66. COBOL Example of CEEGBLDY (Part 1 of 2)

```

      PARA-CBLDAYS.
      *****
      ** Specify input date and length          **
      *****
      MOVE 25 TO Vstring-length of CHRDATE.
      MOVE "1 January 00"
        to Vstring-text of CHRDATE.

      *****
      ** Specify a picture string that describes **
      ** input date, and set the string's length. **
      *****
      MOVE 23 TO Vstring-length of PICSTR.
      MOVE "ZD Mmmmmmmmmmmmmz YY"
        TO Vstring-text of PICSTR.

      *****
      ** Call CEECBLDY to convert input date to a **
      ** COBOL Integer date                      **
      *****
      CALL "CEECEBDY" USING CHRDATE, PICSTR,
        INTEGER, FC.

      *****
      ** If CEECBLDY runs successfully, then compute **
      ** the date of the 90th day after the          **
      ** input date using Intrinsic Functions       **
      *****
      IF CEE000 of FC THEN
        COMPUTE INTEGER = INTEGER + 90
        COMPUTE NEWDATE = FUNCTION
          DATE-OF-INTEGER (INTEGER)
        DISPLAY NEWDATE
        " is Lilian day: " INTEGER
      ELSE
        DISPLAY "CEECEBDY failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.

      GOBACK.

```

Figure 66. COBOL Example of CEECEBDY (Part 2 of 2)

CEECEMI—Store and load message insert data

CEECEMI copies message insert data and loads the address of that data into the Instance Specific Information (ISI) associated with the condition being processed. CEECEMI also allocates storage for the ISI, if necessary. The number of ISIs per thread is determined by the MSGQ run-time option.

ISIs are released when the value specified in the MSGQ run-time option is exceeded. The least recently used ISI is overwritten.

If you plan on using a routine that signals a new condition with a call to the CEESGL callable service, you should first call CEECEMI to copy any insert information into the ISI associated with the condition.

Syntax

```
►►CEEEMI—(—cond_rep—,— insert_seq_num—,—insert_data—,—fc—)◄◄
```

cond_rep (input/output)

A condition token that defines the condition for which the q_data_token is retrieved.

insert_seq_num (input)

A 4-byte integer that contains the insert sequence number (such as insert 1 insert 2). It corresponds to an insert number specified with an `ins` tag in the message source file created by the CEEBLDTX EXEC.

insert_data (input)

A halfword-prefixed length string that represents the insert data. The entire length described in the halfword prefix is used without truncation. DBCS strings must be enclosed within shift-out (X'0E') and shift-in (X'0F') characters.

The maximum size for an individual insert data item is 254 bytes.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0EB	3	0459	Not enough storage was available to create a new instance specific information block.
CEE0EC	1	0460	Multiple instances of the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> were detected.
CEE0ED	3	0461	The maximum number of unique message insert blocks was reached. This condition token had its I_S_info field set to 1.
CEE0EE	3	0462	Instance specific information for the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> could not be found.
CEE0EF	3	0463	The maximum size for an insert data item was exceeded.
CEE0H9	3	0553	An internal error was detected in creating the inserts for a condition.

Usage notes

- z/OS UNIX consideration—In multithread applications, CEEEMI applies to message insert data for only the calling thread.

For more information

- See “MSGQ” on page 53 for more information about the MSGQ run-time option.
- For more information about CEEBLDTX, see *z/OS Language Environment Programming Guide*.

Examples

```

/*Module/File Name: EDCCMI */
/*****
**
** FUNCTION: CEENCOD - set up a condition token *
**           : CEECCI - store and load message *
**           : CEEMSG - retrieve, format, and *
**                   dispatch a message to *
**                   message file *
**
** This example illustrates the invocation of *
** the Lang. Environ. message services to *
** store and load message insert data. *
** The resulting message and insert is written *
** to the Lang. Environ. MSGFILE ddname. *
**
*****/
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

void main ()
{
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;
    _VSTRING insert;
    _FEEDBACK ctok;
    _FEEDBACK fbcode;
    _INT4 MSGFILE;
    _INT4 insert_no ;
    /* Condition Token Declarations */
    /*****
    * EXPLMSG is a token that represents message *
    * number 10 in a user message file constructed *
    * using the CEEBLDTXT facility. *
    * Message 10 is designed to allow one insert. *
    *****/
    insert.length = 18;
    memcpy(insert.string, "<CEPGCMI's insert>",
           insert.length);
    /*give ctok value of hex 0000000A40E7D4D700000000 */
    /*sev = 0 msgno = 10 facid = XMP */
    c_1 = 0;
    c_2 = 10;
    cond_case = 1;
    sev = 0;
    control = 0;
    memcpy(facid,"XMP",3);
    isi = 0;

```

Figure 67. C/C++ Example of CEECCI (Part 1 of 2)

```

/*****
/* Call CEENCOD to set-up a condition token */
/*****
CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
        facid,&isi,&ctok,&fbcode);
if ( _FBCHECK ( fbcode , CEE000 ) != 0 )
    printf("CEENCOD failed with message number %d\n",
           fbcode.tok_msgno);

/*****
/* Call CEEECMI to create a message insert */
/*****
CEEECMI(&ctok, &insert_no, &insert, &fbcode);
if ( _FBCHECK ( fbcode , CEE000 ) != 0 )
    printf("CEEECMI failed with message number %d\n",
           fbcode.tok_msgno);

/*****
/* Call CEEMSG to issue the message */
/*****
CEEMSG(&ctok, &MSGFILE , &fbcode);
if ( _FBCHECK ( fbcode , CEE000 ) != 0 )
    printf("CEEMSG failed with message number %d\n",
           fbcode.tok_msgno);

}

```

Figure 67. C/C++ Example of CEEECMI (Part 2 of 2)

```

CBL LIB,QUOTE
*Module/File Name: IGZTCMI
*****
**
** Function: CEECEMI - Store and load message *
**                  insert data *
**      : CEENCOD - Construct a condition *
**                  token *
**      : CEEMSG - Dispatch a Message. *
**
** This example illustrates the invocation *
** of the Lang. Environ. message services to*
** store and load message insert data. *
** CEENCOD is called to construct a token *
** for a user defined message (message 10) *
** in a user message file. *
** CEECEMI is called to insert text into *
** message 10. The resulting message and *
** insert is written to the MSGFILE. *
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLCEMI.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 INSERTNO          PIC S9(9) BINARY.
01 CTOK              PIC X(12).
01 FBCODE.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity      PIC S9(4) BINARY.
            04 Msg-No       PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code   PIC S9(4) BINARY.
            04 Cause-Code   PIC S9(4) BINARY.
        03 Case-Sev-Ctl    PIC X.
        03 Facility-ID     PIC XXX.
    02 I-S-Info           PIC S9(9) BINARY.
01 MSGDEST           PIC S9(9) BINARY.
01 SEV               PIC S9(4) BINARY.
01 MSGNO             PIC S9(4) BINARY.
01 CASE              PIC S9(4) BINARY.
01 SEV2              PIC S9(4) BINARY.
01 CNTRL             PIC S9(4) BINARY.
01 FACID             PIC X(3).
01 ISINFO            PIC S9(9) BINARY.
01 VSTRING.

```

Figure 68. COBOL Example of CEECEMI (Part 1 of 2)


```

      05 INSERT-TXTL          PIC S9(4) BINARY.
      05 INSERT-TXT          PIC X(80).
PROCEDURE DIVISION.
PARA-CEPGCMI.
*****
*   Set up token fields for creation of a      *
*   condition token for the user defined      *
*   message file and message number.          *
*****
      MOVE 0 TO SEV.
      MOVE 10 TO MSGNO.
      MOVE 1 TO CASE.
      MOVE 0 TO SEV2.
      MOVE 0 TO CNTRL.
      MOVE "XMP" TO FACID.
      MOVE 0 TO ISINFO.
*****
*   Call CEENCOD to construct a condition token *
*****
      CALL "CEENCOD" USING SEV, MSGNO, CASE,
                          SEV2, CNTRL, FACID,
                          ISINFO, CTOK, FBCODE.
      IF NOT CEE000 of FBCODE THEN
          DISPLAY "CEENCOD failed with msg"
          Msg-No of FBCODE UPON CONSOLE
          STOP RUN
      END-IF.
*****
*   Call CEEEMI to store and load message      *
*   insert 1.                                *
*****
      MOVE "<CEPGCMI">"s insert>" TO INSERT-TXT.
      MOVE 19 TO INSERT-TXTL.
      MOVE 1 TO INSERTNO.
      CALL "CEEEMI" USING CTOK, INSERTNO, VSTRING.
*****
*   Call CEEMSG to write message to MSGFILE    *
*****
      MOVE 2 TO MSGDEST.
      CALL "CEEMSG" USING CTOK, MSGDEST, FBCODE.
      IF NOT CEE000 of FBCODE THEN
          DISPLAY "CEEMSG failed with msg "
          Msg-No of FBCODE UPON CONSOLE
          STOP RUN
      END-IF.

      GOBACK.

```

Figure 68. COBOL Example of CEEEMI (Part 2 of 2)

```

*PROCESS MACRO;
IBMCEMI: Proc Options(Main);

/*Module/File Name: IBMCEMI */
/*****
**
** FUNCTION : CEECEMI - store and load message *
**                insert data *
**                : CEEMSG - retrieve, format, and *
**                dispatch a message to *
**                message file *
**
** This example illustrates the invocation of *
** LE/370 message services to store and load *
** message insert data. The resulting message *
** and insert are written to the MSGFILE. *
**
*****/
%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;
DECLARE INSERT CHAR(255) VARYING;
DCL 01 CTOK, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);
DCL 01 FBCODE, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);
DECLARE MSGFILE REAL FIXED BINARY(31,0);
DECLARE INSERT_NO REAL FIXED BINARY(31,0);

```

Figure 69. PL/I Example (Part 1 of 2)

```

/*****
/* Ctok is initialized in the DECLARE statement */
/* to message 10 in a user message file          */
/* constructed using the CEEBLDTX tool.          */
/* Message 10 is designed to allow one insert.   */
/* The message facility ID is XMP.               */
*****/
insert = '<CEPGCMI's insert>';
insert_no = 1;

/*****
/* Call CEEECMI to create a message insert */
*****/
Call CEEECMI(ctok, insert_no, insert, *);

/*****
/* Call CEEMSG to issue the message          */
*****/
MSGFILE = 2;
Call CEEMSG(ctok, MSGFILE, *);

End IBMCCI;

```

Figure 69. PL/I Example (Part 2 of 2)

CEECRHP—Create new additional heap

CEECRHP lets you define additional heaps. It returns a unique *heap_id*. The heaps defined by CEECRHP can be used just like the initial heap (*heap_id=0*), below heap, and anywhere heap. Unlike the heaps created by these heap services, all heap elements within an additional heap can be quickly freed by a single call to CEEDSHP (discard heap).

The number of heaps supported by Language Environment is limited only by the amount of virtual storage available.

Syntax

```

▶▶ CEECRHP—(—heap_id—,—initial_size—,—increment—,—options—,—————▶
▶—fc—)————▶▶

```

heap_id (output)

A fullword binary signed integer. *heap_id* is the heap identifier of the created heap. If a new heap cannot be created, the value of *heap_id* remains undefined.

Storage obtained from *heap_ids* 79 and 80 is set to binary 0 independent of any initialization value specified by the STORAGE option.

initial_size (input)

A fullword binary signed integer. *initial_size* is the initial amount of storage, in bytes, allocated for the new heap. *initial_size* is rounded up to the nearest increment of 4096 bytes.

If *initial_size* is specified as 0, then the *init_size* specified in the HEAP run-time option is used. If no HEAP run-time option was provided and *initial_size* is specified as 0, CEECRHP uses the installation default.

increment (input)

A fullword binary signed integer. When it is necessary to enlarge the heap to satisfy an allocation request, *increment* represents the number of bytes by which the heap is extended. *increment* is rounded up to the nearest 4096 bytes.

If *increment* is specified as 0, then the *incr_size* specified in the HEAP run time option is used. If no HEAP run-time option was provided and *increment* equals 0, CEECRHP uses the installation default.

options (input)

A fullword binary signed integer. *options* are specified with the decimal codes as shown in Table 25.

Table 25. HEAP Attributes Based on the Setting of the options Parameter

Option Setting	HEAP Attributes
00	Use same attributes as the initial heap (copy them from the HEAP run-time option)
01	HEAP(,,,FREE) (location inherited from HEAP run-time option)
70	HEAP(,,,KEEP) (location inherited from HEAP run-time option)
71	HEAP(,,ANYWHERE,KEEP)
72	HEAP(,,ANYWHERE,FREE)
73	HEAP(,,BELOW,KEEP)
74	HEAP(,,BELOW,FREE)
75	HEAP(,,ANYWHERE,) (disposition inherited from the HEAP run-time option)
76	HEAP(,,BELOW,) (disposition inherited from the HEAP run-time option)
77	HEAP(,,ANYWHERE,KEEP) (all heap storage obtained using this heap_id is allocated on a 4K boundary)
78	HEAP(,,ANYWHERE,FREE) (all heap storage obtained using this heap_id is allocated on a 4K boundary)
79	HEAP(,,ANYWHERE,KEEP) (all heap storage obtained using this heap_id is set to binary 0 when allocated using CEEGTST)
80	HEAP(,,ANYWHERE,FREE) (all heap storage obtained using this heap_id is set to binary 0 when allocated using CEEGTST)

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE0P2	4	0802	Heap storage control information was damaged.
CEE0P4	3	0804	The initial size value supplied in a create heap request was unsupported.
CEE0P5	3	0805	The increment size value supplied in a create heap request was unsupported.
CEE0P6	3	0806	The options value supplied in a create heap request was unrecognized.

Code	Severity	Message number	Message text
CEE0PD	3	0813	Insufficient storage was available to satisfy a get storage request.

Usage notes

- z/OS UNIX consideration—CEECRHP applies to the enclave.

For more information

- See “CEEDSHP—Discard heap” on page 280 for more information about the CEEDSHP callable service.
- See “HEAP” on page 36 for more information about the HEAP run-time option and IBM-supplied defaults.
- See “HEAP” on page 36 for more information about the HEAP run-time option and IBM-supplied defaults.

Examples

```

/*Module/File Name: EDCCRHP */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _INT4 heapid, size, increment, options;
    _FEEDBACK fc;
    /* .
     .
     . */
    heapid = 0;          /* heap identifier is set */
                        /* by CEECRHP */
    size = 4096;         /* initial size of heap (in */
                        /* bytes) */
    increment = 4096;    /* increment to extend heap by */
    options = 72;        /* set up heap as */
                        /* (,ANYWHERE,FREE) */

    /* create heap using CEECRHP */
    CEECRHP(&heapid,&size,&increment,&options,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEECRHP failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
    /* discard the heap that was previously created */
    /* using CEECRHP */
    CEEDSHP(&heapid,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDSHP failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
}

```

Figure 70. C/C++ Example of CEECRHP

```

CBL LIB,QUOTE
*Module/File Name: IGTZCRHP
*****
**
** Function: CEECRHP - create new additional **
**             heap **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLCRHP.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 HEAPID          PIC S9(9) BINARY.
01 HPSIZE          PIC S9(9) BINARY.
01 INCR            PIC S9(9) BINARY.
01 OPTS            PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity        PIC S9(4) BINARY.
04 Msg-No          PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code      PIC S9(4) BINARY.
04 Cause-Code      PIC S9(4) BINARY.
03 Case-Sev-Ctl    PIC X.
03 Facility-ID     PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.
PROCEDURE DIVISION.
*****
** Specify 0 for HEAPID, and heap id will be **
** set by CEECRHP. **
** Heap size and increment will each be **
** 4096 bytes. **
** Specify 00 for OPTS, and HEAP attributes **
** will be inherited from the initial heap **
** (copied from the HEAP run-time option). **
*****
MOVE 0 TO HEAPID.
MOVE 4096 TO HPSIZE.
MOVE 4096 TO INCR.
MOVE 00 TO OPTS.

CALL "CEECRHP" USING HEAPID, HPSIZE,
                    INCR, OPTS, FC.
IF CEE000 of FC THEN
    DISPLAY "Created heap number " HEAPID
    " which is " HPSIZE " bytes long"
ELSE
    DISPLAY "CEECRHP failed with msg "
    Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 71. COBOL Example of CEECRHP

```

*PROCESS MACRO;
/*Module/File Name: IBMCRHP                                     */

/*****
/**
/** Function: CEECRHP - create new additional
/**             heap
/**
/** In this example, CEECRHP is called to set up
/** a new additional heap of 4096 bytes. Each
/** time the heap needs to be extended, an
/** increment of 4096 bytes will be added.
/**
/**
*****/
PLICRHP: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;
    DCL HEAPID  REAL FIXED BINARY(31,0) ;
    DCL HPSIZE  REAL FIXED BINARY(31,0) ;
    DCL INCR    REAL FIXED BINARY(31,0) ;
    DCL OPTS    REAL FIXED BINARY(31,0) ;
    DCL 01 FC,                                     /* Feedback token */
        03 MsgSev    REAL FIXED BINARY(15,0),
        03 MsgNo     REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case      BIT(2),
            05 Severity  BIT(3),
            05 Control   BIT(3),
        03 FacID     CHAR(3), /* Facility ID */
        03 ISI       /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    HEAPID = 0; /* HEAPID will be set and
                /* returned by CEECRHP
    HPSIZE = 4096; /* Initial size of heap,
                /* in bytes
    INCR = 4096; /* Number of bytes to extend
                /* heap by
    OPTS = 00; /* Set up heap with the same
                /* attributes as the
                /* initial heap (HEAPID = 0)

    /* Call CEECRHP to set up new heap
    CALL CEECRHP ( HEAPID, HPSIZE, INCR, OPTS, FC );
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST( 'Created heap number ' || HEAPID
            || ' consisting of ' || HPSIZE || ' bytes' );
        END;
    ELSE DO;
        DISPLAY( 'CEECRHP failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLICRHP;

```

Figure 72. PL/I Example of CEECRHP

CEEZST—Reallocate (change size of) storage

CEEZST changes the size of a previously allocated heap element. The *address* parameter points to the beginning of the heap element. The *new_size* parameter gives the new size of the heap element, in bytes. The contents of the heap element are unchanged up to the shorter of the new and old sizes.

The CEEZST service returns a pointer to the reallocated heap element. It can move the storage location of the heap element. As a result, the *address* parameter passed to CEEZST is not necessarily the same as the value returned.

Because the new storage might be allocated at a different location from the existing allocation, any pointers (specifically any addresses) that referred to the old storage are no longer valid. Continued use of such dangling pointers gives unpredictable, and almost certainly incorrect, results.

The heap identifier is inferred from the address. The new storage block is allocated from the same heap that contained the old block.

The contents of the old storage are preserved in the following manner:

- If *new_size* is greater than the old size, the entire contents of the old storage block are copied to the new block. The remaining bytes in the new element are left uninitialized unless an initialization suboption value was specified for the heap in the STORAGE option.
- If *new_size* is less than the old size, the contents of the old block are truncated to the size of the new block.
- If *new_size* is equal to the old size, no operations are performed; a successful feedback code is returned.

Syntax

►►CEEZST(—address—,—new_size—,—fc—)◄◄

address (input/output)

A fullword address pointer. On input, this parameter contains an address returned by a previous CEEGTST call. On output, the address of the first byte of the newly allocated storage is returned in this parameter.

new_size (input)

A fullword binary signed integer. *new_size* is the number of bytes of storage to be allocated for the new heap element.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE0P2	4	0802	Heap storage control information was damaged.
CEE0P8	3	0808	Storage size in a get storage request or a re-allocate request was not a positive number.
CEE0PA	3	0810	The storage address in a free storage request was not recognized, or heap storage control information was damaged.
CEE0PD	3	0813	Insufficient storage was available to satisfy a get storage request.

Usage notes

- Storage that is reallocated maintains the same mark/release status as the old storage block. If the old storage block was marked, the new storage block carries the same mark and is released by a release operation that specifies that mark.
- z/OS UNIX consideration—CEEZST applies to the enclave.

For more information

- See “STORAGE” on page 72 for more information about the STORAGE run-time option.
- For information about CEEGTST, see “CEEGTST—Get heap storage” on page 351.

Examples

```

/*Module/File Name: EDCCZST */
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>
int main(void) {
    _INT4 heapid, size;
    _POINTER address;
    _FEEDBACK fc;
    /* .
     .
     . */
    heapid = 0; /* get storage from initial heap */
    size = 4000; /* number of bytes of heap storage */

    /* obtain the storage using CEEGTST */
    CEEGTST(&heapid,&size,&address,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEGTST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
    size = 2000; /* new size of storage element */

    /* change the size of the storage element */
    CEEZST(&address,&size,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEZST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
    /* free the storage that was previously obtained */
    /* using CEEGTST */
    CEEFRST(&address,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEFRST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
}

```

Figure 73. C/C++ Example of CEEZST

```

CBL LIB,QUOTE
*Module/File Name: IGZTCZST
*****
**
** Function: CEEZST - reallocate storage
**
** In this example, CEEGTST is called to
** request storage from HEAPID = 0, and
** CEEZST is called to change the size of
** that storage request.
**
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLZCZST.
DATA DIVISION.
WORKING-STORAGE SECTION.
01  HEAPID          PIC S9(9) BINARY.
01  HPSIZE          PIC S9(9) BINARY.
01  ADDRSS          POINTER.
01  NEWSIZE         PIC S9(9) BINARY.
01  FC.
02  Condition-Token-Value.
COPY CEEIGZCT.
03  Case-1-Condition-ID.
04  Severity        PIC S9(4) BINARY.
04  Msg-No          PIC S9(4) BINARY.
03  Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04  Class-Code      PIC S9(4) BINARY.
04  Cause-Code      PIC S9(4) BINARY.
03  Case-Sev-Ctl    PIC X.
03  Facility-ID     PIC XXX.
02  I-S-Info        PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLGTST.
*****
** Specify 0 to get storage from the initial
** heap. Specify 4000 to get 4000 bytes of
** storage.
**
*****
MOVE 0 TO HEAPID.
MOVE 4000 TO HPSIZE.

*****
** Call CEEGTST to obtain storage.
**
*****
CALL "CEEGTST" USING HEAPID, HPSIZE,
ADDRSS, FC.

```

Figure 74. COBOL Example of CEEZST (Part 1 of 2)

```

*****
** If CEEGTST runs successfully, display result**
*****
      IF CEE000 OF FC THEN
          DISPLAY " " HPSIZE
              " bytes have been allocated."
      ELSE
          DISPLAY "CEEGTST failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

*****
** Specify a new size of 2000 bytes.          **
*****
      MOVE 2000 TO NEWSIZE.

*****
** Call CEEZST to change the size of the      **
** storage allocated in the call to CEEGTST.  **
*****
      CALL "CEEZST" USING ADDRSS, NEWSIZE, FC.

*****
** If CEEZST runs successfully, display result**
*****
      IF CEE000 OF FC THEN
          DISPLAY
              "The storage element now contains "
              NEWSIZE " bytes."
      ELSE
          DISPLAY "CEEGTST failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

      GOBACK.

```

Figure 74. COBOL Example of CEEZST (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMCZST */
/*****
**
** Function: CEEZST - reallocate storage
**
** In this example, CEEZST is called to request
** storage from HEAPID = 0, and CEEZST is called
** to change the size of that storage request.
**
**
**
*****/
PLICZST: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL HEAPID REAL FIXED BINARY(31,0) ;
    DCL STGSIZE REAL FIXED BINARY(31,0) ;
    DCL ADDRSS1 POINTER;
    DCL 01 FC1, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

```

Figure 75. PL/I Example of CEEZST (Part 1 of 2)

```

DCL ADDRSS2 POINTER;
DCL NEWSIZE REAL FIXED BINARY(31,0) ;
DCL 01 FC2, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

HEAPID = 0; /* get storage from initial heap */
STGSIZE = 4000; /* get 4000 bytes of storage */

/* Call CEEGTST to obtain the storage */
CALL CEEGTST ( HEAPID, STGSIZE, ADDRSS1, FC1 );
IF FBCHECK( FC1, CEE000) THEN DO;
    PUT SKIP LIST( 'Obtained ' || STGSIZE
        || ' bytes of storage at location '
        || DECIMAL( UNSPEC( ADDRSS1 ) )
        || ' from heap ' || HEAPID );
    END;
ELSE DO;
    DISPLAY( 'CEEGTST failed with msg '
        || FC1.MsgNo );
    STOP;
    END;

NEWSIZE = 2000;
/* change size of HEAPID 0 to 2000 bytes */

/* Call CEECZST to change the size of storage */
ADDRSS2 = ADDRSS1;
CALL CEECZST ( ADDRSS2, NEWSIZE , FC2 );
IF FBCHECK( FC2, CEE000) THEN DO;
    PUT SKIP LIST( 'Obtained ' || NEWSIZE
        || ' bytes of storage at location '
        || DECIMAL( UNSPEC( ADDRSS1 ) ) );
    PUT SKIP LIST( 'Original ' || STGSIZE
        || ' bytes of storage at location '
        || DECIMAL( UNSPEC( ADDRSS1 ) )
        || ' no longer valid' );
    END;
ELSE DO;
    DISPLAY( 'CEECZST failed with msg '
        || FC2.MsgNo );
    STOP;
    END;

END PLICZST;

```

Figure 75. PL/I Example of CEECZST (Part 2 of 2)

CEEDATE—Convert Lilian date to character format

CEEDATE converts a number representing a Lilian date to a date written in character format. The output is a character string, such as 1993/09/09.

Do not use CEEDATE in combination with COBOL intrinsic functions.

The inverse of CEEDATE is CEEDAYS, which converts character dates to the Lilian format.

CEEDATE is affected only by the country code setting of the COUNTRY run-time option or CEE3CTY callable service, not the CEESETL callable service or the `setlocale()` function.

Syntax

```
►►CEEDATE—(—input_Lilian_date—,—picture_string—,——————►
►output_char_date—,—fc—)—————►◄
```

input_Lilian_date (input)

A 32-bit integer representing the Lilian date. The Lilian date is the number of days since 14 October 1582. For example, 16 May 1988 is Lilian day number 148138. The valid range of Lilian dates is 1 to 3,074,324 (15 October 1582 to 31 December 9999).

picture_string (input)

A halfword length-prefixed character string (VSTRING), representing the desired format of *output_char_date*, for example MM/DD/YY. Each character in *picture_string* represents a character in *output_char_date*. If delimiters such as the slash (/) appear in the picture string, they are copied to *output_char_date*.

See Table 29 on page 551 for a list of valid picture characters, and Table 30 on page 552 for examples of valid picture strings.

If *picture_string* is null or blank, CEEDATE gets *picture_string* based on the current value of the COUNTRY run-time option. For example, if the current value of the COUNTRY run-time option is US (United States), the date format would be MM/DD/YY. If the current COUNTRY value is FR (France), the date format would be MM/DD/YY HH:MM:SS AM (or PM), for example: 09/09/93 4:56:29 PM. This default mechanism makes it easy for translation centers to specify the preferred date, and for applications and library routines to use this format automatically.

If *picture_string* includes a Japanese Era symbol <JJJJ>, the YY position in *output_char_date* is replaced by the year number within the Japanese Era. For example, the year 1988 equals the Japanese year 63 in the Showa era. See Table 30 on page 552 for an additional example. Also see Table 31 on page 552 for a list of Japanese Eras supported by CEEDATE.

If *picture_string* includes a era symbol <CCCC> or <CCCCCCCC>, the YY position in *output_char_date* is replaced by the year number within the era. See Table 30 on page 552 for an example.

output_char_date (output)

A fixed-length 80-character string (VSTRING), is the result of converting *input_Lilian_date* to the format specified by *picture_string*. See Table 26 on page 258 for sample output dates. If *input_Lilian_date* is not valid, *output_char_date* is set to all blanks. CEEDATE terminates with a non-CEE000 symbolic feedback code.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE2EG	3	2512	The Lilian date value was not within the supported range.
CEE2EM	3	2518	An incorrect picture string was specified.
CEE2EQ	3	2522	<JJJJ>, <CCCC> or <CCCCCCCC> was used in a picture string passed to CEEDATE, but the Lilian date value was not within the supported range. The Era could not be determined.
CEE2EU	2	2526	The date string returned by CEEDATE was truncated.

Usage notes

- The probable cause for receiving message number 2518 is a picture string that contains a DBCS string that is not valid. You should verify that the data in the picture string is correct.
- To create a null VSTRING, set the length to zero; the content of the text portion does not matter. To create a blank VSTRING, any length greater than zero can be used; the content of the text portion must be spaces or blanks.
- z/OS UNIX consideration—In multithread applications, CEEDATE applies to the enclave.

For more information

- See the INTDATE COBOL compiler installation option in *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide* for information about how to get Lilian integer values from COBOL intrinsic functions that are compatible with the Language Environment callable services CEEDAYS and CEEDATE.
- See “CEEDAYS—Convert date to Lilian format” on page 266 for more information about the CEEDAYS callable service.
- See “COUNTRY” on page 22 for more information about the COUNTRY run-time option.
- See “CEEFMDA—Get default date format” on page 297 for information about how to get the default format for a given country code.

Examples

```

/*Module/File Name: EDCDATE */

#include <leawi.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4 lil_date = 139370; /* May 14, 1964 */
    _VSTRING date_pic,date;
    _CHAR80 date_out;

    strcpy(date_pic.string,
        "The date is WwwwwwwWZ, MmmmmmmmmZD, YYYY");
    date_pic.length = strlen(date_pic.string);

    CEEDATE(&lil_date,&date_pic,date_out,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDATE failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    printf("%.80s\n",date_out);
}

```

Figure 76. C/C++ Example of CEEDATE

```

CBL LIB,QUOTE
*Module/File Name: IGZTDATE
*****
**
** Function: CEEDATE - convert Lilian date to **
**                      character format      **
**
** In this example, a call is made to CEEDATE **
** to convert a Lilian date (the number of   **
** days since 14 October 1582) to a character **
** format (such as 6/22/88). The result is    **
** displayed. The Lilian date is obtained    **
** via a call to CEEDAYS.                     **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDATE.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 LILIAN                PIC S9(9) BINARY.
01 CHRDATE              PIC X(80).
01 IN-DATE.
   02 Vstring-length    PIC S9(4) BINARY.
   02 Vstring-text.
       03 Vstring-char  PIC X
                           OCCURS 0 TO 256 TIMES
                           DEPENDING ON Vstring-length
                           of IN-DATE.

```

Figure 77. COBOL Example of CEEDATE (Part 1 of 3)

```

01 PICSTR.
02 Vstring-length      PIC S9(4) BINARY.
02 Vstring-text.
03 Vstring-char       PIC X
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of PICSTR.

01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity          PIC S9(4) BINARY.
04 Msg-No           PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code       PIC S9(4) BINARY.
04 Cause-Code       PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.
PARA-CBLDAYS.
*****
** Call CEEDAYS to convert date of 6/2/88 to **
** Lilian representation **
*****
MOVE 6 TO Vstring-length of IN-DATE.
MOVE "6/2/88" TO Vstring-text of IN-DATE(1:6).
MOVE 8 TO Vstring-length of PICSTR.
MOVE "MM/DD/YY" TO Vstring-text of PICSTR(1:8).
CALL "CEEDAYS" USING IN-DATE, PICSTR,
                    LILIAN, FC.

*****
** If CEEDAYS runs successfully, display result**
*****
IF CEE000 of FC THEN
    DISPLAY Vstring-text of IN-DATE
        " is Lilian day: " LILIAN
ELSE
    DISPLAY "CEEDAYS failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

*****
** Specify picture string that describes the **
** desired format of the output from CEEDATE, **
** and the picture string's length. **
*****
MOVE 23 TO Vstring-length OF PICSTR.
MOVE "ZD Mmmmmmmmmmmmmmmz YYYY" TO
    Vstring-text OF PICSTR(1:23).

*****
** Call CEEDATE to convert the Lilian date **
** to a picture string. **
*****
CALL "CEEDATE" USING LILIAN, PICSTR,
                    CHRDATE, FC.

```

Figure 77. COBOL Example of CEEDATE (Part 2 of 3)

```
*****
** If CEEDATE runs successfully, display result**
*****
      IF CEE000 of FC THEN
          DISPLAY "Input Lilian date of " LILIAN
              " corresponds to: " CHRDATE
      ELSE
          DISPLAY "CEEDATE failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

      GOBACK.
```

Figure 77. COBOL Example of CEEDATE (Part 3 of 3)

```

*PROCESS MACRO;
  /*Module/File Name: IBMDATE */
  /*****
  /**
  /** Function: CEEDATE - convert Lilian date to */
  /** character format */
  /**
  /** In this example, a call is made to CEEDATE */
  /** to convert a date in the Lilian format */
  /** (the number of days since 14 October 1582) */
  /** to a date in character format. This date */
  /** is then printed out. */
  /**
  /**
  /*****
  PLIDATE: PROC OPTIONS(MAIN);

  %INCLUDE CEEIBMAW;
  %INCLUDE CEEIBMCT;

  DCL LILIAN REAL FIXED BINARY(31,0) ;
  DCL PICSTR CHAR(255) VARYING;
  DCL CHRDATE CHAR(80) ;
  DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI * Instance-Specific Information */
          REAL FIXED BINARY(31,0);

  LILIAN = 152385; /* input date in Lilian format */
  /* picture string that describes how converted */
  /* date is to be formatted */
  PICSTR = 'ZD Mmmmmmmmmmmmmz YYYY';

  /* Call CEE3DATE to convert input Lilian date to */
  /* a date in the character format specified in */
  /* PICSTR */
  CALL CEEDATE ( LILIAN , PICSTR , CHRDATE , FC );

  /* Print results if call to CEEDATE succeeds */
  IF FBCEK( FC, CEE000) THEN DO;
      PUT SKIP LIST( 'Lilian day ' || LILIAN
          || ' is equivalent to ' || CHRDATE );
      END;
  ELSE DO;
      DISPLAY( 'CEEDATE failed with msg '
          || FC.MsgNo );
      STOP;
      END;

  END PLIDATE;

```

Figure 78. PL/I Example of CEEDATE

Table 26 shows the sample output from CEEDATE.

Table 26. Sample Output of CEEDATE

input_Lillian_date	picture_string	output_char_date
148138	YY	88
	YYMM	8805
	YY-MM	88-05
	YYMMDD	880516
	YYYYMMDD	19880516
	YYYY-MM-DD	1988-05-16
	YYYY-ZM-ZD	1988-5-16
	JJJJ YY.MM.DD	Showa 63.05.16 (in a DBCS string)
	CCCC YY.MM.DD	Min Guo 77.05.16 (in a DBCS string)
148139	MM	05
	MMDD	0517
	MM/DD	05/17
	MMDDYY	051788
	MM/DD/YYYY	05/17/1988
	ZM/DD/YYYY	5/17/1988
148140	DD	18
	DDMM	1805
	DDMMYY	180588
	DD.MM.YY	18.05.88
	DD.MM.YYYY	18.05.1988
	DD Mmm YYYY	18 May 1988
148141	DDD	140
	YYDD	88148
	YY.DDD	88.140
	YYYY.DDD	1988.140
148142	YY/MM/DD HH:MI:SS.99	88/05/20 00:00:00.00
	YYYY/ZM/ZD ZH:MI AP	1988/5/20 0:00 AM
148143	WWW., MMM DD, YYYY	SAT., MAY 21, 1988
	Www., Mmm DD, YYYY	Sat., May 21, 1988
	Wwwwwwww Mmmmmmmmm	Saturdaybb,
	DD, YYYY	Maybbbbbb 21, 1988
	Wwwwwwwwz, Mmmmmmmmmz	Saturday, May 21,
	DD, YYYY	1988

CEEDATM—Convert seconds to character timestamp

CEEDATM converts a number representing the number of seconds since 00:00:00 14 October 1582 to a character string format. The format of the output is a character string timestamp, for example: 1988/07/26 20:37:00.

The inverse of CEEDATM is CEESECS, which converts a timestamp to number of seconds.

CEEDATM is affected only by the country code setting of the COUNTRY run-time option or CEE3CTY callable service, not the CEESETL callable service or the setlocale() function.

Syntax

```

▶▶CEEDATM(—input_seconds—,—picture_string—,—output_timestamp—,—
▶fc—)——▶▶

```

input_seconds (input)

A 64-bit double floating-point number representing the number of seconds since 00:00:00 on 14 October 1582, not counting leap seconds.

For example, 00:00:01 on 15 October 1582 is second number 86,401 ($24 \times 60 \times 60 + 01$). The valid range of *input_seconds* is 86,400 to 265,621,679,999.999 (23:59:59.999 31 December 9999).

picture_string (input)

A halfword length-prefixed character string (VSTRING), representing the desired format of *output_timestamp*, for example, MM/DD/YY HH:MI AP.

Each character in the *picture_string* represents a character in *output_timestamp*. If delimiters such as a slash (/) appear in the picture string, they are copied as is to *output_timestamp*.

See Table 29 on page 551 for a list of valid picture character terms and Table 30 on page 552 for examples of valid picture strings.

If *picture_string* is null or blank, CEEDATM gets *picture_string* based on the current value of the COUNTRY run-time option. For example, if the current value of the COUNTRY run-time option is US (United States), the date-time format would be “MM/DD/YY HH:MI:SS AP”; if the current COUNTRY value is FR (France), however, the date-time format would be “DD.MM.YYYY HH:MI:SS”.

If *picture_string* includes the Japanese Era symbol <JJJJ>, the YY position in *output_timestamp* represents the year within Japanese Era. See Table 30 on page 552 for an example. See Table 31 on page 552 for a list of Japanese Eras supported by CEEDATM.

If *picture_string* includes era symbol <CCCC> or <CCCCCCCC>, the YY position in *output_timestamp* represents the year within the era. See Table 30 on page 552 for an example.

output_timestamp (output)

A fixed-length 80-character string (VSTRING), that is the result of converting *input_seconds* to the format specified by *picture_string*.

If necessary, the output is truncated to the length of *output_timestamp*. See Table 27 on page 266 for sample output.

If *input_seconds* is not valid, *output_timestamp* is set to all blanks and CEEDATM terminates with a non-CEE000 symbolic feedback code.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.

Code	Severity	Message number	Message text
CEE2E9	3	2505	The number-of-seconds value was not within the supported range.
CEE2EA	3	2506	<JJJJ>, <CCCC> or <CCCCCCCC> was used in a picture string passed to CEEDATM, but the input number-of-seconds value was not within the supported range. The Era could not be determined.
CEE2EM	3	2518	An invalid picture string was specified.
CEE2EV	2	2527	The timestamp string returned by CEEDATM was truncated.
CEE3CF	2	3471	The country code <i>country-code</i> was not valid for CEEFMDT. The default date and time picture string <i>datetime-string</i> was returned.

Usage notes

- The probable cause for receiving message number 2518 is a picture string that contains a DBCS string that is not valid. You should verify that the data in the picture string is correct.
- To create a null VSTRING, set the length to zero; the content of the text portion does not matter. To create a blank VSTRING, any length greater than zero can be used; the content of the text portion must be spaces or blanks.
- z/OS UNIX consideration—In multithread applications, CEEDATM applies to the enclave.

For more information

- See “CEESECS—Convert timestamp to seconds” on page 467 for more information about the CEESECS callable service.
- See “COUNTRY” on page 22 for more information about the COUNTRY run-time option.
- See “CEEFMDT—Get default date and time format” on page 300 for information about how to get a default timestamp for a given country code.

Examples

```

/*Module/File Name: EDCDATM */

#include <leawi.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    /* September 13, 1991 at 11:23:23 PM */
    _FLOAT8 seconds = 12904183403.0;
    _VSTRING date,date_pic;
    _CHAR80 out_date;
    _FEEDBACK fc;

    strcpy(date_pic.string,
"MMMMMMMMMMz DD, YYYY at ZH:MI:.SS AP");
    date_pic.length = strlen(date_pic.string);

    CEEDATM(&seconds,&date_pic,out_date,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDATM failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    printf("%.80s\n",out_date);
}

```

Figure 79. C/C++ Example of CEEDATM

```

CBL LIB,QUOTE
*Module/File Name: IGZTDATM
*****
**
** Function: CEEDATM - convert seconds to
**                  character timestamp
**
** In this example, a call is made to CEEDATM
** to convert a date represented in Lilian
** seconds (the number of seconds since
** 00:00:00 14 October 1582) to a character
** format (such as 06/02/88 10:23:45). The
** result is displayed.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDATM.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 DEST          PIC S9(9) BINARY VALUE 2.
01 SECONDS       COMP-2.
01 IN-DATE.
   02 Vstring-length PIC S9(4) BINARY.
   02 Vstring-text.
       03 Vstring-char PIC X
           OCCURS 0 TO 256 TIMES
           DEPENDING ON Vstring-length
           of IN-DATE.

```

Figure 80. COBOL Example of CEEDATM (Part 1 of 3)

```

01 PICSTR.
02 Vstring-length      PIC S9(4) BINARY.
02 Vstring-text.
03 Vstring-char        PIC X
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of PICSTR.
01 TIMESTP              PIC X(80).
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity             PIC S9(4) BINARY.
04 Msg-No               PIC S9(4) BINARY.
03 Case-2-Condition-ID
                        REDEFINES Case-1-Condition-ID.
04 Class-Code           PIC S9(4) BINARY.
04 Cause-Code           PIC S9(4) BINARY.
03 Case-Sev-Ctl         PIC X.
03 Facility-ID          PIC XXX.
02 I-S-Info             PIC S9(9) BINARY.

PROCEDURE DIVISION.
PARA-CBLDATM.
*****
** Call CEESECS to convert timestamp of 6/2/88 **
** at 10:23:45 AM to Lilian representation **
*****
MOVE 20 TO Vstring-length of IN-DATE.
MOVE "06/02/88 10:23:45 AM"
    TO Vstring-text of IN-DATE.
MOVE 20 TO Vstring-length of PICSTR.
MOVE "MM/DD/YY HH:MI:SS AP"
    TO Vstring-text of PICSTR.
CALL "CEESECS" USING IN-DATE, PICSTR,
    SECONDS, FC.

*****
** If CEESECS runs successfully, display result**
*****
IF CEE000 of FC THEN
    DISPLAY Vstring-text of IN-DATE
        " is Lilian second: " SECONDS
ELSE
    DISPLAY "CEESECS failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

*****
** Specify desired format of the output.      **
*****
MOVE 35 TO Vstring-length OF PICSTR.
MOVE "ZD Mmmmmmmmmmmmmmmz YYYY at HH:MI:SS"
    TO Vstring-text OF PICSTR.

```

Figure 80. COBOL Example of CEEDATM (Part 2 of 3)

```
*****
** Call CEEDATM to convert Lilian seconds to **
** a character timestamp **
*****
      CALL "CEEDATM" USING SECONDS, PICSTR,
                          TIMESTP, FC.

*****
** If CEEDATM runs successfully, display result**
*****
      IF CEE000 of FC THEN
          DISPLAY "Input seconds of " SECONDS
              " corresponds to: " TIMESTP
      ELSE
          DISPLAY "CEEDATM failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

      GOBACK.
```

Figure 80. COBOL Example of CEEDATM (Part 3 of 3)

```

*PROCESS MACRO;
/*Module/File Name: IBMDATM

/*****
**
** Function: CEEDATM - Convert seconds to
** character timestamp
**
** In this example, CEEDATM is called to convert
** the number of seconds since 00:00:00 14
** October 1582 to the character format specified
** in PICSTR.
**
**
*****/

PLIDATM: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL SECONDS REAL FLOAT DECIMAL(16);
    DCL PICSTR CHAR(255) VARYING;
    DCL TIMESTP CHAR(80);
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    SECONDS = 13166064060; /* Input is Lilian seconds*/

    PICSTR = 'ZD Mmmmmmmmmmmmmz YYYY'; /* Picture */
    /* string describing desired output format */

    /* Call CEEDATM to convert Lilian seconds to
    /* format specified in PICSTR
    CALL CEEDATM ( SECONDS , PICSTR , TIMESTP , FC );

    /* If CEEDATM ran successfully, print result
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST(
            'Input Lilian seconds correspond to '
            || TIMESTP);
        END;
    ELSE DO;
        DISPLAY( 'CEEDATM failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLIDATM;

```

Figure 81. PL/I Example of CEEDATM

Table 27 shows the sample output of CEEDATM.

Table 27. Sample Output of CEEDATM

input_seconds	picture_string	output_timestamp
12,799,191,601.000	YYMMDD	880516
	HH:MI:SS	19:00:01
	YY-MM-DD	88-05-16
	YYMMDDHHMISS	880516190001
	YY-MM-DD HH:MI:SS	88-05-16
	YYYY-MM-DD HH:MI:SS	19:00:01
	AP	1988-05-16 07:00:01 PM
12,799,191,661.986	DD Mmm YY	16 May 88
	DD MMM YY HH:MM	16 MAY 88 19:01
	WWW, MMM DD, YYYY	MON, MAY 16,
	ZH:MI AP	1988 7:01 PM
	Wwwwwwwwwz, ZM/ZD/YY	Monday, 5/16/88
	HH:MI:SS.99	19:01:01.98
12,799,191,662.009	YYYY	1988
	YY	88
	Y	8
	MM	05
	ZM	5
	RRRR	Vbbb
	MMM	MAY
	Mmm	Maybbbbbb
	Mmmmmmmmm	May
	Mmmmmmmmmz	16
	DD	16
	ZD	137
	DDD	19
	HH	01
	ZH	02
	MI	00
	SS	009
	99	PM
	999	MON
	AP	Mon
	WWW	Mondaybbbb
	Www	Monday
	Wwwwwwwwwww	
	Wwwwwwwwwwz	

CEEDAYS—Convert date to Lilian format

CEEDAYS converts a string representing a date into a Lilian format, which represents a date as the number of days from the beginning of the Gregorian calendar. CEEDAYS converts the specified *input_char_date* to a number representing the number of days since day one in the Lilian format: Friday, 14 October, 1582.

Do not use CEEDAYS in combination with COBOL intrinsic functions unless the programs are compiled with the INTDATE(LILIAN) compiler option. Use CEECBLDY for COBOL programs that use intrinsic functions and that are compiled with INTDATE(ANSI).

CEEDAYS can convert a date into Lilian format. The inverse of CEEDAYS is CEEDATE, which converts *output_Lilian_date* from Lilian format to character format.

To handle dates earlier than 1601, it is possible to add 4000 to each year, convert to Lilian, calculate, subtract 4000 from the result, and then convert back to character format.

By default, 2-digit years lie within the 100-year range starting 80 years prior to the system date. Thus, in 1995, all 2-digit years represent dates between 1915 and 2014, inclusive. This default range is changed by using the callable service CEESCEN.

Syntax

```
►►CEEDAYS(—input_char_date—,—picture_string—,——————►
►output_Lilian_date—,—fc—)—————►◄
```

input_char_date (input)

A halfword length-prefixed character string (VSTRING), representing a date or timestamp, in a format conforming to that specified by *picture_string*.

The character string must contain between 5 and 255 characters, inclusive.

input_char_date can contain leading or trailing blanks. Parsing for a date begins with the first nonblank character (unless the picture string itself contains leading blanks, in which case CEEDAYS skips exactly that many positions before parsing begins).

After parsing a valid date, as determined by the format of the date specified in *picture_string*, CEEDAYS ignores all remaining characters. Valid dates range between and include 15 October 1582 to 31 December 9999.

See Table 29 on page 551 for a list of valid picture character terms that can be specified in *input_char_date*.

picture_string (input)

A halfword length-prefixed character string (VSTRING), indicating the format of the date specified in *input_char_date*.

Each character in the *picture_string* corresponds to a character in *input_char_date*. For example, if you specify MMDDYY as the *picture_string*, CEEDAYS reads an *input_char_date* of 060288 as 02 June 1988.

If delimiters such as a slash (/) appear in the picture string, leading zeros can be omitted. For example, the following calls to CEEDAYS:

```
CALL CEEDAYS('6/2/88' , 'MM/DD/YY' , lildate, fc);
CALL CEEDAYS('06/02/88' , 'MM/DD/YY' , lildate, fc);
CALL CEEDAYS('060288' , 'MMDDYY' , lildate, fc);
CALL CEEDAYS('88154' , 'YYDDD' , lildate, fc);
CALL CEEDAYS('1988154' , 'YYYYDDD' , lildate, fc);
```

would each assign the same value, 148155 (02 June 1988), to *lildate*.

Whenever characters such as colons or slashes are included in the *picture_string* (such as HH:MI:SS YY/MM/DD), they count as placeholders but are otherwise ignored.

See Table 29 on page 551 for a list of valid picture character terms and Table 30 on page 552 for examples of valid picture strings.

If *picture_string* includes a Japanese Era symbol <JJJJ>, the YY position in *input_char_date* is replaced by the year number within the Japanese Era. For example, the year 1988 equals the Japanese year 63 in the Showa era. See Table 30 on page 552 for an additional example. See also Table 31 on page 552 for a list of Japanese Eras supported by CEEDATE.

If *picture_string* includes era symbol <CCCC> or <CCCCCCCC>, the YY position in *input_char_date* is replaced by the year number within the era. See Table 30 on page 552 for an additional example.

output_Lilian_date (output)

A 32-bit binary integer representing the Lilian date, the number of days since 14 October 1582. For example, 16 May 1988 is day number 148138.

If *input_char_date* does not contain a valid date, *output_Lilian_date* is set to 0 and CEEDAYS terminates with a non-CEE000 symbolic feedback code.

Date calculations are performed easily on the *output_Lilian_date*, because it is an integer. Leap year and end-of-year anomalies do not affect the calculations.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE2EB	3	2507	Insufficient data was passed to CEEDAYS or CEESECS. The Lilian value was not calculated.
CEE2EC	3	2508	The date value passed to CEEDAYS or CEESECS was not valid.
CEE2ED	3	2509	The era passed to CEEDAYS or CEESECS was not recognized.
CEE2EH	3	2513	The input date was not within the supported range.
CEE2EL	3	2517	The month value was not recognized.
CEE2EM	3	2518	An incorrect picture string was specified.
CEE2EO	3	2520	CEEDAYS detected non-numeric data in a numeric field, or the date string did not match the picture string.
CEE2EP	3	2521	The year-within-era value passed to CEEDAYS or CEESECS was zero.

Usage notes

- The probable cause for receiving message number 2518 is a picture string that contains a DBCS string that is not valid. You should verify that the data in the picture string is correct.
- z/OS UNIX consideration—In multithread applications, CEEDAYS applies to the enclave.

For more information

- See the INTDATE COBOL compiler installation option in *Enterprise COBOL for z/OS Programming Guide* or *COBOL for OS/390 & VM Programming Guide* for

information about how to get Lilian integer values from COBOL intrinsic functions that are compatible with the Language Environment callable services CEEDAYS and CEEDATE.

- See “CEEDATE—Convert Lilian date to character format” on page 251 for more information about the CEEDATE run-time option.
- See “CEESCEN—Set the century window” on page 453 for more information about the CEESCEN callable service.

Examples

```
/*Module/File Name: EDCDAYS */

#include <leawi.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4 lil_date1,lil_date2;
    _VSTRING date,date_pic;

    /* use CEEDAYS to get the Lilian format */
    strcpy(date.string,"05/14/64");
    date.length = strlen(date.string);
    strcpy(date_pic.string,"MM/DD/YY");
    date_pic.length = strlen(date_pic.string);

    CEEDAYS(&date,&date_pic,&lil_date1,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDAYS failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    /* use CEEDAYS to get the Lilian format */
    strcpy(date.string,"August 14, 1966");
    date.length = strlen(date.string);
    strcpy(date_pic.string,"MMMMMMMMMMMM DD, YYYY");
    date_pic.length = strlen(date_pic.string);

    CEEDAYS(&date,&date_pic,&lil_date2,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDAYS failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    /* subtract the two Lilian dates to find out */
    /* difference in days */
    printf("The number of days between"
        " May 14, 1964 and August 14, 1966"
        " is: %d\n",lil_date2 - lil_date1);
}
```

Figure 82. C/C++ Example of CEEDAYS

```

CBL LIB,QUOTE
*Module/File Name: IGTDDAYS
*****
**
** Function: CEEDAYS - convert date to      **
**                               Lilian format  **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDAYS.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 CHRDATE.
   02 Vstring-length      PIC S9(4) BINARY.
   02 Vstring-text.
   03 Vstring-char        PIC X
                           OCCURS 0 TO 256 TIMES
                           DEPENDING ON Vstring-length
                           of CHRDATE.
01 PICSTR.
   02 Vstring-length      PIC S9(4) BINARY.
   02 Vstring-text.
   03 Vstring-char        PIC X
                           OCCURS 0 TO 256 TIMES
                           DEPENDING ON Vstring-length
                           of PICSTR.
01 LILIAN                  PIC S9(9) BINARY.
01 FC.
   02 Condition-Token-Value.
COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity            PIC S9(4) BINARY.
   04 Msg-No              PIC S9(4) BINARY.
   03 Case-2-Condition-ID
       REDEFINES Case-1-Condition-ID.
   04 Class-Code          PIC S9(4) BINARY.
   04 Cause-Code          PIC S9(4) BINARY.
   03 Case-Sev-Ctl        PIC X.
   03 Facility-ID         PIC XXX.
   02 I-S-Info            PIC S9(9) BINARY.

PROCEDURE DIVISION.
PARA-CBLDAYS.
*****
** Specify input date and length          **
*****
   MOVE 16 TO Vstring-length of CHRDATE.
   MOVE "1 January 2000"
     TO Vstring-text of CHRDATE.

```

Figure 83. COBOL Example of CEEDAYS (Part 1 of 2)

```

*****
** Specify a picture string that describes      **
** input date, and the picture string's length.**
*****
      MOVE 25 TO Vstring-length of PICSTR.
      MOVE "ZD Mmmmmmmmmmmmmz YYYY"
        TO Vstring-text of PICSTR.

*****
** Call CEEDAYS to convert input date to a      **
** Lilian date                                **
*****
      CALL "CEEDAYS" USING CHRDATE, PICSTR,
        LILIAN, FC.

*****
** If CEEDAYS runs successfully, display result**
*****
      IF CEE000 of FC THEN
        DISPLAY Vstring-text of CHRDATE
          " is Lilian day: " LILIAN
      ELSE
        DISPLAY "CEEDAYS failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.

      GOBACK.

```

Figure 83. COBOL Example of CEEDAYS (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMDAYS */
/*****
**
** Function      : CEEDAYS - Convert date to
**                  Lilian format
**
** This example converts two dates to the Lilian
** format in order to calculate the number of
** days between them.
**
*****/

PLIDAYS: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL CHRDATE CHAR(255) VARYING;
DCL CHRD2 CHAR(255) VARYING;
DCL PICSTR CHAR(255) VARYING;
DCL PICST2 CHAR(255) VARYING;
DCL LILIAN REAL FIXED BINARY(31,0);
DCL LIL2 REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

/* First date to be converted to Lilian format */

```

Figure 84. PL/I Example of CEEDAYS (Part 1 of 2)

```

CHRDATE = '5/7/69';

/* Picture string of first input date          */
PICSTR = 'ZM/ZD/YY';

/* Call CEEDAYS to convert input date to the   */
/* Lilian format                               */
CALL CEEDAYS ( CHRDATE , PICSTR , LILIAN , FC );
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'The Lilian date for ' || CHRDATE
        || ' is ' || LILIAN );
END;
ELSE DO;
    DISPLAY( 'CEEDAYS failed with msg '
        || FC.MsgNo );
    STOP;
END;

/* Second date to be converted to Lilian format */
CHRD2 = '1 January 2000';

/* Picture string of second input date          */
PICST2 = 'ZD Mmmmmmmmmmmmmmmmmz YYYY';

/* Call CEEDAYS to convert input date to the   */
/* Lilian format                               */
CALL CEEDAYS ( CHRD2 , PICST2 , LIL2 , FC );
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'The Lilian date for ' || CHRD2
        || ' is ' || LIL2 );
END;
ELSE DO;
    DISPLAY( 'CEEDAYS failed with msg '
        || FC.MsgNo );
    STOP;
END;

/* Subtract the two Lilian dates to find out   */
/* the difference in days between the two     */
/* input dates                                */
PUT SKIP LIST( 'The number of days between '
    || CHRDATE || ' and ' || CHRD2 || ' is'
    || LIL2 - LILIAN || '.' );

END PLIDAYS;

```

Figure 84. PL/I Example of CEEDAYS (Part 2 of 2)

CEEDCOD—Decompose a condition token

CEEDCOD alters an existing condition token.

Language Environment-conforming HLLs can decompose or alter the condition token fields without using the CEEDCOD service. See the CEESGL HLL examples in Figure 190 on page 484 for examples of how to alter the condition token field.

Syntax

```

►►CEEDCOD(—cond_token—,—c_1—,—c_2—,—case—,—severity—,—
►control—,—facility_ID—,—i_s_info—,—fc—)◄◄

```

cond_token (input)

A 12-byte condition token representing the current condition or feedback information.

c_1 (output)

A 2-byte binary integer representing the value of the first 2 bytes of the condition_ID.

c_2 (output)

A 2-byte binary integer representing the value of the second 2 bytes of the condition_ID. See “CEENCOD—Construct a condition token” on page 432 for a detailed explanation of the condition_ID.

case (output)

A 2-byte binary integer field defining the format of the condition_ID portion of the token. A value of 1 identifies a case 1 condition. A value of 2 identifies a case 2 condition. The values 0 and 3 are reserved.

severity (output)

A 2-byte binary integer representing the severity of the condition. *severity* specifies the following values:

- 0** Information only (or, if the entire token is zero, no information).
- 1** Warning—service completed, probably correctly.
- 2** Error detected—correction attempted; service completed, perhaps incorrectly.
- 3** Severe error—service not completed.
- 4** Critical error—service not completed; condition signaled. A critical error is a condition that jeopardizes the environment. If a critical error occurs during a Language Environment callable service, instead of returning synchronously to the caller, the condition manager is always signaled.

control (output)

A 2-byte binary integer containing flags describing aspects of the state of the condition. Valid values for the control field are 1 and 0. 1 indicates that the *facility_ID* is assigned by IBM. 0 indicates the *facility_ID* is assigned by the user.

facility_ID (output)

A 3-character field containing three alphanumeric characters identifying the product generating the condition or feedback information.

i_s_info

A fullword binary integer that identifies the ISI associated with the given instance of the condition represented by the condition token where it is contained. If an ISI is not associated with a given condition token, the *i_s_info* field contains a value of binary zero.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE036	3	0102	An unrecognized condition token was passed to <i>routine</i> and could not be used.

Usage notes

- C/C++ considerations—The structure of the condition token (`type_FEEDBACK`) is described in the `leawi.h` header file shipped with Language Environment. C users can assign values directly to the fields of the token in the header file without using the CEENCOD service.

The layout of the `type_FEEDBACK` condition token in the header file is shown in Figure 165 on page 434.

- z/OS UNIX consideration—In multithread applications, CEEDCOD affects only the calling thread.

For more information

- See the CEESGL HLL examples starting in Figure 190 on page 484 for examples of how to alter the condition token field.
- See “CEENCOD—Construct a condition token” on page 432 for a detailed explanation of the `condition_ID`.
- See CEENCOD “Usage notes” on page 434 for a discussion of case 1 and case 2 types.
- See the *facility_ID* parameter of “CEENCOD—Construct a condition token” on page 432 for more information.
- For more C user information about assigning values directly to the fields of the token in the header file without using the CEENCOD service, see the example for “CEESGL—Signal a condition” on page 481.

Examples

```

/*Module/File Name: EDCDCOD */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

/*****
/* In C/C++ it is not necessary to use this service.*/
/* The fields can be manipulated directly. See the */
/* example for CEESGL to see how to manipulate */
/* condition token fields directly. */
*****/

int main(void) {

    _FEEDBACK fc,newfc;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi, heapid, size;
    _POINTER address;

    heapid = 0;
    size = 4000;

    CEEGTST(&heapid,&size,&address,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEGTST failed with msgno %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    /* decompose the feedback token to check for errors */
    CEEDCOD(&fc,&c_1,&c_2,&cond_case,&sev,&control,facid,
        &isi,&newfc);

    if ( _FBCHECK ( newfc , CEE000 ) != 0 ) {
        printf("CEEDCOD failed with msgno %d\n",
            newfc.tok_msgno);
        exit(2889);
    }
    if (c_1 != 0 || c_2 != 0)
        printf(
            "c_1 and c_2 returned from CEEDCOD should be 0\n");
    /* .
    .
    . */
}

```

Figure 85. C/C++ Example of CEEDCOD

```

CBL LIB,QUOTE
*Module/File Name: IGZTDCOD
*****
**
** Function: CEEDCOD - Decompose a condition **
**          token                               **
**
** In this example, a call is made to          **
** CEEGTST in order to obtain a condition      **
** token to use in the call to CEEDCOD.        **
** A call could also have been made to any    **
** other Lang Env svc., or a condition token  **
** could have been constructed using          **
** CEEDCOD.                                   **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDCOD.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 HEAPID          PIC S9(9) BINARY.
01 HPSIZE          PIC S9(9) BINARY.
01 ADDRSS          USAGE POINTER.
01 SEV             PIC S9(4) BINARY.
01 MSGNO           PIC S9(4) BINARY.
01 CASE            PIC S9(4) BINARY.
01 SEV2            PIC S9(4) BINARY.
01 CNTRL           PIC S9(4) BINARY.
01 FACID           PIC X(3).
01 ISINFO          PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity        PIC S9(4) BINARY.
04 Msg-No          PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code      PIC S9(4) BINARY.
04 Cause-Code      PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.
01 FC2.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity        PIC S9(4) BINARY.
04 Msg-No          PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code      PIC S9(4) BINARY.
04 Cause-Code      PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

```

Figure 86. COBOL Example of CEEDCOD (Part 1 of 2)

```

PROCEDURE DIVISION.
*****
** Call any Lang Env svc to receive a condition**
**      token to use as input to CEEDCOD.      **
*****

PARA-CBLGTST.
*****
** Specify 0 to get storage from the initial  **
**      heap.                                **
** Specify 4000 to get 4000 bytes of storage. **
** Call CEEGTST to obtain storage.           **
*****

      MOVE 0 TO HEAPID.
      MOVE 4000 TO HPSIZE.

      CALL "CEEGTST" USING HEAPID, HPSIZE,
                          ADDRSS, FC.

PARA-CBLDCOD.
*****
** Use the FC returned from CEEGTST as an    **
**      input condition token to CEEDCOD.    **
*****

      CALL "CEEDCOD" USING FC, SEV, MSGNO, CASE,
                          SEV2, CNTRL, FACID,
                          ISINFO, FC2.
      IF CEE000 of FC2 THEN
          DISPLAY "CEEGTST completed with msg "
                  MSGNO ", Severity " SEV ", Case "
                  CASE ", Control " CNTRL ", and "
                  "Instance-Specific Information of "
                  ISINFO "."
      ELSE
          DISPLAY "CEEDCOD failed with msg "
                  Msg-No of FC2 UPON CONSOLE
      END-IF.

      GOBACK.

```

Figure 86. COBOL Example of CEEDCOD (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMDCOD */
/*****
**
** Function: CEEDCOD - decompose a condition **
** token **
**
** In this example, a call is made to CEEGTST to **
** receive a condition token to decompose. **
** A call could have been made to any LE/370 **
** service. The condition token returned by **
** CEEGTST is used as input to CEEDCOD. **
**
*****/
PLIDCOD: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL HEAPID REAL FIXED BINARY(31,0);
DCL STGSIZE REAL FIXED BINARY(31,0);
DCL ADDRSS POINTER;
DCL 01 FC, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

```

Figure 87. PL/I Example of CEEDCOD (Part 1 of 2)

```

DCL SEV      REAL FIXED BINARY(15,0);
DCL MSGNO    REAL FIXED BINARY(15,0);
DCL CASE     REAL FIXED BINARY(15,0);
DCL SEV2     REAL FIXED BINARY(15,0);
DCL CNTRL    REAL FIXED BINARY(15,0);
DCL FACID    CHARACTER ( 3 );
DCL ISINFO   REAL FIXED BINARY(31,0);
DCL 01 FC2,                                     /* Feedback token */
      03 MsgSev   REAL FIXED BINARY(15,0),
      03 MsgNo    REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case     BIT(2),
          05 Severity BIT(3),
          05 Control  BIT(3),
      03 FacID    CHAR(3),                      /* Facility ID */
      03 ISI      /* Instance-Specific Information */
                  REAL FIXED BINARY(31,0);

HEAPID = -1;    /* invalid heap ID */
STGSIZE = 4000; /* request 4000 bytes of storage */

/* Call any service (in this case, CEEGTST) to
/*      create a condition token to decompose
CALL CEEGTST ( HEAPID , STGSIZE , ADDRSS , FC );
/* Call CEEDCOD with the condition token
/*      returned in FC from CEEGTST
CALL CEEDCOD ( FC , SEV , MSGNO , CASE , SEV2 ,
              CNTRL , FACID , ISINFO , FC2 );
IF FBCHECK( FC2, CEE000) THEN DO;
    PUT SKIP LIST( 'Feedback token from CEEGTST has'
        || ' Severity of ' || SEV
        || ', Message Number of ' || MSGNO
        || ', Case of ' || CASE || ', ' );
    PUT SKIP LIST( ' Severity 2 of ' || SEV2
        || ', Control of ' || CNTRL
        || ', Facility ID of ' || FACID
        || ', and I-S-Info of ' || ISINFO || '.' );
END;
ELSE DO;
    DISPLAY( 'CEEDCOD failed with msg '
        || FC2.MsgNo );
STOP;
END;

END PLIDCOD;

```

Figure 87. PL/I Example of CEEDCOD (Part 2 of 2)

CEEDSHP—Discard heap

CEEDSHP discards an entire heap created by CEECRHP or by CEEGTST. CEECRHP and CEEGTST return a unique *heap_id* to the caller; use this ID in the CEEDSHP call. A *heap_id* of 0 is not permitted with CEEDSHP.

Discarding a heap with CEEDSHP immediately returns all storage allocated to the heap to the operating system, even if the KEEP suboption has been specified with the HEAP run-time option.

Syntax

```
►►CEEDSHP(—heap_id—,—fc—)◄◄
```

***heap_id* (input)**

A fullword binary signed integer. *heap_id* is a token specifying the discarded heap.

A *heap_id* of 0 is not valid; the initial heap is logically created during enclave initialization and cannot be discarded.

***fc* (output)**

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE0P2	4	0802	Heap storage control information was damaged.
CEE0P3	3	0803	The heap identifier in a get storage request or a discard heap request was unrecognized.
CEE0PC	3	0812	An invalid attempt to discard the Initial Heap was made.

Usage notes

- After the call to CEEDSHP, any existing pointers to storage allocated from this heap are dangling pointers, that is, pointers to storage that is freed. Using these pointers can cause unpredictable results.
- z/OS UNIX considerations—CEEDSHP applies to the enclave. Language Environment frees all storage in the heap regardless of which thread allocated it.

For more information

- For more information about the CEEDSHP callable service, see “CEE0RHP—Create new additional heap” on page 239.
- For more information about the CEEGTST callable service, and “CEE0TST—Get heap storage” on page 351.

Examples

```

/*Module/File Name: EDCDSHP  */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _INT4 heapid, size, increment, options;
    _FEEDBACK fc;
    /* .
     .
     . */
    heapid = 0;          /* heap identifier is set */
                        /* by CEECRHP */
    size = 4096;         /* initial size of heap */
                        /* (in bytes) */
    increment = 4096;    /* increment to extend */
                        /* the heap by */
    options = 72;        /* set up heap as */
                        /* (,ANYWHERE,FREE)*/

    /* create heap using CEECRHP */
    CEECRHP(&heapid,&size,&increment,&options,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEECRHP failed with message number %d\n",
               fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */

    /* discard the heap that was previously created */
    /* using CEECRHP */
    CEEDSHP(&heapid,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDSHP failed with message number %d\n",
               fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
}

```

Figure 88. C/C++ Example of CEEDSHP

```

CBL LIB,QUOTE
*Module/File Name: IGZTDSHP
*****
**                                     **
** Function: CEEDSHP - discard heap    **
**                                     **
** In this example, a new additional heap is **
** created a call to CEECRHP, and then    **
** discarded through a call to CEEDSHP.    **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDSHP.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 HEAPID          PIC S9(9) BINARY.
01 HPSIZE          PIC S9(9) BINARY.
01 INCR            PIC S9(9) BINARY.
01 OPTS            PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity        PIC S9(4) BINARY.
04 Msg-No          PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code      PIC S9(4) BINARY.
04 Cause-Code      PIC S9(4) BINARY.
03 Case-Sev-Ctl    PIC X.
03 Facility-ID     PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLCRHP.
*****
** Specify 0 for HEAPID, and heap id will    **
** be set by CEECRHP.                        **
** Heap size and increment will each be 4096 **
** bytes.                                    **
** Specify 00 for OPTS, and HEAP attributes  **
** will be inherited from the initial heap **
** (copied from the HEAP run-time option). **
*****
MOVE 0 TO HEAPID.
MOVE 4096 TO HPSIZE.
MOVE 4096 TO INCR.
MOVE 00 TO OPTS.

CALL "CEECRHP" USING HEAPID, HPSIZE,
                    INCR, OPTS, FC.
IF CEE000 of FC THEN
    DISPLAY "Created heap number " HEAPID
    " which is " HPSIZE " bytes long"
ELSE
    DISPLAY "CEECRHP failed with msg "
    Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

```

Figure 89. COBOL Example of CEEDSHP (Part 1 of 2)

```

*****
** To discard the heap, call CEEDSHP with the **
** heap id returned from CEECRHP.           **
*****
CALL "CEEDSHP" USING HEAPID, FC.
IF CEE000 of FC THEN
    DISPLAY "Disposed of heap # " HEAPID
ELSE
    DISPLAY "CEEDSHP failed with msg "
    Msg-No of FC UPON CONSOLE
END-IF.

GOBACK.

```

Figure 89. COBOL Example of CEEDSHP (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMSHP */
/*****/
/** */
/** Function: CEEDSHP - discard heap */
/** */
/** In this example, calls are made to CEECRHP */
/** and CEEDSHP to create a heap of 4096 bytes */
/** and then discard it. */
/** */
/*****/

PLIDSHP: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL HEAPID REAL FIXED BINARY(31,0) ;
    DCL HPSIZE REAL FIXED BINARY(31,0) ;
    DCL INCR REAL FIXED BINARY(31,0) ;
    DCL OPTS REAL FIXED BINARY(31,0) ;
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

```

Figure 90. PL/I Example of CEEDSHP (Part 1 of 2)

```

DCL 01 FC2,                                /* Feedback token */
      03 MsgSev    REAL FIXED BINARY(15,0),
      03 MsgNo     REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case    BIT(2),
          05 Severity BIT(3),
          05 Control  BIT(3),
      03 FacID     CHAR(3),                /* Facility ID */
      03 ISI       /* Instance-Specific Information */
                      REAL FIXED BINARY(31,0);

HEAPID = 0;    /* HEAPID will be set and          */
               /* returned by CEECRHP             */
HPSIZE = 4096; /* Initial size of heap in bytes   */
INCR = 4096;   /* Number of bytes to extend      */
               /* heap by                          */
OPTS = 00;     /* Set up heap with the same          */
               /* attributes as the initial         */
               /* heap (HEAPID = 0)                */

/* Call CEECRHP to set up new heap          */
CALL CEECRHP ( HEAPID, HPSIZE, INCR,
              OPTS, FC );
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'Created heap number ' || HEAPID
                  || ' consisting of ' || HPSIZE || ' bytes' );
END;
ELSE DO;
    DISPLAY( 'CEECRHP failed with msg '
            || FC.MsgNo );
    STOP;
END;

/* Call CEEDSHP to discard heap with the id */
/* returned by CEECRHP                      */
CALL CEEDSHP ( HEAPID, FC2 );
IF FBCEK( FC2, CEE000) THEN DO;
    PUT SKIP LIST( 'Disposed of heap number '
                  || HEAPID );
END;
ELSE DO;
    DISPLAY( 'CEEDSHP failed with msg '
            || FC2.MsgNo );
    STOP;
END;

END PLIDSHP;

```

Figure 90. PL/I Example of CEEDSHP (Part 2 of 2)

CEEDYWK—Calculate day of week from Lilian date

CEEDYWK calculates the day of the week on which a Lilian date falls. The day of the week is returned to the calling routine as a number between 1 and 7.

The number returned by CEEDYWK is useful for end-of-week calculations.

Syntax

```
►►CEEDYWK(—input_Lilian_date—,—output_day_no—,—fc—)◄◄
```

input_Lilian_date (input)

A 32-bit binary integer representing the Lilian date, the number of days since 14 October 1582.

For example, 16 May 1988 is day number 148138. The valid range of *input_Lilian_date* is between 1 and 3,074,324 (15 October 1582 and 31 December 9999).

output_day_no (output)

A 32-bit binary integer representing *input_Lilian_date*'s day-of-week: 1 equals Sunday, 2 equals Monday, ..., 7 equals Saturday.

If *input_Lilian_date* is invalid, *output_day_no* is set to 0 and CEEDYWK terminates with a non-CEE000 symbolic feedback code.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2EG	3	2512	The Lilian date value passed in a call to CEEDATE or CEEDYWK was not within the supported range.

Usage notes

- z/OS UNIX consideration—In multithread applications, CEEDYWK affects only the calling thread.
- COBOL consideration—The CEEDYWK callable service has different values than the COBOL ACCEPT statement with conceptual data item DAY-OF-WEEK. Use one or the other, not both.

Examples

```

/*Module/File Name: EDCDYWK */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main (void) {

    _INT4 in_date, day;
    _FEEDBACK fc;

    in_date = 139370; /* Thursday */

    CEEDYWK(&in_date,&day,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEDYWK failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    printf("Lilian date %d, occurs on a ",in_date);
    switch(day) {
        case 1: printf("Sunday.\n");
            break;
        case 2: printf("Monday.\n");
            break;
        case 3: printf("Tuesday.\n");
            break;
        case 4: printf("Wednesday.\n");
            break;
        case 5: printf("Thursday.\n");
            break;
        case 6: printf("Friday.\n");
            break;
        case 7: printf("Saturday.\n");
            break;
        default: printf(
            " ERROR! DAY RETURN BY CEEDYWK UNKNOWN\n");
            break;
    }
}

```

Figure 91. C/C++ Example of CEEDYWK

```

CBL LIB,QUOTE
*Module/File Name: IGZTDYWK
*****
**                                     **
** CBLDYWK - Call CEEDYWK to calculate the **
**           day of the week from Lilian date **
**                                     **
** In this example, a call is made to CEEDYWK **
** to return the day of the week on which a **
** Lilian date falls. (A Lilian date is the **
** number of days since 14 October 1582) **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLDYWK.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 LILIAN                PIC S9(9) BINARY.
01 DAYNUM                PIC S9(9) BINARY.
01 IN-DATE.
   02 Vstring-length     PIC S9(4) BINARY.
   02 Vstring-text.
   03 Vstring-char       PIC X,
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of IN-DATE.
01 PICSTR.
   02 Vstring-length     PIC S9(4) BINARY.
   02 Vstring-text.
   03 Vstring-char       PIC X,
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of PICSTR.
01 FC.
   02 Condition-Token-Value.
COPY CEEIGZCT.
   03 Case-1-Condition-ID.
       04 Severity      PIC S9(4) BINARY.
       04 Msg-No        PIC S9(4) BINARY.
   03 Case-2-Condition-ID
       REDEFINES Case-1-Condition-ID.
       04 Class-Code    PIC S9(4) BINARY.
       04 Cause-Code    PIC S9(4) BINARY.
   03 Case-Sev-Ctl      PIC X.
   03 Facility-ID       PIC XXX.
   02 I-S-Info          PIC S9(9) BINARY.

PROCEDURE DIVISION.
PARA-CBLDAYS.
** Call CEEDAYS to convert date of 6/2/88 to
** Lilian representation
MOVE 6 TO Vstring-length of IN-DATE.
MOVE "6/2/88" TO Vstring-text of IN-DATE(1:6).
MOVE 8 TO Vstring-length of PICSTR.
MOVE "MM/DD/YY" TO Vstring-text of PICSTR(1:8).
CALL "CEEDAYS" USING IN-DATE, PICSTR,
LILIAN, FC.

```

Figure 92. COBOL Example of CEEDYWK (Part 1 of 2)

```
** If CEEDAYS runs successfully, display result.
  IF CEE000 of FC THEN
    DISPLAY Vstring-text of IN-DATE
      " is Lilian day: " LILIAN
  ELSE
    DISPLAY "CEEDAYS failed with msg "
      Msg-No of FC UPON CONSOLE
    STOP RUN
  END-IF.

  PARA-CBLDYWK.

** Call CEEDYWK to return the day of the week on
** which the Lilian date falls
  CALL "CEEDYWK" USING LILIAN , DAYNUM , FC.

** If CEEDYWK runs successfully, print results
  IF CEE000 of FC THEN
    DISPLAY "Lilian day " LILIAN
      " falls on day " DAYNUM
      " of the week, which is a:"
** Select DAYNUM to display the name of the day
** of the week.
    EVALUATE DAYNUM
      WHEN 1
        DISPLAY "Sunday."
      WHEN 2
        DISPLAY "Monday."
      WHEN 3
        DISPLAY "Tuesday"
      WHEN 4
        DISPLAY "Wednesday."
      WHEN 5
        DISPLAY "Thursday."
      WHEN 6
        DISPLAY "Friday."
      WHEN 7
        DISPLAY "Saturday."
    END-EVALUATE
  ELSE
    DISPLAY "CEEDYWK failed with msg "
      Msg-No of FC UPON CONSOLE
    STOP RUN
  END-IF.

  GOBACK.
```

Figure 92. COBOL Example of CEEDYWK (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMDYWK */
/*****
**
** Function: CEEDYWK - calculate day of week **
** from Lilian date **
**
** In this example, CEEDYWK is called to **
** calculate the day of week on which a **
** Lilian date falls. **
**
** *****/
/*****

PLIDYWK: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL LILIAN REAL FIXED BINARY(31,0) ;
DCL DAYNUM REAL FIXED BINARY(31,0) ;
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

LILIAN = 152385; /* specify input as Lilian date */

/* Call CEEDYWK to calculate the day of the */
/* week on which Lilian date 152385 falls */
CALL CEEDYWK ( LILIAN , DAYNUM , FC );

/* If CEEDYWK ran successfully, print result */
IF FBCHECK( FC, CEE000) THEN DO;
  PUT SKIP LIST ( 'Lilian date ' || LILIAN
    || ' falls on a ' );
  SELECT (DAYNUM);
    WHEN (1) PUT LIST ( 'Sunday.' );
    WHEN (2) PUT LIST ( 'Monday.' );
    WHEN (3) PUT LIST ( 'Tuesday.' );
    WHEN (4) PUT LIST ( 'Wednesday.' );
    WHEN (5) PUT LIST ( 'Thursday.' );
    WHEN (6) PUT LIST ( 'Friday.' );
    WHEN (7) PUT LIST ( 'Saturday.' );
  END /* Case of DAYNUM */;
END;
ELSE DO;
  DISPLAY( 'CEEDYWK failed with msg '
    || FC.MsgNo );
  STOP;
END;

END PLIDYWK;

```

Figure 93. PL/I Example of CEEDYWK

CEEENV—Process environmental variables

CEEENV processes environment variables depending on the function code passed in as input. Based on the input to this function, CEEENV can do the following:

- Obtain the value for an existing environment variable
- Create a new environment variable with a value
- Clear all environment variables
- Delete an existing environment variable
- Overwrite the value for an existing environment variable

Syntax

```

▶▶—CEEENV—(—function_code—,—name_length—,—name—,—value_length—▶▶
▶,—value—,—fc—)——▶▶

```

function_code(input)

A fullword binary integer containing the function code of one of the following values:

1	Searches the environment table for environment variables specified by <i>name</i> and if found returns a pointer to <i>value</i> .
2	Adds an environment variable to the environment table. It does not overwrite an existing environment variable.
3	Clears all environment variables from the environment table.
4	Deletes an environment variable from the environment table.
5	Overwrites an existing environment variable in the environment table and adds the environment variable if it does not exist.

name_length(input)

A fullword binary integer containing the length of the name for the environment variable. If the request is for function code 3, this argument is ignored.

name(input)

Specifies the address of the name of an environment variable. If the request is for function code 3, this argument is ignored.

value_length(input/output)

A fullword binary integer containing the length of the value for the environment variable. This argument is input for setting or modifying an environment variable and output for getting an environment variable value. If the request is for function code 3 or 4, this argument is ignored.

value(input/output)

Specifies the address of a field that contains the address of a string containing the value of the environment variable. This argument is input for setting or modifying an environment variable and output for getting an environment variable value. If request is for function code 3 or 4, this argument is ignored. For function code 1 (get), the value address is 0 (NULL) if the name is not found in the environment.

fc (output)

The parameter in which the feedback code is placed. The following conditions can result from this service.

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE51O	3	5176	Not enough memory available.
CEE51P	3	5177	Bad input character detected for name or value.
CEE51Q	3	5178	Bad address detected for the ENVAR anchor or environment variable array.
CEE51R	3	5179	A parameter to the environment variable processing routine contained a value that was not valid.
CEE51S	0	5180	The specified environment variable name already exists.

Usage notes

- The environment array is searched sequentially and the first occurrence of *name* is used.
- Because an application can manipulate the environment using the environ pointer, Language Environment cannot guarantee a single instance of any particular environment variable.
- For a function code 1 request, the storage returned for the value character string is supplied by Language Environment. There is one buffer per thread, making it the user's responsibility to use or save the value before the next call for a function code 1 on that thread.
- Specifying 0 for *value_length* with function code 2 or 5 results in the environment variable being removed from the environment.
- Applications should not define environment variables that begin with the characters "_BPXK_", "_EDC_", or "_CEE_" because there might be conflicts with variable names reserved for z/OS that begin with those characters.
- *name* and *value* are copied into storage owned by Language Environment.
- If a function code 1 request is made and the variable name is not found in the environment, *value_length* is set to 0 upon return.
- A NULL character in *name* is not valid and causes the feedback code, CEE51P, to be returned.

Examples

```

/*Module/File Name: EDCENV    */
/*****
/*
/* THIS EXAMPLE CALLS CEEENV TO CLEAR THE ENVIRONMENT VARIABLE    */
/* ARRAY, SET AN ENVIRONMENT VARIABLE AND THEN GET THE VARIABLE    */
/* FROM THE ARRAY.                                                */
/*
/*****
#include <stdio.h>
#include <stdlib.h>
#include <leawi.h>

int main(void) {
    _INT4 func_code;
    _INT4 name_len;
    _POINTER name = (_POINTER)malloc(255);
    _INT4 value_len;
    _POINTER value_ptr;
    _FEEDBACK fc;
    char value[255];

    /* Clearing all the environment variables */
    func_code = 3;
    CEEENV(&func_code,&name_len,name,&value_len,&value_ptr,&fc);

    /* Setting a new environment variable */
    func_code = 2;
    strcpy(name,"ENVAR1");
    strcpy(value,"DEFAULT");
    name_len = strlen(name);
    value_len = strlen(value);
    value_ptr = value;
    CEEENV(&func_code,&name_len,name,&value_len,&value_ptr,&fc);

    /* Getting the value of the new variable */
    func_code = 1;
    strcpy(name,"ENVAR1");
    strcpy(value,"");
    value_ptr = value;
    CEEENV(&func_code,&name_len,name,&value_len,&value_ptr,&fc);

    if (value_len != 0)
        printf("$s=%s\n",name,value_ptr);
    else
        printf("$s not found\n",name);
}

```

Figure 94. C/C++ Example of CEEENV

CBL LIB,QUOTE

```

*****
*
*   IBM Language Environment
*
*   Licensed Materials - Property of IBM
*
*   5694-A01
*   (C) Copyright IBM Corp. 2005
*   All Rights Reserved
*
*   US Government Users Restricted Rights - Use,
*   duplication or disclosure restricted by GSA
*   ADP Schedule Contract with IBM Corp.
*
*****
*Module/File Name: IGZTENV
*****
** Function: CEEENV - Process environment variables
**
** This example calls CEEENV to clear the environment
** variable array, set an environment variable and then get
** the variable from the array.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGZTENV.

DATA DIVISION.
WORKING-STORAGE SECTION.

01  FUNCCODE  PIC 9(9) BINARY.
01  NAMELEN   PIC 9(9) BINARY.
01  VALUELEN  PIC 9(9) BINARY.
01  NAME      PIC X(255).
01  VALPTR    POINTER.

01  FC.
    02  CONDITION-TOKEN-VALUE.
        COPY CEEIGZCT.
            03  CASE-1-CONDITION-ID.
                04  SEVERITY      PIC S9(4) BINARY.
                04  MSG-NO        PIC S9(4) BINARY.
            03  CASE-SEV-CTL      PIC X.
            03  FACILITY-ID      PIC XXX.
            02  I-S-INFO          PIC S9(9) BINARY.
01  VAL      PIC X(255).

LINKAGE SECTION.
01  VAR      PIC X(5000).

PROCEDURE DIVISION.
MAIN-PROG.
*****
**   Clear environment array
*****
MOVE 3 TO FUNCCODE.
CALL "CEEENV" USING FUNCCODE,
                    NAMELEN,
                    NAME,
                    VALUELEN,
                    VALPTR,
                    FC.

```

```

*****
**   Set an environment variable
*****
MOVE 2 TO FUNCCODE.
MOVE "ENVVAR1" TO NAME

```

```
*****
**  Get the environment variable
*****
MOVE 1 TO FUNCCODE.
MOVE " " TO VAL.
MOVE 0 TO VALUELEN.
CALL "CEEENV" USING FUNCCODE,
                    NAMELEN,
                    NAME,
                    VALUELEN,
                    VALPTR,
                    FC.

IF VALUELEN NOT = 0 THEN
    SET ADDRESS OF VAR TO VALPTR
    DISPLAY NAME(1:NAMELEN) "=" VAR(1:VALUELEN)
ELSE
    DISPLAY NAME " NOT FOUND"
END-IF.

GOBACK.
```

Figure 95. COBOL Example of CEEENV (Part 2 of 2)

```

*PROCESS MACRO;
/*****
/*
/* Licensed Materials - Property of IBM
/*
/* 5694-A01 (C) Copyright IBM Corp. 2005
/* All rights reserved
/*
/* US Government Users Restricted Rights - Use,
/* duplication or disclosure restricted by GSA
/* ADP Schedule Contract with IBM Corp.
/*
/*
*****/
/*Module/File Name: IBMENV
*****/
*****/
**
** Function: CEEENV - process environment variables
**
** This example calls CEEENV to clear the environment variable
** array, set an environment variable and then get the variable
** from the array.
**
**
*****/
/*****
PLIENV: PROCEDURE OPTIONS (MAIN) REORDER;

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DECLARE FUNC_CODE      REAL FIXED BINARY(31,0);
DECLARE NAME_LEN       REAL FIXED BINARY(31,0);
DECLARE VALUE_LEN      REAL FIXED BINARY(31,0);
DECLARE NAME           CHAR(255) INIT('');
DECLARE VALUE          CHAR(255) INIT('');
DECLARE VALUE2         CHAR(255) BASED(VALUE_PTR);
DECLARE VALUE_PTR      POINTER;

DECLARE 01 LE_FEEDBACK_CODE,
        03 MSGSEV      REAL FIXED BINARY(15,0),
        03 MSGNO       REAL FIXED BINARY(15,0),
        03 FLAGS,
        05 CASE        BIT(2),
        05 SEVERITY    BIT(3),
        05 CONTROL     BIT(3),
        03 FACID       CHAR(3),
        03 ISI         REAL FIXED BINARY(31,0);

DECLARE MSG_STRING     CHAR(255) VARYING;
DECLARE MSG_DEST       REAL FIXED BINARY(31,0);
DECLARE SUBSTR BUILTIN;
DECLARE SYSPRINT FILE PRINT;

MSG_DEST = 2;

/*****
/* Clear all the environment variables */
*****/
FUNC_CODE = 3;
CALL CEEENV(FUNC_CODE,
            NAME_LEN,
            NAME,
            VALUE_LEN,
            VALUE_PTR,
            LE_FEEDBACK_CODE);

/*****
/* Set an environment variable
*****/
FUNC_CODE = 2;
NAME = 'ENVVAR1';

```

```

/*****
/* Get the variable, to see if added */
/*****
FUNC_CODE = 1;
NAME = 'ENVAR1';
VALUE = '';
NAME_LEN = 6;
VALUE_LEN = 0;
CALL CEEENV(FUNC_CODE,
            NAME_LEN,
            NAME,
            VALUE_LEN,
            VALUE_PTR,
            LE_FEEDBACK_CODE);

IF VALUE_LEN ^= 0 THEN DO;
    MSG_STRING = SUBSTR(NAME,1,NAME_LEN) ||
                ' = ' || SUBSTR(VALUE,1,VALUE_LEN);
    PUT SKIP LIST(MSG_STRING);
END;
ELSE DO;
    MSG_STRING = 'SET REQUEST UNSUCCESSFUL';
    PUT SKIP LIST(MSG_STRING);
END;
END PLIENV;

```

Figure 96. PL/I Example of CEEENV (Part 2 of 2)

CEEFMDA—Get default date format

CEEFMDA returns to the calling routine the default date picture string for a specified country.

CEEFMDA is affected only by the country code setting of the COUNTRY run-time option or CEE3CTY callable service, not the CEESETL callable service or the `setlocale()` function.

Syntax

```

▶▶ CEEFMDA(—country_code—,—date_pic_str—,—fc—)————▶▶

```

country_code (input)

A 2-character fixed-length string representing one of the country codes found in Table 28 on page 547.

country_code is not case-sensitive. Also, if no value is specified, the default country code (as set by either the COUNTRY run-time option or the CEE3CTY callable service) is used.

If you specify an invalid *country_code*, the default date format is 'YYYY-MM-DD'.

date_pic_str (output)

A fixed-length 80-character string (VSTRING), returned to the calling routine. It contains the default date picture string for the country specified. The picture string is left-justified and padded on the right with blanks if necessary.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3CB	2	3467	The country code <i>country_code</i> was invalid for CEEFMDA. The default date picture string <i>date_pic_string</i> was returned.

Usage notes

- z/OS UNIX considerations—CEEFMDA applies to the enclave. Every enclave has a single current country setting that has a single date format. Every thread in every enclave has the same default.

For more information

- For a list of the default settings for a specified country, see Table 28 on page 547.
- See “COUNTRY” on page 22 for an explanation of the COUNTRY run-time option.
- See “CEE3CTY—Set default country” on page 131 for an explanation of the CEE3CTY callable service.

Examples

```

/*Module/File Name: EDCFMDA  */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {
    _FEEDBACK fc;
    _CHAR2 country;
    _CHAR80 date_pic;

    /* get the default date format for Canada */
    memcpy(country,"CA",2);
    CEEFMDA(country,date_pic,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEFMDA failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* print out the default date format for Canada */
    printf("%.80s\n",date_pic);
}

```

Figure 97. C/C++ Example of CEEFMDA

```

CBL LIB,QUOTE
*Module/File Name: IGZTFMDA
*****
**
** CBLFMDA - Call CEEFMDA to obtain the **
**      default date format           **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLFMDA.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 COUNTRY                PIC X(2).
01 PICSTR                 PIC X(80).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
       03 Case-1-Condition-ID.
           04 Severity    PIC S9(4) BINARY.
           04 Msg-No     PIC S9(4) BINARY.
       03 Case-2-Condition-ID
           REDEFINES Case-1-Condition-ID.
           04 Class-Code  PIC S9(4) BINARY.
           04 Cause-Code  PIC S9(4) BINARY.
       03 Case-Sev-Ctl    PIC X.
       03 Facility-ID     PIC XXX.
   02 I-S-Info            PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLFMDA.
** Specify country code for the US and call
**      CEEFMDA to return the default date format
**      for the US.
      MOVE "US" TO COUNTRY.
      CALL "CEEFMDA" USING COUNTRY , PICSTR , FC.

** If CEEFMDA runs successfully, display result
      IF CEE000 of FC THEN
          DISPLAY "The default date format for "
                  "the US is: " PICSTR
      ELSE
          DISPLAY "CEEFMDA failed with msg "
                  Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.
      GOBACK.

```

Figure 98. COBOL Example of CEEFMDA

```

*PROCESS MACRO;
/* Module/File Name: IBMFMDA */
/*****
**                               **
** Function: CEEFMDA - obtain default date format **
**                               **
**                               **
*****/

PLIFMDA: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;
DCL COUNTRY CHARACTER ( 2 );
DCL PICSTR CHAR(80);
DCL 01 FC,                               /* Feedback token */
      03 MsgSev    REAL FIXED BINARY(15,0),
      03 MsgNo     REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case    BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID     CHAR(3),               /* Facility ID */
      03 ISI       /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

COUNTRY = 'US'; /* Specify country code for */
              /* the United States */

/* Get the default date format for the US */
CALL CEEFMDA ( COUNTRY , PICSTR , FC );

/* Print the default date format for the US */
IF FBCHECK( FC, CEE000) THEN DO;
  PUT SKIP LIST(
    'The default date format for the US is '
    || PICSTR );
  END;
ELSE DO;
  DISPLAY( 'CEEFMDA failed with msg '
    || FC.MsgNo );
  STOP;
  END;

END PLIFMDA;

```

Figure 99. PL/I Example of CEEFMDA

CEEFMDT—Get default date and time format

CEEFMDT returns the default date and time picture strings for the country specified by *country_code*.

CEEFMDT is affected only by the country code setting of the COUNTRY run-time option or CEE3CTY callable service, not the CEESETL callable service or the setlocale() function.

Syntax

```
►► CEEFMDT (—country_code—, —datetime_str—, —fc—) ◄◄
```

country_code (input)

A 2-character fixed-length string representing one of the country codes found in Table 28 on page 547.

country_code is not case-sensitive. Also, if no value is specified, the default country code (as set by either the COUNTRY run-time option or by CEE3CTY) is used.

If you specify an invalid *country_code*, the default date/time picture string is 'YYYY-MM-DD HH:MI:SS'.

datetime_str (output)

A fixed-length 80-character string (VSTRING), returned to the calling routine. It contains the default date and time picture string for the country specified. The picture string is left-justified and padded on the right with blanks, if necessary.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3CF	2	3471	The country code <i>country_code</i> was invalid for CEEFMDT. The default date and time picture string <i>datetime_str</i> was returned.

Usage notes

- z/OS UNIX considerations—CEEFMDT applies to the enclave. Every enclave has a single current country setting that has a single date and time format. Every thread in every enclave has the same default.

For more information

- For a list of the default settings for a specified country, see Table 28 on page 547.
- See “COUNTRY” on page 22 for an explanation of the COUNTRY run-time option.
- See “CEE3CTY—Set default country” on page 131 for an explanation of CEE3CTY.

Examples

```

/*Module/File Name: EDCFMDT */

#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {
    _FEEDBACK fc;
    _CHAR2 country;
    _CHAR80 date_pic;

    /* get the default date and time format for Canada */
    memcpy(country,"CA",2);
    CEEFMDT(country,date_pic,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEFMDT failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* print out the default date and time format */
    printf("%.80s\n",date_pic);
}

```

Figure 100. C/C++ Example of CEEFMDT

```

CBL LIB,QUOTE
*Module/File Name: IGZTFMDT
*****
**                                     **
** CBLFMDT - Call CEEFMDT to obtain the **
**           default date & time format **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLFMDT.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 COUNTRY                PIC X(2).
01 PICSTR                 PIC X(80).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
      03 Case-1-Condition-ID.
         04 Severity      PIC S9(4) BINARY.
         04 Msg-No       PIC S9(4) BINARY.
      03 Case-2-Condition-ID
         REDEFINES Case-1-Condition-ID.
         04 Class-Code   PIC S9(4) BINARY.
         04 Cause-Code  PIC S9(4) BINARY.
      03 Case-Sev-Ctl    PIC X.
      03 Facility-ID    PIC XXX.
02 I-S-Info             PIC S9(9) BINARY.

PROCEDURE DIVISION.
PARA-CBLFMDT.
** Specify country code for the US
   MOVE "US" TO COUNTRY.
** Call CEEFMDT to return the default date and
**   time format for the US
   CALL "CEEFMDT" USING COUNTRY , PICSTR , FC.

** If CEEFMDT runs successfully, display result.
   IF CEE000 of FC THEN
      DISPLAY "The default date and time "
        "format for the US is: " PICSTR
   ELSE
      DISPLAY "CEEFMDT failed with msg "
        Msg-No of FC UPON CONSOLE
      STOP RUN
   END-IF.
GOBACK.

```

Figure 101. COBOL Example of CEEFMDT

```

*PROCESS MACRO;
/* Module/File Name: IBMFMDT */
/*****
**
** Function: CEEFMDT - obtain default
**          date & time format
**
**
*****/

PLIFMDT: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL COUNTRY CHARACTER ( 2 );
DCL PICSTR CHAR(80);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
           05 Case BIT(2),
           05 Severity BIT(3),
           05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
           REAL FIXED BINARY(31,0);

COUNTRY = 'US'; /* Specify country code for
                /* the United States

/* Call CEEFMDT to get default date format
/* for the US
CALL CEEFMDT ( COUNTRY , PICSTR , FC );

/* Print default date format for the US
IF FBCheck( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'The default date and time '
    || 'format for the US is ' || PICSTR );
END;
ELSE DO;
    DISPLAY( 'CEEFMDT failed with msg '
    || FC.MsgNo );
STOP;
END;

END PLIFMDT;

```

Figure 102. PL/I Example of CEEFMDT

CEEFMON—Format monetary string

CEEFMON, analogous to the C function `strfmon()`, converts numeric values to monetary strings according to the specifications passed to it. These specifications work in conjunction with the format conversions set in the current locale. The current locale's `LC_MONETARY` category affects the behavior of this service, including the monetary radix character, the thousands separator, the monetary grouping, the currency symbols (national and international), and formats.

CEEFMON is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

```

▶▶ CEEFMON (—omitted_parm—,—stringin—,—maxsize—,—format—,—
▶—stringout—,—result—,—fc—)————▶▶

```

omitted_parm

This parameter is reserved for future expansion and must be omitted. For information on how to code an omitted parm, see “Invoking callable services” on page 109.

stringin (input)

An 8-byte field that contains the value of a double-precision floating point number.

maxsize (input)

A 4-byte integer that specifies the maximum number of bytes (including the string terminator) that can be placed in *stringout*.

format (input)

A halfword length-prefixed character string (VSTRING) of 256 bytes that contains plain characters and a conversion specification. Plain characters are copied to the output stream. Conversion specification results in the fetching of the input *stringin* argument that is converted and formatted.

A conversion specification consists of a percent character (%), optional flags, optional field width, optional left precision, optional right precision, and a required conversion character that determines the conversion to be performed.

Flags

You can specify one or more of the following flags to control the conversion.

- =f** An = followed by a single character *f* specifies that the character *f* should be used as the numeric fill character. The default numeric fill character is the space character. This option does not affect the other fill operations (such as field-width filling), which always use the space as the fill character.
- ^** Do not format the currency amount with the grouping characters. The default is to insert the grouping characters if defined for the current locale.
- + or (** Specifies the style of representing positive and negative currency amounts. You must specify either + or (. If + is specified, the locale’s equivalent of + and - are used (for example, in USA: the empty (null) string if positive and - (minus sign) if negative). If (is specified, the locale’s equivalent of enclosing negative amounts within a parenthesis is used. If this option is not included, a default specified by the current locale is used.
- !** Suppresses the currency symbol from the output conversion.

Field Width

- w** The decimal digit string *w* specifies a minimum field width in which the result of the conversion is right-justified (or left-justified if -*w* is specified).

Left Precision

#n A # (pound sign) followed by the decimal digit string *n* specifies a maximum number of digits expected to be formatted to the left of the radix character. This option can be used to keep the formatted output from multiple calls to the CEEFMON service aligned in the same columns. It can also be used to fill unused positions with a special character as in \$***123.45. This option causes an amount to be formatted as if it has the number of digits specified by *n*. If more digit positions are required than are specified, this conversion specification is ignored. Digit positions in excess of those actually required are filled with the numeric fill character. See the *=f* specification above.

If grouping is enabled, it is applied to the combined fill characters plus regular digits. However, if the fill character is not 0 (digit zero), grouping separators inserted after a fill character are replaced by the same fill character (\$0,001,234.56 versus \$****1,234.56).

Right Precision

.p A period followed by the decimal digit string *p* specifies the number of digits after the radix character. If the value of the precision *p* is zero, no radix character appears. If this option is not included, a default specified by the current locale is used. The amount being formatted is rounded to the specified number of digits prior to formatting.

Conversion Characters

i The double argument is formatted according to the locale's international currency format (for example, in USA: USD 1,234.56).

n The double argument is formatted according to the locale's national currency format (for example, in USA: \$1,234.56).

% No argument is converted; the conversion specification %% is replaced by a single %.

stringout (output)

Contains the output of the CEEFMON service.

result (output)

Contains the number of characters placed in *stringout*, if successful. If unsuccessful, an error is reported.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3T1	3	4001	General Failure: Service could not be completed.
CEE3VM	3	4086	Input Error: The number of characters to be formatted must be greater than zero.

Usage notes

- PL/I MTF consideration—CEEFMON is not supported in PL/I MTF applications.

- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.

For more information

- For more information about the `setlocale()` function, see “COUNTRY” on page 22, “CEE3CTY—Set default country” on page 131, and “CEE3LNG—Set national language” on page 181.
- For more information about the CEESETL callable service, see “CEESETL—Set locale operating environment” on page 475.

Examples

```

      CBL LIB,QUOTE
*Module/File Name: IGZTFMON
*****
* Example for callable service CEEFMON          *
* Function: Convert a numeric value to a        *
*           monetary string using specified    *
*           format passed as parameter.        *
* Valid only for COBOL for MVS & VM Release 2 *
* or later.                                    *
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. COBFMON.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 Monetary          COMP-2.
01 Max-Size          PIC S9(9)  BINARY.
01 Format-Mon.
   02 FM-Length      PIC S9(4)  BINARY.
   02 FM-String      PIC X(256).
01 Output-Mon.
   02 OM-Length      PIC S9(4)  BINARY.
   02 OM-String      PIC X(60).
01 Length-Mon        PIC S9(9)  BINARY.
01 Locale-Name.
   02 LN-Length      PIC S9(4)  BINARY.
   02 LN-String      PIC X(256).
** Use Locale category constants

```

Figure 103. COBOL Example of CEEFMON (Part 1 of 2)

```

COPY CEEIGZLC.
01 FC.
  02 Condition-Token-Value.
  COPY CEEIGZCT.
    03 Case-1-Condition-ID.
      04 Severity    PIC S9(4) BINARY.
      04 Msg-No     PIC S9(4) BINARY.
    03 Case-2-Condition-ID
      REDEFINES Case-1-Condition-ID.
      04 Class-Code PIC S9(4) BINARY.
      04 Cause-Code PIC S9(4) BINARY.
    03 Case-Sev-Ctl  PIC X.
    03 Facility-ID   PIC XXX.
  02 I-S-Info       PIC S9(9) BINARY.
**
  PROCEDURE DIVISION.
** Set up locale name for United States
  MOVE 14 TO LN-Length.
  MOVE "En_US.IBM-1047"
    TO LN-String (1:LN-Length).
** Set all locale categories to United States.
** Use LC-ALL category constant from CEEIGZLC.
  CALL "CEESETL" USING Locale-Name, LC-ALL, FC.
** Check feedback code
  IF Severity > 0
    DISPLAY "Call to CEESETL failed. " Msg-No
    STOP RUN
  END-IF.
** Set up numeric value
  MOVE 12345.62 TO Monetary.
  MOVE 60 TO Max-Size.
  MOVE 2 TO FM-Length.
  MOVE "%i" TO FM-String (1:FM-Length).
** Call CEEFMON to convert numeric value
  CALL "CEEFMON" USING OMITTED, Monetary,
    Max-Size, Format-Mon
    Output-Mon, Length-Mon,
    FC.

** Check feedback code and display result
  IF Severity > 0
    DISPLAY "Call to CEEFMON failed. " Msg-No
  ELSE
    DISPLAY "International format is "
      OM-String(1:OM-Length)
  END-IF.

  STOP RUN.
END PROGRAM COBFMON.

```

Figure 103. COBOL Example of CEEFMON (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMFMON */
/*****/
/* Example for callable service CEEFMON */
/* Function: Convert a numeric value to a monetary */
/* string using specified format passed as parm */
/*****/

PLIFMON: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs */
%INCLUDE CEEIBMCT; /* FBCECK macro, FB constants */
%INCLUDE CEEIBMLC; /* Locale category constants */

/* CEESETL service call arguments */
DCL LOCALE_NAME CHAR(14) VARYING;

/* CEEFMON service call arguments */
DCL MONETARY REAL FLOAT DEC(16); /* input value */
DCL MAXSIZE_FMON BIN FIXED(31); /* output size */
DCL FORMAT_FMON CHAR(256) VARYING; /* format spec */
DCL RESULT_FMON BIN FIXED(31); /* result status */
DCL OUTPUT_FMON CHAR(60) VARYING; /* output string */

DCL 01 FC, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

/* init locale name to United States */
LOCALE_NAME = 'En_US.IBM-1047';

/* use LC_ALL category constant from CEEIBMLC */
CALL CEESETL (LOCALE_NAME, LC_ALL, FC);

/* FBCECK macro used (defined in CEEIBMCT) */
IF FBCECK (FC, CEE2KE) THEN
DO; /* invalid locale name */
    DISPLAY ('Locale LC_ALL Call '||FC.MsgNo);
    STOP;
END;

```

Figure 104. PL/I Example of CEEFMON (Part 1 of 2)

```

MONETARY = 12345.62; /* monetary numeric value */
MAXSIZE_FMON = 60; /* max char length returned */
FORMAT_FMON = '%i'; /* international currency */

CALL CEEFMON ( *, /* optional argument */
              MONETARY , /* input, 8 byte floating point */
              MAXSIZE_FMON, /* maximum size of output string*/
              FORMAT_FMON, /* conversion request */
              OUTPUT_FMON, /* string returned by CEEFMON */
              RESULT_FMON, /* no. of chars in OUTPUT_FMON */
              FC ); /* feedback code structure */

IF RESULT_FMON = -1 THEN
DO;
/* FBCHECK macro used (defined in CEEIBMCT) */
IF FBCHECK( FC, CEE3VM ) THEN
DISPLAY ( 'Invalid input ' || MONETARY );
ELSE
DISPLAY ( 'CEEFMON not completed ' || FC.MsgNo );
STOP;
END;
ELSE
DO;
PUT SKIP LIST(
'International Format ' || OUTPUT_FMON );
END;
END PLIFMON;

```

Figure 104. PL/I Example of CEEFMON (Part 2 of 2)

CEEFMTM—Get default time format

CEEFMTM returns to the calling routine the default time picture string for the country specified by *country_code*. For a list of the default settings for a specified country, see Table 28 on page 547. CEEFMTM is affected only by the country code setting of the COUNTRY run-time option or CEE3CTY callable service, not the CEESETL callable service or the `setlocale()` function.

Syntax

```
►► CEEFMTM(—country_code—, —time_pic_str—, —fc—) ◀◀
```

country_code (input)

A 2-character fixed-length string representing one of the country codes found in Table 28 on page 547.

country_code is not case-sensitive. Also, if no value is specified, the default country code (as set by either the COUNTRY run-time option or the CEE3CTY callable service) is used.

If you specify an invalid *country_code*, the default time picture string is 'HH:MI:SS'.

time_pic_str (output)

A fixed-length 80-character string (VSTRING), representing the default time picture string for the country specified. The picture string is left-justified and padded on the right with blanks if necessary.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3CD	2	3469	The country code <i>country_code</i> was invalid for CEEFMTM. The default time picture string <i>time_pic_string</i> was returned.
CEE3CE	2	3470	The date and time string <i>datetime_str</i> was truncated and was not defined in CEEFMDT.

Usage notes

- z/OS UNIX considerations—CEEFMTM applies to the enclave. Every enclave has a single current country setting that has a single time format. Every thread in every enclave has the same default.

For more information

- See “COUNTRY” on page 22 for an explanation of the COUNTRY run-time option.
- See “CEE3CTY—Set default country” on page 131 for an explanation of the CEE3CTY callable service.

Examples

```

/*Module/File Name: EDCFMTM  */

#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {
    _FEEDBACK fc;
    _CHAR2 country;
    _CHAR80 time_pic;

    /* get the default time format for Canada */
    memcpy(country,"CA",2);
    CEEFMTM(country,time_pic,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEFMTM failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* print out the default time format */
    printf("%.80s\n",time_pic);
}

```

Figure 105. C/C++ Example of CEEFMTM

```

CBL LIB,QUOTE
*Module/File Name: IGZTFMTM
*****
**                                     **
** IGZTFMTM - Call CEEFMTM to obtain the **
**           default time format         **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGZTFMTM.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 COUNTRY                PIC X(2).
01 PICSTR                  PIC X(80).
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity               PIC S9(4) BINARY.
04 Msg-No                  PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code             PIC S9(4) BINARY.
04 Cause-Code             PIC S9(4) BINARY.
03 Case-Sev-Ctl           PIC X.
03 Facility-ID            PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLFMTM.
** Specify country code for the US.
    MOVE "US" TO COUNTRY.

** Call CEEFMTM to return the default time format
** for the US.
    CALL "CEEFMTM" USING COUNTRY , PICSTR , FC.

** If CEEFMTM runs successfully, display result.
    IF CEE000 of FC THEN
        DISPLAY "The default time format for "
            "the US is: " PICSTR
    ELSE
        DISPLAY "CEEFMTM failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.
GOBACK.

```

Figure 106. COBOL Example of CEEFMTM

```

*PROCESS MACRO;
/* Module/File Name: IBMFMTM */
/*****
**
** Function: CEEFMTM - obtain default time
**          format
**
** This example calls CEEFMTM to request the
** default time format for the US and print
** it out.
**
**
*****/
PLIFMTM: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL COUNTRY CHARACTER ( 2 );
DCL PICSTR CHAR(80);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

COUNTRY = 'US'; /* Specify country code for
                /* the United States */

/* Call CEEFMTM to get default time format for
/* the US */
CALL CEEFMTM ( COUNTRY , PICSTR , FC );

/* Print the default time format for the US */
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST(
        'The default time format for the US is '
        || PICSTR);
    END;
ELSE DO;
    DISPLAY( 'CEEFMTM failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLIFMTM;

```

Figure 107. PL/I Example of CEEFMTM

CEEFRST—Free heap storage

CEEFRST frees storage previously allocated by CEEGTST or by a language intrinsic function. Normally, you do not need to call CEEFRST because Language Environment automatically returns all heap storage to the operating system when the enclave terminates. However, if you are allocating a large amount of heap storage, you should free the storage when it is no longer needed. This freed storage then becomes available for later requests for heap storage, thus reducing the total amount of storage needed to run the application.

All requests for storage are conditional. If storage is not available, the feedback code (*fc*) is set and returned to you, but the thread does **not** abend. An attempt to free storage that was already marked as free produces no action and returns a non-CEE000 symbolic feedback code. An attempt to free storage at anything other than a valid starting address produces no action and returns a non-CEE000 symbolic feedback code. The application does not abend.

However, if you call CEEFRST for an invalid address, and you had specified TRAP(OFF), your application **can** abend. Language Environment's reaction to this is undefined. Also, partial freeing of an allocated area is not supported.

When storage is allocated by CEEGTST, its allocated size is used during free operations. Storage allocated by CEEGTST, but not explicitly freed, is automatically freed at enclave termination.

CEEFRST generates a system-level free storage call to return a storage increment to the operating system only when:

- The last heap element within an increment is being freed, and
- The HEAP run-time option or a call to CEECRHP specifies FREE (note that KEEP is the IBM-supplied default setting for the initial heap).

Otherwise, the freed storage is simply added to the free list; it is not returned to the operating system until termination. The out-of-storage condition can cause freeing of empty increments even when KEEP is specified.

Syntax

►► CEEFRST (—*address*—, —*fc*—) ◀◀

address (input)

A fullword address pointer. *address* is the address returned by a previous CEEGTST call or a language intrinsic function such as ALLOCATE or malloc(). The storage at this address is deallocated.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0P2	4	0802	Heap storage control information was damaged.
CEE0PA	3	0810	The storage address in a free storage (CEEFRST) request was not recognized, or heap storage (CEEZST) control information was damaged.

Usage notes

- If you specify *heap_free_value* in the STORAGE run-time option, all freed storage is overwritten with *heap_free_value*. Otherwise, it is simply marked as available.

Portions of the freed storage area can be used to hold internal storage manager control information. These areas are overwritten, but not with *heap_free_value*.

- The heap identifier is inferred from the address of the storage to be freed. The storage is freed from the heap in which it was allocated.
- The address passed as the argument is a dangling pointer after a call to CEEFRST. The storage freed by this operation can be reallocated on a subsequent CEEGTST call. If the pointer is not reassigned, any further use of it causes unpredictable results.
- z/OS UNIX considerations—CEEFRST applies to the enclave. One thread can allocate storage, and another can free it.

For more information

- See “CEEGTST—Get heap storage” on page 351 for more information about the CEEGTST callable service.
- See “HEAP” on page 36 for further information about the HEAP run-time option.
- See “CEECRHP—Create new additional heap” on page 239 for more information about the CEECRHP callable service.
- See “STORAGE” on page 72 for further information about the STORAGE run-time option.

Examples

```

/*Module/File Name: EDCFRST  */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {
    _INT4 heapid, size;
    _POINTER address;
    _FEEDBACK fc;
    /* .
     .
     . */
    heapid = 0;    /* get storage from initial heap */
    size = 4000;   /* number of bytes of heap storage */

    /* obtain the storage using CEEGTST */
    CEEGTST(&heapid,&size,&address,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEGTST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */

    /* free the storage that was previously obtained */
    /* using CEEGTST */
    CEEFRST(&address,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEFRST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     .
     . */
}

```

Figure 108. C/C++ Example of CEEFRST

```

CBL LIB,QUOTE
*Module/File Name: IGZTFRST
*****
**
** IGZTFRST - Call CEEFRST to free heap
**           storage
**
** In this example, a call is made to
** CEEGTST to obtain 4000 bytes of storage
** from the initial heap (HEAPID = 0).
** A call is then made to CEEFRST to free
** the storage.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGZTFRST.
DATA DIVISION.
WORKING-STORAGE SECTION.
01  HEAPID          PIC S9(9) BINARY.
01  STGSIZE         PIC S9(9) BINARY.
01  ADDRSS         USAGE IS POINTER.
01  FC.
    02  Condition-Token-Value.
        COPY CEEIGZCT.
            03  Case-1-Condition-ID.
                04  Severity    PIC S9(4) BINARY.
                04  Msg-No     PIC S9(4) BINARY.
            03  Case-2-Condition-ID
                REDEFINES Case-1-Condition-ID.
                04  Class-Code  PIC S9(4) BINARY.
                04  Cause-Code  PIC S9(4) BINARY.
            03  Case-Sev-Ctl    PIC X.
            03  Facility-ID     PIC XXX.
    02  I-S-Info              PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLFRST.

** Specify 0 to get storage from the initial
** heap.
** Specify 4000 to get 4000 bytes of storage.
** Call CEEGTST to obtain storage.
    MOVE 0 TO HEAPID.
    MOVE 4000 TO STGSIZE.

    CALL "CEEGTST" USING HEAPID , STGSIZE ,
        ADDRSS , FC.
    IF CEE000 of FC THEN
        DISPLAY "Obtained " STGSIZE " bytes of"
            " storage at location " ADDRSS
            " from heap number " HEAPID
    ELSE
        DISPLAY "CEEGTST failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

```

Figure 109. COBOL Example of CEEFRST (Part 1 of 2)

```

** To free storage, use the address returned
**   by CEECRHP in the call to CEEFRST.
CALL "CEEFRST" USING ADDRSS , FC.
IF CEE000 of FC THEN
    DISPLAY "Returned " STGSIZE " bytes of"
           " storage at location " ADDRSS
           " to heap number " HEAPID
ELSE
    DISPLAY "CEEFRST failed with msg "
           Msg-No of FC UPON CONSOLE
END-IF.
GOBACK.

```

Figure 109. COBOL Example of CEEFRST (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMFRST */
/***** */
/** */
/** Function: CEEFRST - free heap storage */
/** */
/** This example calls CEEGTST to obtain storage */
/** from the initial heap, and then calls */
/** CEEFRST to discard it. */
/** */
/***** */
PLIFRST: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL ADDRSS POINTER;
DCL HEAPID REAL FIXED BINARY(31,0);
DCL STGSIZE REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

DCL 01 FC2, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

HEAPID = 0; /* get storage from the initial heap */

```

Figure 110. PL/I Example of CEEFRST (Part 1 of 2)

```

STGSIZE = 4000;  /* get 4000 bytes of storage */

/* Call CEEGTST to obtain the storage */
CALL CEEGTST ( HEAPID, STGSIZE, ADDRSS, FC );
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'Obtained ' || STGSIZE
        || ' bytes of storage at location '
        || DECIMAL( UNSPEC( ADDRSS ) )
        || ' from heap ' || HEAPID );
    END;
ELSE DO;
    DISPLAY( 'CEEGTST failed with msg '
        || FC.MsgNo );
    STOP;
END;

/* Call CEEFRST with the address returned from */
/* CEEGTST to free the storage allocated by */
/* the call to CEEGTST */
CALL CEEFRST ( ADDRSS, FC2 );
IF FBCEK( FC2, CEE000) THEN DO;
    PUT SKIP LIST( 'Storage block at location '
        || DECIMAL( UNSPEC( ADDRSS ) ) || ' freed');
    END;
ELSE DO;
    DISPLAY( 'CEEFRST failed with msg '
        || FC2.MsgNo );
    STOP;
END;

END PLIFRST;

```

Figure 110. PL/I Example of CEEFRST (Part 2 of 2)

CEEFTDS—Format time and date into character string

CEEFTDS, analogous to the C function `strftime()`, converts the internal time and date to character strings according to the specifications passed to it by the `TD_STRUCT`. These specifications work in conjunction with the format conversions set in the current locale. The current locale's `LC_TIME` category affects the behavior of this service, including the actual values for the format specifiers.

CEEFTDS is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

```

►►CEEFTDS(—omitted_parm—,—time_and_date—,—maxsize—,—format—,—
►stringout—,—fc—)►►

```

omitted_parm

This parameter is reserved for future expansion and must be omitted. For information on how to code an omitted parm, see “Invoking callable services” on page 109.

time_and_date (input)

Points to the time structure that is to be converted.

td_sec

A 4-byte integer that describes the number of seconds in the range of 0 through 59.

td_min

A 4-byte integer that describes the number of minutes in the range of 0 through 59.

td_hour

A 4-byte integer that describes the number of hours in the range of 0 through 23.

td_mday

A 4-byte integer that describes the day of the month in the range of 1 through 31.

td_mon

A 4-byte integer that describes the month of the year in the range of 0 through 12.

td_year

A 4-byte integer that describes the year of an era.

td_wday

A 4-byte integer that describes the day of the week in the range of 0 through 6.

td_yday

A 4-byte integer that describes the day of the year in the range of 0 through 365.

td_isdst

A 4-byte integer that is a flag for daylight savings time.

maxsize (input)

A 4-byte integer that specifies the maximum length (including the string terminator) of the string that can be placed in *stringout*.

format (input)

A halfword length-prefixed character string (VSTRING) of 256 bytes that contains the conversion specifications.

The format parameter is a character string containing two types of objects: plain characters that are placed in the output string and conversion specifications that convert information from *time_and_date* into readable form in the output string. Each conversion specification is a sequence of this form:

%[-][width][.precision]type

- A percent sign (%) introduces a conversion specification.
- An optional decimal digit string specifies a minimum field width. A converted value that has fewer characters than the field width is padded with spaces to the left. If the decimal digit string is preceded by a minus sign, padding with spaces occurs to the right of the converted value.

If no width is given, for numeric fields the appropriate default width is used with the field padded on the left with zeros as required. For strings, the output field is made exactly wide enough to contain the string.

- An optional precision value gives the maximum number of characters to be printed for the conversion specification. The precision value is a decimal digit string preceded by a period. If the value to be output is longer than the precision, it is truncated on the right.
- The type of conversion is specified by one or two conversion characters. The characters and their meanings are:

%a	The abbreviated weekday name (for example, Sun) defined by the <i>abday</i> statement in the current locale.
%A	The full weekday name (for example, Sunday) defined by the <i>day</i> statement in the current locale.
%b	The abbreviated month name (for example, Jan) defined by the <i>abmon</i> statement in the current locale.
%B	The full month name (for example, January) defined by the <i>month</i> statement in the current locale.
%c	The date and time format defined by the <i>d_t_fmt</i> statement in the current locale.
%d	The day of the month as a decimal number (01 to 31).
%D	The date in <i>%m/%d/%y</i> format (for example, 01/31/91).
%e	The day of the month as a decimal number (1 to 31). The <i>%e</i> field descriptor uses a two-digit field. If the day of the month is not a two-digit number, the leading digit is filled with a space character.
%E	The combined alternative era year and name, respectively, in <i>%o %N</i> format in the current locale.
%F	The ISO 8601:2000 standard date format, equivalent to <i>%Y-%m-%d</i> .
%g	The last 2 digits of the week-based year as a decimal number [00,99].
%G	The week-based year as a 4-digit decimal number.
%h	The abbreviated month name (for example, Jan) defined by the <i>abmon</i> statement in the current locale. This field descriptor is a synonym for the <i>%b</i> field descriptor.
%H	The 24-hour clock hour as a decimal number (00 to 23).
%I	The 12-hour clock hour as a decimal number (01 to 12).
%j	The day of the year as a decimal number (001 to 366).
%m	The month of the year as a decimal number (01 to 12).
%M	The minutes of the hour as a decimal number (00 to 59).
%n	Specifies a new-line character.
%N	The alternative era name in the current locale.
%o	The alternative era year in the current locale.
%p	The AM or PM string defined by the <i>am_pm</i> statement in the current locale.
%r	The 12-hour clock time with AM/PM notation as defined by the <i>t_fmt_ampm</i> statement (<i>%I:%M:%S [AM/PM]</i>) in the current locale.
%S	The seconds of the minute as a decimal number (00 to 60).

%t	Specifies a tab character.
%T	Represents 24-hour clock time in the format <i>%H:%M:%S</i> (for example, 16:55:15).
%U	The week of the year as a decimal number (00 to 53). Sunday, or its equivalent as defined by the <i>day</i> statement, is considered the first day of the week for calculating the value of this field descriptor.
%w	The day of the week as a decimal number (0 to 6). Sunday, or its equivalent as defined by the <i>.day</i> statement, is considered as 0 for calculating the value of this field descriptor.
%W	The week of the year as a decimal number (00 to 53). Monday, or its equivalent as defined by the <i>day</i> statement, is considered the first day of the week for calculating the value of this field descriptor.
%x	The date format defined by the <i>d_fmt</i> statement in the current locale.
%X	The time format defined by the <i>t_fmt</i> statement in the current locale.
%y	The year of the century (00 to 99).
%Y	The year as a decimal number (for example, 1989).
%z	The offset from UTC in ISO8601:2000 standard format (<i>+hhmm</i> or <i>-hhmm</i>). For example, "-0430" means 4 hours 30 minutes behind UTC (west of Greenwich).
%Z	The time-zone name, if one can be determined (for example, EST); no characters are displayed if a time zone cannot be determined.
%%	Specifies a percent sign (%) character.

stringout (output)

A halfword length-prefixed character string (VSTRING) of 256 bytes that contains the formatted time and date output of the CEEFTDS service.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following feedback codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3T1	3	4001	General Failure: Service could not be completed.
CEE3VM	3	4086	Input Error: The number of characters to be formatted must be greater than zero.

Usage notes

- PL/I MTF consideration—CEEFTDS is not supported in PL/I MTF applications.
- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.

For more information

- For more information about the `setlocale()` function, see "COUNTRY" on page 22, "CEE3CTY—Set default country" on page 131, and "CEE3LNG—Set national language" on page 181.

- For more information about the CEESETL callable service, see “CEESETL—Set locale operating environment” on page 475.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGZTFDTS
*****
* Example for callable service CEEFTDS          *
* Function: Convert numeric time and date       *
*          values to a string using specified  *
*          format string and locale format     *
*          conversions.                        *
* Valid only for COBOL for MVS & VM Release 2 *
* or later.                                    *
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. MAINFTDS.
DATA DIVISION.
WORKING-STORAGE SECTION.
* Use TD-Struct for CEEFTDS calls
COPY CEEIGZTD.
*

PROCEDURE DIVISION.
* Subroutine needed for pointer addressing
CALL "COBFTDS" USING TD-Struct.

STOP RUN.
*
IDENTIFICATION DIVISION.
PROGRAM-ID. COBFTDS.
DATA DIVISION.
WORKING-STORAGE SECTION.
* Use Locale category constants
COPY CEEIGZLC.
*
01 Ptr-FTDS POINTER.
01 Output-FTDS.
   02 O-Length PIC S9(4) BINARY.
   02 O-String PIC X(72).
01 Format-FTDS.
   02 F-Length PIC S9(4) BINARY.
   02 F-String PIC X(64).
01 Max-Size PIC S9(9) BINARY.

```

Figure 111. COBOL Example of CEEFTDS (Part 1 of 2)

```

01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
LINKAGE SECTION.
* Use TD-Struct for calls to CEEFTDS
COPY CEEIGZTD.
*
PROCEDURE DIVISION USING TD-Struct.
* Set up time and date values
MOVE 1 TO TM-Sec.
MOVE 2 TO TM-Min.
MOVE 3 TO TM-Hour.
MOVE 9 TO TM-Day.
MOVE 11 TO TM-Mon.
MOVE 94 TO TM-Year.
MOVE 5 TO TM-Wday.
MOVE 344 TO TM-Yday.
MOVE 1 TO TM-Is-DLST.

* Set up format string for CEEFTDS call
MOVE 72 TO Max-Size.
MOVE 36 TO F-Length.
MOVE "Today is %A, %b %d Time: %I:%M %p"
    TO F-String (1:F-Length).

* Set up pointer to structure for CEEFTDS call
SET Ptr-FTDS TO ADDRESS OF TD-Struct.

* Call CEEFTDS to convert numeric values
CALL "CEEFTDS" USING OMITTED, Ptr-FTDS,
    Max-Size, Format-FTDS,
    Output-FTDS, FC.

* Check feedback code and display result
IF Severity = 0
    DISPLAY "Format " F-String (1:F-Length)
    DISPLAY "Result " O-String (1:O-Length)
ELSE
    DISPLAY "Call to CEEFTDS failed. " Msg-No
END-IF.

EXIT PROGRAM.
END PROGRAM COBFTDS.
*
END PROGRAM MAINFTDS.

```

Figure 111. COBOL Example of CEEFTDS (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMFTDS */
/*****
/* Example for callable service CEEFTDS */
/* Function: Convert numeric time and date values */
/* to a string based on a format specification */
/* string parameter and locale format conversions */
*****/

PLIFTDS: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs */
%INCLUDE CEEIBMCT; /* FBCHECK macro, FB constants */
%INCLUDE CEEIBMLC; /* Locale category constants */
%INCLUDE CEEIBMTD; /* TD_STRUCT for CEEFTDS calls */

/* use explicit pointer to local TD_STRUCT structure*/
DCL TIME_AND_DATE POINTER INIT(ADDR(TD_STRUCT));

/* CEEFTDS service call arguments */
DCL MAXSIZE_FTDS BIN FIXED(31); /* OUTPUT_FTDS size */
DCL FORMAT_FTDS CHAR(64) VARYING; /* format string */
DCL OUTPUT_FTDS CHAR(72) VARYING; /* output string */

```

Figure 112. PL/I Example of CEEFTDS (Part 1 of 2)

```

DCL 01 FC,                                /* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case    BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID     CHAR(3),                /* Facility ID */
    03 ISI       /* Instance-Specific Information */
                REAL FIXED BINARY(31,0);

/* specify numeric input fields for conversion */
TD_STRUCT.TM_SEC=1; /* seconds after min (0-61) */
TD_STRUCT.TM_MIN=2; /* minutes after hour (0-59)*/
TD_STRUCT.TM_HOUR=3; /* hours since midnight(0-23)*/
TD_STRUCT.TM_MDAY=9; /* day of the month (1-31) */
TD_STRUCT.TM_MON=11; /* months since Jan(0-11) */
TD_STRUCT.TM_YEAR=94; /* years since 1900 */
TD_STRUCT.TM_WDAY=5; /* days since Sunday (0-6) */
TD_STRUCT.TM_YDAY=344; /* days since Jan 1 (0-365) */
TD_STRUCT.TM_ISDST=1; /* Daylight Saving Time flag*/

/* specify format string for CEEFTDS call */
FORMAT_FTDS = 'Today is %A, %b %d Time: %I:%M %p';

MAXSIZE_FTDS = 72; /* specify output string size */

CALL CEEFTDS ( *, TIME_AND_DATE, MAXSIZE_FTDS,
              FORMAT_FTDS, OUTPUT_FTDS, FC );

/* FBCHECK macro used (defined in CEEIBMCT) */
IF FBCHECK( FC, CEE000 ) THEN
    DO; /* CEEFTDS call is successful */
        PUT SKIP LIST('Format '||FORMAT_FTDS );
        PUT SKIP LIST('Results in '||OUTPUT_FTDS );
    END;
ELSE
    DISPLAY ( 'Format '||FORMAT_FTDS||
              ' Results in '||FC.MsgNo );

END PLIFTDS;

```

Figure 112. PL/I Example of CEEFTDS (Part 2 of 2)

CEEGMT—Get current Greenwich Mean Time

CEEGMT returns the current Greenwich Mean Time (GMT) as both a Lilian date and as the number of seconds since 00:00:00 14 October 1582. The returned values are compatible with those generated and used by the other Language Environment date and time services.

In order for the results of this service to be meaningful, your system's TOD (time-of-day) clock must be set to Greenwich Mean Time and be based on the standard epoch. Use CEEGMT0 to get the offset from GMT to local time.

The values returned by CEEGMT are handy for elapsed time calculations. For example, you can calculate the time elapsed between two calls to CEEGMT by calculating the differences between the returned values.

Language Environment treats Coordinated Universal Time (UTC) and Greenwich Mean Time (GMT) as the same. You can use the CEEUTC service, which is an alias of the CEEGMT service, to get the same value.

Syntax

```
►► CEEGMT—(—output_GMT_Lilian—,—output_GMT_seconds—,—fc—)◄◄
```

output_GMT_Lilian (output)

A 32-bit binary integer representing the current time in Greenwich, England, in the Lilian format (the number of days since 14 October 1582).

For example, 16 May 1988 is day number 148138. If GMT is not available from the system, *output_GMT_Lilian* is set to 0 and CEEGMT terminates with a non-CEE000 symbolic feedback code.

output_GMT_seconds (output)

A 64-bit double floating-point number representing the current date and time in Greenwich, England, as the number of seconds since 00:00:00 on 14 October 1582, not counting leap seconds.

For example, 00:00:01 on 15 October 1582 is second number 86,401 (24*60*60 + 01). 19:00:01.078 on 16 May 1988 is second number 12,799,191,601.078. If GMT is not available from the system, *output_GMT_seconds* is set to 0 and CEEGMT terminates with a non-CEE000 symbolic feedback code.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2E6	3	2502	The UTC/GMT was not available from the system.

Usage notes

- CEEDATE converts *output_GMT_Lilian* to a character date, and CEEDATM converts *output_GMT_seconds* to a character timestamp.
- CICS consideration—CEEGMT does not use the OS TIME macro.
- z/OS UNIX consideration—In multithread applications, CEEGMT affects only the calling thread.
- Setting the TOD (time-of-day) clock to anything before January 1, 1972 may produce unpredictable results in your applications.

For more information

- See “CEEGMT—Get offset from Greenwich Mean Time to local time” on page 330 for more information about the CEEGMT callable service.

Examples

```

/*Module/File Name: EDCGMT    */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4      lilGMT_date;
    _FLOAT8    secGMT_date;

    CEEGMT(&lilGMT_date,&secGMT_date,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEGMT failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }
    printf("The current Lilian date in Greenwich,");
    printf(" England is %d\n", lilGMT_date);
}

```

Figure 113. C/C++ Example of CEEGMT

```

CBL LIB,QUOTE
*Module/File Name: IGZTGMT
*****
**
** IGZTGMT - Call CEEGMT to get current      **
**           Greenwich Mean Time           **
**                                           **
** In this example, a call is made to CEEGMT **
** to return the current GMT as a Lilian date **
** and as Lilian seconds. The results are   **
** displayed.                             **
**                                           **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGZTGMT.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 LILIAN          PIC S9(9) BINARY.
01 SECS            COMP-2.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity       PIC S9(4) BINARY.
04 Msg-No         PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code     PIC S9(4) BINARY.
04 Cause-Code     PIC S9(4) BINARY.
03 Case-Sev-Ctl   PIC X.
03 Facility-ID    PIC XXX.
02 I-S-Info       PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLGMT.
    CALL "CEEGMT" USING LILIAN , SECS , FC.

    IF CEE000 of FC THEN
        DISPLAY "The current GMT is also "
            "known as Lilian day: " LILIAN
        DISPLAY "The current GMT in Lilian "
            "seconds is: " SECS
    ELSE
        DISPLAY "CEEGMT failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

    GOBACK.

```

Figure 114. COBOL Example of CEEGMT

```

*PROCESS MACRO;
/* Module/File Name: IBMGMT */
/*****
**
** Function: CEEGMT - get current Greenwich Mean
** Time
** In this example, CEEGMT is called to return
** the current Greenwich Mean Time as the number
** of days and number of seconds since
** 14 October 1582. The Lilian date is then
** printed.
**
*****/

PLICGMT: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL LILIAN REAL FIXED BINARY(31,0);
DCL SECONDS REAL FLOAT DECIMAL(16);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

/* Call CEEGMT to return current GMT as a */
/* Lilian date and Lilian seconds */
CALL CEEGMT ( LILIAN, SECONDS, FC );

/* If CEEGMT ran successfully, print results */
IF FBCEK( FC, CEE000) THEN DO;
    PUT SKIP LIST( LILIAN ||
        ' days have passed since 14 October 1582.' );
    END;
ELSE DO;
    DISPLAY( 'CEEGMT failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLICGMT;

```

Figure 115. PL/I Example of CEEGMT

CEEGMTO—Get offset from Greenwich Mean Time to local time

CEEGMTO returns values to the calling routine representing the difference between the local system time and Greenwich Mean Time (GMT).

Syntax

```

▶▶ CEEGMTO—(—offset_hours—,—offset_minutes—,—offset_seconds—,—
▶fc—)——▶

```

offset_hours (output)

A 32-bit binary integer representing the offset from GMT to local time, in hours.

For example, for Pacific Standard Time, *offset_hours* equals -8 .

The range of *offset_hours* is -12 to $+13$ ($+13$ = Daylight Savings Time in the $+12$ time zone).

If local time offset is not available, *offset_hours* equals 0 and CEEGMTO terminates with a non-CEE000 symbolic feedback code.

offset_minutes (output)

A 32-bit binary integer representing the number of additional minutes that local time is ahead of or behind GMT.

The range of *offset_minutes* is 0 to 59.

If the local time offset is not available, *offset_minutes* equals 0 and CEEGMTO terminates with a non-CEE000 symbolic feedback code.

offset_seconds (output)

A 64-bit double floating-point number representing the offset from GMT to local time, in seconds.

For example, Pacific Standard Time is eight hours behind GMT. If local time is in the Pacific time zone during standard time, CEEGMTO would return $-28,800$ ($-8 * 60 * 60$). The range of *offset_seconds* is $-43,200$ to $+46,800$.

offset_seconds can be used with CEEGMT to calculate local date and time. See “CEEGMT—Get current Greenwich Mean Time” on page 326 for more information.

If the local time offset is not available from the system, *offset_seconds* is set to 0 and CEEGMTO terminates with a non-CEE000 symbolic feedback code.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2E7	3	2503	The offset from UTC/GMT to local time was not available from the system.

Usage notes

- CEEDATM is used to convert number of seconds to a character timestamp.
- CICS consideration—CEEGMTO does not use the OS TIME macro.
- z/OS UNIX consideration—In multithread applications, CEEGMTO affects only the calling thread.

CEEGMTO

For more information

- See “CEEDATM—Convert seconds to character timestamp” on page 258 for more information about the CEEDATM callable service.

Examples

```

/*Module/File Name: EDCGMTO */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4      GMT_hours,GMT_mins;
    _FLOAT8    GMT_secs;

    CEEGMTO(&GMT_hours,&GMT_mins,&GMT_secs,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEGMTO failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }
    printf("The difference between GMT and the local ");
    printf("time is:\n");
    printf("%d hours, %d minutes\n",GMT_hours,GMT_mins);
}

```

Figure 116. C/C++ Example of CEEGMTO

```

CBL LIB,QUOTE
  *Module/File Name: IGZTGMTO
  ****
  **
  ** IGZTGMTO - Call CEEGMTO to get offset from
  **             Greenwich Mean Time to local
  **             time
  **
  ** In this example, a call is made to CEEGMTO
  ** to return the offset from GMT to local time
  ** as separate binary integers representing
  ** offset hours, minutes, and seconds. The
  ** results are displayed.
  **
  ****
  IDENTIFICATION DIVISION.
  PROGRAM-ID. IGZTGMTO.

  DATA DIVISION.
  WORKING-STORAGE SECTION.
  01 HOURS          PIC S9(9) BINARY.
  01 MINUTES        PIC S9(9) BINARY.
  01 SECONDS COMP-2.
  01 FC.
  02 Condition-Token-Value.
  COPY CEEIGZCT.
  03 Case-1-Condition-ID.
  04 Severity       PIC S9(4) BINARY.
  04 Msg-No         PIC S9(4) BINARY.
  03 Case-2-Condition-ID
  REDEFINES Case-1-Condition-ID.
  04 Class-Code     PIC S9(4) BINARY.
  04 Cause-Code     PIC S9(4) BINARY.
  03 Case-Sev-Ctl   PIC X.
  03 Facility-ID    PIC XXX.
  02 I-S-Info       PIC S9(9) BINARY.
  PROCEDURE DIVISION.

```

```

*PROCESS MACRO;
/* Module/File Name: IBMGMTO */
/*****
**
** Function: CEEGMTO - get the offset from
** Greenwich Mean Time
** to local time
**
**
*****/
PLIGMTO: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL HOURS REAL FIXED BINARY(31,0);
DCL MINUTES REAL FIXED BINARY(31,0);
DCL SECONDS REAL FLOAT DECIMAL(16);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

/* Call CEEGMTO to return hours, minutes, and
/* seconds that local time is offset from GMT */

CALL CEEGMTO ( HOURS, MINUTES, SECONDS, FC );

/* If CEEGMTO ran successfully, print results */
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP EDIT('The difference between GMT and '
        || 'local time is ', HOURS, ':', MINUTES )
        (A, P'S99', A, P'99' );
    END;
ELSE DO;
    DISPLAY( 'CEEGMTO failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLIGMTO;

```

Figure 118. PL/I Example of CEEGMTO

CEEGPID—Retrieve the Language Environment version and platform ID

CEEGPID retrieves the Language Environment version ID and the platform ID of the version and platform of Language Environment that is processing the currently active condition.

Syntax

```
►► CEECPID(—CEE_Version_ID—,—Plat_ID—,—fc—)◄◄
```

CEE_Version_ID (output)

A fullword integer representing the version of Language Environment that created this data block. The current value of this parameter is still a fullword, but can be interpreted as a four-byte hex number,

IPPIVVIRIMMI

PP = Product Number

VV = Version

RR = Release

MM = Modification.

Plat_ID (output)

A fullword integer representing the platform used for processing the current condition.

The current values of this parameter are:

3 z/OS or VM

4 AS/400

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

Usage notes

- z/OS UNIX consideration—In multithread applications, CEECPID affects only the calling thread.

Examples

```

/*Module/File Name: EDCGPID */
/*****
/*
/* Licensed Materials - Property of IBM */
/*
/* 5647-A01 5688-198 */
/*
/* (C) Copyright IBM Corp. 1991, 2000 */
/*
/* US Government Users Restricted Rights - Use, */
/* duplication or disclosure restricted by GSA */
/* ADP Schedule Contract with IBM Corp. */
/*
/* STATUS = HLE7703 */
/*****
/*****
/* Note that the format of data returned by CEECPID */
/* changed in OS/390 V2R10. This sample tests the */
/* version and chooses the appropriate format. */
/*****
include (stdio.h)
include (string.h)
include (stdlib.h)
include (leawi.h)
include (ceedcct.h)
int main(void) {
    _INT4 cee_ver_id, plat_id;
    _FEEDBACK fc;
    int Vmask= 0x00FF0000;
    int Rmask= 0x0000FF00;
    int Mmask= 0x000000FF;
    /* get the LE version and the platform id */
    CEECPID(cee_ver_id,plat_id,fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEECPID failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* If platform is z/OS and LE is at release 2.10 or later, */
    /* use the new interface definition. */
    if ((plat_id == 3) & (cee_ver_id > 290)) {
        printf("The LE version id is %08X\n",cee_ver_id);
        printf("          Version:  %d\n",(Vmask & cee_ver_id)>>16);
        printf("          Release:   %d\n",(Rmask & cee_ver_id)>>8);
        printf("          Modification: %d\n\n",Mmask & cee_ver_id);
    }
}

```

Figure 119. C/C++ Example of CEECPID (Part 1 of 2)

```
/* else use the old interface */
else {
    printf("The LE version is %d\n",cee_ver_id);
}
printf("The current platform is ");
switch(plat_id) {
    case 3: printf("z/OS\n");
           break;
    case 4: printf("AS/400\n");
           break;
    default: printf("unrecognized platform id\n");
}
}
```

Figure 119. C/C++ Example of CEEGPID (Part 2 of 2)

```

CBL LIB,QUOTE
*****
*
*   IBM Language Environment
*
*   Licensed Materials - Property of IBM
*
*   5694-A01 5688-198
*   (C) Copyright IBM Corp. 1991, 2000
*   All Rights Reserved
*
*   US Government Users Restricted Rights - Use,
*   duplication or disclosure restricted by GSA
*   ADP Schedule Contract with IBM Corp.
*
*****
*Module/File Name: IGTGPID
*****
**
** IGTGPID - Call CEECPID to retrieve the
**           LE version and platform ID
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGTGPID.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 VERSION                PIC S9(9) BINARY.
01 VER-MAP REDEFINES VERSION.
   03 FILLER                PIC X(1).
   03 VER-VERSION            PIC X(1).
   03 VER-RELEASE            PIC X(1).
   03 VER-MOD                PIC X(1).
01 WORK-AREA.
   03 WORK-BIN                PIC S9(4) BINARY.
   03 WORK-BIN-BY-BYTE REDEFINES WORK-BIN.
       05 WORK-BIN-BYTE1      PIC X(1).
       05 WORK-BIN-BYTE2      PIC X(1).
01 VERSION-F                PIC 99.
01 RELEASE-F                PIC 99.
01 MOD-F                    PIC 99.
01 PLATID                    PIC S9(9) BINARY.
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
       03 Case-1-Condition-ID.
           04 Severity        PIC S9(4) BINARY.
           04 Msg-No          PIC S9(4) BINARY.
       03 Case-2-Condition-ID
           REDEFINES Case-1-Condition-ID.
           04 Class-Code      PIC S9(4) BINARY.
           04 Cause-Code      PIC S9(4) BINARY.
       03 Case-Sev-Ctl        PIC X.
       03 Facility-ID         PIC XXX.
02 I-S-Info                    PIC S9(9) BINARY.

```

Figure 120. COBOL Example of CEECPID (Part 1 of 2)

```

PROCEDURE DIVISION.
PARA-CBLGPID.
** Call CEEGPID to return the version and
** platform ID
CALL "CEEGPID" USING VERSION , PLATID , FC.
IF NOT CEE000 of FC THEN
    DISPLAY "CEEGPID failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

** If platform is OS/390 or VM and version is greater than 290,
** then use different format of VERSION.
IF PLATID = 3 AND
    VERSION > 290 THEN
** Format the version, release, and modification level
    MOVE 0 to WORK-BIN
    MOVE VER-VERSION TO WORK-BIN-BYTE2
    MOVE WORK-BIN TO VERSION-F
    MOVE VER-RELEASE TO WORK-BIN-BYTE2
    MOVE WORK-BIN TO RELEASE-F
    MOVE VER-MOD TO WORK-BIN-BYTE2
    MOVE WORK-BIN TO MOD-F
    DISPLAY "Currently running version " VERSION-F
        " release " RELEASE-F " modification " MOD-F
        " of IBM Language Environment"
ELSE
    DISPLAY "Currently running version " VERSION
        " of IBM Language Environment"
END-IF

** Evaluate PLATID to display this platform
EVALUATE PLATID
    WHEN 3
        DISPLAY "on OS/390 or VM"
    WHEN 4
        DISPLAY "on an AS/400"
END-EVALUATE

GOBACK.

```

Figure 120. COBOL Example of CEEGPID (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMGPID */
/*****
**
** Function: CEEGPID - Get LE/370 Version
** and Platform ID
**
** This example calls CEEGPID to get the
** version and platform of Language
** Environment that is currently running.
** This information is then printed out.
**
*****/
PLIGPID: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL VERSION REAL FIXED BINARY(31,0);
DCL PLATID REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

/* Call CEEGPID to get the version and platform */
/* of Language Environment that is currently */
/* running */
CALL CEEGPID ( VERSION, PLATID, FC );

IF FBCHECK( FC, CEE000) THEN DO;
  PUT SKIP LIST
    ('Language Environment Version ' || VERSION);
  PUT LIST (' is running on system ');
  SELECT (PLATID);
    WHEN (2) PUT LIST( 'OS/2');
    WHEN (3) PUT LIST( 'MVS/VM/370');
    WHEN (4) PUT LIST( 'AS/400');
  END /* Case of PLATID */;
END;
ELSE DO;
  DISPLAY( 'CEEGPID failed with msg '
    || FC.MsgNo );
  STOP;
END;

END PLIGPID;

```

Figure 121. PL/I Example of CEEGPID

CEEQQDT—Retrieve `q_data_token`

CEEQQDT retrieves the `q_data_token` from the Instance-Specific Information (ISI). CEEQQDT is particularly useful when you have user-written condition handlers registered by CEEHDLR.

Syntax

```
►► CEEGQDT (—cond_rep—, —q_data_token—, —fc—) ◄◄
```

cond_rep (input)

A condition token defining the condition for which the *q_data_token* is retrieved.

q_data_token (output)

A pointer to the *q_data* associated with condition token *cond_rep*.

fc (output)

An optional 12-byte condition token returned by CEEGQDT indicating the result of the service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0EE	3	0462	Instance-specific information for the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> could not be found.
CEE0EG	3	0464	Instance-specific information for the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> did not exist.

Usage notes

- **z/OS UNIX consideration**—In multithread applications, CEEGQDT affects only the calling thread.

For more information

- For more information on the various types of *q_data* structures, see *z/OS Language Environment Programming Guide*.
- For more information about the CEEHDLR callable service, see “CEEHDLR—Register User-written condition handler” on page 356.
- For more information about the CEESGL callable service, see “CEESGL—Signal a condition” on page 481.

Examples

```

/*Module/File Name: EDCGQDT */
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <leawi.h>
#include <ceedcct.h>
#ifdef __cplusplus
extern "C" {
#endif
void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
}
#endif

typedef struct {          /* condition info structure */
    int    error_value;
    char err_msg_80;
    int    retcode;
} info_struct;
int main(void) {
    _FEEDBACK fc,condtok;
    _ENTRY routine;
    _INT4 token,qdata;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;
    info_struct *info;
    /* .
    .
    . */
    /* register the condition handler */
    token = 99;
    routine.address = (_POINTER)&handler;
    routine.nesting = NULL;
    CEEHDLR(&routine,&token,&fc);
    if ( _FBCEK ( fc , CEE000 ) != 0 ) {
        printf("CEEHDLR failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* .
    .
    . */
    /* set up the condition info structure */
    info = (info_struct *)malloc(sizeof(info_struct));
    if (info == NULL) {
        printf("error allocating info_struct\n");
        exit(2399);
    }
}

```

Figure 122. C/C++ Example of CEEQGDT (Part 1 of 2)

```

info->error_value = 86;
strcpy(info->err_msg,"Test message");
info->retcode = 99;
/* set qdata to be the condition info structure */
qdata = (int)info;
/* build the condition token */
c_1 = 3;
c_2 = 99;
cond_case = 1;
sev = 3;
control = 0;
memcpy(facid,"ZZZ",3);
isi = 0;
CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
        facid,&isi,&condtok,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEENCOD failed with message number %d\n",
           fc.tok_msgno);
    exit(2999);
}
/* signal the condition */
CEESGL(&condtok,&qdata,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEESGL failed with message number %d\n",
           fc.tok_msgno);
    exit(2999);
}
/* .
.
. */
}
void handler(_FEEDBACK *fc, _INT4 *token, _INT4 *result,
             _FEEDBACK *newfc) {
    _FEEDBACK qdatafc;
    _INT4 idata;
    info_struct *qdata;
    /* .
    .
    . */
    /* get the q_data_token from the ISI */
    CEEGQDT(fc, &idata, &qdatafc);
    if ( _FBCHECK ( qdatafc , CEE000 ) != 0 ) {
        printf("CEEGQDT failed with message number %d\n",
               qdatafc.tok_msgno);
        *result = 20; /* percolate */
        return;
    }
    /******
    /* set info_struct pointer to address return by */
    /* CEEGQDT */
    /******
    qdata = (info_struct *) idata;
    /* use the condition info structure (qdata) */
    if (qdata->error_value == 86) {
        printf("%.12s\n",qdata->err_msg);
        printf("retcode = %d\n",qdata->retcode);
        *result = 10; /* resume this is what we want */
        return;
    }
    /* .
    .
    . */
    *result = 20; /* percolate */
}

```

Figure 122. C/C++ Example of CEEGQDT (Part 2 of 2)

```

CBL LIB,QUOTE
*Module/File Name: IGZTGQDT
*****
** DRVGQDT - Drive sample program for CEEQGDT **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRVGQDT.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE                PROCEDURE-POINTER.
01 TOKEN                  PIC S9(9) BINARY.
01 SEV                    PIC S9(4) BINARY.
01 MSGNO                  PIC S9(4) BINARY.
01 CASE                   PIC S9(4) BINARY.
01 SEV2                   PIC S9(4) BINARY.
01 CNTRL                  PIC S9(4) BINARY.
01 FACID                  PIC X(3).
01 ISINFO                 PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity               PIC S9(4) BINARY.
04 Msg-No                 PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code             PIC S9(4) BINARY.
04 Cause-Code             PIC S9(4) BINARY.
03 Case-Sev-Ctl           PIC X.
03 Facility-ID            PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.
01 QDATA                  PIC S9(9) BINARY.
01 CONDTOK.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity               PIC S9(4) BINARY.
04 Msg-No                 PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code             PIC S9(4) BINARY.
04 Cause-Code             PIC S9(4) BINARY.
03 Case-Sev-Ctl           PIC X.
03 Facility-ID            PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.

```

Figure 123. COBOL Example of CEEQGDT (Part 1 of 3)

```

PROCEDURE DIVISION.
** Register handler
  SET ROUTINE TO ENTRY "CBLGQDT".
  CALL "CEEHDLR" USING ROUTINE , TOKEN , FC.
  IF NOT CEE000 of FC THEN
    DISPLAY "CEEHDLR failed with msg "
      Msg-No of FC UPON CONSOLE
    STOP RUN
  END-IF.
** Signal a condition
  MOVE 1 TO QDATA.
  SET CEE001 of CONDTOK to TRUE.
  MOVE ZERO to I-S-Info of CONDTOK.
  CALL "CEESGL" USING CONDTOK , QDATA , FC.
  IF CEE000 of FC THEN
    DISPLAY "**** Resumed execution in the "
      "routine which registered the handler"
  ELSE
    DISPLAY "CEESGL failed with msg "
      Msg-No of FC UPON CONSOLE
  END-IF.
** UNregister handler
  CALL "CEEHDLU" USING ROUTINE , TOKEN , FC.
  IF NOT CEE000 of FC THEN
    DISPLAY "CEEHDLU failed with msg "
      Msg-No of FC UPON CONSOLE
  END-IF.
  STOP RUN.
END PROGRAM DRVGQDT.
*****
** CBLGQDT - Call CEEGQDT to get          **
**      the Q_DATA_TOKEN                  **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLGQDT.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity      PIC S9(4) BINARY.
04 Msg-No       PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code   PIC S9(4) BINARY.
04 Cause-Code   PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID  PIC XXX.
02 I-S-Info     PIC S9(9) BINARY.
01 QDATA        PIC S9(9) BINARY.

```

Figure 123. COBOL Example of CEEGQDT (Part 2 of 3)

```

LINKAGE SECTION.
01  CURCOND.
    02  Condition-Token-Value.
    COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity      PIC S9(4) BINARY.
            04  Msg-No       PIC S9(4) BINARY.
        03  Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04  Class-Code   PIC S9(4) BINARY.
            04  Cause-Code   PIC S9(4) BINARY.
        03  Case-Sev-Ctl     PIC X.
        03  Facility-ID      PIC XXX.
    02  I-S-Info             PIC S9(9) BINARY.
01  TOKEN                   PIC S9(9) BINARY.
01  RESULT                  PIC S9(9) BINARY.
88  RESUME                  VALUE 10.
01  NEWCOND.
    02  Condition-Token-Value.
    COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity      PIC S9(4) BINARY.
            04  Msg-No       PIC S9(4) BINARY.
        03  Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04  Class-Code   PIC S9(4) BINARY.
            04  Cause-Code   PIC S9(4) BINARY.
        03  Case-Sev-Ctl     PIC X.
        03  Facility-ID      PIC XXX.
    02  I-S-Info             PIC S9(9) BINARY.
PROCEDURE DIVISION
    USING CURCOND, TOKEN, RESULT, NEWCOND.
    PARA-CBLGQDT.
    ** Obtain the Qdata for the current condition
    CALL "CEEQGDT" USING CURCOND , QDATA , FC.
    IF CEE000 of FC THEN
        DISPLAY "QDATA for " Facility-ID of
            CURCOND Msg-No of CURCOND
            " is " QDATA
    ELSE
        DISPLAY "CEEQGDT failed with msg "
            Msg-No of FC UPON CONSOLE
    END-IF.
    SET RESUME TO TRUE.
    GOBACK.
END PROGRAM CBLGQDT.

```

Figure 123. COBOL Example of CEEQGDT (Part 3 of 3)

The following example uses a COBOL program and handler to establish the condition handling environment prior to calling a PL/I subroutine to illustrate the use of the callable service from PL/I.

```

CBL LIB,QUOTE
*Module/File Name: IGZTGQDP
*****
** IGZTGQDP - Drive sample program for CEEQGDT **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGZTGQDP.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE                PROCEDURE-POINTER.
01 TOKEN                  PIC S9(9) BINARY.
01 SEV                    PIC S9(4) BINARY.
01 MSGNO                  PIC S9(4) BINARY.
01 CASE                   PIC S9(4) BINARY.
01 SEV2                   PIC S9(4) BINARY.
01 CNTRL                  PIC S9(4) BINARY.
01 FACID                  PIC X(3).
01 ISINFO                 PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity               PIC S9(4) BINARY.
04 Msg-No                 PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code             PIC S9(4) BINARY.
04 Cause-Code             PIC S9(4) BINARY.
03 Case-Sev-Ctl           PIC X.
03 Facility-ID            PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.
01 QDATA                  PIC S9(9) BINARY.
01 CONDTOK.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity               PIC S9(4) BINARY.
04 Msg-No                 PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code             PIC S9(4) BINARY.
04 Cause-Code             PIC S9(4) BINARY.
03 Case-Sev-Ctl           PIC X.
03 Facility-ID            PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.
PROCEDURE DIVISION.
** Register handler

```

Figure 124. PL/I Example of CEEQGDT (Part 1 of 3)

```

      SET ROUTINE TO ENTRY "HDLGQDT".
      CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
      IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLR failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.
** Signal a condition
      MOVE 1 TO QDATA.
      SET CEE001 of CONDOK to TRUE.
      MOVE ZERO to I-S-Info of CONDOK.
      CALL "CEESGL" USING CONDOK, QDATA, FC.
      IF CEE000 of FC THEN
        DISPLAY "**** Resumed execution in the "
          "routine which registered the handler"
      ELSE
        DISPLAY "CEESGL failed with msg "
          Msg-No of FC UPON CONSOLE
      END-IF.
** UNregister handler
      CALL "CEEHDLU" USING ROUTINE, FC.
      IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
          Msg-No of FC UPON CONSOLE
      END-IF.
      STOP RUN.
END PROGRAM IGZTGQDP.

*****
** HDLGQDT -- COBOL condition handler to call **
**          PL/I routine for actual work.      **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. HDLGQDT.
DATA DIVISION.
LINKAGE SECTION.
01  CURCOND.
    02  Condition-Token-Value.
        COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity      PIC S9(4) BINARY.
            04  Msg-No       PIC S9(4) BINARY.
        03  Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04  Class-Code   PIC S9(4) BINARY.
            04  Cause-Code  PIC S9(4) BINARY.
        03  Case-Sev-Ctl    PIC X.
        03  Facility-ID     PIC XXX.
    02  I-S-Info            PIC S9(9) BINARY.
01  TOKEN                  PIC S9(9) BINARY.
01  RESULT                  PIC S9(9) BINARY.
01  NEWCOND.
    02  Condition-Token-Value.
        COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity      PIC S9(4) BINARY.
            04  Msg-No       PIC S9(4) BINARY.
        03  Case-2-Condition-ID

```

Figure 124. PL/I Example of CEEQGDT (Part 2 of 3)

```
                REDEFINES Case-1-Condition-ID.
                04 Class-Code PIC S9(4) BINARY.
                04 Cause-Code PIC S9(4) BINARY.
                03 Case-Sev-Ctl PIC X.
                03 Facility-ID  PIC XXX.
                02 I-S-Info     PIC S9(9) BINARY.
PROCEDURE DIVISION
    USING CURCOND, TOKEN, RESULT, NEWCOND.
    PARA-CBLQGDT.

** Invoke the PL/I routine to handle condition

    CALL "IBMGQDT"
        USING ADDRESS OF CURCOND,
              ADDRESS OF TOKEN,
              ADDRESS OF RESULT,
              ADDRESS OF NEWCOND.

    GOBACK.

END PROGRAM HDLGQDT.
```

Figure 124. PL/I Example of CEEQGDT (Part 3 of 3)

```

*PROCESS OPT(0), MACRO;
/* Module/File Name: IBMGQDT */
/*****
/**                                     */
/** Function: CEEQDQT -- get qualifying data */
/**                                     */
*****/
IBMGQDT: PROC (@COND TOK, @TOKEN, @RESULT, @NEWCOND)
            OPTIONS(COBOL);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

/* Parameters */
DCL @COND TOK    POINTER;
DCL @TOKEN      POINTER;
DCL @RESULT     POINTER;
DCL @NEWCOND    POINTER;
DCL 01 COND TOK  BASED(@COND TOK),
/* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case     BIT(2),
        05 Severity BIT(3),
        05 Control  BIT(3),
    03 FacID     CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);
DCL TOKEN      BASED(@TOKEN) REAL FIXED BIN(31,0);
DCL RESULT     BASED(@RESULT) REAL FIXED BIN(31,0);

DCL 01 NEWCOND  BASED(@NEWCOND),
/* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case     BIT(2),
        05 Severity BIT(3),
        05 Control  BIT(3),
    03 FacID     CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

```

Figure 125. COBOL Example of CEEQDQT (Part 1 of 2)

```

/* Local identifiers */
DCL QDATA      REAL FIXED BINARY(31,0);
DCL 01 FC,      /* Feedback token */
      03 MsgSev  REAL FIXED BINARY(15,0),
      03 MsgNo   REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case    BIT(2),
          05 Severity BIT(3),
          05 Control  BIT(3),
      03 FacID   CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

IF FBCHECK(CONDTOK, CEE001) THEN /* expected */ DO;

    /* Call CEEGQDT with condition token defined */
    /* above to retrieve associated q_data */
    CALL CEEGQDT ( CONDTOK, QDATA, FC );
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST( 'Qualifying data for current '
            || ' condition is ' || QDATA );
        RESULT = 10 /* Resume */;
        END;
    ELSE DO;
        DISPLAY('CEEGQDT failed with msg ' ||
            FC.MsgNo);

        NEWCOND = FC;
        RESULT = 30 /* Promote */;
        END;
    END;
ELSE /* Unexpected condition -- percolate */ DO;
    DISPLAY( 'User condition handler entered for '
        || CONDTOK.FacID || ' condition...' );
    DISPLAY( '... with message number ' ||
        CONDTOK.MsgNo);

    RESULT = 20 /* Percolate */;
    END;

RETURN;

END IBMGQDT;

```

Figure 125. COBOL Example of CEEGQDT (Part 2 of 2)

CEEGETST—Get heap storage

CEEGETST gets storage from a heap whose ID you specify. It is used to acquire both large and small blocks of storage. CEEGETST always allocates storage that is addressable by the caller. Therefore, if the caller is in 24-bit addressing mode, or if HEAP(,BELOW) is in effect, the storage returned is always below the 16M line. Above-the-line storage is returned only if the caller is in 31-bit addressing mode and HEAP(,ANY) is in effect.

All requests for storage are conditional. If storage is not available, the feedback code (*fc*) is set and returned to you, but the thread does **not** abend. When storage is not available, the appropriate action in the member environment should be taken. One option is to use the CEESGL callable service to signal the Language Environment condition handler with the returned feedback code.

Storage obtained by CEEGETST can be freed by a call to CEEFRST or CEEDSHP. You can also free storage by using a language intrinsic function. If storage is not explicitly freed, it is freed automatically at termination.

CEEGTST

If you have specified a *heap_alloc_value* in the STORAGE run-time option, all storage allocated by CEEGTST is initialized to *heap_alloc_value*. Otherwise, it is left uninitialized.

If the value specified in the *size* parameter of CEEGTST is greater than the size of an increment (as specified in the HEAP run-time option), all of the requested storage (rounded up to the nearest doubleword) is allocated in a single system-level call.

Heap storage is acquired by a system-level get storage call in increments of *init_size* and *incr_size* bytes as specified by the HEAP run-time option, or in the CEECRHP callable service. If the increment size is chosen appropriately, only a few of the calls to CEEGTST result in a system call. The storage report generated when the RPTSTG run-time option is specified shows the number of system-level get storage calls required. This helps you tune the *init_size* and *incr_size* fields in order to minimize calls to the operating system.

Syntax

►►CEEGTST(—*heap_id*—,—*size*—,—*address*—,—*fc*—)◄◄

heap_id (input)
A fullword binary signed integer. *heap_id* is a token denoting the heap in which the storage is allocated. A *heap_id* of 0 allocates storage from the initial heap (or user heap). Any other *heap_id* must be a value obtained from the CEECRHP callable service.

If the *heap_id* you specify is invalid, no storage is allocated. CEEGTST terminates with a non-CEE000 symbolic feedback code and the value of the *address* parameter is undefined.

size (input)
A fullword binary signed integer. *size* represents the amount of storage allocated, in bytes. If the specified amount of storage cannot be obtained, no storage is allocated, CEEGTST terminates with a non-CEE000 symbolic feedback code, and the value of the *address* parameter is undefined.

address (output)
A fullword address pointer. *address* is the main storage address of the first byte of allocated storage. If storage cannot be obtained, *address* remains undefined. Storage is always allocated on a doubleword boundary. This parameter contains an address that is returned as output to CEECZST.

fc (output)
A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Codes can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0P2	4	0802	Heap storage control information was damaged.

Code	Severity	Message Number	Message Text
CEE0P3	3	0803	The heap identifier in a get storage request or a discard heap request was unrecognized.
CEE0P8	3	0808	Storage size in a get storage request (CEEGTST) or a reallocate request (CEEZST) was not a positive number.
CEE0PD	3	0813	Insufficient storage was available to satisfy a get storage (CEEZST) request.

Usage notes

- **COBOL considerations**— If you want to use the CEEGTST callable service in a 24-bit addressing mode COBOL program to request 24-bit heap storage, you can make a static call to CEEGTST without any additional changes. If you want to call it dynamically (either by using the COBOL DYNAM compiler option, or using the "CALL identifier" statement, where identifier is a variable that holds the name of the program you want to call), you must also specify HEAP(,BELOW,,) as a run-time option.

This run-time specification affects all programs in the enclave using the user heap, not just the 24-bit addressing mode program. If this is undesirable, one alternative is to use the CEECRHP callable service to create an additional heap, specifying for the options parameter a value that will create the heap BELOW. The 24-bit addressing mode COBOL program can then obtain storage from this additional heap using the CEEGTST callable service.

- **PL/I considerations**—Storage allocated within PL/I AREAs is managed by PL/I. Therefore, only PL/I language functions can allocate and free storage within a PL/I area.
- Based upon the layout of a PL/I structure, PL/I might adjust the starting byte of the PL/I structure to a non-doubleword aligned byte. The difference between the doubleword boundary and the first byte of such a structure is known as the *hang*. Because Language Environment callable storage services do not adjust the starting byte, you must be careful using callable services to allocate storage for PL/I structures. Use either the PL/I ALLOCATE statement or fully defined structures and aggregates to avoid this problem.
- **CICS considerations**—In a CICS environment, *size* should not exceed 1024M (1 gigabyte or X'40000000') when running in AMODE ANY, and 65,504 bytes when running in 24-bit addressing mode. These CICS restrictions are subject to change from one release of CICS to another. Portable applications should respect current CICS limitations.
- **z/OS UNIX considerations**—CEEGTST applies to the enclave. Any thread can free the allocated storage.

For more information

- See "HEAP" on page 36 for further information about the Language Environment HEAP run-time option.
- For more information about the CEESGL callable service, see "CEESGL—Signal a condition" on page 481.
- For more information about the CEEFRST callable service, see "CEEFRST—Free heap storage" on page 313.
- For more information about the CEEDSHP callable service, see "CEEDSHP—Discard heap" on page 280.

- For more information about the STORAGE run-time option, see “STORAGE” on page 72.
- For more information about the CEECRHP callable service, see “CEECRHP—Create new additional heap” on page 239.
- For more information about the RPTSTG run-time option, see “RPTSTG” on page 64.
- For more information about the CEECRHP callable service, see “CEECRHP—Create new additional heap” on page 239.
- For more information about the CEECZST callable service, see “CEECZST—Reallocate (change size of) storage” on page 244.

Examples

```

/*Module/File Name: EDCGTST */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {
    _INT4 heapid, size;
    _POINTER address;
    _FEEDBACK fc;
    /* .
     . */
    heapid = 0; /* get storage from initial heap */
    size = 4000; /* number of bytes of heap storage */

    /* obtain the storage using CEEGTST */
    CEEGTST(&heapid,&size,&address,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEGTST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     . */
    /* free the storage that was previously obtained */
    /* using CEEGTST */
    CEEFRST(&address,&fc);

    /* check the first 4 bytes of the feedback token */
    /* (0 if successful) */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEFRST failed with message number %d\n",
            fc.tok_msgno);
        exit(99);
    }
    /* .
     . */
}

```

Figure 126. C/C++ Example of CEEGTST

```

CBL LIB,QUOTE
*Module/File Name: IGZTGTST
*****
**
** IGZTGTST - Call CEEGTST to get heap storage
**
**
** In this example, a call is made to CEEGTST to
** obtain 4000 bytes of storage from the initial
** heap (HEAPID=0).
**
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. IGZTGTST.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 HEAPID PIC S9(9) BINARY.
01 STGSIZE PIC S9(9) BINARY.
01 ADDRSS POINTER.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
*****
** Specify 0 to get storage from initial heap. **
** Specify 4000 to get 4000 bytes of storage. **
** Call CEEGTST to obtain storage. **
*****
PARA-CBLGTST.
MOVE 0 TO HEAPID.
MOVE 4000 TO STGSIZE.

CALL "CEEGETST" USING HEAPID, STGSIZE,
ADDRSS, FC.
IF CEE000 of FC THEN
DISPLAY "Obtained " STGSIZE " bytes of"
" storage at location " ADDRSS
" from heap number " HEAPID
ELSE
DISPLAY "CEEGETST failed with msg "
Msg-No of FC UPON CONSOLE
STOP RUN
END-IF.

GOBACK.

```

Figure 127. COBOL Example of CEEGTST

```

*PROCESS MACRO;
/* Module/File Name: IBMGSTST */
/*****
**
** Function: CEEGTST - Get Heap Storage
**
** In this example, a call is made to CEEGTST to
** request 4000 bytes of storage from the
** initial heap.
**
**
*****/
PLIGTST: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL HEAPID    REAL FIXED BINARY(31,0);
    DCL STGSIZE   REAL FIXED BINARY(31,0);
    DCL ADDRSS    POINTER;
    DCL 01 FC, /* Feedback token */
        03 MsgSev    REAL FIXED BINARY(15,0),
        03 MsgNo     REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case    BIT(2),
            05 Severity BIT(3),
            05 Control  BIT(3),
        03 FacID     CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    HEAPID = 0; /* get storage from the initial heap */
    STGSIZE = 4000; /* get 4000 bytes of storage */

    /* Call CEEGTST to obtain the storage */
    CALL CEEGTST ( HEAPID, STGSIZE, ADDRSS, FC );
    IF FBCEK( FC, CEE000) THEN DO;
        PUT SKIP LIST( 'Obtained ' || STGSIZE
            || ' bytes of storage at location '
            || DECIMAL( UNSPEC( ADDRSS1 ) )
            || ' from heap ' || HEAPID );
        END;
    ELSE DO;
        DISPLAY( 'CEEGTST failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLIGTST;

```

Figure 128. PL/I Example

CEEHDLR—Register User-written condition handler

CEEHDLR registers a user-written condition handler for the current stack frame. The user condition handler is invoked when:

- It is registered for the current stack frame by CEEHDLR, and
- The Language Environment condition manager requests the condition handler associated with the current stack frame handle the condition.

Language Environment places the user-written condition handlers associated with each stack frame in a queue. The queue can be empty at any given time. The Language Environment condition manager invokes the registered condition handlers in LIFO (last in, first out) order to handle the condition.

The opposite of CEEHDLR, which registers a user-written condition handler, is CEEHDLU, which unregisters the handler. You do not necessarily need to use CEEHDLU to remove user-written condition handlers you registered with CEEHDLR. Any user-written condition handlers created through CEEHDLR and not unregistered by CEEHDLU are unregistered automatically by Language Environment, but only when the associated stack frame is removed from the stack.

Language Environment condition handlers are driven only for synchronous conditions.

Syntax

► CEEHDLR (—*routine*—, —*token*—, —*fc*—) ►

routine (input)

An entry variable or entry constant for the routine called to process the condition. The entry variable or constant must be passed by reference. The routine must be an external routine; that is, it must not be a nested routine.

token (input)

A fullword integer of information you want passed to your user handler each time it is called. This can be a pointer or any other fullword integer you want to pass.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE080	1	0256	The user-written condition handler routine specified was already registered for this stack frame. It was registered again.
CEE081	3	0257	The routine specified contained an invalid entry variable.

Usage notes

- PL/I MTF consideration—CEEHDLR is not supported in PL/I MTF applications. This includes any CEEHDLR service called from a COBOL program in the application.
- COBOL consideration—You should not call CEEHDLR from a nested COBOL program.
- z/OS UNIX consideration—In multithread applications, CEEHDLR affects only the calling thread.
- C consideration—The CEEHDLR service does not save Writeable Static Area (WSA) information about the user handler, so it's possible that the user handler will be given control with the wrong WSA. Specifically, the user handler(s) on the stack will be invoked with the WSA of the routine that incurred the condition. The preferred method of handling conditions from a C application is to use C signal handlers.

For more information

- For more information about the CEEHDLU callable service, see “CEEHDLU—Unregister user-written condition handler” on page 366.

Examples

```

/*Module/File Name: EDCHDLR   */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

#ifdef __cplusplus
extern "C" {
#endif
void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
}
#endif

int main(void) {

    _FEEDBACK fc;
    _ENTRY routine;
    _INT4 token;

    /* set the routine structure to point to the handler */
    /* and use CEEHDLR to register the user handler      */

    token = 99;
    routine.address = (_POINTER)&handler;
    routine.nesting = NULL;

    CEEHDLR(&routine,&token,&fc);

    /* verify that CEEHDLR was successful */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEHDLR failed with message number %d\n",
               fc.tok_msgno);
        exit (2999);
    }
    /*
    :
    :
    */
}
/*****
/* handler is a user condition handler          */
/*****
void handler(_FEEDBACK *fc,_INT4 *token,_INT4 *result,
             _FEEDBACK *newfc) {

    /*
    :
    :
    */
}

```

Figure 129. C/C++ Example of CEEHDLR

```

CBL LIB,QUOTE
*Module/File Name: IGZTHDLR
*****
**                               **
** CBLHDLR - Call CEEHDLR to register a user **
**           condition handler           **
**                               **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLHDLR.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE PROCEDURE-POINTER.
01 TOKEN PIC S9(9) BINARY.
01 SEV PIC S9(4) BINARY.
01 MSGNO PIC S9(4) BINARY.
01 CASE PIC S9(4) BINARY.
01 SEV2 PIC S9(4) BINARY.
01 CNTRL PIC S9(4) BINARY.
01 FACID PIC X(3).
01 ISINFO PIC S9(9) BINARY.
01 QDATA PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
01 CONDTOK.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLHDLR.
SET ROUTINE TO ENTRY "HANDLER".
CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
IF NOT CEE000 of FC THEN
    DISPLAY "CEEHDLR failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

```

Figure 130. COBOL Program that Registers HANDLER Routine (Part 1 of 2)

```

*   RAISE A SIGNAL

PARA-CBLSGL.
*****
** Call CEENCOD with the values assigned above **
** to build a condition token "COND TOK"      **
** Set COND TOK to sev=3, msgno=1 facid=CEE. We **
** raise a sev 3 to ensure our handler is driven*
*****
    MOVE 3 TO SEV.
    MOVE 1 TO MSGNO.
    MOVE 1 TO CASE.
    MOVE 3 TO SEV2.
    MOVE 1 TO CNTRL.
    MOVE "CEE" TO FACID.
    MOVE 0 TO ISINFO.

    CALL "CEENCOD" USING SEV, MSGNO, CASE,
        SEV2, CNTRL, FACID, ISINFO, COND TOK, FC.
    IF NOT CEE000 OF FC THEN
        DISPLAY "CEENCOD failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

*****
** Call CEESGL to signal the condition with    **
** the condition token and qdata described **
** in COND TOK and QDATA                      **
*****
    MOVE 0 TO QDATA.
    CALL "CEESGL" USING COND TOK, QDATA, FC.
    IF NOT CEE000 OF FC THEN
        DISPLAY "CEESGL failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

GOBACK.

```

Figure 130. COBOL Program that Registers HANDLER Routine (Part 2 of 2)

```

CBL LIB,QUOTE,NOOPT,NODYNAM
*Module/File Name: IGZTHAND
*****
**
** DRVHAND - Drive sample program for COBOL
**           user-written condition handler.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRVHAND.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE          PROCEDURE-POINTER.
01 DENOMINATOR      PIC S9(9) BINARY.
01 NUMERATOR        PIC S9(9) BINARY.
01 RATIO            PIC S9(9) BINARY.
01 TOKEN            PIC S9(9) BINARY VALUE 0.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity         PIC S9(4) BINARY.
04 Msg-No           PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code       PIC S9(4) BINARY.
04 Cause-Code       PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

REGISTER-HANDLER.
*****
** Register handler
**
*****
SET ROUTINE TO ENTRY "HANDLER".
CALL "CEEHDLR" USING ROUTINE , TOKEN , FC.
IF NOT CEE000 OF FC THEN
    DISPLAY "CEEHDLR failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

RAISE-CONDITION.
*****
** Cause a zero-divide condition.
**
*****
MOVE 0 TO DENOMINATOR.
MOVE 1 TO NUMERATOR.
DIVIDE NUMERATOR BY DENOMINATOR
    GIVING RATIO.

```

Figure 131. COBOL User-Written Condition Handler Registered by CBLHDLR and Unregistered by CBLHDLU (Part 1 of 2)

```

        DISPLAY "Execution continues following "
            "divide-by-zero exception".
    UNREGISTER-HANDLER.
*****
** UNregister handler                **
*****
    CALL "CEEHDLU" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
            Msg-No of FC UPON CONSOLE
    END-IF.
    STOP RUN.
END PROGRAM DRVHAND.

IDENTIFICATION DIVISION.
PROGRAM-ID. HANDLER.
DATA DIVISION.
WORKING-STORAGE SECTION.

LINKAGE SECTION.
01 TOKEN                PIC S9(9) BINARY.
01 RESULT                PIC S9(9) BINARY.
88 RESUME                VALUE 10.
01 CURCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity      PIC S9(4) BINARY.
        04 Msg-No       PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code   PIC S9(4) BINARY.
        04 Cause-Code   PIC S9(4) BINARY.
    03 Case-Sev-Ctl      PIC X.
    03 Facility-ID       PIC XXX.
02 I-S-Info              PIC S9(9) BINARY.
01 NEWCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity      PIC S9(4) BINARY.
        04 Msg-No       PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code   PIC S9(4) BINARY.
        04 Cause-Code   PIC S9(4) BINARY.
    03 Case-Sev-Ctl      PIC X.
    03 Facility-ID       PIC XXX.
02 I-S-Info              PIC S9(9) BINARY.
PROCEDURE DIVISION USING CURCOND, TOKEN,
                        RESULT, NEWCOND.

PARA-HANDLER.
    DISPLAY "Entered user handler for condition"
        " with message number " Msg-No Of CURCOND
        " -- will resume execution".
    SET RESUME TO TRUE.

    GOBACK.
END PROGRAM HANDLER.

```

Figure 131. COBOL User-Written Condition Handler Registered by CBLHDLR and Unregistered by CBLHDLU (Part 2 of 2)

```

*Process macro;
/* Module/File Name: IBMHDLR */
/*****
/*
/* EXCOND .-> DIVZERO
/* - register handler | - force a divide-by-0
/* - call DIVZERO --'
/* ==> "resume point"
/* - unregister handler
/*
/* USRHLR:
/* - if divide-by-zero then
/* - move resume cursor
/* - resume at "resume"
/* point
/*
/*****
Excond :Proc Options(Main);

/*****
/* Important elements are found in these includes */
/* - feedback declaration
/* - fbcheck macro call
/* - condition tokens such as CEE000
/* - entry declarations such as ceehdlr
/*****

%include ceeibmct;
%include ceeibmaw;

dcl Usrhd1r external entry;

dcl 1 fback feedback;
dcl divisor fixed bin(31);
dcl token fixed bin(31);

/*****
/* Register a user-written condition handler */
/*****
token = 97;
Call ceehdlr(Usrhd1r, token, fback);
If fbcheck (fback, cee000) then
    display ('MAIN: registered USRHLR');
else
    do;
        display ('CEEHDLR failed with message number ' ||
            fback.MsgNo);
    stop;
end;

```

Figure 132. EXCOND Program (PL/I) to Handle Divide-by-Zero Condition (Part 1 of 2)

```

/*****
/* Call DIVZERO to divide by zero          */
/* and drive USRHDLR                      */
*****/
divisor = 0;
call divzero (divisor);
display ('MAIN: resumption after DIVZERO');

/*****
/* Unregister the user condition handler    */
*****/

Call ceehdlu (UsrhdLr, fback);
If fbcheck (fback, cee000) then
    display ('MAIN: unregistered USRHDLR');
else
    do;
        display ('CEEHDLU failed with message number ' ||
            fback.MsgNo);
        stop;
    end;

/*****
/* Subroutine that simply raises ZERODIVIDE */
*****/
divzero: proc (arg);
    dcl arg fixed bin(31);

    display(' DIVZERO: starting. ');
    arg = 1 / arg;
    display(' DIVZERO: Returning to its caller');

end divzero;

end Excond;

```

Figure 132. EXCOND Program (PL/I) to Handle Divide-by-Zero Condition (Part 2 of 2)

```

AHDL      TITLE 'Main program that registers a handler'
*
*      Symbolic Register Definitions and Usage
*
R0        EQU    0           Parm list addr (CMS only)
R1        EQU    1           Parm list addr, 0=no parms
R10       EQU    10          Base reg for executable code
R12       EQU    12          Language Environment Common Anchor Area addr
R13       EQU    13          Dynamic Storage Area addr
R14       EQU    14          Return point addr
R15       EQU    15          Entry point address
*
*      Prologue
*
CEEHDLRA  CEEENTRY AUTO=DSASIZ,    Main memory to obtain  *
          MAIN=YES,                This program is a MAIN prog *
          PPA=PPA1,                Our Program Prolog Area  *
          BASE=R10                 Base reg for executable code
          USING CEECAA,R12          Addressing for LE/370 CAA
          USING CEEDSA,R13          Addressing for dynamic data
*
*      Announce ourselves
*
          WTO    'CEEHDLRA Says "HELLO"',ROUTCDE=11
*
*      Register User Handler
*
          LA     R1,USRHDLPP        Get addr of proc-ptr to Hdlr
          ST     R1,PARM1           Make it 1st parameter
          LA     R1,TOKEN           Get addr of 32-bit token
          ST     R1,PARM2           Make it 2nd parameter
          LA     R1,FEEDBACK        Get addr of Feedback Code
          ST     R1,PARM3           Make it 3rd parameter
          LA     R1,HDLRPLST        Point to CEEHDLR's parm list
          CALL   CEEHDLR            Invoke CEEHDLR service
          CLC    FEEDBACK,=XL12'00' Check for success..
          BE     HDLRGOOD           Skip diagnostics if success
*                                Failure.. issue diagnostics
          WTO    '**** Call to CEEHDLR failed ****',      *
          ROUTCDE=11
          ABEND  1,DUMP             Terminate program with Dump

```

Figure 133. PL/I Example of CEEHDLR (Part 1 of 2)

```

HDLRG00D EQU      *           Handler registered OK
*   ... code covered by User-Written Handler goes here...
*       Un-Register User Handler
*
        LA      R1,USRHDLPP    Get addr of proc-ptr to Hdlr
        ST      R1,HDLUPRM1    Make it 1st parameter
        LA      R1,HDLUFBC     Address for Feedback Code
        ST      R1,HDLUPRM2    Make it 2nd parameter
        LA      R1,HDLUPLST    Point to CEEHDLU parm list
        CALL    CEEHDLU        Invoke CEEHDLU service
*       Bid a fond farewell
        WTO     'CEEHDLRA Says "GOOD-BYE"',ROUTCDE=11
*
*       Epilogue
*
        CEETERM RC=4,MODIFIER=1 Terminate program
*
*       Program Constants and Local Static Variables
*
USRHDLPP DC      V(USRHDLR),A(0) Procedure-ptr to Handlr
*
        LTORG ,                Place Literal Pool here
        EJECT
PPA1     CEEPPA ,              Our Program Prolog Area
        EJECT
        CEEDSA ,              Map CEE Dynamic Save Area
*
*       Local Automatic (Dynamic) Storage.
*
HDLRPLST DS      0F
PARM1    DS      A            Addr of User-written Handler
PARM2    DS      A            Addr of 32-bit Token
PARM3    DS      A            Addr of Feedback Code
*
HDLUPLST DS      0F
HDLUPRM1 DS      A            Addr of User-written Handler
HDLUPRM2 DS      A            Addr of Feedback Code
*
TOKEN    DS      F            32-bit Token: fullword whose
*                               *value* will be passed
*                               to the user handler
*                               each time it is called.
FEEDBACK DS      CL12         CEEHDLR Feedback code
*
HDLUFBC  DS      CL12         CEEHDLU Feedback code
*
DSASIZ   EQU      *-CEEDSA    Length of DSA
        EJECT
        CEECAA ,              Map LE370 Common Anchor Area
        END    CEEHDLRA

```

Figure 133. PL/I Example of CEEHDLR (Part 2 of 2)

CEEHDLU—Unregister user-written condition handler

CEEHDLU unregisters a user condition handler for the current stack frame.

You do not necessarily need to use CEEHDLU to remove user-written condition handlers you registered with CEEHDLR. Any user-written condition handlers created through CEEHDLR and not unregistered by CEEHDLU are unregistered automatically by Language Environment, but only when the associated stack frame is removed from the stack.

Note: For information about restrictions on the use of CEEHDLU with PL/I, see *z/OS Language Environment Programming Guide*.

Syntax

►—CEEHDLU—(—*routine*—,—*fc*—)——►

routine (input)

An entry variable or constant for the routine to be unregistered as a user condition handler. This routine must be previously registered (with CEEHDLR) by the same stack frame that invokes CEEHDLU.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE07S	1	0252	CEEHDLU was unable to find the requested user-written condition handler routine.

Usage notes

- PL/I MTF consideration—CEEHDLU is not supported in PL/I MTF applications. This includes any CEEHDLR service called from a COBOL program in the application.
- z/OS UNIX consideration—In multithread applications, CEEHDLU affects only the calling thread.

For more information

- See “CEEHDLR—Register User-written condition handler” on page 356 for further information about specifying the *routine* parameter.

Examples

```

/*Module/File Name: EDCHDLU   */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

#ifdef __cplusplus
extern "C" {
#endif
    void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
}
#endif

int main(void) {

    _FEEDBACK fc;
    _ENTRY routine;
    _INT4 token;

    /* set the routine structure to point to the handler */
    /* and use CEEHDLR to register the user handler      */

    token = 99;
    routine.address = (_POINTER)&handler;;
    routine.nesting = NULL;

    CEEHDLR(&routine,&token,&fc);

    /* verify that CEEHDLR was successful */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEHDLR failed with message number %d\n",
            fc.tok_msgno);
        exit (2999);
    }
    /*
    :
    */
    /* Unregister the condition handler */
    CEEHDLU(&routine,&fc);

    /* verify that CEEHDLU was successful */
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEHDLU failed with message number %d\n",
            fc.tok_msgno);
        exit (2999);
    }
    /*
    :
    */
}

void handler(_FEEDBACK *fc, _INT4 *token, _INT4 *result,
    _FEEDBACK *newfc) {
    /*
    :
    */
}

```

Figure 134. C/C++ Example of CEEHDLU

```

CBL LIB,QUOTE
*Module/File Name: IGZTHDLU
*****
**
** CBLHDLU - Call CEEHDLU to unregister a user **
**          condition handler                  **
**
** In this example, a call is made to CEEHDLU **
** to unregister a user condition handler     **
** previously registered using CEEHDLR.       **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLHDLU.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE                PROCEDURE-POINTER.
01 TOKEN                  PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity               PIC S9(4) BINARY.
04 Msg-No                 PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code             PIC S9(4) BINARY.
04 Cause-Code             PIC S9(4) BINARY.
03 Case-Sev-Ctl           PIC X.
03 Facility-ID            PIC XXX.
02 I-S-Info               PIC S9(9) BINARY.

PROCEDURE DIVISION.
PARA-CBLHDLR.
    SET ROUTINE TO ENTRY "HANDLER".
    CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLR failed with msg "
            Msg-No of FC UPON CONSOLE
        STOP RUN
    ELSE
        DISPLAY "HANDLER REGISTERED"
    END-IF.

*
:

```

Figure 135. COBOL Program that Unregisters User-Written Condition Handler (Part 1 of 2)

```
      PARA-CBLHDLU.  
        CALL "CEEHDLU" USING ROUTINE, FC.  
        IF NOT CEE000 of FC THEN  
          DISPLAY "CEEHDLU failed with msg "  
            Msg-No of FC UPON CONSOLE  
          STOP RUN  
        ELSE  
          DISPLAY "HANDLER UNREGISTERED"  
        END-IF.  
  
      GOBACK.  
  
    END PROGRAM CBLHDLU.
```

Figure 135. COBOL Program that Unregisters User-Written Condition Handler (Part 2 of 2)

```

CBL LIB,QUOTE,NOOPT,NODYNAM
*Module/File Name: IGZTHAND
*****
**
** DRVHAND - Drive sample program for COBOL
**          user-written condition handler.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRVHAND.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE          PROCEDURE-POINTER.
01 DENOMINATOR      PIC S9(9) BINARY.
01 NUMERATOR        PIC S9(9) BINARY.
01 RATIO            PIC S9(9) BINARY.
01 TOKEN            PIC S9(9) BINARY VALUE 0.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity         PIC S9(4) BINARY.
04 Msg-No           PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code       PIC S9(4) BINARY.
04 Cause-Code       PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

REGISTER-HANDLER.
*****
** Register handler
**
*****
SET ROUTINE TO ENTRY "HANDLER".
CALL "CEEHDLR" USING ROUTINE , TOKEN , FC.
IF NOT CEE000 OF FC THEN
    DISPLAY "CEEHDLR failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

RAISE-CONDITION.
*****
** Cause a zero-divide condition.
**
*****
MOVE 0 TO DENOMINATOR.
MOVE 1 TO NUMERATOR.
DIVIDE NUMERATOR BY DENOMINATOR
    GIVING RATIO.

```

Figure 136. COBOL User-Written Condition Handler Registered by CBLHDLR and Unregistered by CBLHDLU (Part 1 of 2)

```

        DISPLAY "Execution continues following "
            "divide-by-zero exception".
    UNREGISTER-HANDLER.
*****
** UNregister handler                **
*****
    CALL "CEEHDLU" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
            Msg-No of FC UPON CONSOLE
    END-IF.
    STOP RUN.
END PROGRAM DRVHAND.

IDENTIFICATION DIVISION.
PROGRAM-ID. HANDLER.
DATA DIVISION.
WORKING-STORAGE SECTION.

LINKAGE SECTION.
01 TOKEN                PIC S9(9) BINARY.
01 RESULT                PIC S9(9) BINARY.
88 RESUME                VALUE 10.
01 CURCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity      PIC S9(4) BINARY.
        04 Msg-No       PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code    PIC S9(4) BINARY.
        04 Cause-Code    PIC S9(4) BINARY.
    03 Case-Sev-Ctl      PIC X.
    03 Facility-ID       PIC XXX.
02 I-S-Info              PIC S9(9) BINARY.
01 NEWCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity      PIC S9(4) BINARY.
        04 Msg-No       PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code    PIC S9(4) BINARY.
        04 Cause-Code    PIC S9(4) BINARY.
    03 Case-Sev-Ctl      PIC X.
    03 Facility-ID       PIC XXX.
02 I-S-Info              PIC S9(9) BINARY.
PROCEDURE DIVISION USING CURCOND, TOKEN,
                        RESULT, NEWCOND.

PARA-HANDLER.
    DISPLAY "Entered user handler for condition"
        " with message number " Msg-No Of CURCOND
        " -- will resume execution".
    SET RESUME TO TRUE.

    GOBACK.
END PROGRAM HANDLER.

```

Figure 136. COBOL User-Written Condition Handler Registered by CBLHDLR and Unregistered by CBLHDLU (Part 2 of 2)

CEEISEC—Convert integers to seconds

CEEISEC converts separate binary integers representing year, month, day, hour, minute, second, and millisecond to a number representing the number of seconds

since 00:00:00 14 October 1582. Use CEEISEC instead of CEESECS when the input is in numeric format rather than character format.

The inverse of CEEISEC is CEESECI, which converts number of seconds to integer year, month, day, hour, minute, second, and millisecond.

Syntax

```

► CEEISEC (—input_year—, —input_months—, —input_day—, —input_hours—,
—input_minutes—, —input_seconds—, —input_milliseconds—,
—output_seconds—, —fc—)

```

input_year (input)

A 32-bit binary integer representing the year.

The range of valid *input_years* is 1582 to 9999, inclusive.

input_month (input)

A 32-bit binary integer representing the month.

The range of valid *input_month* is 1 to 12.

input_day (input)

A 32-bit binary integer representing the day.

The range of valid *input_days* is 1 to 31.

input_hours (input)

A 32-bit binary integer representing the hours.

The range of valid *input_hours* is 0 to 23.

input_minutes (input)

A 32-bit binary integer representing the minutes.

The range of valid *input_minutes* is 0 to 59.

input_seconds (input)

A 32-bit binary integer representing the seconds.

The range of valid *input_seconds* is 0 to 59.

input_milliseconds (input)

A 32-bit binary integer representing milliseconds.

The range of valid *input_milliseconds* is 0 to 999.

output_seconds (output)

A 64-bit double floating-point number representing the number of seconds since 00:00:00 on 14 October 1582, not counting leap seconds.

For example, 00:00:01 on 15 October 1582 is second number 86,401 ($24 \times 60 \times 60 + 01$). The valid range of *output_seconds* is 86,400 to 265,621,679,999.999 (23:59:59.999 31 December 9999). If any input values are invalid, *output_seconds* is set to zero. To convert *output_seconds* to a Lilian day number, divide *output_seconds* by 86,400 (the number of seconds in a day).

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2EE	3	2510	The hours value in a call to CEEISEC or CEESECS was not recognized.
CEE2EF	3	2511	The day parameter passed in a CEEISEC call was invalid for year and month specified.
CEE2EH	3	2513	The input date passed in a CEEISEC, CEEDAYS, or CEESECS call was not within the supported range.
CEE2EI	3	2514	The year value passed in a CEEISEC call was not within the supported range.
CEE2EJ	3	2515	The milliseconds value in a CEEISEC call was not recognized.
CEE2EK	3	2516	The minutes value in a CEEISEC call was not recognized.
CEE2EL	3	2517	The month value in a CEEISEC call was not recognized.
CEE2EN	3	2519	The seconds value in a CEEISEC call was not recognized.

Usage notes

- z/OS UNIX consideration—In multithread applications, CEEISEC affects only the calling thread.

For more information

- For more information about the CEESECS callable service, see “CEESECS—Convert timestamp to seconds” on page 467.
- See “CEESECI—Convert seconds to integers” on page 462 for more information about the CEESECI callable service.

Examples

```

/*Module/File Name: EDCISEC */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _INT4 year, month, day, hours, minutes, seconds,
        millisecs;
    _FLOAT8 output;
    _FEEDBACK fc;

    year = 1991;
    month = 9;
    day = 13;
    hours = 4;
    minutes = 34;
    seconds = 25;
    millisecs = 746;

    CEEISEC(&year,&month,&day,&hours,&minutes,&seconds,;
        &millisecs,&output,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEISEC failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    printf("The number of seconds between 00:00:00.00"
        " 10/14/1582 and 04:34:25.746 09/13/1991"
        " is %.3f\n",output);
}

```

Figure 137. C/C++ Example of CEEISEC

```

CBL LIB,QUOTE
*Module/File Name: IGZTISEC
*****
**                               **
** CBLISEC - Call CEEISEC to convert integers **
**           to seconds                **
**                               **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLISEC.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 YEAR          PIC S9(9) BINARY.
01 MONTH         PIC S9(9) BINARY.
01 DAYS          PIC S9(9) BINARY.
01 HOURS         PIC S9(9) BINARY.
01 MINUTES       PIC S9(9) BINARY.
01 SECONDS       PIC S9(9) BINARY.
01 MILLSEC       PIC S9(9) BINARY.
01 OUTSECS       COMP-2.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity      PIC S9(4) BINARY.
04 Msg-No        PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code    PIC S9(4) BINARY.
04 Cause-Code    PIC S9(4) BINARY.
03 Case-Sev-Ctl  PIC X.
03 Facility-ID   PIC XXX.
02 I-S-Info      PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLISEC.
*****
** Specify seven binary integers representing **
** the date and time as input to be converted **
** to Lilian seconds                **
*****
MOVE 2000 TO YEAR.
MOVE 1 TO MONTH.
MOVE 1 TO DAYS.
MOVE 0 TO HOURS.
MOVE 0 TO MINUTES.
MOVE 0 TO SECONDS.
MOVE 0 TO MILLSEC.

```

Figure 138. COBOL Example of CEEISEC (Part 1 of 2)

```
*****
** Call CEEISEC to convert the integers      **
** to seconds                               **
*****
      CALL "CEEISEC" USING YEAR, MONTH, DAYS,
                                HOURS, MINUTES, SECONDS,
                                MILLSEC, OUTSECS , FC.
*****
** If CEEISEC runs successfully, display result**
*****
      IF CEE000 of FC THEN
        DISPLAY MONTH "/" DAYS "/" YEAR
          " AT " HOURS ":" MINUTES ":" SECONDS
          " is equivalent to " OUTSECS " seconds"
      ELSE
        DISPLAY "CEEISEC failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.

      GOBACK.
```

Figure 138. COBOL Example of CEEISEC (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMISEC
/*****
/**
/** Function: CEEISEC - Convert integers to
/** seconds
/**
/** In this example, CEEISEC is called to convert
/** integers representing the date and time to the
/** number of seconds since 00:00 14 October 1582.
/**
/**
/*****
PLIISEC: PROC OPTIONS(MAIN);
    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL YEAR      REAL FIXED BINARY(31,0);
    DCL MONTH     REAL FIXED BINARY(31,0);
    DCL DAYS      REAL FIXED BINARY(31,0);
    DCL HOURS     REAL FIXED BINARY(31,0);
    DCL MINUTES   REAL FIXED BINARY(31,0);
    DCL SECONDS   REAL FIXED BINARY(31,0);
    DCL MILLSEC   REAL FIXED BINARY(31,0);
    DCL OUTSECS   REAL FLOAT DECIMAL(16);
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo  REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);
    /* Specify integers representing
    /* 00:00:00 1 January 2000

    YEAR = 2000;
    MONTH = 1;
    DAYS = 1;
    HOURS = 0;
    MINUTES = 0;
    SECONDS = 0;
    MILLSEC = 0;

```

Figure 139. PL/I Example of CEEISEC (Part 1 of 2)

```

/* Call CEEISEC to convert integers to Lilian      */
/* seconds                                         */

CALL CEEISEC ( YEAR, MONTH, DAYS, HOURS,
              MINUTES, SECONDS, MILLSEC, OUTSECS, FC );
IF FBCHECK( FC, CEE000) THEN DO;
  PUT EDIT( OUTSECS, ' seconds corresponds to ',
            MONTH, '/', DAYS, '/', YEAR, ' at ', HOURS,
            ':', MINUTES, ':', SECONDS, '.', MILLSEC )
            (SKIP, F(9), A, 2 (P'99',A), P'9999', A,
             3 (P'99', A), P'999' );
END;
ELSE DO;
  DISPLAY( 'CEEISEC failed with msg '
           || FC.MsgNo );
  STOP;
END;

END PLIISEC;

```

Figure 139. PL/I Example of CEEISEC (Part 2 of 2)

CEEITOK—Return initial condition token

CEEITOK returns the condition that initially triggered the current condition. The current condition might be different from the initial condition if the initial condition has been promoted by a user-written condition handler.

Syntax

►► CEEITOK (—*i_ctok*—, —*fc*—) ◀◀

i_ctok(output)

A 12-byte condition token identifying the initial condition in the current active data block being processed.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE35S	1	3260	No condition was active when a call to a condition management routine was made.

Usage notes

- z/OS UNIX considerations—In multithread applications, CEEITOK affects only the calling thread. CEEITOK returns the initial token for the condition of the thread.

For more information

- See “CEENCOD—Construct a condition token” on page 432, for more information about the CEENCOD callable service.

Examples

```

/*Module/File Name: EDCITOK */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

#ifdef __cplusplus
    extern "C" {
#endif
    void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
    }
#endif

int main(void) {

    _FEEDBACK fc,condtok;
    _ENTRY routine;
    _INT4 token,qdata;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;

    /* register condition handler */
    token = 99;
    routine.address = (_POINTER)&handler;;
    routine.nesting = NULL;
    CEEHDLR(&routine,&token,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEHDLR failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* .
     .
     . */
    /* build the condition token */
    c_1 = 1;
    c_2 = 99;
    cond_case = 1;
    sev = 1;
    control = 0;
    memcpy(facid,"ZZZ",3);
    isi = 0;

```

Figure 140. C/C++ Example of CEEITOK (Part 1 of 2)

```

    CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
            facid,&isi,&condtok,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEENCOD failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }

    /*
    :
    :
    */
    /* signal the condition */
    CEESGL(&condtok,&qdata,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEESGL failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }
    /*
    :
    :
    */
}

void handler(_FEEDBACK *fc, _INT4 *token, _INT4 *result,
             _FEEDBACK *newfc) {

    _FEEDBACK orig_fc, itok_fc;
    /*
    :
    :
    */
    /* get the original condition token */
    CEEITOK(&orig_fc, &itok_fc);
    if ( _FBCHECK ( itok_fc , CEE000 ) != 0 ) {
        printf("CEEITOK failed with message number %d\n",
               itok_fc.tok_msgno);
        exit(2999);
    }
    /*
    :
    :
    */
    *result = 10;
}

```

Figure 140. C/C++ Example of CEEITOK (Part 2 of 2)

```

CBL LIB,QUOTE,NOOPT
*Module/File Name: IGZTITOK
*****
**                                     **
** Purpose: Drive sample program for CEEITOK. **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRVITOK.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE          PROCEDURE-POINTER.
01 DENOMINATOR      PIC S9(9) BINARY.
01 NUMERATOR        PIC S9(9) BINARY.
01 RATIO            PIC S9(9) BINARY.
01 TOKEN            PIC S9(9) BINARY VALUE 0.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity         PIC S9(4) BINARY.
04 Msg-No           PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code       PIC S9(4) BINARY.
04 Cause-Code       PIC S9(4) BINARY.
03 Case-Sev-Ctl     PIC X.
03 Facility-ID      PIC XXX.
02 I-S-Info         PIC S9(9) BINARY.

PROCEDURE DIVISION.

REGISTER-HANDLER.
*****
** Register handler                                     **
*****
    SET ROUTINE TO ENTRY "CBLITOK".
    CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLR failed with msg "
            Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

RAISE-CONDITION.
*****
** Cause a zero-divide condition.                                     **
*****
    MOVE 0 TO DENOMINATOR.
    MOVE 1 TO NUMERATOR.
    DIVIDE NUMERATOR BY DENOMINATOR, GIVING RATIO.

```

Figure 141. COBOL Example of CEEITOK (Part 1 of 3)

```

UNREGISTER-HANDLER.
*****
** UNregister handler                               **
*****
    CALL "CEEHDLU" USING ROUTINE, TOKEN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEHDLU failed with msg "
            Msg-No of FC UPON CONSOLE
    END-IF.
    STOP RUN.

END PROGRAM DRVITOK.

*****
**                               **
** Function: CEEITOK - Return initial             **
**                               condition token   **
**                               **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLITOK.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ITOKEN.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity    PIC S9(4) BINARY.
            04 Msg-No     PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code  PIC S9(4) BINARY.
            04 Cause-Code  PIC S9(4) BINARY.
        03 Case-Sev-Ctl   PIC X.
        03 Facility-ID    PIC XXX.
    02 I-S-Info           PIC S9(9) BINARY.
01 FC.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity    PIC S9(4) BINARY.
            04 Msg-No     PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code  PIC S9(4) BINARY.
            04 Cause-Code  PIC S9(4) BINARY.
        03 Case-Sev-Ctl   PIC X.
        03 Facility-ID    PIC XXX.
    02 I-S-Info           PIC S9(9) BINARY.

```

Figure 141. COBOL Example of CEEITOK (Part 2 of 3)

```

LINKAGE SECTION.
01 TOKEN                      PIC S9(9) BINARY.
01 RESULT                     PIC S9(9) BINARY.
88 RESUME                      VALUE 10.
01 CURCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity                   PIC S9(4) BINARY.
04 Msg-No                     PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code                 PIC S9(4) BINARY.
04 Cause-Code                 PIC S9(4) BINARY.
03 Case-Sev-Ctl               PIC X.
03 Facility-ID                PIC XXX.
02 I-S-Info                   PIC S9(9) BINARY.
01 NEWCOND.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity                   PIC S9(4) BINARY.
04 Msg-No                     PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code                 PIC S9(4) BINARY.
04 Cause-Code                 PIC S9(4) BINARY.
03 Case-Sev-Ctl               PIC X.
03 Facility-ID                PIC XXX.
02 I-S-Info                   PIC S9(9) BINARY.

PROCEDURE DIVISION USING CURCOND, TOKEN,
                      RESULT, NEWCOND.

PARA-CBLITOK.
CALL "CEEITOK" USING ITOKEN, FC.
IF CEE000 of FC THEN
    DISPLAY "Initial condition has msg "
        Msg-No of ITOKEN
ELSE
    DISPLAY "CEEITOK failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.
PARA-HANDLER.
*****
** In user handler - resume execution          **
*****
SET RESUME TO TRUE.

GOBACK.

END PROGRAM CBLITOK.

```

Figure 141. COBOL Example of CEEITOK (Part 3 of 3)

```

*PROCESS OPT(0), MACRO;
/* Module/File Name: IBMITOK */
/*****
**
** Function: CEEITOK - example of CEEITOK
** invoked from PL/I ON-unit
**
**
*****/
IBMITOK: PROCEDURE OPTIONS(MAIN);
%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;
DECLARE
  01 ITOKEN, /* Feedback token */
  03 MsgSev REAL FIXED BINARY(15,0),
  03 MsgNo REAL FIXED BINARY(15,0),
  03 Flags,
  05 Case BIT(2),
  05 Severity BIT(3),
  05 Control BIT(3),
  03 FacID CHAR(3), /* Facility ID */
  03 ISI /* Instance-Specific Information */
  REAL FIXED BINARY(31,0),
  01 FC, /* Feedback token */
  03 MsgSev REAL FIXED BINARY(15,0),
  03 MsgNo REAL FIXED BINARY(15,0),
  03 Flags,
  05 Case BIT(2),
  05 Severity BIT(3),
  05 Control BIT(3),
  03 FacID CHAR(3), /* Facility ID */
  03 ISI /* Instance-Specific Information */
  REAL FIXED BINARY(31,0),
  divisor FIXED BINARY(31) INITIAL(0);
ON ZERODIVIDE BEGIN;
CALL CEEITOK ( ITOKEN, FC );
IF FBCHECK( FC, CEE000) THEN DO;
  PUT SKIP LIST('The initial condition for the '
  || 'current active block was message '
  || ITOKEN.MsgNo
  || ' for facility ' || ITOKEN.FacID );
END;
ELSE DO;
  DISPLAY( 'CEEITOK failed with msg '
  || FC.MsgNo );
  CALL CEEMSG( FC, 2, * );
END;
END /* ON ZeroDivide */;
divisor = 15 / divisor /* signals ZERODIVIDE */;
END IBMITOK;

```

Figure 142. PL/I Example of CEEITOK

CEELCNV—Query Locale numeric conventions

CEELCNV, which calls the C function `localeconv()`, queries the numeric formatting information from the current locale and sets the components of a structure with values pertaining to the LC_NUMERIC and LC_MONETARY categories. It sets the components of an object of the type NM_STRUCT with the values appropriate for the formatting of the numeric quantities (monetary and otherwise) according to the rules of the current locale.

CEELCNV is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

```

▶▶CEELCNV—(—version—,—num_and_mon—,—fc—)—▶▶

```

version

This parameter points to a user supplied VERSION_INFO structure, in which the first four bytes contain the callable service version number.

Requirement: If the parameter does not point to a user supplied VERSION_INFO structure, it must be omitted. If the parameter points to a VERSION_INFO containing version number 2, CEELCNV returns a num_and_mon structure with the international monetary string formatting elements added for ISO/IEC 9899:1999 (C99). This corresponds to the current C language lconv structure. If the parameter is omitted, CEELCNV returns the structure format used before C99. For information on how to code this parameter, see “Invoking callable services” on page 109.

num_and_mon (output)

Points to the numeric and monetary structure that is filled in by this service. If the service fails, the contents of the structure are undefined.

num_and_mon has the following structure:

NM_STRUCT

A halfword length-prefixed character string (VSTRING). A pointer to the filled-in structure NM_STRUCT is returned. The structure pointed to by the return value should not be modified by the program but can be overridden by subsequent calls to CEELCNV. In addition, calls to CEESETL with the LC_ALL, LC_MONETARY or LC_NUMERIC categories can cause subsequent calls to CEELCNV to return different values based on the selection of the locale.

The members of the structure with the type VSTRING are strings, any of which (except decimal_point) can point to an empty string, to indicate that the value is not available in the current locale or is of zero length. The members with type VINT are non-negative numbers, any of which can be CHAR_MAX to indicate that the value is not available in the current locale. The members include the following:

VSTRING decimal_point

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the decimal-point character used to format non-monetary quantities.

VSTRING thousands_sep

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the character used to separate groups of digits to the left of the decimal point in formatted non-monetary quantities.

VSTRING grouping

A halfword length-prefixed character string (VSTRING) of 22 bytes whose elements indicate the size of each group of digits in formatted non-monetary quantities.

VSTRING int_curr_symbol

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the international currency symbol applicable to the current locale, left justified within a four-character space-padded field.

VSTRING currency_symbol

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the local currency symbol applicable to the current locale.

VSTRING mon_decimal_point

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the decimal point character used to format monetary quantities.

VSTRING mon_thousands_sep

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the separator for groups of digits to the left of the decimal point in formatted monetary quantities.

VSTRING mon_grouping

A halfword length-prefixed character string (VSTRING) of 22 bytes whose elements indicate the size of each group of digits in formatted monetary quantities.

VSTRING positive_sign

A halfword length-prefixed character string (VSTRING) of 22 bytes that indicates a non-negative-formatted monetary quantity.

VSTRING negative_sign

A halfword length-prefixed character string (VSTRING) of 22 bytes used to indicate a negative-formatted monetary quantity.

VINT int_frac_digits

A 1-byte integer that is the number of fractional digits (those to the right of the decimal point) to be displayed in an internationally-formatted monetary quantity.

VINT frac_digits

A 1-byte integer that is the number of fractional digits (those to the right of the decimal point) to be displayed in a formatted monetary quantity.

VINT p_cs_precedes

A 1-byte integer that is set to 1 if the *currency_symbol* precedes the value for a non-negative-formatted monetary quantity. It is set to 0 if it follows.

VINT p_sep_by_space

A 1-byte integer that is set to 1 if the *currency_symbol* is separated by a space from the value for a non-negative-formatted monetary quantity. It is set to 0 if it is not separated.

VINT n_cs_precedes

A 1-byte integer that is set to 1 if the *currency_symbol* precedes the value for a negative-formatted monetary quantity. It is set to 0 if it follows.

VINT n_sep_by_space

A 1-byte integer that is set to 1 if the *currency_symbol* is separated by a space from the value for a negative-formatted monetary quantity. It is set to 0 if it is not separated.

VINT p_sign_posn

A 1-byte integer that is set to a value indicating the positioning of the *positive_sign* for non-negative-formatted monetary quantity.

VINT n_sign_posn

A 1-byte integer that is set to a value indicating the position of the *negative_sign* for negative-formatted monetary quantity.

VSTRING left_parenthesis

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the used to denote a negative monetary quantity.

VSTRING right_parenthesis

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the used to denote a negative monetary quantity.

VSTRING debit_sign

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the debit sign character in monetary formats.

VSTRING credit_sign

A halfword length-prefixed character string (VSTRING) of 22 bytes that is the credit sign character in monetary formats.

VINT int_p_cs_precedes

A 1-byte integer that is set to 1 if the *currency_symbol* precedes the value for a non-negative-formatted international monetary quantity. It is set to 0 if it follows.

VINT int_p_sep_by_space

A 1-byte integer that is set to 1 if the *currency_symbol* is separated by a space from the value for a non-negative-formatted international monetary quantity. It is set to 0 if it is not separated.

VINT int_n_cs_precedes

A 1-byte integer that is set to 1 if the *currency_symbol* precedes the value for a negative-formatted international monetary quantity. It is set to 0 if it follows.

VINT int_n_sep_by_space

A 1-byte integer that is set to 1 if the *currency_symbol* is separated by a space from the value for a negative-formatted international monetary quantity. It is set to 0 is it is not separated.

VINT int_p_sign_posn

A 1-byte integer that is set to a value indicating the positioning of the *positive_sign* for non-negative-formatted international monetary quantity.

VINT n_sign_posn

A 1-byte integer that is set to a value indicating the position of the *negative_sign* for negative-formatted international monetary quantity.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3T1	3	4001	General Failure: Service could not be completed.
CEE3VN	3	4087	Input Error: The <i>version_info</i> control block contains a version number that is not valid.

Usage Notes

- PL/I MTF consideration—CEELCNV is not supported in PL/I MTF applications.

- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.
- CEELCNV does not return all numeric conventions.
- CHAR_MAX determines when no further grouping is to be performed. The elements of *grouping* and *mon_grouping* are interpreted according to the following CHAR_MAX settings:
 - 0 specifies that the previous element is to be repeatedly used for the remainder of the digits. Indicates that no further grouping is to be performed.
 - Any other value represents the number of digits comprising the current group. The next element is examined to determine the size of the next group of digits to the left of the current group.
- The value of *p_sign_posn* and *n_sign_posn* is interpreted according to the following:
 - 0 Parentheses surround the quantity and *currency_symbol*.
 - 1 The sign string precedes the quantity and *currency_symbol*.
 - 2 The sign string follows the quantity and *currency_symbol*.
 - 3 The sign string immediately precedes the *currency_symbol*.
 - 4 The sign string immediately follows the *currency_symbol*.

For more information

- See “CEEQRYL—Query active locale environment” on page 448 for a description of LC_NUMERIC and LC_MONETARY categories.
- See “CEESETL—Set locale operating environment” on page 475 for details on the CEESETL callable service.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGTLCNV
*****
** Example for callable service CEELCNV          **
** Function: Retrieve numeric and monetary      **
**          format for default locale and       **
**          print an item.                      **
**          Set locale to France, retrieve      **
**          structure, and print an item.       **
** Valid only for COBOL for MVS & VM Release 2 **
** or later.                                   **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. MAINLCNV.
DATA DIVISION.
WORKING-STORAGE SECTION.
*****
** Use Locale NM-Struct for CEELCNV calls      **
*****
COPY CEEIGZN2M.
*
PROCEDURE DIVISION.
*****
** Subroutine needed for addressing            **
*****
CALL "COBLCNV" USING NM-Struct.
STOP RUN.
*
IDENTIFICATION DIVISION.
PROGRAM-ID. COBLCNV.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 PTR1 Pointer.
01 Locale-Name.
   02 LN-Length PIC S9(54) BINARY.
   02 LN-String PIC X(256).

*****
** Use Locale category constants              **
*****
COPY CEEIGZLC.
*
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
      03 Case-1-Condition-ID.
         04 Severity PIC S9(4) BINARY.
         04 Msg-No PIC S9(4) BINARY.
      03 Case-2-Condition-ID
         REDEFINES Case-1-Condition-ID.
            04 Class-Code PIC S9(4) BINARY.
            04 Cause-Code PIC S9(4) BINARY.
      03 Case-Sev-Ctl PIC X.
      03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.

```

Figure 143. COBOL Example of CEELCNV (Part 1 of 2)

```

LINKAGE SECTION.
*****
** Use Locale NM-Struct for CEELCNV calls      **
*****
COPY CEEIGZN2M.
*
PROCEDURE DIVISION USING NM-Struct.
*****
** Call CEELCNV to retrieve values for locale**
*****
CALL "CEELCNV" USING OMITTED,
ADDRESS OF NM-Struct, FC.
*****
** Check feedback code and display result      **
*****
IF Severity = 0 THEN
    DISPLAY "Default decimal point is "
    DECIMAL-PT-String(1:DECIMAL-PT-Length)
ELSE
    DISPLAY "Call to CEELCNV failed. " Msg-No
END-IF.
*****
** Set up locale for France                    **
*****
MOVE 54 TO LN-Length.
MOVE "Fr_FR" TO LN-String (1:LN-Length).
*****
** Call CEESETL to set monetary locale          **
*****
CALL "CEESETL" USING Locale-Name,
LC-MONETARY, FC.

*****
** Call CEESETL to set numeric locale          **
*****
CALL "CEESETL" USING Locale-Name,
LC-NUMERIC, FC.
*****
** Check feedback code and call CEELCNV again **
** using version 2 to get at C99 mapping.      **
*****
IF Severity = 0
    MOVE 2 TO Version
    set PTR1 to address of Version-Info
    CALL "CEELCNV" USING PTR1,
ADDRESS OF NM-Struct, FC
IF Severity > 0
    DISPLAY "Call to CEELCNV failed. "
Msg-No
ELSE
    DISPLAY "French decimal point is "
    DECIMAL-PT-String(1:DECIMAL-PT-Length)
END-IF
ELSE
    DISPLAY "Call to CEESETL failed. " Msg-No
END-IF.
EXIT PROGRAM.
END PROGRAM COBLCNV.
*
END PROGRAM MAINLCNV.

```

Figure 143. COBOL Example of CEELCNV (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMLCNV */
/*****
/* Example for callable service CEELCNV */
/* Function: Retrieve numeric and monetary format */
/* structure for default locale and print an item. */
/* Set locale to France, retrieve structure and */
/* print an item. */
*****/
PLILCNV: PROC OPTIONS(MAIN);
%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs */
%INCLUDE CEEIBMCT; /* FBCHECK macro, FB constants */
%INCLUDE CEEIBMLC; /* Locale category constants */
%INCLUDE CEEIBMNM2M; /* NM_STRUCT for CEELCNV calls */
/* use explicit pointer for local NM_STRUCT struct */
DCL NUM_AND_MON POINTER INIT(ADDR(NM_STRUCT));

/* Point to local version info struct and initialize*/
/* VERSION TO 2 TO USE C99 MAPPING OF NM_STRUCT */
DCL VERSN POINTER INIT(ADDR(version_info));
VERSION_INFO.VERSION = 2;

/* CEESETL service call arguments */
DCL LOCALE_NAME CHAR(256) VARYING;

DCL 01 FC, /* Feedback token */
03 MsgSev REAL FIXED BINARY(15,0),
03 MsgNo REAL FIXED BINARY(15,0),
03 Flags,
05 Case BIT(2),
05 Severity BIT(3),
05 Control BIT(3),
03 FacID CHAR(3), /* Facility ID */
03 ISI /* Instance-Specific Information */
REAL FIXED BINARY(31,0);
/* retrieve structure for default locale */
CALL CEELCNV ( *, NUM_AND_MON, FC );
PUT SKIP LIST('Default DECIMAL_POINT is ',
NM_STRUCT.DECIMAL_POINT);
/* set locale for France */
LOCALE_NAME = 'Fr_FRFRAN';
/* use LC_NUMERIC category const from CEEIBMLC */
CALL CEESETL ( LOCALE_NAME, LC_NUMERIC, FC );
/* use LC_MONETARY category const from CEEIBMLC */
CALL CEESETL ( LOCALE_NAME, LC_MONETARY, FC );
/* FBCHECK macro used (defined in CEEIBMCT) */
IF FBCHECK( FC, CEE000 ) THEN
DO;
/* retrieve active NM_STRUCT, France Locale */
CALL CEELCNV ( *VERSN, NUM_AND_MON, FC );
PUT SKIP LIST('French DECIMAL_POINT is ',
NM_STRUCT.DECIMAL_POINT);
END;
END PLILCNV;

```

Figure 144. PL/I Example of CEELCNV

CEELOCT—Get current local date or time

CEELOCT returns the current local date or time in three formats:

- Lilian date (the number of days since 14 October 1582)
- Lilian seconds (the number of seconds since 00:00:00 14 October 1582)
- Gregorian character string (in the form YYYYMMDDHHMISS999)

These values are compatible with other Language Environment date and time services, and with existing language intrinsic functions.

CEELOCT performs the same function as calling the CEEGMT, CEEGMO, and CEEDATM date and time services separately. CEELOCT, however, performs the same services with much greater speed.

The character value returned by CEELOCT is designed to match that produced by existing language intrinsic functions. The numeric values returned can be used to simplify date calculations.

Syntax

```
►► CEELOCT(—output_Lilian—,—output_seconds—,—output_Gregorian—,—fc—)►►
```

output_Lilian (output)

A 32-bit binary integer representing the current local date in the Lilian format, that is, day 1 equals 15 October 1582, day 148,887 equals 4 June 1990. If the local time is not available from the system, *output_Lilian* is set to 0 and CEELOCT terminates with a non-CEE000 symbolic feedback code.

output_seconds (output)

A 64-bit double-floating point number representing the current local date and time as the number of seconds since 00:00:00 on 14 October 1582, not counting leap seconds. For example, 00:00:01 on 15 October 1582 is second number 86,401 ($24 \times 60 \times 60 + 01$). 19:00:01.078 on 4 June 1990 is second number 12,863,905,201.078.

If the local time is not available from the system, *output_seconds* is set to 0 and CEELOCT terminates with a non-CEE000 symbolic feedback code.

output_Gregorian (output)

A 17-byte fixed-length character string in the form YYYYMMDDHHMISS999 representing local year, month, day, hour, minute, second, and millisecond.

If the format of *output_Gregorian* does not meet your needs, you can use the CEEDATM callable service to convert *output_seconds* to another format.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2F3	3	2531	The local time was not available from the system.

Usage notes

- z/OS consideration—The MVS command SET DATE will not affect the value returned by CEELOCT.
- CICS consideration—CEELOCT does not use the OS TIME macro.
- z/OS UNIX consideration—In multithread applications, CEELOCT affects only the calling thread.

For more information

- See “CEEDATM—Convert seconds to character timestamp” on page 258 for more information about the CEEDATM callable service.

Examples

```
/*Module/File Name: EDCLOCT */

#include <string.h>
#include <stdio.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc;
    _INT4      lil_date;
    _FLOAT8    local_date;
    _CHAR17    gregorian_date;

    CEELOCT(&lil_date,&local_date,gregorian_date,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEELOCT failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }

    printf("The current date is YYYYMMDDHHMISS999\n");
    printf("                %.17s\n",gregorian_date);
}
```

Figure 145. C/C++ Example of CEELOCT

```

CBL LIB,QUOTE
*Module/File Name: IGZTLOCT
*****
**
** CBLLOCT - Call CEELOCT to get current      **
**          local time                        **
**
** In this example, a call is made to CEELOCT **
** to return the current local time in Lilian **
** days (the number of days since 14 October **
** 1582), Lilian seconds (the number of      **
** seconds since 00:00:00 14 October 1582), **
** and a Gregorian string (in the form      **
** YYYYMMDDMISS999). The Gregorian character **
** string is then displayed.                **
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLLOCT.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 LILIAN          PIC S9(9) BINARY.
01 SECONDS         COMP-2.
01 GREGORN         PIC X(17).
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity       PIC S9(4) BINARY.
04 Msg-No        PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code    PIC S9(4) BINARY.
04 Cause-Code   PIC S9(4) BINARY.
03 Case-Sev-Ctl  PIC X.
03 Facility-ID   PIC XXX.
02 I-S-Info      PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLLOCT.
    CALL "CEELOCT" USING LILIAN, SECONDS,
                        GREGORN, FC.
*****
** If CEELOCT runs successfully, display      **
**      Gregorian character string            **
*****
IF CEE000 of FC THEN
    DISPLAY "Local Time is " GREGORN
ELSE
    DISPLAY "CEELOCT failed with msg "
    Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 146. COBOL Example of CEELOCT

```

*PROCESS MACRO;
/* Module/File Name: IBMLOCT */
/*****
**
** Function: CEELOCT - get current local time
**
** In this example, CEELOCT is called to return
** the current local time as a Lilian date,
** Lilian timestamp, and Gregorian character
** string.
**
**
*****/
PLILOCT: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL LILIAN    REAL FIXED BINARY(31,0);
    DCL SECONDS  REAL FLOAT DECIMAL(16);
    DCL GREGORN   CHARACTER ( 17 );
    DCL 01 FC, /* Feedback token */
        03 MsgSev    REAL FIXED BINARY(15,0),
        03 MsgNo     REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case    BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID     CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    /* Call CEELOCT to return local time in 3 formats */
    CALL CEELOCT ( LILIAN, SECONDS, GREGORN, FC );

    /* If CEELOCT ran successfully, print Gregorian */
    /* result */
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST( 'The local date and time are '
            || GREGORN || '.' );
        END;
    ELSE DO;
        DISPLAY( 'CEELOCT failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLILOCT;

```

Figure 147. PL/I Example of CEELOCT

CEEMGET—Get a message

CEEMGET retrieves, formats, and stores in a passed message area a message corresponding to a condition token that is either returned from a callable service or passed to a user-written condition handler. The caller can later retrieve the message to change or to write as output.

Syntax

```

►►—CEEMGET—(—cond_token—,—message_area—,—msg_ptr—,—fc—)—◄◄

```


cond_token (input/output)

A 12-byte condition token received or returned as the result of a Language Environment callable service.

message_area (input/output)

A fixed-length 80-character string (VSTRING), where the message is placed.

The message is left-justified and padded on the right with blanks.

msg_ptr (input/output)

A 4-byte binary integer returned to the calling routine.

The *msg_ptr* should be passed a value of zero on the initial call to CEEMGET. If a message is too large to be contained in the *message_area*, *msg_ptr* (containing the index) is returned into the message. This index is used on subsequent calls to CEEMGET to retrieve the remaining portion of the message. A feedback code is also returned, indicating the message has been truncated. When the entire message is returned, *msg_ptr* is zero.

msg_ptr contains different results based on the length of the message:

- If a message contains fewer than 80 characters, the entire message is returned on the first call. *msg_ptr* contains 0.
- If a message contains exactly 80 characters, the entire message is returned on the first call. *msg_ptr* contains 0.
- If the message is too long, CEEMGET splits it into segments. The *msg_ptr* does not contain the cumulative index for the entire message returned so far, but contains only the index into the segment that was just returned. It is up to the user of CEEMGET to maintain the cumulative count if needed. When a message is too long, the following can occur:
 - If a message contains more than 80 characters and at least one blank is contained in the first 80 characters, the string up to and including the last blank is returned on the first call.
 - If the 80th character is nonblank (even if the 81st character is a blank), *msg_ptr* contains the index of the last blank (something less than 80), and the next call starts with the next character.
 - If the 80th character is a blank, *msg_ptr* contains 80 and the next call starts with the 81st character, blank or nonblank.
 - If a message contains more than 80 characters and at least the first 80 are all nonblank, the first 80 are returned and the next call does not add any blanks and starts with the 81st character. *msg_ptr* contains 80.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE036	3	0102	An unrecognized condition token was passed to <i>routine</i> and could not be used.
CEE0E2	3	0450	The message inserts for the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> could not be located.
CEE0E6	3	0454	The message number <i>message-number</i> could not be found for facility ID <i>facility-id</i> .

CEEMGET

Code	Severity	Message Number	Message Text
CEE0E7	1	0455	The message with message number <i>message-number</i> and facility ID <i>facility-id</i> was truncated.
CEE0EA	3	0458	The message repository <i>repository-name</i> could not be located.

Usage notes

- z/OS UNIX considerations—In multithread applications, CEEMGET affects only the calling thread. However, CEEMGET uses the NATLANG value of the enclave. Any subsequent calls to CEEMGET, for a given condition, use the NATLANG value in effect at the time of the first call.

For more information

- See “CEENCOD—Construct a condition token” on page 432 for a description of the 12-byte condition token constructed by the CEENCOD callable service.

Examples

```

/*Module/File Name: EDCMGET */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {
    _VSTRING message;
    _INT4 dest,msgindx;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;
    _CHAR80 msgarea;
    _FEEDBACK fc,token;

    /* construct a token for CEE message 2523 */
    c_1 = 1;
    c_2 = 2523;
    cond_case = 1;
    sev = 1;
    control = 1;
    memcpy(facid,"CEE",3);
    isi = 0;

    CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
            facid,&isi,&token,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEENCOD failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    msgindx = 0;
    memset(msgarea,' ',79);/* initialize the message area */
    msgarea_80 = '\0';

    /* use CEEMGET until all the message has been */
    /* retrieved */
    /* msgindx will be zero when all the message has */
    /* been retrieved */
    do {
        CEEMGET(&token,msgarea,&msgindx,&fc);

        if (fc.tok_sev > 1 ) {
            printf("CEEMGET failed with message number %d\n",
                fc.tok_msgno);
            exit(2999);
        }
    }
}

```

Figure 148. C/C++ Example of CEEMGET (Part 1 of 2)

```
    /* put out the message using CEEMOUT */
    memcpy(message.string,msgarea,80);
    message.length = 80;
    dest = 2;
    CEEMOUT(&message,&dest,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEMOUT failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
} while (msgindx != 0);
}
```

Figure 148. C/C++ Example of CEEMGET (Part 2 of 2)

```

CBL LIB,QUOTE
*Module/File Name: IGZTMGET
*****
**
** CBLMGET - Call CEEMGET to get a
**           message. First set up a
**           condition token using
**           CEENCOD.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLMGET.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 MSGBUF PIC X(80).
01 MSGPTR PIC S9(9) BINARY.
01 SEV PIC S9(4) BINARY.
01 MSGNO PIC S9(4) BINARY.
01 CASE PIC S9(4) BINARY.
01 SEV2 PIC S9(4) BINARY.
01 CNTRL PIC S9(4) BINARY.
01 FACID PIC X(3).
01 ISINFO PIC S9(9) BINARY.
01 NEWTOK.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLMGET.

```

Figure 149. COBOL Example of CEEMGET (Part 1 of 2)

```

*****
** Give contok value of                               **
** sev = 0, msgno = 1 facid = CEE                     **
*****
      MOVE 0 TO SEV.
      MOVE 1 TO MSGNO.
      MOVE 1 TO CASE.
      MOVE 0 TO SEV2.
      MOVE 1 TO CNTRL.
      MOVE "CEE" TO FACID.
      MOVE 0 TO ISINFO.

*****
** Call CEENCOD with the values assigned above **
** to build a condition token "NEWTOK"              **
*****
      CALL "CEENCOD" USING SEV, MSGNO, CASE,
                          SEV2, CNTRL, FACID,
                          ISINFO, NEWTOK, FC.
      IF NOT CEE000 of FC THEN
          DISPLAY "CEENCOD failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

*****
** Always pass 0 in MSGPTR on the initial            **
** call to CEEMGET. If the message is too            **
** long to be returned in a single call,             **
** MSGPTR will be returned containing an             **
** index to the message that can be used on         **
** subsequent calls to CEEMGET.                     **
*****
      MOVE 0 TO MSGPTR.

*****
** Call CEEMGET to get the message associated **
** with the condition token                      **
*****
      CALL "CEEMGET" USING NEWTOK, MSGBUF,
                          MSGPTR , FC.
      IF NOT CEE000 of FC THEN
          DISPLAY "CEEMGET failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      ELSE
          DISPLAY "The message is: " MSGBUF
      END-IF.

      GOBACK.

```

Figure 149. COBOL Example of CEEMGET (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMMGET */
/*****
**
**Function      : CEEMGET - Get a Message
**
**
*****/
/*****
PLIMGET: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL 01 CONTOK, /* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case    BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID     CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case    BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID     CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);
DCL MSGBUF     CHAR(80);
DCL MSGPTR     REAL FIXED BINARY(31,0);

/* Give CONTOK value of condition CEE001 */
ADDR( CONTOK ) -> CEEIBMCT = CEE001;
MSGPTR = 0;

/* Call CEEMGET to retrieve msg corresponding */
/* to condition token */
CALL CEEMGET ( CONTOK, MSGBUF, MSGPTR, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'Message text for message number'
        || CONTOK.MsgNo || ' is "' || MSGBUF || "' );
    END;
ELSE DO;
    DISPLAY( 'CEEMGET failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLIMGET;

```

Figure 150. PL/I Example of CEEMGET

CEEMOUT—Dispatch a message

CEEMOUT dispatches a user-defined message string to the message file.

Syntax

►►CEEMOUT—(—*message_string*—,—*destination_code*—,—*fc*—)◄◄

message_string (input)

A halfword-prefixed printable character string containing the message. DBCS characters must be enclosed within shift-out (byte X'0F') shift-in (X'0E') characters.

Insert data cannot be placed in the message with CEEMOUT. The halfword-prefixed message string (input) must contain only printable characters. For length greater than zero, unpredictable results will occur if the byte following the halfword prefix is X'00'

destination_code (input)

A 4-byte binary integer. The only accepted value for *destination_code* is 2. Under systems other than CICS, Language Environment writes the message to the *ddname* of the file specified in the MSGFILE run-time option. Under CICS, the message is written to a transient data queue named CESE.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0E3	3	0451	An invalid destination code <i>destination-code</i> was passed to routine <i>routine-name</i> .
CEE0E9	3	0457	The message file destination <i>ddname</i> could not be located.

Usage notes

- z/OS UNIX considerations—In multithread applications, CEEMOUT affects only the calling thread. When multiple threads write to the message file, the output is interwoven by line. To group lines of output, serialize MSGFILE access (by using a mutex, for example).
- If the message file is defined with an LRECL greater than 256, and the input to CEEMOUT is greater than 256 bytes, the output results in multiple records. The first 256 bytes of each record contains output data. The remaniing bytes of each record, up to the LRECL size, might contain unpredictable data.

For more information

- See “MSGFILE” on page 50 for more information about the MSGFILE run-time option.
- See *z/OS Language Environment Programming Guide* for more information on CESE.

Examples

```

/*Module/File Name: EDCMOUT */

#include <string.h>
#include <stdio.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _VSTRING message;
    _INT4 dest;
    _FEEDBACK fc;

    strcpy(message.string,"This is a test message");
    message.length = strlen(message.string);
    dest = 2;

    CEEMOUT(&message,&dest,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEMOUT failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* .
     * . */
}

```

Figure 151. C/C++ Example of CEEMOUT

```

CBL LIB,QUOTE
*Module/File Name: IGZTMOUT
*****
** CBLMOUT - Call CEEMOUT to dispatch a msg. **
** In this example, a call is made to CEEMOUT **
** to dispatch a user-defined message string **
** to the ddname specified defaulted in the **
** MSGFILE run-time option. **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLMOUT.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 MSGSTR.
    02 Vstring-length      PIC S9(4) BINARY.
    02 Vstring-text.
    03 Vstring-char        PIC X,
                           OCCURS 0 TO 256 TIMES
                           DEPENDING ON Vstring-length
                           of MSGSTR.
01 DESTIN                  PIC S9(9) BINARY.
01 FC.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity      PIC S9(4) BINARY.
        04 Msg-No        PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code    PIC S9(4) BINARY.
        04 Cause-Code    PIC S9(4) BINARY.
    03 Case-Sev-Ctl       PIC X.
    03 Facility-ID        PIC XXX.
    02 I-S-Info           PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLMOUT.
*****
** Create message string and specify length **
*****
    MOVE 25 TO Vstring-length of MSGSTR.
    MOVE "CEEMOUT ran successfully"
      TO Vstring-text of MSGSTR.
*****
** Specify 2 to send the message to the ddname **
** specified or defaulted in the MSGFILE **
** run-time option. **
*****
    MOVE 2 TO DESTIN.
    CALL "CEEMOUT" USING MSGSTR, DESTIN, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEEMOUT failed with msg "
          Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.
GOBACK.

```

Figure 152. COBOL Example of CEEMOUT

```

*PROCESS MACRO;
/* Module/File Name: IBMMOUT */
/*****
** Function: CEEMOUT - Dispatch a message **
** **
** In this example, CEEMOUT is called to dispatch **
** a user-defined message string to the ddname **
** specified or defaulted in the MSGFILE run-time **
** option. **
*****/
PLIMOUT: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL MSGSTR CHAR(255) VARYING;
DCL DESTIN REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

MSGSTR = 'CEEMOUT ran successfully.';
/* Set message string */
DESTIN = 2; /* Send to MSGFILE ddname */

/* Dispatch message to destination by a */
/* call to CEEMOUT */
CALL CEEMOUT ( MSGSTR, DESTIN, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'Message ' || MSGSTR
    || ' sent to destination ' || DESTIN );
END;
ELSE DO;
    DISPLAY( 'CEEMOUT failed with msg '
    || FC.MsgNo );
STOP;
END;

END PLIMOUT;

```

Figure 153. PL/I Example of CEEMOUT

CEEMRCE—Move resume cursor explicit

The CEEMRCE service resumes execution of a user routine at the location established by CEE3SRP. CEEMRCE is designed to be called from a user condition handler and works only in conjunction with the CEE3SRP service.

Syntax

►►—CEEMRCE—(—resume_token—,—fc—)—————◄◄

resume_token (input)

An INT4 data type that contains a token, returned from the CEE3SRP service, representing the resume point in the user routine.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE07V	2	0255	The first parameter passed to CEEMRCE was an unrecognized label.

Usage notes

- Exit DSA routines are invoked as the resume cursor is moved back across stack frames.
- When a resume is requested, the state of the machine indicated in the machine state block is established prior to entry at the resume point.

For more information

- See *z/OS Language Environment Programming Guide* for more information about the CEEMRCE callable service.

Examples

```

CBL NODYNAM APOST
IDENTIFICATION DIVISION.
PROGRAM-ID. PGM2.
*Module/File Name: IGZTMRCE
*-----*
* Sample program using CEE3SRP and CEEMRCE.*
* PGM2 registers user-written condition *
* handler UCH1 using CEEHDLR. It *
* sets a resume point using CEE3SRP. After *
* incurring a condition and returning *
* to PGM2, PGM3 is called. PGM3 sets up *
* new resume point, does a divide-by-zero, *
* and after resuming in PGM3, resets the *
* resume point to PGM2 and does a GOBACK. *
*-----*

DATA DIVISION.
WORKING-STORAGE SECTION.

01 RECOVERY-AREA EXTERNAL.
   05 RECOVERY-POINT          POINTER.
   05 ERROR-INDICATOR         PIC X(01).

01 UCH-ROUTINE                PROCEDURE-POINTER.

01 FIELDS.
   05 FIRST-TIME-SW          PIC X(03) VALUE ' ON'.
   88 FIRST-TIME-88          VALUE ' ON'.
   05 ANSWER                 PIC S9(02) COMP-3 VALUE 0.
   05 UCH1                   PIC X(08) VALUE 'UCH1 '.
   05 PGM3                   PIC X(08) VALUE 'PGM3 '.
   05 CEEHDLR                PIC X(08) VALUE 'CEEHDLR '.
   05 CEE3SRP                PIC X(08) VALUE 'CEE3SRP '.
   05 TOKEN                  PIC S9(09) BINARY.
   05 FC.
      10 CASE-1.
         15 SEVERITY          PIC S9(04) BINARY.
         15 MSG-NO           PIC S9(04) BINARY.
      10 SEV-CTL             PIC X(01).
      10 FACILITY-ID         PIC X(03).
      10 I-S-INFO            PIC S9(09) BINARY.

PROCEDURE DIVISION.

      SET UCH-ROUTINE TO ENTRY 'UCH1'.
*-----*
* Register the condition handler, UCH1. *
*-----*

      CALL CEEHDLR USING UCH-ROUTINE, TOKEN, FC.
      IF CASE-1 NOT = LOW-VALUE
         GOBACK.
      PERFORM COMPUTE-LOOP 3 TIMES.
      CALL PGM3 USING RECOVERY-AREA.
      SET RECOVERY-POINT TO NULL.
      GOBACK.

```

Figure 154. COBOL Example of CEEMRCE (Part 1 of 4)

```

      COMPUTE-LOOP.
        IF FIRST-TIME-88
          MOVE 'OFF' TO FIRST-TIME-SW
*-----*
*
* Set up a new resume point.
*-----*

          CALL CEE3SRP USING RECOVERY-POINT,
                           CASE-1

                           SERVICE LABEL

          IF CASE-1 NOT = LOW-VALUE
            GOBACK.

          IF ERROR-INDICATOR = 'E'
            MOVE SPACE TO ERROR-INDICATOR
            MOVE 1 TO ANSWER.

* Application code may go here.

          COMPUTE ANSWER = 1 / ANSWER.

* Put application code here.


      CBL NODYNAM APOST
      IDENTIFICATION DIVISION.
      PROGRAM-ID. PGM3.
*-----*
*
* Sample program using CEE3SRP and CEEMRCE.*
* PGM2 registered UCH1. This program sets a*
* new resume point, does a divide-by-zero,*
* and after resuming in PGM3, resets the  *
* resume point to PGM2 and does a GOBACK.*
*-----*

      DATA DIVISION.
      WORKING-STORAGE SECTION.

      01 RECOVERY-AREA EXTERNAL.
         05 RECOVERY-POINT          POINTER.
         05 ERROR-INDICATOR         PIC X(01).

      01 UCH-ROUTINE      PROCEDURE-POINTER.

```

Figure 154. COBOL Example of CEEMRCE (Part 2 of 4)

```

01 FIELDS.
   05 FIRST-TIME-SW    PIC X(03) VALUE ' ON'.
      88 FIRST-TIME-88      VALUE ' ON'.
   05 ANSWER          PIC S9(02) COMP-3 VALUE 0.
   05 CEEHDLR         PIC X(08) VALUE 'CEEHDLR '.
   05 CEE3SRP         PIC X(08) VALUE 'CEE3SRP '.
   05 TOKEN           PIC S9(09) BINARY.
   05 SEV PIC -9(05).
   05 MSG PIC -9(05).
   05 FC.
      10 CASE-1.
         15 SEVERITY PIC S9(04) BINARY.
         15 MSG-NO  PIC S9(04) BINARY.
      10 SEV-CTL      PIC X(01).
      10 FACILITY-ID  PIC X(03).
      10 I-S-INFO     PIC S9(09) BINARY.

```

PROCEDURE DIVISION.

```

      PERFORM COMPUTE-LOOP 3 TIMES.
      SET RECOVERY-POINT TO NULL.
      GOBACK.

```

COMPUTE-LOOP.

```

      IF FIRST-TIME-88
        MOVE 'OFF' TO FIRST-TIME-SW

```

```

*-----*
*                                           *
* Set new resume point.                  *
*-----*

```

```

      CALL CEE3SRP USING RECOVERY-POINT, FC

```

SERVICE LABEL

```

      IF CASE-1 NOT = LOW-VALUE
        GOBACK.

```

```

      IF ERROR-INDICATOR = 'E'
        MOVE SPACE TO ERROR-INDICATOR
        MOVE 1 TO ANSWER.

```

* Application code may go here.

```

      COMPUTE ANSWER = 1 / ANSWER.

```

* Put application code here.

```

CBL NODYNAM APOST
IDENTIFICATION DIVISION.
PROGRAM-ID. UCH1.

```

Figure 154. COBOL Example of CEEMRCE (Part 3 of 4)

```

*                                     *
*                                     *
* Sample user condition handler using *
* CEEMRCE. This program sets an error *
* flag for the program-in-error to query *
* and issues a call to CEEMRCE to return *
* control to the statement following the *
* call to CEE3SRP.                    *
*                                     *
*                                     *
DATA DIVISION.
WORKING-STORAGE SECTION.

01 RECOVERY-AREA EXTERNAL.
   05 RECOVERY-POINT      POINTER.
   05 ERROR-INDICATOR     PIC X(01).

01 FC.
   10 CASE-1.
       15 SEVERITY PIC S9(04) BINARY.
       15 MSG-NO   PIC S9(04) BINARY.
   10 SEV-CTL      PIC X(01).
   10 FACILITY-ID  PIC X(03).
   10 I-S-INFO     PIC S9(09) BINARY.

01 CEEMRCE          PIC X(08) VALUE 'CEEMRCE '.
LINKAGE SECTION.

01 CURRENT-CONDITION PIC X(12).
01 TOKEN              PIC X(04).
01 RESULT-CODE        PIC S9(09) BINARY.
   88 RESUME           VALUE +10.
   88 PERCOLATE        VALUE +20.
   88 PERC-SF          VALUE +21.
   88 PROMOTE          VALUE +30.
   88 PROMOTE-SF       VALUE +31.
01 NEW-CONDITION      PIC X(12).

PROCEDURE DIVISION USING CURRENT-CONDITION,
                     TOKEN,
                     RESULT-CODE,
                     NEW-CONDITION.

    MOVE 'E' TO ERROR-INDICATOR.

*                                     *
*                                     *
* Call CEEMRCE to return control to the *
* last resume point.                    *
*                                     *
*                                     *
    CALL CEEMRCE USING RECOVERY-POINT,
                     FC.
    IF CASE-1 NOT = LOW-VALUE
        GOBACK.
    MOVE +10 TO RESULT-CODE.

    GOBACK.

```

Figure 154. COBOL Example of CEEMRCE (Part 4 of 4)

```

*Process lc(101),opt(0),s,map,list,stmt,a(f),ag;
*Process macro;
DRV3SRP: Proc Options(Main);

/*Module/File Name: IBM3SRP */
/*****
**
** DRV3SRP - Set an explicit resume point by
**          calling CEE3SRP then registering a
**          condition handler that calls CEEMRCE
**          to resume at the explicitly set
**          resume point.
**
*****/

%include CEEIBMCT;
%include CEEIBMAW;
declare 01 FBCODE feedback; /* Feedback token */
declare DENOMINATOR fixed binary(31,0);
declare NUMERATOR fixed binary(31,0);
declare RATIO fixed binary(31,0);
declare PLI3SRP external entry;
declare U_PTR pointer;
declare 01 U_DATA,
          03 U_CNTL fixed binary(31),
          03 U_TOK pointer;

U_PTR = addr(U_DATA);
U_CNTL = 0;

/* Set Resume Point */

Display('Setting resume point via CEE3SRP');
Call CEE3SRP(U_TOK,FBCODE);
Display('After CEE3SRP ... Resume point');
If U_CNTL = 0 Then
Do;
Display('First time through...');

Display('Registering user handler');
Call CEEHDLR(PLI3SRP, U_PTR, FBCODE);
If FBCHECK(FBCODE, CEE000) Then
Do;
/* Cause a zero-divide condition */

DENOMINATOR = 0;
NUMERATOR = 1;
RATIO = NUMERATOR / DENOMINATOR;
End;
Else
Do;
Display('CEEHDLR failed with msg ');
Display(MsgNo);
End;
End;
Else
Display('Second time through...');

/* Unregister handler */

```

Figure 155. PL/I Example of CEEMRCE (Part 1 of 2)

```

        Call CEEHDLU(PLI3SRP, FBCODE);
        If FBCHECK(FBCODE, CEE000) Then
            Display('Main: unregistered PLI3SRP');
        Else
            Do;
                Display('CEEHDLU failed with msg ');
                Display(MsgNo);
            End;
        End DRV3SRP;

*Process lc(101),opt(0),s,map,list,stmt,a(f),ag;
*Process macro;
PLI3SRP: Proc (PTR1,PTR2,PTR3,PTR4) Options(byvalue);
    /*****
    **
    ** PLI3SRP - Call CEEMCRE to resume at the resume *
    **           point explicitly set in user          *
    **           program.                             *
    **
    *****/

    %include CEEIBMCT;
    %include CEEIBMAW;
    declare (PTR1,PTR2,PTR3,PTR4) pointer;
    declare 01 CURCOND based(PTR1) feedback;
    declare TOKEN      pointer based(PTR2);
    declare RESULT     fixed bin(31,0) based(PTR3);
    declare 01 NEWCOND based(PTR4) feedback;
    declare 01 U_DATA  based(TOKEN),
                03 U_CNTL fixed binary(31,0),
                03 U_TOK pointer;
    declare 01 FBCODE feedback;

    Display('In user handler');
    RESULT = 10;
    Call CEEMRCE(U_TOK,FBCODE);
    Display(U_CNTL);
    U_CNTL = 1;
    Return;
End PLI3SRP;

```

Figure 155. PL/I Example of CEEMRCE (Part 2 of 2)

CEEMRCR—Move resume cursor

CEEMRCR moves the resume cursor to a position relative to the current position of the handle cursor. The actions supported are:

- Moving the resume cursor to the call return point of the routine registering the executing condition handler.
- Moving the resume cursor to the caller of the routine registering the executing condition handler.

Initially, the resume cursor is placed after the instruction that caused the condition. Whenever CEEMRCR moves the resume cursor and passes stack frames, associated exit routines are invoked. Note that “exit routine” refers to user condition handlers as well as language-specific condition handlers. In addition, any associated user condition handlers are unregistered. The movement direction is always toward earlier stack frames, never toward more recent stack frames. The movement occurs only after the condition handler returns to the Language Environment condition manager.

Multiple calls to CEEMRCR yield the net results of the calls; that is, if two calls move the resume cursor to different places for the same stack frame, the most restrictive call (that closest to the earliest stack frame) is used for that stack frame.

Moving the resume cursor to a particular stack frame:

- Cancels all stack frames from the previous resume point up to but not including the new resume point
- Unregisters any user condition handlers registered for the canceled stack frames

Syntax

►—CEEMRCR—(—*type_of_move*—,—*fc*—)——►

type_of_move (input)

A fullword binary signed integer indicating the target of the resume cursor movement. The possible values for *type_of_move* are:

- 0** Move the resume cursor to the call return point of the stack frame associated with the handle cursor.
- 1** Move the resume cursor to the call return point of the stack frame prior to the stack frame associated with the handle cursor. The handle cursor is moved to the most recently established condition handler of the stack frame. The new resume cursor position now points to this condition handler for the stack frame.

Do not use a *type_of_move* value of 1 if the caller of the stack frame associated with the handle cursor is a nested COBOL program.

Modifying the resume cursor to point to stack frame 0 is not allowed. You cannot move the resume cursor beyond the earliest stack frame.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE07U	1	0254	The first parameter passed to CEEMRCR was not 0 or 1.
CEE083	3	0259	A move to stack frame zero using CEEMRCR was attempted from a MAIN routine.
CEE084	3	0260	No condition was active when a call to a condition management routine was made. The requested function was not performed.
CEE08L	1	0277	CEEMRCR was called to perform an unnecessary move.

Usage notes

- PL/I MTF consideration—CEEMRCR is not supported in PL/I MTF applications. This includes any CEEHDLR service called from a COBOL program in the application.
- z/OS UNIX considerations—In multithread applications, CEEMRCR affects only the calling thread. You can use CEEMRCR only within the thread's call chain.

Illustration of CEEMRCR Usage

The following three figures illustrate how you can move the resume cursor by using the CEEMRCR service.

In Figure 156 on page 417, routine A calls routine B, which in turn calls C, which calls D. User condition handlers are registered in routines B and C.

When a condition is raised in routine D, the Language Environment condition manager passes control to the user condition handler established for routine C. The handle cursor now points to the stack frame for routine C. Routine C percolates the condition.

The handle cursor now points to the stack frame for routine B. The next user condition handler to gain control is that one established for routine B; it recognizes the condition and issues a resume by calling CEEMRCR.

A 0 *type_of_move*, meaning move the resume cursor to the stack frame associated with the handle cursor, causes control to resume at the call return point in routine B, the instruction immediately following the call to routine C. A 1 *type_of_move*, meaning move the resume cursor to the call return point of the stack frame immediately preceding the one to which the handle cursor points, moves the resume cursor to the instruction immediately following a call in routine A to routine B.

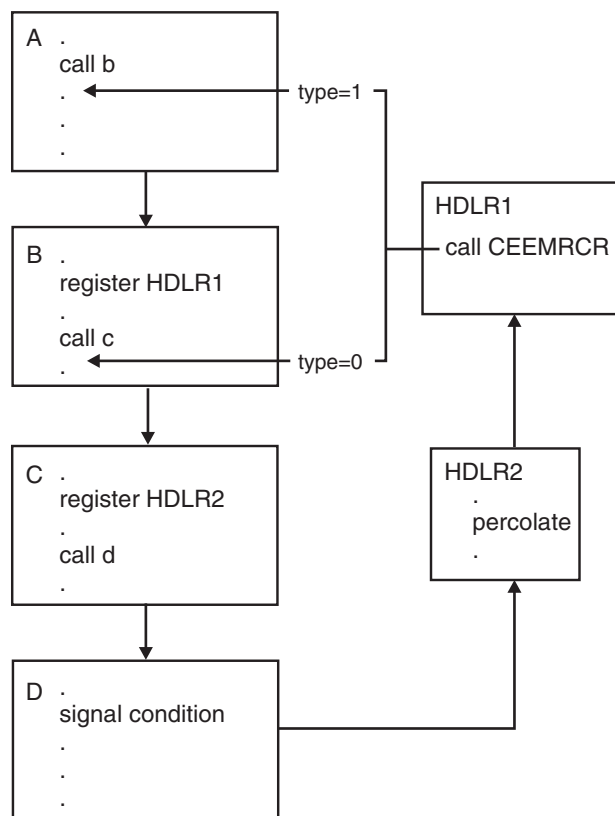


Figure 156. First Example Moving Resume Cursor Using CEEMRCR

The same scenario is illustrated in Figure 157 on page 418, except that HDLR2 issues a resume for the signaled condition rather than percolating it. HDLR1 never gains control. Because the handle cursor now points to the stack frame for routine C, a 0 *type_of_move* causes control to resume at the call return point in routine C, the instruction immediately following the call to routine D. A 1 *type_of_move* moves the resume cursor to the instruction immediately following a call in routine B to routine C.

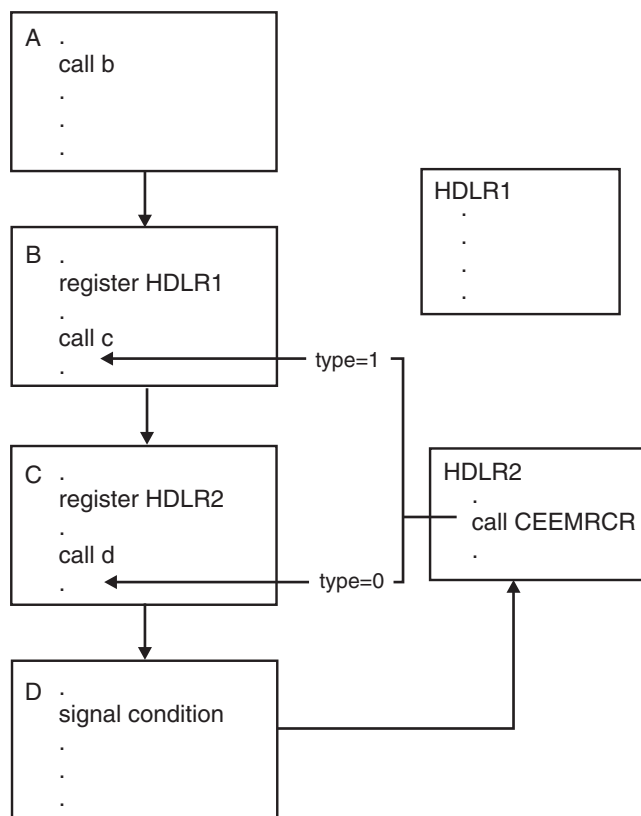


Figure 157. Second Example Moving Resume Cursor Using CEEMRCR

In Figure 158 on page 419, the user condition handlers are established for routines C and D. When a condition is raised in routine D, only a 1 *type_of_move* is permitted. A 0 *type_of_move* results in error warning message CEE0277.

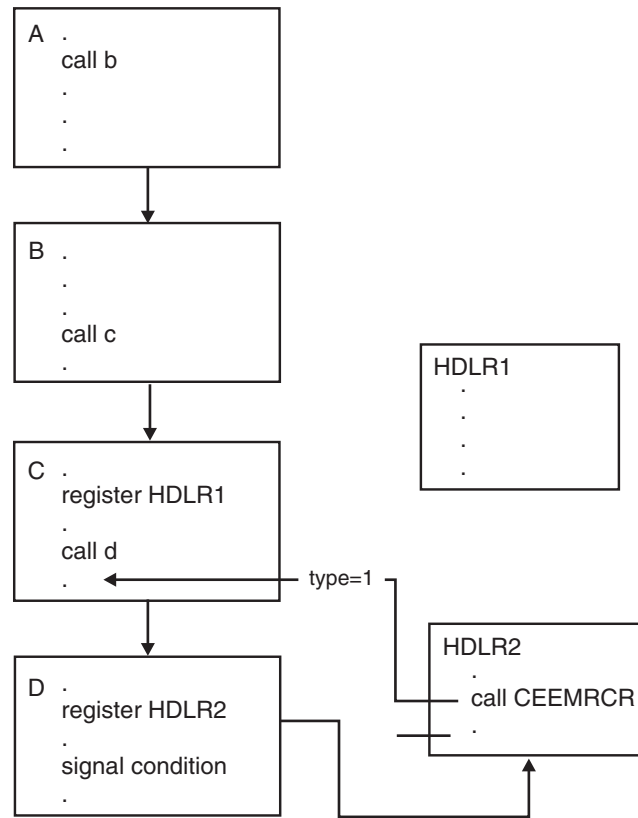


Figure 158. Third Example Moving Resume Cursor Using CEEMRCR

Examples

```

/*Module/File Name: EDCMRCR  */

#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

#ifdef __cplusplus
extern "C" {
#endif
void handler(_FEEDBACK *,_INT4 *,_INT4 *,_FEEDBACK *);
#ifdef __cplusplus
}
#endif

void b(void);

int main(void) {
/* .
.
. */
b();
/* the CEEMRCR call in the handler will place the */
/* resume cursor at this point. */
/* .
.
. */
}

void b(void) {

    _FEEDBACK fc,condtok;
    _ENTRY routine;
    _INT4 token,qdata;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;

    /* register the condition handler */
    token = 99;
    routine.address = (_POINTER)&handler;;
    routine.nesting = NULL;

```

Figure 159. C/C++ Example of CEEMRCR (Part 1 of 2)

```

CEEHDLR(&routine,&token,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEEHDLR failed with message number %d\n",
        fc.tok_msgno);
    exit (2999);
}
/* .
.
. */
/* set up the condition using CEENCOD */
c_1 = 3;
c_2 = 2523;
cond_case = 1;
sev = 3;
control = 0;
memcpy(facid,"CEE",3);
isi = 0;

CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
    facid,&isi,&condtok,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEENCOD failed with message number %d\n",
        fc.tok_msgno);
    exit(2999);
}

/* signal the condition */
CEESGL(&condtok,&qdata,&fc);
if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
    printf("CEESGL failed with message number %d\n",
        fc.tok_msgno);
    exit(2999);
}
/* .
.
. */
}

void handler(_FEEDBACK *fc, _INT4 *token, _INT4 *result,
    _FEEDBACK *newfc) {

    _FEEDBACK cursorfc, orig_fc;
    _INT4 type;
/* .
.
. */
/* move the resume cursor to the caller of the */
/* routine that registered the condition handler */
type = 1;
CEEMRCR(&type,&cursorfc);
if ( _FBCHECK ( cursorfc , CEE000 ) != 0 ) {
    printf("CEEMRCR failed with message number %d\n",
        cursorfc.tok_msgno);
    exit (2999);
}
printf("condition handled\n");
*result = 10;
return;
}

```

Figure 159. C/C++ Example of CEEMRCR (Part 2 of 2)

```

CBL LIB,QUOTE
*Module/File Name: IGZTMRCR
*****
**
** CBLMAIN - Main for sample program for      **
**          CEEMRCR.                          **
**                                          **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLMAIN.
PROCEDURE DIVISION.
    CALL "DRVMRCR"
    DISPLAY "Resumed execution in the CALLER "
           "of the routine which registered the "
           "handler"
    GOBACK.
END PROGRAM CBLMAIN.

*****
**
** DRVMRCR - Drive sample program CEEMRCR.    **
**                                          **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. DRVMRCR.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 ROUTINE          PROCEDURE-POINTER.
01 TOKEN            PIC S9(9) BINARY.
01 SEV              PIC S9(4) BINARY.
01 MSGNO            PIC S9(4) BINARY.
01 CASE             PIC S9(4) BINARY.
01 SEV2             PIC S9(4) BINARY.
01 CNTRL            PIC S9(4) BINARY.
01 FACID            PIC X(3).
01 ISINFO           PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity    PIC S9(4) BINARY.
        04 Msg-No      PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code  PIC S9(4) BINARY.
        04 Cause-Code  PIC S9(4) BINARY.
    03 Case-Sev-Ctl    PIC X.
    03 Facility-ID     PIC XXX.
02 I-S-Info           PIC S9(9) BINARY.
01 QDATA              PIC S9(9) BINARY.

```

Figure 160. COBOL Example of CEEMRCR (Part 1 of 4)

```

01 CONDOK.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
*****
** Register handler **
*****
SET ROUTINE TO ENTRY "CBLMRCR".
CALL "CEEHDLR" USING ROUTINE, TOKEN, FC.
IF NOT CEE000 of FC THEN
    DISPLAY "CEEHDLR failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

*****
** Signal a condition **
*****
MOVE 1 TO QDATA.
SET CEE001 of CONDOK to TRUE.
MOVE ZERO to I-S-Info of CONDOK.
CALL "CEESGL" USING CONDOK, QDATA, FC.
IF CEE000 of FC THEN
    DISPLAY "**** Resumed execution in the "
        "routine which registered the handler"
ELSE
    DISPLAY "CEESGL failed with msg "
        Msg-No of FC UPON CONSOLE
END-IF.

*****
** UNregister handler **
*****
CALL "CEEHDLU" USING ROUTINE, TOKEN, FC.
IF NOT CEE000 of FC THEN
    DISPLAY "CEEHDLU failed with msg "
        Msg-No of FC UPON CONSOLE
END-IF.
STOP RUN.
END PROGRAM DRVMRCR.

```

Figure 160. COBOL Example of CEEMRCR (Part 2 of 4)

```

*****
**                                     **
** CBLMRCR - Invoke CEEMRCR to Move resume **
**           cursor relative to handle cursor **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLMRCR.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 MOVETYP          PIC S9(9) BINARY.
01 DEST            PIC S9(9) BINARY VALUE 2.
01 FC.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
    03 Case-1-Condition-ID.
    04 Severity     PIC S9(4) BINARY.
    04 Msg-No       PIC S9(4) BINARY.
    03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
    04 Class-Code   PIC S9(4) BINARY.
    04 Cause-Code   PIC S9(4) BINARY.
    03 Case-Sev-Ctl PIC X.
    03 Facility-ID  PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.
01 FC2.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
    03 Case-1-Condition-ID.
    04 Severity     PIC S9(4) BINARY.
    04 Msg-No       PIC S9(4) BINARY.
    03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
    04 Class-Code   PIC S9(4) BINARY.
    04 Cause-Code   PIC S9(4) BINARY.
    03 Case-Sev-Ctl PIC X.
    03 Facility-ID  PIC XXX.
02 I-S-Info        PIC S9(9) BINARY.

```

Figure 160. COBOL Example of CEEMRCR (Part 3 of 4)

```

LINKAGE SECTION.
01 CURRENT-CONDITION.
  02 Condition-Token-Value.
  COPY CEEIGZCT.
    03 Case-1-Condition-ID.
      04 Severity PIC S9(4) BINARY.
      04 Msg-No PIC S9(4) BINARY.
    03 Case-2-Condition-ID
      REDEFINES Case-1-Condition-ID.
      04 Class-Code PIC S9(4) BINARY.
      04 Cause-Code PIC S9(4) BINARY.
    03 Case-Sev-Ctl PIC X.
    03 Facility-ID PIC XXX.
  02 I-S-Info PIC S9(9) BINARY.
01 TOKEN PIC X(4).
01 RESULT-CODE PIC S9(9) BINARY.
88 RESUME VALUE +10.
88 PERCOLATE VALUE +20.
88 PROMOTE VALUE +30.
01 NEW-CONDITION.
  02 Condition-Token-Value.
  COPY CEEIGZCT.
    03 Case-1-Condition-ID.
      04 Severity PIC S9(4) BINARY.
      04 Msg-No PIC S9(4) BINARY.
    03 Case-2-Condition-ID
      REDEFINES Case-1-Condition-ID.
      04 Class-Code PIC S9(4) BINARY.
      04 Cause-Code PIC S9(4) BINARY.
    03 Case-Sev-Ctl PIC X.
    03 Facility-ID PIC XXX.
  02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION USING CURRENT-CONDITION,
                        TOKEN, RESULT-CODE,
                        NEW-CONDITION
*****
** Move the resume cursor to the caller of **
** the routine that registered the condition **
** handler **
*****
MOVE 1 TO MOVETYP.
CALL "CEEMRCR" USING MOVETYP , FC.
IF NOT CEE000 of FC THEN
  DISPLAY "CEEMRCR failed with msg "
    Msg-No of FC UPON CONSOLE
  CALL "CEEMSG" USING FC, DEST, FC2
  IF NOT CEE000 of FC2 THEN
    DISPLAY "CEEMSG failed with msg "
      Msg-No of FC2 UPON CONSOLE
  MOVE FC TO NEW-CONDITION
  SET PROMOTE TO TRUE
  GOBACK
END-IF.

SET RESUME TO TRUE.

GOBACK.

END PROGRAM CBLMRCR.

```

Figure 160. COBOL Example of CEEMRCR (Part 4 of 4)

```

*Process macro;
/* Module/File Name: IBMMRCR */
/*****
/*
/* Ushrhdr - the user handler routine.
/* Handle DIVIDE-BY-ZERO conditions,
/* percolate all others.
/*
*****/
Ushrhdr: Proc (@condtok, @token, @result, @newcond)
           options(byvalue);

%include ceeibmct;
%include ceeibmaw;

/* Parameters */
dcl @condtok pointer;
dcl @token pointer;
dcl @result pointer;
dcl @newcond pointer;
dcl 1 condtok based(@condtok) feedback;
dcl token fixed bin(31) based(@token);
dcl result fixed bin(31) based(@result);
dcl 1 newcond based(@newcond) feedback;
dcl 1 fback feedback;
dcl move_type fixed bin(31);
dcl resume fixed bin(31) static initial(10);
dcl percolate fixed bin(31) static initial(20);
dcl promote fixed bin(31) static initial(30);
dcl promote_sf fixed bin(31) static initial(31);
display ('>>> USRHLDR: Entered user handler');
display ('>>> USRHLDR: passed token value is ' ||
        token);

/* Check if this is the divide-by-zero token */
if fbcheck (condtok, cee349) then
do;
    move_type = 0;
    call ceemrcr (move_type, fback);
    If fbcheck (fback, cee000) then
    do;
        result = resume;
        display ('>>> USRHLDR: Resuming execution');
    end;
else
do;
    display
    ('CEEMRCR failed with message number ' ||
     fback.MsgNo);
    stop;
end;
end;
else /* something besides div-zero token */
do;
    result = percolate;
    display ('>>> USRHLDR: Percolating it');
end;
end Ushrhdr;

```

Figure 161. EXCOND Program (PL/I) to Handle Divide-by-Zero Condition

CEEMSG—Get, format, and dispatch a message

CEEMSG gets, formats, and dispatches a message corresponding to an input condition token received from a callable service or passed to a user-written condition handler. You can use this service to print a message after a call to any Language Environment service that returns a condition token.

Syntax

```
►►CEEMSG—(—cond_token—,—destination_code—,—fc—)————►►
```

***cond_token* (input)**

A 12-byte condition token received as the result of a Language Environment callable service.

***destination_code* (input)**

A 4-byte binary integer. *destination_code* can be specified only as 2, meaning write the message to the *ddname* of the file specified in the MSGFILE run-time option.

***fc* (output)**

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0E2	3	0450	The message inserts for the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> could not be located.
CEE0E3	3	0451	An invalid destination code <i>destination-code</i> was passed to routine <i>routine-name</i> .
CEE0E6	3	0454	The message number <i>message-number</i> could not be found for facility ID <i>facility-id</i> .
CEE0E9	3	0457	The message file destination <i>ddname</i> could not be located.
CEE0EA	3	0458	The message repository <i>repository-name</i> could not be located.
CEE3CT	3	3485	An internal message services error occurred while locating the message number within a message file.
CEE3CU	3	3486	An internal message services error occurred while formatting a message.
CEE3CV	3	3487	An internal message services error occurred while locating a message number within the ranges specified in the repository.

Usage notes

- z/OS UNIX considerations—In multithread applications, CEEMSG affects only the calling thread. When multiple threads write to the message file, the output is interwoven by line. To group lines of output, serialize MSGFILE access (by using a mutex, for example).

For more information

- See “CEENCOD—Construct a condition token” on page 432 for more information about the CEENCOD callable service.

- See “MSGFILE” on page 50 for more information about the MSGFILE run-time option.

Examples

```
/*Module/File Name: EDCMSG    */

#include <string.h>
#include <stdio.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _VSTRING message;
    _INT4 dest,msgindx;
    _CHAR80 msgarea;
    _FEEDBACK fc,token;

    strcpy(message.string,"This is a test message");
    message.length = strlen(message.string);
    dest = 5; /* invalid dest so CEEMOUT will fail */

    CEEMOUT(&message,&dest,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        /* put the message if CEEMOUT failed */
        dest = 2;
        CEEMSG(&fc,&dest,NULL);
        exit(2999);
    }
}
```

Figure 162. C/C++ Example of CEEMSG

```

CBL LIB,QUOTE
*Module/File Name: IGZTMSG
*****
**
** CBLMSG - Call CEEMSG to get, format and
**           dispatch a message
**
** In this example, CEE3MDS is called with an
** invalid country code so that a condition
** token would be returned to use as input to
** Any Lang Env service could have been called.
** CEEMSG uses the condition token to get,
** format and dispatch the message associated
** with the condition that occurred in CEE3MDS.
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLMSG.
DATA DIVISION.
WORKING-STORAGE SECTION.
01  COUNTRY                PIC X(2).
01  DECSEP                 PIC X(2).
01  MSGDEST                PIC S9(9) BINARY.
01  FC.
    02  Condition-Token-Value.
    COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity    PIC S9(4) BINARY.
            04  Msg-No     PIC S9(4) BINARY.
        03  Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04  Class-Code  PIC S9(4) BINARY.
            04  Cause-Code  PIC S9(4) BINARY.
        03  Case-Sev-Ctl    PIC X.
        03  Facility-ID     PIC XXX.
    02  I-S-Info            PIC S9(9) BINARY.
01  FC2.
    02  Condition-Token-Value.
    COPY CEEIGZCT.
        03  Case-1-Condition-ID.
            04  Severity    PIC S9(4) BINARY.
            04  Msg-No     PIC S9(4) BINARY.
        03  Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04  Class-Code  PIC S9(4) BINARY.
            04  Cause-Code  PIC S9(4) BINARY.
        03  Case-Sev-Ctl    PIC X.
        03  Facility-ID     PIC XXX.
    02  I-S-Info            PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBL3MDS.

```

Figure 163. COBOL Example of CEEMSG (Part 1 of 2)

```

*****
** Call a Lang Env svc, CEE3MDS in this case, **
** to receive a condition token that CEEMSG **
** can format as a message. Specify an **
** invalid value for country code so that a **
** condition will be built **
*****
      MOVE "LN" TO COUNTRY.
      CALL "CEE3MDS" USING COUNTRY, DECSEP, FC.
      PARA-CBLMSG.
*****
** Specify 2 for destination, so message will **
** be written to the ddname specified or **
** defaulted in the MSGFILE run-time option. **
*****
      MOVE 2 TO MSGDEST.
*****
** Call CEEMSG using the FC returned from **
** CEE3MDS as the input condition token. **
*****
      CALL "CEEMSG" USING FC, MSGDEST, FC2.
      IF NOT CEE000 OF FC2 THEN
          DISPLAY "CEEMSG failed with msg "
              Msg-No of FC2 UPON CONSOLE
          STOP RUN
      END-IF.

      GOBACK.

```

Figure 163. COBOL Example of CEEMSG (Part 2 of 2)

```

*PROCESS LANGLVL(SAA), MACRO;
/* Module/File Name: IBMMSG */
/*****
/**
/** Function: CEEMSG - get, format and dispatch
/** a message
/**
/** In this example, CEE3MDS is called with an
/** invalid country code so that a condition token
/** would be returned to use as input to CEEMSG.
/** Any LE/370 could have been called. CEEMSG uses
/** the condition to get, format and dispatch the
/** message associated with the condition that
/** occurred in CEE3MDS
/**
/**
/**
*****/
PLIMSG: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL COUNTRY CHARACTER ( 2 );
DCL DECSEP CHARACTER ( 2 );
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

```

Figure 164. PL/I Example of CEEMSG (Part 1 of 2)

```

DCL MSGDEST  REAL FIXED BINARY(31,0);
DCL 01 FC2,          /* Feedback token */
    03 MsgSev      REAL FIXED BINARY(15,0),
    03 MsgNo       REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case      BIT(2),
        05 Severity  BIT(3),
        05 Control   BIT(3),
    03 FacID       CHAR(3),      /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);

COUNTRY = 'LN'; /* Specify an invalid country */
              /* code to receive a non-zero */
              /* feedback code */

/* Call any service (CEE3MDS in this case) to */
/* receive a condition token that CEEMSG will */
/* format and dispatch a message */
CALL CEE3MDS ( COUNTRY, DECSEP, FC );

MSGDEST = 2; /* Specify 2 as destination, so */
             /* message will go to ddname speci- */
             /* fied in MSGFILE run-time option */

CALL CEEMSG ( FC, MSGDEST, FC2 );
IF ¬ FBCHECK( FC2, CEE000) THEN DO;
    DISPLAY( 'CEEMSG failed with msg '
            || FC.MsgNo );
    STOP;
END;

END PLIMSG;

```

Figure 164. PL/I Example of CEEMSG (Part 2 of 2)

CEENCOD—Construct a condition token

CEENCOD dynamically constructs a 12-byte condition token that communicates a condition in Language Environment.

The condition token communicates with the Language Environment message and condition handling callable services, and user routines. Also, all Language Environment callable services use the condition-token data type to return information to the user as a feedback code.

Syntax

```

►► CEENCOD (—c_1—, —c_2—, —case—, —severity—, —control—, —
—facility_ID—, —i_s_info—, —cond_token—, —fc—) ►►

```

c_1 (input)

c_1 and *c_2* together make up the condition_ID portion of the condition token. *c_1* is a 2-byte binary integer representing the value of the first 2 bytes of the 4-byte condition_ID.

For case 1, *c_1* represents the severity; for case 2, it is the class_code.

c_2 (input)

A 2-byte binary integer representing the value of the second 2 bytes of the condition_ID.

For case 1, this is the Msg_No; for case 2, it is the cause_code.

case (input)

A 2-byte binary integer defining the format of the condition_ID portion of the token.

severity (input)

A 2-byte binary integer indicating the condition's severity. For case 1 conditions, the value of this field is the same as the severity value specified in the condition_ID.

For case 1 and 2 conditions, this field is also used to test the condition's severity. *severity* can be specified with the following values:

- 0** Information only (or, if the entire token is 0, no information).
- 1** Warning—service completed, probably correctly.
- 2** Error detected—correction attempted; service completed, perhaps incorrectly.
- 3** Severe error—service not completed.
- 4** Critical error—service not completed; condition signaled. A critical error is a condition jeopardizing the environment. If a critical error occurs during a Language Environment callable service, it is always signaled to the condition manager instead of returning synchronously to the caller.

control (input)

A 2-byte binary integer containing flags describing or controlling various aspects of condition handling. Valid values for the control field are 1 and 0. 1 indicates the *facility_ID* is assigned by IBM. 0 indicates the *facility_ID* is assigned by the user.

facility_ID (input)

A 3-character field containing three alphanumeric characters (A-Z, a-z and 0-9) identifying the product or component of a product generating this condition or feedback information, for example, CEE.

The *facility_ID* is associated with the repository (for example, a file) of the run-time messages. If a unique ID is required (for IBM and non-IBM products), an ID can be obtained by contacting an IBM project office.

If you create a new *facility_ID* to use with a message file you created by using the CEEBLDTX utility, be aware that the *facility_ID* must be part of the message file name. It is therefore important to follow the naming guidelines described below in order to have a module name that does not cause your application to abend.

Begin a non-IBM assigned product *facility_ID* with letters J through Z. (See the *control (input)* parameter, above, on how to indicate whether the *facility_ID* has been assigned by IBM.) Special characters, including blank spaces, cannot be used in a *facility_ID*. There are no other constraints (besides the alphanumeric requirement) on a non-IBM assigned *facility_ID*.

i_s_info (input)

A fullword binary integer identifying the ISI, that contains insert data.

Whenever a condition is detected by the Language Environment condition manager, insert data is generated describing the particular instance of its

occurrence is generated. This insert data is used, for example, to write to a file a message associated with that particular instance or occurrence of the condition.

cond_token (output)

The 12-byte representation of the constructed condition token.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE0CH	3	0401	An invalid case code <i>case-code</i> was passed to routine <i>routine-name</i> .
CEE0CI	3	0402	An invalid control code <i>control-code</i> was passed to routine <i>routine-name</i> .
CEE0CJ	3	0403	An invalid severity code <i>severity-code</i> was passed to routine <i>routine-name</i> .
CEE0CK	1	0404	Facility ID <i>facility-id</i> with non-alphanumeric characters was passed to routine <i>routine-name</i> .
CEE0E4	3	0452	An invalid facility ID <i>facility-id</i> was passed to routine <i>routine-name</i> .

Usage notes

- C/C++ considerations—The structure of the condition token (type_FEEDBACK) is described in the `leawi.h` header file shipped with Language Environment. You can assign values directly to the fields of the token in the header file without using the CEENCOD service.

The layout of the type_FEEDBACK condition token in the header file is:

```
typedef struct {
    short    tok_sev      ; /* severity          */
    short    tok_msgno    ; /* message number   */
    int      tok_case :2, /* flags-case/sev/cont */
           tok_sever:3,
           tok_ctrl :3 ;
    char     tok_facid[3]; /* fac ID          */
    int      tok_isi      ; /* index in ISI block */
}          _FEEDBACK;
```

Figure 165. type_FEEDBACK Data Type as Defined in the `leawi.h` Header File

- z/OS UNIX consideration—In multithread applications, CEENCOD affects only the calling thread.

For more information

- For more information about case 1 and case 2, see CEENCOD “Usage notes.”

Examples

```

/*Module/File Name: EDCNCOD */

/*****
/* Note that it is not necessary to use this service. */
/* The fields may be manipulated directly. */
*****/

#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc,condtok;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;

    c_1 = 1;
    c_2 = 99;
    cond_case = 1;
    sev = 1;
    control = 0;
    memcpy(facid,"ZZZ",3);
    isi = 0;

    CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
            facid,&isi,&condtok,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEENCOD failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }
    /* .
     .
     . */
}

```

Figure 166. C/C++ Example of CEENCOD

```

CBL LIB,QUOTE
*Module/File Name: IGZTNCOD
*****
**
** CBLNCOD - Call CEENCOD to construct a
** condition token
**
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLNCOD.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 SEV PIC S9(4) BINARY.
01 MSGNO PIC S9(4) BINARY.
01 CASE PIC S9(4) BINARY.
01 SEV2 PIC S9(4) BINARY.
01 CNTRL PIC S9(4) BINARY.
01 FACID PIC X(3).
01 ISINFO PIC S9(9) BINARY.
01 NEWTOK.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity PIC S9(4) BINARY.
04 Msg-No PIC S9(4) BINARY.
03 Case-2-Condition-ID
REDEFINES Case-1-Condition-ID.
04 Class-Code PIC S9(4) BINARY.
04 Cause-Code PIC S9(4) BINARY.
03 Case-Sev-Ctl PIC X.
03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLNCOD.

```

Figure 167. COBOL Example of CEENCOD (Part 1 of 2)


```

*****
** Set severity portion of Condition-ID to 0, **
** or information only. **
** Set msg number portion of Condition-ID to 1.**
** Set case to 1. This is a service condition. **
** Set severity to 0, for information only. **
** Set control to 1, for Facility-ID has been **
** assigned by IBM. **
** Set Facility-ID to CEE for a Language **
** Environment condition token. **
** Set I-S-Info to 0, indicating that no **
** Instance Specific Information (ISI) is **
** to be supplied. **
*****
MOVE 0 TO SEV.
MOVE 1 TO MSGNO.
MOVE 1 TO CASE.
MOVE 0 TO SEV2.
MOVE 1 TO CNTRL.
MOVE "CEE" TO FACID.
MOVE 0 TO ISINFO.

*****
** Call CEENCOD with the values assigned above **
** to build a condition token "NEWTOK" **
*****
CALL "CEENCOD" USING SEV, MSGNO, CASE, SEV2,
CNTRL, FACID, ISINFO,
NEWTOK, FC.
IF NOT CEE000 of FC THEN
    DISPLAY "CEENCOD failed with msg "
    Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 167. COBOL Example of CEENCOD (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMNCOD */
/*****
** */
** Function: CEENCOD - construct a condition token */
** */
*****/
PLINCOD: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL SEV      REAL FIXED BINARY(15,0);
    DCL MSGNO    REAL FIXED BINARY(15,0);
    DCL CASE     REAL FIXED BINARY(15,0);
    DCL SEV2     REAL FIXED BINARY(15,0);
    DCL CNTRL    REAL FIXED BINARY(15,0);
    DCL FACID    CHARACTER ( 3 );
    DCL ISINFO   REAL FIXED BINARY(31,0);
    DCL 01 NEWTOK, /* Feedback token */
        03 MsgSev  REAL FIXED BINARY(15,0),
        03 MsgNo   REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case    BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID   CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);
    DCL 01 FC, /* Feedback token */
        03 MsgSev  REAL FIXED BINARY(15,0),
        03 MsgNo   REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case    BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID   CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

```

Figure 168. PL/I Example of CEENCOD (Part 1 of 2)

```

SEV = 0;          /* Set severity portion of      */
                  /* Condition_ID to 0, or          */
                  /* information only.                */
MSGNO = 1;        /* Set msg number portion of      */
                  /* Condition_ID to 1.            */
CASE = 1;         /* Set case to 1. This is a      */
                  /* service condition.           */
SEV2 = 0;         /* Set severity to 0, or        */
                  /* information only.            */
CNTRL = 0;        /* Set control to 0, or Facility */
                  /* ID has been assigned by user  */
FACID = 'USR';    /* Set Facility_ID to USR for a  */
                  /* user condition token.        */
ISINFO = 0;       /* Set I_S_Info to 0, indicating */
                  /* that no Instance Specific    */
                  /* Information is to be supplied.*/
EENCOD ( SEV, MSGNO, CASE, SEV2,
CALL CEENCOD ( SEV, MSGNO, CASE, SEV2,
               CNTRL, FACID, ISINFO, NEWTOK, FC );
IF FBCEK( FC, CEE000) THEN DO;
  PUT SKIP LIST( 'CEENCOD created token for msg '
                || NEWTOK.MsgNo || ' and facility '
                || NEWTOK.FacID );
END;
ELSE DO;
  DISPLAY( 'CEENCOD failed with msg '
          || FC.MsgNo );
  STOP;
END;
END PLINCOD;

```

Figure 168. PL/I Example of CEENCOD (Part 2 of 2)

CEEQCEN—Query the century window

CEEQCEN queries the century in which Language Environment contains the 2-digit year value. When you want to change the setting, use CEEQCEN to get the setting and then use CEESCE to save and restore the current setting.

Syntax

```
►► CEEQCEN(—century_start—,—fc—)◄◄
```

century_start (output)

An integer between 0 and 100 indicating the year on which the century window is based.

For example, if the Language Environment default is in effect, all 2-digit years lie within the 100-year window starting 80 years prior to the system date. CEEQCEN then returns the value 80. An 80 value indicates to Language Environment that, in 1995, all 2-digit years lie within the 100-year window starting 80 years before the system date (between 1915 and 2014, inclusive).

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

Usage notes

- z/OS UNIX considerations—CEEQCEN applies to the enclave, as does the century window.

For more information

- See “CEESCEN—Set the century window” on page 453 for more information about the CEESCEN callable service.

Examples

```

/*Module/File Name: EDCQCEN  */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main (void) {

    _INT4 century_start;
    _FEEDBACK fc;

    /* query the century window */
    CEEQCEN(&century_start,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEEQCEN failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    /* if the century window is not 50 set it to 50 */
    if (century_start != 50) {
        century_start = 50;

        CEESCEN(&century_start,&fc);
        if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
            printf("CEESCEN failed with message number %d\n",
                fc.tok_msgno);
            exit(2999);
        }
    }
}

```

Figure 169. C/C++ Example of CEEQCEN

```

CBL LIB,QUOTE
*Module/File Name: IGZTQCEN
*****
** CBLQCEN - Call CEEQCEN to query the Lang Env**
**          century window                      **
** In this example, CEEQCEN is called to query **
** the date at which the century window starts **
** The century window is the 100-year window  **
** within which Lang Envir                      **
** assumes all two-digit years lie.           **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLQCEN.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 STARTCW          PIC S9(9) BINARY.
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
       04 Severity    PIC S9(4) BINARY.
       04 Msg-No      PIC S9(4) BINARY.
   03 Case-2-Condition-ID
       REDEFINES Case-1-Condition-ID.
       04 Class-Code  PIC S9(4) BINARY.
       04 Cause-Code  PIC S9(4) BINARY.
   03 Case-Sev-Ctl    PIC X.
   03 Facility-ID     PIC XXX.
   02 I-S-Info        PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLQCEN.
*****
** Call CEEQCEN to return the start of the    **
**          century window                      **
*****
CALL "CEEQCEN" USING STARTCW, FC.
*****
** CEEQCEN has no non-zero feedback codes to  **
**          check, so just display result.     **
*****
IF CEE000 of FC THEN
    DISPLAY "The start of the century "
           "window is: " STARTCW
ELSE
    DISPLAY "CEEQCEN failed with msg "
           "Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.

GOBACK.

```

Figure 170. COBOL Example of CEEQCEN

```

*PROCESS MACRO;
/* Module/File Name: IBMQCEN */
/*****
**
** Function: CEEQCEN - query the century window
**
** In this example, CEEQCEN is called to query
** The date at which the century window starts.
** The century window is the 100-year window
** within which Language Environment assumes
** all two-digit years lie.
**
**
*****/
PLIQEN: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL STARTCW REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

/* Call CEEQCEN to return the start of the */
/* century window */
CALL CEEQCEN ( STARTCW, FC );

/* CEEQCEN has no non-zero feedback codes */
/* to check, so print result */
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST ( 'The century window starts '
        || STARTCW || ' years before today.' );
    END;
ELSE DO;
    DISPLAY( 'CEEQCEN failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLIQEN;

```

Figure 171. PL/I Example of CEEQCEN

CEEQDTC—Query locale date and time conventions

CEEQDTC, analogous to the C language function `localdtconv()`, queries the date and time conventions from the current locale and sets the components of a structure with values appropriate to the settings for the `LC_TIME` category.

CEEQDTC is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

► CEEQDTC (—*version*—, —*localdt*—, —*fc*—) ◄

version

This parameter points to a user supplied VERSION_INFO structure, in which the first four bytes contain the callable service version number.

Requirement: If the parameter does not point to a user supplied VERSION_INFO structure, it must be omitted. If the parameter points to a VERSION_INFO containing version number 1, CEEQDTC returns a DTCONV structure with the new element showing the format of the ISO 8601:2000 standard date. If the parameter is omitted, CEEQDTC returns the DTCONV format used before C99. For information on how to code this parameter, see “Invoking callable services” on page 109.

localdt (output)

A pointer to the data structure containing the date and time formatting information from the current, active locale. The fields used to populate the structure come from the LC_TIME category.

The LC_TIME category structure fields used to retrieve the date and time values are:

Keyword	Meaning
abmon	Abbreviated month names (12 instances of a halfword length-prefixed character string, VSTRING, of 22 bytes)
mon	Month names (12 instances of a halfword length-prefixed character string, VSTRING, of 62 bytes)
abday	Abbreviated day names (7 instances of a halfword length-prefixed character string, VSTRING, of 22 bytes)
day	Day names (7 instances of a halfword length-prefixed character string, VSTRING, of 62 bytes)
d_t_fmt	Date and time format (1 instance of a halfword length-prefixed character string, VSTRING, of 82 bytes)
d_fmt	Date format (1 instance of a halfword length-prefixed character string, VSTRING, of 42 bytes)
t_fmt	Time format (1 instance of a halfword length-prefixed character string, VSTRING, of 42 bytes)
am_fmt	AM string (1 instance of a halfword length-prefixed character string, VSTRING, of 22 bytes)
pm_fmt	PM string (1 instance of a halfword length-prefixed character string, VSTRING, of 22 bytes)
t_fmt_ampm	Time format ampm (1 instance of a halfword length-prefixed character string, VSTRING, of 42 bytes)
ISO_STD8601_2000	ISO8601:2000 standard date format (1 instance of a halfword length-prefixed character string, VSTRING, of 42 bytes)

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3T1	3	4001	General Failure: Service could not be completed.
CEE3VN	3	4087	Input Error: The version_info control block contains a version number that is not valid.

Usage notes

- PL/I MTF consideration—CEEQDTC is not supported in PL/I MTF applications.
- If no call to CEESETL has been made, the default locale values to be used are determined at installation time for Language Environment.
- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.

For more information

- See “CEESETL—Set locale operating environment” on page 475 for more information about the current locale.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGZTQDTC
*****
* Example for callable service CEEQDTC *
* MAINQDTC - Retrieve date and time convention *
*           structures for two countries and *
*           compare an item. *
* Valid only for COBOL for MVS & VM Release 2 *
* or later. *
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. MAINQDTC.
DATA DIVISION.
WORKING-STORAGE SECTION.
* Use DTCONV structure for CEEQDTC calls
COPY CEEIGZDT.
*
PROCEDURE DIVISION.
* Subroutine needed for addressing
CALL "COBQDTC" USING DTCONV.

STOP RUN.
*
IDENTIFICATION DIVISION.
PROGRAM-ID. COBQDTC.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 Locale-Name.
   02 LN-Length PIC S9(4) BINARY.
   02 LN-String PIC X(256).
* Use Locale category constants
COPY CEEIGZLC.
*
01 Test-Length1 PIC S9(4) BINARY.
01 Test-String1 PIC X(80).
01 Test-Length2 PIC S9(4) BINARY.
01 Test-String2 PIC X(80).
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity PIC S9(4) BINARY.
   04 Msg-No PIC S9(4) BINARY.
   03 Case-2-Condition-ID
   REDEFINES Case-1-Condition-ID.
   04 Class-Code PIC S9(4) BINARY.
   04 Cause-Code PIC S9(4) BINARY.
   03 Case-Sev-Ctl PIC X.
   03 Facility-ID PIC XXX.
   02 I-S-Info PIC S9(9) BINARY.
*
LINKAGE SECTION.
* Use Locale structure DTCONV for CEEQDTC calls
COPY CEEIGZDT.
*
PROCEDURE DIVISION USING DTCONV.
* Set up locale for France
MOVE 4 TO LN-Length.
MOVE "FFEY" TO LN-String (1:LN-Length).

```

Figure 172. COBOL Example of CEEQDTC (Part 1 of 2)

```

* Call CEESETL to set all locale categories
  CALL "CEESETL" USING Locale-Name, LC-ALL,
    FC.

* Check feedback code
  IF Severity > 0
    DISPLAY "Call to CEESETL failed. " Msg-No
    EXIT PROGRAM
  END-IF.

* Call CEEQDTC for French values
  CALL "CEEQDTC" USING OMITTED,
    ADDRESS OF DTCONV, FC.

* Check feedback code
  IF Severity > 0
    DISPLAY "Call to CEEQDTC failed. " Msg-No
    EXIT PROGRAM
  END-IF.

* Save date and time format for FFEY locale
  MOVE D-T-FMT-Length IN DTCONV TO Test-Length1
  MOVE D-T-FMT-String IN DTCONV TO Test-String1

* Set up locale for French Canadian
  MOVE 4 TO LN-Length.
  MOVE "FCEY" TO LN-String (1:LN-Length).

* Call CEESETL to set locale for all categories
  CALL "CEESETL" USING Locale-Name, LC-ALL,
    FC.

* Check feedback code
  IF Severity > 0
    DISPLAY "Call to CEESETL failed. " Msg-No
    EXIT PROGRAM
  END-IF.

* Call CEEQDTC again for French Canadian values
  CALL "CEEQDTC" USING OMITTED,
    ADDRESS OF DTCONV, FC.

* Check feedback code and display results
  IF Severity = 0
* Save date and time format for FCEY locale
    MOVE D-T-FMT-Length IN DTCONV
      TO Test-Length2
    MOVE D-T-FMT-String IN DTCONV
      TO Test-String2
    IF Test-String1(1:Test-Length1) =
      Test-String2(1:Test-Length2)
      DISPLAY "Same date and time format."
    ELSE
      DISPLAY "Different formats."
      DISPLAY Test-String1(1:Test-Length1)
      DISPLAY Test-String2(1:Test-Length2)
    END-IF
  ELSE
    DISPLAY "Call to CEEQDTC failed. " Msg-No
  END-IF.

  EXIT PROGRAM.
END PROGRAM COBQDTC.
*
END PROGRAM MAINQDTC.

```

Figure 172. COBOL Example of CEEQDTC (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMQDTC */
/*****
/* Example for callable service CEEQDTC */
/* Function: Retrieve date and time convention */
/* structures for two countries, compare an item. */
*****/

PLIQDTC: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs */
%INCLUDE CEEIBMCT; /* FBCHECK macro, FB constants */
%INCLUDE CEEIBMLC; /* Locale category constants */
%INCLUDE CEEIBMDT; /* DTCONV for CEEQDTC calls */

/* use explicit pointer to local DTCONV structure */
DCL LOCALDT POINTER INIT(ADDR(DTCONV));

/* CEESETL service call arguments */
DCL LOCALE_NAME CHAR(256) VARYING;

DCL 1 DTCONVC LIKE DTCONV; /* Def Second Structure */

DCL 1 FC, /* Feedback token */
  3 MsgSev REAL FIXED BINARY(15,0),
  3 MsgNo REAL FIXED BINARY(15,0),
  3 Flags,
    5 Case BIT(2),
    5 Severity BIT(3),
    5 Control BIT(3),
  3 FacID CHAR(3), /* Facility ID */
  3 ISI /* Instance-Specific Information */
    REAL FIXED BINARY(31,0);

```

Figure 173. PL/I Example of CEEQDTC (Part 1 of 2)

```

/* set locale with IBM default for France      */
LOCALE_NAME = 'FFEY'; /* or Fr_FR.IBM-1047    */

/* use LC_ALL category constant from CEEIBMLC */
CALL CEESETL ( LOCALE_NAME, LC_ALL, FC );

/* retrieve date and time structure, France Locale*/
CALL CEEQDTC ( *, LOCALDT, FC );

/* set locale with French Canadian(FCEY) defaults */
/* literal constant -1 used to set all categories */
CALL CEESETL ( 'FCEY', -1, FC );

/* retrieve date and time tables for French Canada*/
/* example of temp pointer used for service call */
CALL CEEQDTC ( *, ADDR(DTCONVC), FC );

/* compare date and time formats for two countries*/
IF DTCONVC.D_T_FMT = DTCONV.D_T_FMT THEN
  DO;
    PUT SKIP LIST('Countries have same D_T_FMT' );
  END;
ELSE
  DO;
    PUT SKIP LIST('Date and Time Format ',
                  DTCONVC.D_T_FMT||' vs '||
                  DTCONV.D_T_FMT );
  END;

END PLIQDTC;

```

Figure 173. PL/I Example of CEEQDTC (Part 2 of 2)

CEEQRYL—Query active locale environment

CEEQRYL, analogous to the C language function `localename=setlocale(category, NULL)`, queries the environment for which locale defines the current setting for the locale category.

CEEQRYL is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

►► CEEQRYL—(—*category*—,—*localename*—,—*fc*—)—————►

category (input)

A symbolic integer number that represents all or part of the locale for a program. Depending on the value of the *localename*, these categories can be initiated by the values of global categories of corresponding names. The following values for the *category* parameter are valid:

LC_ALL

A 4-byte integer (with a value of -1) that affects all locale categories associated with a program's locale.

LC_COLLATE

A 4-byte integer (with a value of 0) that affects the behavior of regular expression and collation subroutines.

LC_CTYPE

A 4-byte integer (with a value of 1) that affects the behavior of regular expression, character classification, case conversion, and wide character subroutines.

LC_MESSAGES

A 4-byte integer (with a value of 6) that affects the format and values for positive and negative responses.

LC_MONETARY

A 4-byte integer (with a value of 3) that affects the behavior of subroutines that format monetary values.

LC_NUMERIC

A 4-byte integer (with a value of 2) that affects the behavior of subroutines that format non-monetary numeric values.

LC_TIME

A 4-byte integer (with a value of 4) that affects the behavior of time conversion subroutines.

Language Environment locale callable services do not support the LC_TOD and LC_SYNTAX categories.

localename (output)

Returns the name of the locale that describes the current setting of the category requested.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2KD	3	2701	An invalid category parameter was passed to a locale function.
CEE3T1	3	4001	General Failure: Service could not be completed.

Usage notes

- PL/I MTF consideration—CEEQRYL is not supported in PL/I MTF applications.
- CEEQRYL does not change the status of the active locales.
- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.
- If the active locale is not explicitly set with CEESETL or `setlocale(category, localename)`, then the locale chosen is as follows:
 - With POSIX(OFF), the SAA C locale is chosen, and querying the locale with CEEQRYL returns “C” as the locale name.
 - With POSIX(ON), the POSIX C locale is chosen, and querying the locale with CEEQRYL returns “POSIX” as the locale name.

The SAA C locale provides compatibility with previous releases of C/370. The POSIX C locale provides consistency with POSIX requirements and supports the z/OS UNIX System Services environment.

For more information

- See “CEESETL—Set locale operating environment” on page 475 for more information about the current locale.
- For more information about LC_TIME, see “CEEQDTC—Query locale date and time conventions” on page 442.
- For information on the definition of the SAA C and POSIX C locales and the differences between them, see *z/OS XL C/C++ Programming Guide*.

Examples

For examples of how to use CEEQRYL in combination with other Language Environment locale callable services, see “CEESETL—Set locale operating environment” on page 475.

CEERAN0—Calculate uniform random numbers

CEERAN0 generates a sequence of uniform pseudo-random numbers between 0.0 and 1.0 using the multiplicative congruential method with a user-specified seed.

The uniform (0,1) pseudo-random numbers are generated using the multiplicative congruential method:

```
seed(i) = (950706376 * seed(i-1)) mod 2147483647;
```

```
randomno(i) = seed(i) / 2147483647;
```

Syntax

```
►► CEERAN0 (—seed—, —random_no—, —fc—) ◀◀
```

seed (input/output)

A fullword binary signed integer representing an initial value used to generate random numbers.

seed must be a variable; it cannot be an input-only parameter. The valid range is 0 to +2,147,483,646.

If *seed* equals 0, the seed is generated from the current Greenwich Mean Time.

On return to the calling routine, CEERAN0 changes the value of *seed* so that it can be used as the new seed in the next call.

random_no(output)

An 8-byte double precision floating-point number with a value between 0 and 1, exclusive.

If *seed* is invalid, *random_no* is set to -1 and CEERAN0 terminates with a non-CEE000 symbolic feedback code.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2ER	1	2523	The system time was not available when CEERAN0 was called. A seed value of 1 was used to generate a random number and a new seed value.
CEE2ES	3	2524	An invalid seed value was passed to CEERAN0. The random number was set to -1.

Usage notes

- z/OS UNIX considerations—In multithread applications, CEERAN0 affects only the calling thread. The seed is unique to the thread.

Examples

```

/*Module/File Name: EDCRAN0  */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main (void) {

    _INT4 seed;
    _FLOAT8 random;
    _FEEDBACK fc;
    int number;

    seed = 0;
    CEERAN0(&seed,&random,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEERAN0 failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    number = random * 1000;
    printf("The 3 digit random number is %d\n",number);
}

```

Figure 174. C/C++ Example of CEERAN0

```

CBL LIB,QUOTE
*Module/File Name: IGZTRAN0
*****
** CBLRAN0 - Call CEERAN0 to generate uniform **
**                random numbers                **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLRAN0.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 SEED                      PIC S9(9) BINARY.
01 RANDNUM                   COMP-2.
01 FC.
02 Condition-Token-Value.
COPY CEEIGZCT.
03 Case-1-Condition-ID.
04 Severity                  PIC S9(4) BINARY.
04 Msg-No                    PIC S9(4) BINARY.
03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
04 Class-Code                PIC S9(4) BINARY.
04 Cause-Code                PIC S9(4) BINARY.
03 Case-Sev-Ctl              PIC X.
03 Facility-ID               PIC XXX.
02 I-S-Info                  PIC S9(9) BINARY.

PROCEDURE DIVISION.

PARA-CBLRAN0.
*****
** Specify 0 for SEED, so the seed will be
** derived from the current Greenwich Mean Time
*****
MOVE 0 TO SEED.
*****
** Call CEERAN0 to return random number between
** 0.0 and 1.0
*****
CALL "CEERAN0" USING SEED , RANDNUM , FC.
*****
** If CEERAN0 runs successfully, display result.
*****
IF CEE000 of FC THEN
    DISPLAY "The random number is: " RANDNUM
ELSE
    DISPLAY "CEERAN0 failed with msg "
        Msg-No of FC UPON CONSOLE
    STOP RUN
END-IF.
GOBACK.

```

Figure 175. COBOL Example of CEERAN0

```

*PROCESS MACRO;
/* Module/File Name: IBMRAN0 */
/*****
**
** Function: CEERAN0 - calculate uniform random
** numbers
**
**
*****/
PLIRAN0: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL SEED      REAL FIXED BINARY(31,0);
    DCL RANDNUM   REAL FLOAT DECIMAL(16);
    DCL 01 FC, /* Feedback token */
        03 MsgSev   REAL FIXED BINARY(15,0),
        03 MsgNo    REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case   BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID    CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    SEED = 7; /* Specify an integer as the initial
              /* value used to calculate the random
              /* numbers

    /* Call CEERAN0 to generate random number between
    /* 0.0 and 1.0
    CALL CEERAN0 ( SEED, RANDNUM, FC );

    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST ( 'The random number is '
            || RANDNUM );
        END;
    ELSE DO;
        DISPLAY( 'CEERAN0 failed with msg '
            || FC.MsgNo );
        STOP;
        END;

END PLIRAN0;

```

Figure 176. PL/I Example of CEERAN0

CEESCEN—Set the century window

CEESCEN sets the century in which Language Environment contains the 2-digit year value. Use it in conjunction with CEEDAYS or CEESECS when:

- You process date values containing 2-digit years (for example, in the YYMMDD format).
- The Language Environment default century interval does not meet the requirements of a particular application.

Century intervals are kept as thread-level data, so changing the interval in one thread does not affect the interval in another thread. To query the century window, use CEEQCEN.

CEEQCEN affects and is affected by only the Language Environment NLS and date and time services, not the Language Environment locale callable services or the C locale-sensitive functions.

Syntax

►—CEERAN0—(—*century_start*—,—*fc*—)—————►◄

century_start
An integer between 0 and 100, setting the century window.

A value of 80, for example, places all two-digit years within the 100-year window starting 80 years before the system date. In 1995, therefore, all two-digit years are assumed to represent dates between 1915 and 2014, inclusive.

fc (output)
A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2E6	3	2502	The UTC/GMT was not available from the system.

Usage notes

- z/OS UNIX considerations—CEESCEN applies to the enclave. The century window applies to the enclave.

For more information

- See “CEEDAYS—Convert date to Lilian format” on page 266 for more information about the CEEDAYS callable service.
- See “CEESECS—Convert timestamp to seconds” on page 467 for more information about the CEESECS callable service.
- See “CEEQCEN—Query the century window” on page 439 for more information about the CEEQCEN callable service.

Examples

```
/*Module/File Name: EDCSCEN */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main (void) {

    _INT4 century_start;
    _FEEDBACK fc;

    century_start = 50;

    CEESCEN(&century_start,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEESCEN failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
}
```

Figure 177. C/C++ Example of CEESCEN

```

CBL LIB,QUOTE
*Module/File Name: IGTSCEN
*****
**                               **
** CBLSCEN - Call CEESCEN to set the Lang. Env. **
**          century window                **
**                               **
** In this example, CEESCEN is called to change **
** the start of the century window to 30 years **
** before the system date. CEEQCEN is then    **
** called to query that the change made. A     **
** message that this has been done is then    **
** displayed.                                **
**                               **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLSCEN.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 STARTCW          PIC S9(9) BINARY.
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity      PIC S9(4) BINARY.
   04 Msg-No        PIC S9(4) BINARY.
   03 Case-2-Condition-ID
   REDEFINES Case-1-Condition-ID.
   04 Class-Code    PIC S9(4) BINARY.
   04 Cause-Code    PIC S9(4) BINARY.
   03 Case-Sev-Ctl  PIC X.
   03 Facility-ID   PIC XXX.
   02 I-S-Info      PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLSCEN.
*****
** Specify 30 as century start, and two-digit
**   years will be assumed to lie in the
**   100-year window starting 30 years before
**   the system date.
*****
MOVE 30 TO STARTCW.

*****
** Call CEESCEN to change the start of the century
**   window.
*****

```

Figure 178. COBOL Example of CEESCEN (Part 1 of 2)

```
        CALL "CEESCEN" USING STARTCW, FC.
        IF NOT CEE000 of FC THEN
            DISPLAY "CEESCEN failed with msg "
                Msg-No of FC UPON CONSOLE
            STOP RUN
        END-IF.
    PARA-CBLQCEN.
    *****
    ** Call CEEQCEN to return the start of the century
    ** window
    *****
        CALL "CEEQCEN" USING STARTCW, FC.

    *****
    ** CEEQCEN has no non-zero feedback codes to
    ** check, so just display result.
    *****
        DISPLAY "The start of the century "
            "window is: " STARTCW
    GOBACK.
```

Figure 178. COBOL Example of CEESCEN (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMSCEN */
/*****
**
** Function: CEEScen - set the century window
**
**
*****/
PLISCEN: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL STARTCW REAL FIXED BINARY(31,0);
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    STARTCW = 20; /* Set 20 as century start */

    /* Call CEEScen to request that two-digit years
    /* lie in the 100-year window starting 20
    /* years before the system date
    CALL CEEScen ( STARTCW, FC );
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST ( 'The century window now starts '
            || STARTCW || ' years before today.' );
    END;
    ELSE DO;
        DISPLAY( 'CEEScen failed with msg '
            || FC.MsgNo );
    STOP;
    END;

END PLISCEN;

```

Figure 179. PL/I Example of CEEScen

CEESCOL—Compare collation weight of two strings

CEESCOL, analogous to the C language function `strcoll()`, compares two character strings based on the collating sequence specified in the `LC_COLLATE` category of the current locale.

CEESCOL associates a collation weight with every character in the code set for the locale. The characters in the input strings are converted to their collation weights and then compared on the basis of these weights.

CEESCOL is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

```

▶▶ CEESCOL (—omitted_parm—, —string1—, —string2—, —result—, —fc—▶▶
▶—)——▶▶

```

omitted_parm

This parameter is reserved for future expansion and must be omitted. For information on how to code an omitted parameter, see “Invoking callable services” on page 109.

string1 (input)

A halfword length-prefixed character string (VSTRING) with a maximum length of 4K bytes. *string1* points to a string of characters that are to be compared against *string2*.

string2 (input)

A halfword length-prefixed character string (VSTRING) with a maximum length of 4K bytes. *string2* points to a string of characters that *string1* is compared against.

result (output)

Specifies the result of the string comparison.

- If successful, the following values are returned:
 - Less than 0 if *string1* is less than *string2*
 - Equal to 0 if *string1* is equal to *string2*
 - Greater than 0 if *string1* is greater than *string2*

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3T1	3	4001	General Failure: Service could not be completed.

Usage notes

- PL/I MTF consideration—CEESCOL is not supported in PL/I MTF applications.
- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.

For more information

- See “CEESETL—Set locale operating environment” on page 475 for more information about the CEESETL callable service.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGTZSCOL
*****
* Example for callable service CEESCOL          *
* COBSCOL - Compare two character strings      *
*           and print the result.              *
* Valid only for COBOL for MVS & VM Release 2  *
* or later.                                    *
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. COBSCOL.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 String1.
   02 Str1-Length PIC S9(4) BINARY.
   02 Str1-String.
   03 Str1-Char PIC X
               OCCURS 0 TO 256 TIMES
               DEPENDING ON Str1-Length.

01 String2.
   02 Str2-Length PIC S9(4) BINARY.
   02 Str2-String.
   03 Str2-Char PIC X
               OCCURS 0 TO 256 TIMES
               DEPENDING ON Str2-Length.

01 Result PIC S9(9) BINARY.
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
   03 Case-1-Condition-ID.
   04 Severity PIC S9(4) BINARY.
   04 Msg-No PIC S9(4) BINARY.
   03 Case-2-Condition-ID
       REDEFINES Case-1-Condition-ID.
   04 Class-Code PIC S9(4) BINARY.
   04 Cause-Code PIC S9(4) BINARY.
   03 Case-Sev-Ctl PIC X.
   03 Facility-ID PIC XXX.
   02 I-S-Info PIC S9(9) BINARY.

*
PROCEDURE DIVISION.
*****
* Set up two strings for comparison
*****
   MOVE 9 TO Str1-Length.
   MOVE "12345a789"
       TO Str1-String (1:Str1-Length)
   MOVE 9 TO Str2-Length.
   MOVE "12346$789"
       TO Str2-String (1:Str2-Length)

```

Figure 180. COBOL Example of CEESCOL (Part 1 of 2)


```
*****
* Call CEESCOL to compare the strings
*****
      CALL "CEESCOL" USING OMITTED, String1,
                          String2, Result, FC.

*****
* Check feedback code
*****
      IF Severity > 0
        DISPLAY "Call to CEESCOL failed. " Msg-No
        STOP RUN
      END-IF.

*****
* Check result of compare
*****
      EVALUATE TRUE
        WHEN Result < 0
          DISPLAY "1st string < 2nd string."
        WHEN Result > 0
          DISPLAY "1st string > 2nd string."
        WHEN OTHER
          DISPLAY "Strings are identical."
      END-EVALUATE.

      STOP RUN.
END PROGRAM COBSCOL.
```

Figure 180. COBOL Example of CEESCOL (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMSCOL                                     */
/*****                                                         */
/* Example for callable service CEESCOL                         */
/* Function: Compare two character strings and                  */
/* print the result.                                           */
/*****                                                         */

PLISCOL: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs for Language Environment */
%INCLUDE CEEIBMCT; /* FBCECHK macro, FB constants                    */
%INCLUDE CEEIBMLC; /* Locale category constants                      */

/* CEESCOL service call arguments */
DCL STRING1 CHAR(256) VARYING; /* first string                      */
DCL STRING2 CHAR(256) VARYING; /* second string                     */
DCL RESULT_SCOL BIN FIXED(31); /* result of compare */

DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

STRING1 = '12345a789';
STRING2 = '12346$789';

CALL CEESCOL( *, STRING1, STRING2, RESULT_SCOL,FC);

/* FBCECHK macor used (defined in CEEIBMCT) */
IF FBCECHK( FC, CEE3T1 ) THEN
DO;
    DISPLAY ('CEESCOL not completed '||FC.MsgNo );
    STOP;
END;

SELECT;
WHEN( RESULT_SCOL < 0 )
    PUT SKIP LIST(
        '"firststring" is less than "secondstring" ');
WHEN( RESULT_SCOL > 0 )
    PUT SKIP LIST(
        '"firststring" is greater than "secondstring" ');
OTHERWISE
    PUT SKIP LIST( 'Strings are identical' );
END; /* END SELECT */

END PLISCOL;

```

Figure 181. PL/I Example of CEESCOL

CEESECI—Convert seconds to integers

CEESECI converts a number representing the number of seconds since 00:00:00 14 October 1582 to seven separate binary integers representing year, month, day, hour, minute, second, and millisecond. Use CEESECI instead of CEEDATM when the output is needed in numeric format rather than in character format.

The inverse of CEESECI is CEEISEC, which converts integer year, month, day, hour, second, and millisecond to number of seconds. If the input value is a Lilian date instead of seconds, multiply the Lilian date by 86,400 (number of seconds in a day), and pass the new value to CEESECI.

Syntax

```

▶—CEESECI—(—input_seconds—,—output_year—,—output_month—,—
▶output_day—,—output_hours—,—output_minutes—,—output_seconds—,—
▶output_milliseconds—,—fc—)————▶

```

input_seconds

A 64-bit double floating-point number representing the number of seconds since 00:00:00 on 14 October 1582, not counting leap seconds.

For example, 00:00:01 on 15 October 1582 is second number 86,401 ($24 \times 60 \times 60 + 01$). The valid range for *input_seconds* is 86,400 to 265,621,679,999.999 (23:59:59.999 31 December 9999).

If *input_seconds* is invalid, all output parameters except the feedback code are set to 0.

output_year (output)

A 32-bit binary integer representing the year.

The range of valid *output_years* is 1582 to 9999, inclusive.

output_month (output)

A 32-bit binary integer representing the month.

The range of valid *output_months* is 1 to 12.

output_day (output)

A 32-bit binary integer representing the day.

The range of valid *output_days* is 1 to 31.

output_hours (output)

A 32-bit binary integer representing the hour.

The range of valid *output_hours* is 0 to 23.

output_minutes (output)

A 32-bit binary integer representing the minutes.

The range of valid *output_minutes* is 0 to 59.

output_seconds (output)

A 32-bit binary integer representing the seconds.

The range of valid *output_seconds* is 0 to 59.

output_milliseconds (output)

A 32-bit binary integer representing milliseconds.

The range of valid *output_milliseconds* is 0 to 999.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2E9	3	2505	The input_seconds value in a call to CEEDATM or CEESECI was not within the supported range.

Usage notes

- z/OS UNIX consideration—In multithread applications, CEESECI affects only the calling thread.

For more information

- For more information about the CEEISEC callable service, see “CEEISEC—Convert integers to seconds” on page 372.

Examples

```

/*Module/File Name: EDCSECI   */

#include <string.h>
#include <stdio.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _INT4 year, month, day, hours, minutes, seconds,
        millisecs;
    _FLOAT8 input;
    _FEEDBACK fc;

    input = 13166064000.0;
    CEESECI(&input,&year,&month,&day,&hours,&minutes,;
        &seconds,&millisecs,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEESECI failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    printf("%f seconds corresponds to the date"
        " %d:%d:%d.%d %d/%d/%d\n",input,hours,minutes,
        seconds,millisecs,month,day,year);
}

```

Figure 182. C/C++ Example of CEESECI

```

CBL LIB,QUOTE
*Module/File Name: IGTSECI
*****
**
** CBLSECI - Call CEESECI to convert seconds **
**          to integers                      **
**                                           **
** In this example a call is made to CEESECI **
** to convert a number representing the number **
** of seconds since 00:00:00 14 October 1582 **
** to seven binary integers representing year, **
** month, day, hour, minute, second, and     **
** millisecond. The results are displayed in  **
** this example.                             **
**                                           **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLSECI.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 INSECS                      COMP-2.
01 YEAR                       PIC S9(9) BINARY.
01 MONTH                      PIC S9(9) BINARY.
01 DAYS                       PIC S9(9) BINARY.
01 HOURS                      PIC S9(9) BINARY.
01 MINUTES                   PIC S9(9) BINARY.
01 SECONDS                   PIC S9(9) BINARY.
01 MILLSEC                   PIC S9(9) BINARY.
01 IN-DATE.
   02 Vstring-length          PIC S9(4) BINARY.
   02 Vstring-text.
      03 Vstring-char          PIC X,
                                OCCURS 0 TO 256 TIMES
                                DEPENDING ON Vstring-length
                                of IN-DATE.
01 PICSTR.
   02 Vstring-length          PIC S9(4) BINARY.
   02 Vstring-text.
      03 Vstring-char          PIC X,
                                OCCURS 0 TO 256 TIMES
                                DEPENDING ON Vstring-length
                                of PICSTR.
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
      03 Case-1-Condition-ID.
         04 Severity          PIC S9(4) BINARY.
         04 Msg-No            PIC S9(4) BINARY.
      03 Case-2-Condition-ID
         REDEFINES Case-1-Condition-ID.
         04 Class-Code        PIC S9(4) BINARY.
         04 Cause-Code        PIC S9(4) BINARY.
      03 Case-Sev-Ctl          PIC X.
      03 Facility-ID           PIC XXX.
   02 I-S-Info                PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-CBLSECS.

```

Figure 183. COBOL Example of CEESECI (Part 1 of 2)

```

*****
** Call CEESECS to convert timestamp of 6/2/88
**   at 10:23:45 AM to Lilian representation
*****
      MOVE 20 TO Vstring-length of IN-DATE.
      MOVE "06/02/88 10:23:45 AM"
        TO Vstring-text of IN-DATE.
      MOVE 20 TO Vstring-length of PICSTR.
      MOVE "MM/DD/YY HH:MI:SS AM"
        TO Vstring-text of PICSTR.
      CALL "CEESECS" USING IN-DATE, PICSTR,
                          INSECS, FC.
      IF NOT CEE000 of FC THEN
        DISPLAY "CEESECS failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.
      PARA-CBLSECI.
*****
** Call CEESECI to convert seconds to integers
*****
      CALL "CEESECI" USING INSECS, YEAR, MONTH,
                          DAYS, HOURS, MINUTES,
                          SECONDS, MILLSEC, FC.
*****
** If CEESECI runs successfully, display results
*****
      IF CEE000 of FC THEN
        DISPLAY "Input seconds of " INSECS
          " represents:"
        DISPLAY "  Year..... " YEAR
        DISPLAY "  Month..... " MONTH
        DISPLAY "  Day..... " DAYS
        DISPLAY "  Hour..... " HOURS
        DISPLAY "  Minute..... " MINUTES
        DISPLAY "  Second..... " SECONDS
        DISPLAY "  Millisecond.. " MILLSEC
      ELSE
        DISPLAY "CEESECI failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.

      GOBACK.

```

Figure 183. COBOL Example of CEESECI (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMSECI */
/*****
/**
/** Function: CEESECI - convert seconds to integers */
/**
/*****
PLISECI: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL INSECS REAL FLOAT DECIMAL(16);
DCL YEAR REAL FIXED BINARY(31,0);
DCL MONTH REAL FIXED BINARY(31,0);
DCL DAYS REAL FIXED BINARY(31,0);
DCL HOURS REAL FIXED BINARY(31,0);
DCL MINUTES REAL FIXED BINARY(31,0);
DCL SECONDS REAL FIXED BINARY(31,0);
DCL MILLSEC REAL FIXED BINARY(31,0);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

INSECS = 13166064060; /* number of seconds since */
/* 14 October 1582 */

/* Call CEESECI to convert INSECS to separate */
/* binary integers representing the year, */
/* month, day, hours, minutes, seconds and */
/* milliseconds. */
CALL CEESECI ( INSECS, YEAR, MONTH, DAYS,
              HOURS, MINUTES, SECONDS, MILLSEC, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT EDIT( INSECS, ' seconds corresponds to ',
              MONTH, '/', DAYS, '/', YEAR, ' at ', HOURS,
              ': ', MINUTES, ': ', SECONDS, ': ', MILLSEC )
          (SKIP, F(9), A, 2 (P'99', A), P'9999', A,
           3 (P'99', A), P'999' );
    END;
ELSE DO;
    DISPLAY( 'CEESECI failed with msg '
             || FC.MsgNo );
    STOP;
    END;

END PLISECI;

```

Figure 184. PL/I Example of CEESECI

CEESECS—Convert timestamp to seconds

CEESECS converts a string representing a timestamp into the number of Lilian seconds (number of seconds since 00:00:00 14 October 1582). This service makes it easier to perform time arithmetic, such as calculating the elapsed time between two timestamps.

CEESECS is affected only by the country code setting of the COUNTRY run-time option or CEE3CTY callable service, not the CEESETL callable service or the `setlocale()` function.

The inverse of CEESECS is CEEDATM, which converts *output_seconds* to character format. By default, 2-digit years lie within the 100 year range starting 80 years prior to the system date. Thus, in 1995, all 2-digit years represent dates between 1915 and 2014, inclusive. You can change this range by using the callable service CEESCEN.

Syntax

```
►► CEESECS(—input_timestamp—, —picture_string—, —output_seconds—, —fc—)
►►
```

input_timestamp (input)

A length-prefixed character string representing a date or timestamp in a format matching that specified by *picture_string*.

The character string must contain between 5 and 80 picture characters, inclusive. *input_timestamp* can contain leading or trailing blanks. Parsing begins with the first nonblank character (unless the picture string itself contains leading blanks; in this case, CEESECS skips exactly that many positions before parsing begins).

After a valid date is parsed, as determined by the format of the date you specify in *picture_string*, all remaining characters are ignored by CEESECS. Valid dates range between and including the dates 15 October 1582 to 31 December 9999. A full date must be specified. Valid times range from 00:00:00.000 to 23:59:59.999.

If any part or all of the time value is omitted, zeros are substituted for the remaining values. For example:

```
1992-05-17-19:02 is equivalent to 1992-05-17-19:02:00
1992-05-17      is equivalent to 1992-05-17-00:00:00
```

picture_string (input)

A halfword length-prefixed character string (VSTRING), indicating the format of the date or timestamp value specified in *input_timestamp*.

Each character in the *picture_string* represents a character in *input_timestamp*. For example, if you specify MMDDYY HH.MI.SS as the *picture_string*, CEESECS reads an *input_char_date* of 060288 15.35.02 as 3:35:02 PM on 02 June 1988. If delimiters such as the slash (/) appear in the picture string, leading zeros can be omitted. For example, the following calls to CEESECS all assign the same value to variable *secs*:

```
CALL CEESECS('92/06/03 15.35.03', 'YY/MM/DD
             HH.MI.SS', secs, fc);
CALL CEESECS('92/6/3 15.35.03', 'YY/MM/DD
             HH.MI.SS', secs, fc);
CALL CEESECS('92/6/3 3.35.03 PM', 'YY/MM/DD
             HH.MI.SS AP', secs, fc);
CALL CEESECS('92.155 3.35.03 pm', 'YY.DDD
             HH.MI.SS AP', secs, fc);
```


If picture string is left null or blank, CEESECS gets *picture_string* based on the current value of the COUNTRY run-time option. For example, if the current value of the COUNTRY run-time option is FR (France), the date format would be DD.MM.YYYY.

If *picture_string* includes a Japanese era symbol <JJJJ>, the YY position in *input_timestamp* represents the year number within the Japanese era. For example, the year 1988 equals the Japanese year 63 in the Showa era. See Table 31 on page 552 for a list of Japanese eras supported by CEESECS.

If *picture_string* includes era symbol <CCCC> or <CCCCCCCC>, the YY position in *input_timestamp* represents the year number within the era.

See Table 29 on page 551 for a list of valid picture characters, and Table 30 on page 552 for examples of valid picture strings.

output_seconds (output)

A 64-bit double floating-point number representing the number of seconds since 00:00:00 on 14 October 1582, not counting leap seconds. For example, 00:00:01 on 15 October 1582 is second 86,401 ($24 \times 60 \times 60 + 01$) in the Lilian format. 19:00:01.12 on 16 May 1988 is second 12,799,191,601.12.

The largest value represented is 23:59:59.999 on 31 December 9999, which is second 265,621,679,999.999 in the Lilian format.

A 64-bit double floating-point value can accurately represent approximately 16 significant decimal digits without loss of precision. Therefore, accuracy is available to the nearest millisecond (15 decimal digits).

If *input_timestamp* does not contain a valid date or timestamp, *output_seconds* is set to 0 and CEESECS terminates with a non-CEE000 symbolic feedback code.

Elapsed time calculations are performed easily on the *output_seconds*, because it represents elapsed time. Leap year and end-of-year anomalies do not affect the calculations.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2EB	3	2507	Insufficient data was passed to CEEDAYS or CEESECS. The Lilian value was not calculated.
CEE2EC	3	2508	The date value passed to CEEDAYS or CEESECS was invalid.
CEE2ED	3	2509	The era passed to CEEDAYS or CEESECS was not recognized.
CEE2EE	3	2510	The hours value in a call to CEEISEC or CEESECS was not recognized.
CEE2EH	3	2513	The input date passed in a CEEISEC, CEEDAYS, or CEESECS call was not within the supported range.
CEE2EK	3	2516	The minutes value in a CEEISEC call was not recognized.

Code	Severity	Message Number	Message Text
CEE2EL	3	2517	The month value in a CEEISEC call was not recognized.
CEE2EM	3	2518	An invalid picture string was specified in a call to a date/time service.
CEE2EN	3	2519	The seconds value in a CEEISEC call was not recognized.
CEE2EP	3	2521	The year-within-era value passed to CEEDAYS or CEESECS was zero.
CEE2ET	3	2525	CEESECS detected non-numeric data in a numeric field, or the timestamp string did not match the picture string.

Usage notes

- The probable cause for receiving message number 2518 is a picture string that contains an invalid DBCS string. You should verify that the data in the picture string is correct.
- z/OS UNIX consideration—In multithread applications, CEESECS affects only the calling thread.

For more information

- See “CEESCEN—Set the century window” on page 453 for more information about the CEESCEN callable service.
- See “COUNTRY” on page 22 for more information about the COUNTRY run-time option.

Examples

```

/*Module/File Name: EDCSECS */

#include <stdio.h>
#include <string.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main(void) {
    _FEEDBACK fc;
    _FLOAT8 seconds1, seconds2;
    _VSTRING date,date_pic;

    /* use CEESECS to convert to seconds timestamp */
    strcpy(date.string,"09/13/91 23:23:23");
    date.length = strlen(date.string);
    strcpy(date_pic.string,"MM/DD/YY HH:MI:SS");
    date_pic.length = strlen(date_pic.string);

    CEESECS(&date,&date_pic,&seconds1,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEESECS failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    strcpy(date.string,
        "December 15, 1992 at 8:23:45 AM");
    date.length = strlen(date.string);
    strcpy(date_pic.string,
        "MMMMMMMMMMmz DD, YYYY at ZH:MI:SS AP");
    date_pic.length = strlen(date_pic.string);

    CEESECS(&date,&date_pic,&seconds2,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEESECS failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    printf("The number of seconds between:\n");
    printf(" September 13, 1991 at 11:23:23 PM");
    printf(
        " and December 15, 1992 at 8:23:45 AM is:\n  %f\n",
        seconds2 - seconds1);
}

```

Figure 185. C/C++ Example of CEESECS

```

CBL LIB,QUOTE
*Module/File Name: IGTSECS
*****
** CBLSECS - Call CEESECS to convert          **
**          timestamp to number of seconds    **
**          **                                **
** In this example, calls are made to CEESECS **
** to convert two timestamps to the number of **
** seconds since 00:00:00 14 October 1582.    **
** The Lilian seconds for the earlier         **
** timestamp are then subtracted from the     **
** Lilian seconds for the later timestamp    **
** to determine the number of between the    **
** two. This result is displayed.            **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLSECS.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 SECOND1                COMP-2.
01 SECOND2                COMP-2.
01 TIMESTP.
    02 Vstring-length     PIC S9(4) BINARY.
    02 Vstring-text.
        03 Vstring-char   PIC X,
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of TIMESTP.
01 TIMESTP2.
    02 Vstring-length     PIC S9(4) BINARY.
    02 Vstring-text.
        03 Vstring-char   PIC X,
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of TIMESTP2.
01 PICSTR.
    02 Vstring-length     PIC S9(4) BINARY.
    02 Vstring-text.
        03 Vstring-char   PIC X,
                        OCCURS 0 TO 256 TIMES
                        DEPENDING ON Vstring-length
                        of PICSTR.
01 FC.
    02 Condition-Token-Value.

```

Figure 186. COBOL Example of CEESECS (Part 1 of 3)

```

COPY CEEIGZCT.
  03 Case-1-Condition-ID.
    04 Severity    PIC S9(4) BINARY.
    04 Msg-No      PIC S9(4) BINARY.
  03 Case-2-Condition-ID
    REDEFINES Case-1-Condition-ID.
    04 Class-Code  PIC S9(4) BINARY.
    04 Cause-Code  PIC S9(4) BINARY.
  03 Case-Sev-Ctl  PIC X.
  03 Facility-ID   PIC XXX.
  02 I-S-Info      PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-SECS1.
*****
** Specify first timestamp and a picture string
**   describing the format of the timestamp
**   as input to CEESECS
*****
MOVE 25 TO Vstring-length of TIMESTP.
MOVE "1969-05-07 12:01:00.000"
    TO Vstring-text of TIMESTP.
MOVE 25 TO Vstring-length of PICSTR.
MOVE "YYYY-MM-DD HH:MI:SS.999"
    TO Vstring-text of PICSTR.

*****
** Call CEESECS to convert the first timestamp
** to Lilian seconds
*****
CALL "CEESECS" USING TIMESTP, PICSTR,
                    SECOND1, FC.
IF NOT CEE000 of FC THEN
  DISPLAY "CEESECS failed with msg "
    Msg-No of FC UPON CONSOLE
  STOP RUN
END-IF.

```

Figure 186. COBOL Example of CEESECS (Part 2 of 3)

```

      PARA-SECS2.
      *****
      ** Specify second timestamp and a picture string
      **   describing the format of the timestamp as
      **   input to CEESECS.
      *****
      MOVE 25 TO Vstring-length of TIMESTP2.
      MOVE "2000-01-01 00:00:01.000"
          TO Vstring-text of TIMESTP2.
      MOVE 25 TO Vstring-length of PICSTR.
      MOVE "YYYY-MM-DD HH:MI:SS.999"
          TO Vstring-text of PICSTR.

      *****
      ** Call CEESECS to convert the second timestamp
      **   to Lilian seconds
      *****
      CALL "CEESECS" USING TIMESTP2, PICSTR,
                          SECOND2, FC.
      IF NOT CEE000 of FC THEN
          DISPLAY "CEESECS failed with msg "
              Msg-No of FC UPON CONSOLE
          STOP RUN
      END-IF.

      PARA-SECS2.
      *****
      ** Subtract SECOND2 from SECOND1 to determine the
      **   number of seconds between the two timestamps
      *****
      SUBTRACT SECOND1 FROM SECOND2.
      DISPLAY "The number of seconds between "
          Vstring-text OF TIMESTP " and "
          Vstring-text OF TIMESTP2 " is: " SECOND2.

      GOBACK.

```

Figure 186. COBOL Example of CEESECS (Part 3 of 3)

```

*PROCESS MACRO;
/* Module/File Name: IBMSECS */
/*****
/**
/** Function: CEESECS - Change timestamp to seconds */
/**
/** In this example, CEESECS is called to return an */
/** input timestamp as the number of seconds since */
/** 14 October 1582. */
/**
/**
*****/
PLISECS: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL TIMESTP CHAR(255) VARYING;
DCL PICSTR CHAR(255) VARYING;
DCL SECONDS REAL FLOAT DECIMAL(16);
DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

TIMESTP = '10 November 1992'; /* Specify input */
/* date as timestamp */
PICSTR = 'ZD Mmmmmmmmmmmmmz YYYY';
/* Picture string that describes timestamp */

/* Call CEESECS to return the input date as */
/* Lilian seconds */
CALL CEESECS ( TIMESTP, PICSTR, SECONDS, FC );
IF FBCHECK( FC, CEE000) THEN DO;
    PUT SKIP LIST( 'There were ' || SECONDS
        || ' seconds between 14 Oct 1582 and '
        || TIMESTP );
    END;
ELSE DO;
    DISPLAY( 'CEESECS failed with msg '
        || FC.MsgNo );
    STOP;
    END;

END PLISECS;

```

Figure 187. PL/I Example of CEESECS

CEESETL—Set locale operating environment

CEESETL, analogous to the C language function `setlocale()`, establishes a global locale operating environment, which determines the behavior of character collation, character classification, date and time formatting, numeric punctuation, and positive/negative response patterns.

CEESETL is sensitive to the locales set by `setlocale()` or CEESETL, not to the Language Environment settings from COUNTRY or CEE3CTY.

Syntax

```
►► CEESETL (—localename—, —category—, —fc—) ◄◄
```

*locale*name (input)

A halfword length-prefixed character string (VSTRING) with a maximum of 256 bytes. *locale*name is a valid locale name known to the locale model. The category named in the call is set according to the named locale. If *locale*name is null or blank, CEESETL sets the locale environment according to the environment variables. This is the equivalent to specifying `setlocale(LC_ALL, "")`. If these environment variables are defined, you can locate them in the following order:

- LC_ALL if it is defined and not null
- LANG if it is defined and not null
- The default C locale

category (input)

A symbolic integer number that represents all or part of the locale for a program. Depending on the value of the *locale*name, these categories can be initiated by the values of global categories of corresponding names. The following values for the *category* parameter are valid:

LC_ALL

A 4-byte integer (with a value of -1) that affects all locale categories associated with a program's locale.

LC_COLLATE

A 4-byte integer (with a value of 0) that affects the behavior of regular expression and collation subroutines.

LC_CTYPE

A 4-byte integer (with a value of 1) that affects the behavior of regular expression, character classification, case conversion, and wide character subroutines.

LC_MESSAGES

A 4-byte integer (with a value of 6) that affects the format and values for positive and negative responses.

LC_MONETARY

A 4-byte integer (with a value of 3) that affects the behavior of subroutines that format monetary values.

LC_NUMERIC

A 4-byte integer (with a value of 2) that affects the behavior of subroutines that format non-monetary numeric values.

LC_TIME

A 4-byte integer (with a value of 4) that affects the behavior of time conversion subroutines.

Language Environment locale callable services do not support the LC_TOD and LC_SYNTAX categories.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2KD	3	2701	An invalid category parameter was passed to a locale function.
CEE2KE	3	2702	An invalid locale name parameter was passed to a locale function.
CEE3T1	3	4001	General Failure: Service could not be completed.

Usage notes

- PL/I MTF consideration—CEESETL is not supported in PL/I MTF applications.
- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.
- The LC_ALL category indicates that all categories are to be changed with regard to the specific locale. The LC_ALL value, when set by CEESETL, becomes the current values for all six LC_* categories.
- If the active locale is not explicitly set with CEESETL or `setlocale(category, localename)`, then the locale chosen is as follows:
 - With POSIX(OFF), the SAA C locale is chosen, and querying the locale with CEEQRYL returns “C” as the locale name.
 - With POSIX(ON), the POSIX C locale is chosen, and querying the locale with CEEQRYL returns “POSIX” as the locale name.

The SAA C locale provides compatibility with previous releases of C/370. The POSIX C locale provides consistency with POSIX requirements and supports the z/OS UNIX environment.

For more information

- See *z/OS XL C/C++ Run-Time Library Reference* for details of how various locale categories affect C/C++ language functions.
- For more information about specifying environment variables to set the locale, see *z/OS XL C/C++ Programming Guide*.
- For information on the definition of the SAA C and POSIX C locales and the differences between them, see *z/OS XL C/C++ Programming Guide*.
- For more information about LC_TIME, see “CEEQDTC—Query locale date and time conventions” on page 442.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGTSETL
*****
* Example for callable service CEESETL          *
* COBSETL - Set all global locale environment *
*           categories to country Sweden.      *
*           Query one category.                *
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. COBSETL.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 Locale-Name.
   02 LN-Length PIC S9(4) BINARY.
   02 LN-String PIC X(256).
01 Locale-Time.
   02 LT-Length PIC S9(4) BINARY.
   02 LT-String PIC X(256).
* Use Locale category constants
COPY CEEIGZLC.
*
01 FC.
   02 Condition-Token-Value.
   COPY CEEIGZCT.
      03 Case-1-Condition-ID.
         04 Severity PIC S9(4) BINARY.
         04 Msg-No PIC S9(4) BINARY.
      03 Case-2-Condition-ID
         REDEFINES Case-1-Condition-ID.
         04 Class-Code PIC S9(4) BINARY.
         04 Cause-Code PIC S9(4) BINARY.
      03 Case-Sev-Ctl PIC X.
      03 Facility-ID PIC XXX.
02 I-S-Info PIC S9(9) BINARY.
*
```

Figure 188. COBOL Example of CEESETL (Part 1 of 2)

```

PROCEDURE DIVISION.
*****
* Set up locale name for Sweden
*****
      MOVE 14 TO LN-Length.
      MOVE 'Sv_SE.IBM-1047'
          TO LN-String (1:LN-Length).

*****
* Set all locale categories to Sweden
* Use LC-ALL category constant from CEEIGZLC
*****
      CALL 'CEESETL' USING Locale-Name, LC-ALL,
          FC.

*****
* Check feedback code
*****
      IF Severity > 0
          DISPLAY 'Call to CEESETL failed. ' Msg-No
          STOP RUN
      END-IF.

*****
* Retrieve active locale for LC-TIME category
*****
      CALL 'CEEQRYL' USING LC-TIME, Locale-Time,
          FC.

*****
* Check feedback code and correct locale
*****
      IF Severity = 0
          IF LT-String(1:LT-Length) =
              LN-String(1:LN-Length)
              DISPLAY 'Successful query.'
          ELSE
              DISPLAY 'Unsuccessful query.'
          END-IF
      ELSE
          DISPLAY 'Call to CEEQRYL failed. ' Msg-No
      END-IF.

      STOP RUN.
END PROGRAM COBSETL.

```

Figure 188. COBOL Example of CEESETL (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMSETL */
/*****/
/* Example for callable service CEESETL */
/* Function: Set all global locale environment */
/* categories to country. Query one category. */
/*****/

PLISETL: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs */
%INCLUDE CEEIBMCT; /* FBCHECK macro, FB constants */
%INCLUDE CEEIBMLC; /* Locale category constants */

/* CEESETL service call arguments */
DCL LOCALE_NAME CHAR(14) VARYING;

/* CEEQRYL service call arguments */
DCL LOCALE_NAME_TIME CHAR(256) VARYING;

DCL 01 FC, /* Feedback token */
      03 MsgSev REAL FIXED BINARY(15,0),
      03 MsgNo REAL FIXED BINARY(15,0),
      03 Flags,
          05 Case BIT(2),
          05 Severity BIT(3),
          05 Control BIT(3),
      03 FacID CHAR(3), /* Facility ID */
      03 ISI /* Instance-Specific Information */
          REAL FIXED BINARY(31,0);

```

Figure 189. COBOL Example of CEESETL (Part 1 of 2)

```

/* init locale name with IBM default for Sweden */
LOCALE_NAME = 'Sv_SE.IBM-1047';

/* use LC_ALL category const from CEEIBMLC */
CALL CEESETL ( LOCALE_NAME, LC_ALL, FC );

/* FBCHECK macro used (defined in CEEIBMCT) */
IF FBCHECK( FC, CEE2KE ) THEN
  DO; /* invalid locale name */
    DISPLAY ( 'Locale LC_ALL Call ' || FC.MsgNo );
    STOP;
  END;

/* retrieve active locale for LC_TIME category */
/* use LC_TIME category const from CEEIBMLC */
CALL CEEQRYL ( LC_TIME, LOCALE_NAME_TIME, FC );

IF FBCHECK( FC, CEE000 ) THEN
  DO; /* successful query, check category name */
    IF LOCALE_NAME_TIME ^= LOCALE_NAME THEN
      DO;
        DISPLAY ( 'Invalid LOCALE_NAME_TIME ' );
        STOP;
      END;
    ELSE
      DO;
        PUT SKIP LIST('Successful query LC_TIME',
                      LOCALE_NAME_TIME);
      END;
    END;
  ELSE
    DO;
      DISPLAY ( 'LC_TIME Category Call ' || FC.MsgNo );
      STOP;
    END;
END PLISETL;

```

Figure 189. COBOL Example of CEESETL (Part 2 of 2)

CEESGL—Signal a condition

CEESGL raises, or signals, a condition to the Language Environment condition manager. It also provides qualifying data and creates an ISI for a particular instance of the condition. The ISI contains information used by the Language Environment condition manager to identify and react to conditions.

CEESGL is typically used to generate application-specific conditions that are recognized by condition handlers registered via CEEHDLR. Conditions can also be selected to simulate a Language Environment or system condition. If you plan on using a routine that signals a new condition with a call to CEESGL, you should first call the CEEECMI callable service to copy any insert information into the ISI associated with the condition.

CEESGL generates a Language Environment condition. You can map some of the Language Environment condition tokens to POSIX signals.

Unique conditions signaled by CEESGL are considered to be enabled under Language Environment. Therefore, they undergo Language Environment condition handling.

CEESGL can signal a POSIX condition. If CEESGL signals a POSIX condition and the signal is blocked at the time of the generation but later unblocked and delivered, the POSIX signal processing semantics are applied. The Language Environment synchronous condition manager semantics do not apply.

Severity 0 and 1 conditions are considered safe conditions. They can be ignored if they are not handled and if no feedback token is passed when the condition is raised.

Each signaled condition (of severity 2 or above) increments the error count by one. If the error count exceeds the error count limit (as specified by the `ERRCOUNT` run-time option—see “`ERRCOUNT`” on page 31) the condition manager terminates the enclave with abend code 4091, reason code 11. `T_I_U` (Termination Imminent due to an Unhandled Condition) is not issued. Promoted conditions do not increment the error count. A program established using the `CEEHDLR` callable service or one of the HLL condition handlers, can then process the raised condition.

`ERRCOUNT` applies to CEESGL only if the condition generated by CEESGL is delivered synchronously. POSIX signal handling semantics are then applied to the condition.

Table 24 on page 216 contains a list of the S/370 program interrupt codes and their corresponding Language Environment condition token names and message numbers.

Syntax

```

▶▶ CEESGL (—cond_rep—, —q_data_token—, —fc—)

```

cond_rep (input)

A 12-byte condition token representing the condition to be signaled.

You can either construct your own condition token or use one that Language Environment has already defined.

Conditions signaled by CEESGL are not necessarily handled by Language Environment. If you call CEESGL with a *cond_rep*, Language Environment passes control to the language in which the routine is written. The condition manager then determines whether it should handle the condition. If so, the HLL handles the condition. If not, control returns to Language Environment. The condition might also be ignored or blocked, or might result in enclave termination.

q_data_token (input/output)

An optional 32-bit data object placed in the ISI to access the qualifying data (*q_data*) associated with the given instance of the condition. The *q_data_token* is a list of information addresses a user condition handler uses to specifically identify and, if necessary, react to, a given condition. The information in the *q_data_token* provides a mechanism by which user-written condition handlers can provide a complete fix-up of some conditions.

q_data tokens associated with a condition using CEESGL can be extracted later using the `CEEQDQT` callable service.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE069	0	0201	An unhandled condition was returned in a feedback code.
CEE0CE	1	0398	Resume with new input.
CEE0CF	1	0399	Resume with new output.
CEE0EB	3	0459	Not enough storage was available to create a new instance specific information block.
CEE0EE	3	0462	Instance specific information for the condition token with message number <i>message-number</i> and facility ID <i>facility-id</i> could not be found.

Usage notes

- PL/I consideration—Conditions with a facility_ID of IBM cannot be used in CEESGL.
- z/OS UNIX consideration—In multithread applications, CEESGL affects only the calling thread. Delivery of a CEESGL generated condition is limited to the thread that generated the condition. However, if the condition is a severity 2 or higher, and is not handled by the application, the default action of terminate applies to the enclave, not just the calling thread.

For more information

- See “CEECMI—Store and load message insert data” on page 232 for more information about the CEECMCI callable service.
- See *z/OS Language Environment Programming Guide* for more information about mapping Language Environment condition tokens to POSIX signals.
- See “ERRCOUNT” on page 31 for more information about the ERRCOUNT run-time option.
- To construct your own condition token, see “CEENCOD—Construct a condition token” on page 432.
- For more information about condition handling, see *z/OS Language Environment Programming Guide*.
- See “CEEGQDT—Retrieve q_data_token” on page 340 for more information about the CEEGQDT callable service.

Examples

```

/*Module/File Name: EDCSGL    */

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <leawi.h>
#include <ceedcct.h>

int main(void) {

    _FEEDBACK fc,condtok;
    _ENTRY routine;
    _INT4 token,qdata;
    _INT2 c_1,c_2,cond_case,sev,control;
    _CHAR3 facid;
    _INT4 isi;

    /* .
     .
     . */
    /* build the condition token */
    c_1 = 1;
    c_2 = 99;
    cond_case = 1;
    sev = 1;
    control = 0;
    memcpy(facid,"ZZZ",3);
    isi = 0;

    CEENCOD(&c_1,&c_2,&cond_case,&sev,&control,;
            facid,&isi,&condtok,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEENCOD failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    /* signal the condition */
    CEESGL(&condtok,&qdata,&fc);
    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEESGL failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }
    /* .
     .
     . */
}

```

Figure 190. C/C++ Example of CEESGL

```

CBL LIB,QUOTE
*Module/File Name: IGZTSGL
*****
**                                     **
** CBLSGL - Call CEESGL to signal a condition **
**                                     **
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. CBLSGL.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 CONDTOK.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity    PIC S9(4) BINARY.
            04 Msg-No     PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code  PIC S9(4) BINARY.
            04 Cause-Code  PIC S9(4) BINARY.
        03 Case-Sev-Ctl   PIC X.
        03 Facility-ID    PIC XXX.
    02 I-S-Info           PIC S9(9) BINARY.
01 QDATA                 PIC S9(9) BINARY.
01 FC.
    02 Condition-Token-Value.
    COPY CEEIGZCT.
        03 Case-1-Condition-ID.
            04 Severity    PIC S9(4) BINARY.
            04 Msg-No     PIC S9(4) BINARY.
        03 Case-2-Condition-ID
            REDEFINES Case-1-Condition-ID.
            04 Class-Code  PIC S9(4) BINARY.
            04 Cause-Code  PIC S9(4) BINARY.
        03 Case-Sev-Ctl   PIC X.
        03 Facility-ID    PIC XXX.
    02 I-S-Info           PIC S9(9) BINARY.
01 SEV                   PIC S9(4) BINARY.
01 MSGNO                 PIC S9(4) BINARY.
01 CASE                  PIC S9(4) BINARY.
01 SEV2                  PIC S9(4) BINARY.
01 CNTRL                 PIC S9(4) BINARY.
01 FACID                 PIC X(3).
01 ISINFO                PIC S9(9) BINARY.

PROCEDURE DIVISION.

```

Figure 191. COBOL Example of CEESGL (Part 1 of 2)

```
      PARA-CBLSGL.
*****
** Call CEENCOD with the values assigned above
** to build a condition token "COND TOK"
** Set COND TOK to sev = 0, msgno = 1 facid = CEE
*****
      MOVE 0 TO SEV.
      MOVE 1 TO MSGNO.
      MOVE 1 TO CASE.
      MOVE 0 TO SEV2.
      MOVE 1 TO CNTRL.
      MOVE "CEE" TO FACID.
      MOVE 0 TO ISINFO.

      CALL "CEENCOD" USING SEV, MSGNO, CASE,
        SEV2, CNTRL, FACID, ISINFO, COND TOK, FC.
      IF NOT CEE000 of FC THEN
        DISPLAY "CEENCOD failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.

** Call CEESGL to signal the condition with
*****
**   the condition token and qdata described
**   in COND TOK and QDATA
*****
      MOVE 0 TO QDATA.
      CALL "CEESGL" USING COND TOK, QDATA, FC.
      IF NOT CEE000 of FC THEN
        DISPLAY "CEESGL failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.

      GOBACK.
```

Figure 191. COBOL Example of CEESGL (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMSGL                                     */
/*****                                                         */
/**                                                         */
/** Function: CEESGL - Signal a Condition                     */
/**                                                         */
/*****                                                         */
PLISGL: PROC OPTIONS(MAIN);

%INCLUDE CEEIBMAW;
%INCLUDE CEEIBMCT;

DCL 01 CONDTOK,          /* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case    BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID     CHAR(3),      /* Facility ID */
    03 ISI       /* Instance-Specific Information */
                REAL FIXED BINARY(31,0);
DCL QDATA REAL FIXED BINARY(31,0);
DCL 01 FC,              /* Feedback token */
    03 MsgSev    REAL FIXED BINARY(15,0),
    03 MsgNo     REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case    BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID     CHAR(3),      /* Facility ID */
    03 ISI       /* Instance-Specific Information */
                REAL FIXED BINARY(31,0);

/* Give CONDTOK value of condition CEE001                      */
ADDR( CONDTOK ) -> CEEIBMCT = CEE001;

/* Signal condition CEE001 with qualifying data               */
QDATA = 1;
CALL CEESGL ( CONDTOK, QDATA, FC );
IF FBCEK( FC, CEE000 ) THEN DO;
    PUT SKIP LIST( 'Condition CEE001 signalled' );
END;
ELSE DO;
    DISPLAY( 'CEESGL failed with msg '
            || FC.MsgNo );
    STOP;
END;

END PLISGL;

```

Figure 192. PL/I Example of CEESGL

CEESTXF—Transform string characters into collation weights

CEESTXF, analogous to the C language function `strcfrm()`, transforms every character in a character string to its unique collation weight. The collation weights are established from the `LC_COLLATE` category for the locale. CEESTFX also returns the length of the transformed string.

CEESTXF is sensitive to the locales set by `setlocale()` or `CEESETL`, not to the Language Environment settings from `COUNTRY` or `CEE3CTY`.

Syntax

```

▶▶ CEESTXF(—omitted_parm—,—mbstring—,—number—,—txfstring—,—
▶—length—,—fc—)————▶▶

```

omitted_parm

This parameter is reserved for future expansion and must be omitted. For information on how to code an omitted parm, see “Invoking callable services” on page 109.

mbstring (input)

A halfword length-prefixed character string (VSTRING) that is to be transformed.

number (input)

A 4-byte integer that specifies the number of bytes of *mbstring* to be transformed. The value of this parameter must be greater than zero; otherwise, an error is reported, and no transformation is attempted.

txfstring (output)

A halfword length-prefixed character string (VSTRING) where the transformation of *mbstring* is to be placed.

length (output)

A 4-byte integer that specifies the length of the transformed string, if successful.

fc (output/optional)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE3T1	3	4001	General Failure: Service could not be completed.
CEE3TF	3	4015	Input Error: The number of characters to be transformed must be greater than zero.

Usage notes

- PL/I MTF consideration—CEESETL is not supported in PL/I MTF applications.
- This callable service uses the C/C++ run-time library. The C/C++ library must be installed and accessible even when this service is called from a non-C program.

For more information

- For more information about the `setlocale()`, see “COUNTRY” on page 22, “CEE3CTY—Set default country” on page 131, and “CEE3LNG—Set national language” on page 181.
- For more information about the CEESETL callable service, see “CEESETL—Set locale operating environment” on page 475.

Examples

```

CBL LIB,QUOTE
*Module/File Name: IGTSTXF
*****
* Example for callable service CEESTXF      *
* COBSTXF - Query current collate category and *
*          build input string as function of *
*          locale name.                      *
*          Translate string as function of   *
*          locale.                          *
* Valid only for COBOL for MVS & VM Release 2 *
* or later.                                *
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. COBSTXF.
DATA DIVISION.
WORKING-STORAGE SECTION.
01 MBS.
   02 MBS-Length PIC S9(4) BINARY.
   02 MBS-String PIC X(10).
01 TXF.
   02 TXF-Length PIC S9(4) BINARY.
   02 TXF-String PIC X(256).
01 Locale-Name.
   02 LN-Length PIC S9(4) BINARY.
   02 LN-String PIC X(256).
* Use Locale category constants
COPY CEEIGZLC.
01 MBS-Size PIC S9(9) BINARY VALUE 0.
01 TXF-Size PIC S9(9) BINARY VALUE 0.
01 FC.
   02 Condition-Token-Value.
COPY CEEIGZCT.
   03 Case-1-Condition-ID.
       04 Severity PIC S9(4) BINARY.
       04 Msg-No PIC S9(4) BINARY.
   03 Case-2-Condition-ID
       REDEFINES Case-1-Condition-ID.
       04 Class-Code PIC S9(4) BINARY.
       04 Cause-Code PIC S9(4) BINARY.
   03 Case-Sev-Ctl PIC X.
   03 Facility-ID PIC XXX.
   02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
*****
* Call CEEQRYL to retrieve locale name
*****
CALL "CEEQRYL" USING LC-COLLATE,
                    Locale-Name, FC.
*****
* Check feedback code and set input string
*****
IF Severity = 0
  IF LN-String (1:LN-Length) =
    "Sv-SE.IBM-1047"
    MOVE 10 TO MBS-Length
    MOVE 10 TO MBS-Size
    MOVE "7,123,456."
      TO MBS-String (1:MBS-Length)

```

Figure 193. COBOL Example of CEESTXF (Part 1 of 2)

```

        ELSE
            MOVE 7 TO MBS-Length
            MOVE 7 TO MBS-Size
            MOVE "8765432"
                TO MBS-String (1:MBS-Length)
        END-IF
    ELSE
        DISPLAY "Call to CEEQRYL failed. " Msg-No
        STOP RUN
    END-IF.
    MOVE SPACES TO TXF-String.
    MOVE 0 TO TXF-Length.

    *****
    * Call CEESTXF to translate the string
    *****
    CALL "CEESTXF" USING OMITTED, MBS, MBS-Size,
        TXF, TXF-Size, FC.
    *****
    * Check feedback code and return length
    *****
    IF Severity = 0
        IF TXF-Length > 0
            DISPLAY "Translated string is "
                TXF-String
        ELSE
            DISPLAY "String not translated."
        END-IF
    ELSE
        DISPLAY "Call to CEESTXF failed. " Msg-No
    END-IF.
    STOP RUN.
END PROGRAM COBSTXF.

```

Figure 193. COBOL Example of CEESTXF (Part 2 of 2)

```

*PROCESS MACRO;
/*Module/File Name: IBMSTXF */
/*****/
/* Example for callable service CEESTXF */
/* Function: Query current collate category and */
/* build input string as function of locale name. */
/* Translate string as function of locale. */
/*****/
PLISTXF: PROC OPTIONS(MAIN);
%INCLUDE CEEIBMAW; /* ENTRY defs, macro defs */
%INCLUDE CEEIBMCT; /* FBCECHK macro, FB constants */
%INCLUDE CEEIBMLC; /* Locale category constants */

```

Figure 194. PL/I Example of CEESTXF (Part 1 of 2)

```

/* CEESTXF service call arguments */
DCL MBSTRING CHAR(10) VARYING; /* input string */
DCL MBNUMBER BIN FIXED(31); /* input length */
DCL TXFSTRING CHAR(256) VARYING; /* output string */
DCL TXFLENGTH BIN FIXED(31); /* output length */
/* CEEQRYL service call arguments */
DCL LOCALE_NAME_COLLATE CHAR(256) VARYING;
DCL 01 FC, /* Feedback token */
    03 MsgSev REAL FIXED BINARY(15,0),
    03 MsgNo REAL FIXED BINARY(15,0),
    03 Flags,
        05 Case BIT(2),
        05 Severity BIT(3),
        05 Control BIT(3),
    03 FacID CHAR(3), /* Facility ID */
    03 ISI /* Instance-Specific Information */
        REAL FIXED BINARY(31,0);
/* retrieve active locale for collate category */
/* Use LC_COLLATE category const from CEEIBMLC */
CALL CEEQRYL ( LC_COLLATE, LOCALE_NAME_COLLATE, FC);
/* FBCHECK macro used (defined in CEEIBMCT) */
IF FBCHECK( FC, CEE000 ) THEN
    DO; /* successful query, set string for CEESTXF */
        IF LOCALE_NAME_COLLATE = 'Sv_SE.IBM-1047' THEN
            MBSTRING = '7,123,456.';
        ELSE
            MBSTRING = '8765432';
        MBNUMBER = LENGTH(MBSTRING);
    END;
ELSE
    DO;
        DISPLAY ( 'Locale LC_COLLATE ' || FC.MsgNo );
        STOP;
    END;
TXFSTRING = '';
CALL CEESTXF ( *, MBSTRING, MBNUMBER,
    TXFSTRING, TXFLENGTH, FC );
IF FBCHECK( FC, CEE000 ) THEN
    DO; /* successful call, use transformed length */
        IF TXFLENGTH > 0 THEN
            DO;
                PUT SKIP LIST( 'Transformed string is ' ||
                    SUBSTR(TXFSTRING,1, TXFLENGTH) );
            END;
        END;
    END;
ELSE
    DO;
        IF FBCHECK( FC, CEE3TF ) THEN
            DO;
                DISPLAY ( 'Zero length input string' );
            END;
        END;
    END;
END PLISTXF;

```

Figure 194. PL/I Example of CEESTXF (Part 2 of 2)

CEETDLI—Invoke IMS

CEETDLI provides an interface to PL/I facilities that operates in IMS. In assembler, COBOL, PL/I, and C/C++, you can also invoke IMS by using the following interfaces:

- In assembler, the ASMTDLI interface
- In COBOL, the CBLTDLI interface
- In PL/I, the PLITDLI interface

- In C/C++, the CTDLI interface, a `ctdli()` function call

CEETDLI performs essentially the same functions as these interfaces, but it offers some advantages, particularly if you plan to run an ILC application in IMS.

The names CEETDLI, AIBTDLI, ASMTDLI, CBLTDLI, CTDLI, and PLITDLI are all interpreted as IMS interfaces. If you are currently using them in any other way in your application, you must change them.

The CEETDLI interface supports calls to IMS that use an application interface block (AIB) or a program communication block (PCB).

Syntax

```
►►CEETDLI—(—parmcount—,—function—,—args—)◄◄
```

parmcount

A fullword integer specifying the total number of arguments for the CEETDLI call. This option usually is not needed and can be omitted; it is supported for compatibility with earlier interface modules.

function

The IMS function that you want to perform. The possible values for this field are defined by IMS, not Language Environment.

args

Arguments that you pass to IMS. You cannot pass run-time options as CEETDLI arguments. You cannot alter the settings of run-time options when invoking IMS facilities. The order and meaning of the arguments is defined by IMS, not Language Environment.

Usage notes

- CEETDLI is not supported with CICS.
- z/OS UNIX considerations—IMS supports only applications that use the POSIX(ON) run-time option from a single thread. Calls to z/OS UNIX threading functions are restricted under IMS. See *z/OS XL C/C++ Programming Guide* for a list of restrictions on running IMS and z/OS UNIX.

For more information

- For more information about AIB and a complete description of all available IMS functions and argument parameters you can specify in CEETDLI, see *IMS Application Programming Guide* listed in the Bibliography of this document.
- For more information about CEETDLI in the context of other DLI interfaces, and in the context of IMS condition handling, see *z/OS Language Environment Programming Guide*.

Examples

```

/*Module/File Name: EDCMRCR */

#pragma runopts(env(IMS),plist(IMS))
#include <ims.h>
#include <leawi.h>
#define io_pcb ((IO_PCB_TYPE *) (__pcblist??(0??)))

/* ----- */
/*                                     */
/* Function: Use CEETDLI - interface to IMS */
/*                                     from C. */
/*                                     */
/* In this example, a call is made to CEETDLI */
/* to interface to IMS for an IMS service. */
/* ----- */
/*                                     ENTRY POINT */
/* ----- */

main() {

    static char func_GU??(4??) = "GU ";
    char msg_seg_io_area??(32??);
    CEETDLI(func_GU,io_pcb,msg_seg_io_area);
}

```

Figure 195. C Example of CEETDLI

```

*Module/File Name: IGZTTDLI
*****/
**                                     */
** Function: Use CEETDLI - interface to IMS */
**                                     from COBOL. */
**                                     */
** In this example, a call is made to CEETDLI */
** to interface to IMS for an IMS service. */
**                                     */
*****/
IDENTIFICATION DIVISION.
PROGRAM-ID. CBL2IMS.
DATA DIVISION.
WORKING-STORAGE SECTION.
77 FUNC-GU          PIC X(4) VALUE "GU ".
01 MSG-SEG-IO-AREA  PIC X(32).
LINKAGE SECTION.
01 IO-PCB           PIC X(48).
** ENTRY POINT:                                     */
PROCEDURE DIVISION USING IO-PCB.
    CALL "CEETDLI" USING FUNC-GU,IO-PCB,
                        MSG-SEG-IO-AREA.
    GOBACK.

```

Figure 196. COBOL Example of CEETDLI

```

*PROCESS MACRO SYSTEM(IMS);
/*Module/File Name: IBMTDLI                                     */
/* ----- */
/*                                     */
/* Function: Use CEETDLI - interface to IMS                      */
/*                                     from PL/I.                 */
/*                                     */
/* In this example, a call is made to CEETDLI                   */
/* to interface to IMS for an IMS service.                      */
/*                                     */
/* ----- */
/*                               ENTRY POINT                     */
/* ----- */
PLI2IMS: PROCEDURE(IO_PTR) OPTIONS(MAIN NOEXECOPS);

%INCLUDE   CEEIBMAW;

DCL  FUNC_GU      CHAR(4)  INIT('GU ');

DCL  IO_PTR       PTR;
DCL 1 IO_PCB      CHAR(48) BASED (IO_PTR);

DCL 1 MSG_SEG_IO_AREA CHAR(32);

CALL CEETDLI (FUNC_GU, IO_PCB, MSG_SEG_IO_AREA);

RETURN;

END PLI2IMS;

```

Figure 197. PL/I Example of CEETDLI

CEESTEST—Invoke Debug Tool

CEESTEST invokes a debug service such as Debug Tool, which is supplied with z/OS.

Debug Tool supports debugging of Language Environment, except for some restrictions noted in *Debug Tool Users Guide*. If you want to invoke another interactive debug service, refer to the appropriate user's guide.

Syntax

►► CEESTEST—(string_of_commands—, —fc—) —►►

string_of_commands (input)

A halfword-prefixed string containing a debug tool command list.

string_of_commands is optional.

If a debug tool is available, the commands in the list are passed to the debug tool and carried out.

If this parameter is omitted, your debug service defines the action taken. For more information, refer to the appropriate user's guide for your debug service.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following Feedback Code can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE2F2	3	2530	A debug tool was not available.
CEE2F7	3	2535	Profiler loaded; a debug tool was not available.

Usage notes

- z/OS UNIX considerations—CEETEST applies to the enclave. All threads in the enclave can access debugger information.

For more information

- If you are using CEETEST to invoke Debug Tool and need more information about how to create a Debug Tool command list, refer to *Debug Tool Users Guide*.

Examples

```

/*Module/File Name: EDCTEST  */

#include <string.h>
#include <stdio.h>
#include <leawi.h>
#include <stdlib.h>
#include <ceedcct.h>

int main (void) {

    int x,y,z;
    _VSTRING commands;
    _FEEDBACK fc;

    strcpy(commands.string,
           "AT LINE 30 { LIST(x); LIST(y); GO; }");
    commands.length = strlen(commands.string);

    CEETEST(&commands,&fc);

    if ( _FBCHECK ( fc , CEE000 ) != 0 ) {
        printf("CEETEST failed with message number %d\n",
               fc.tok_msgno);
        exit(2999);
    }
    x = y = 12;
    /* .
     .
     . */
    /* debug tool displays the values of x and y */
    /* at statement 30 */
    /* .
     .
     . */
}

```

Figure 198. C/C++ Example of CEETEST

```

CBL LIB,QUOTE
*Module/File Name: IGTTEST
IDENTIFICATION DIVISION.
PROGRAM-ID. IBCT002.

DATA DIVISION.
WORKING-STORAGE SECTION.
01 MANVAR1 PIC S9(9) BINARY.
01 CEETEST-PARMS.
    02 Vstring-length PIC S9(4) BINARY.
    02 Vstring-text.
        03 Vstring-char PIC X,
            OCCURS 0 TO 256 TIMES
            DEPENDING ON Vstring-length
            of CEETEST-PARMS.

    01 FC.
    02 Condition-Token-Value.
COPY CEEIGZCT.
    03 Case-1-Condition-ID.
        04 Severity PIC S9(4) BINARY.
        04 Msg-No PIC S9(4) BINARY.
    03 Case-2-Condition-ID
        REDEFINES Case-1-Condition-ID.
        04 Class-Code PIC S9(4) BINARY.
        04 Cause-Code PIC S9(4) BINARY.
    03 Case-Sev-Ctl PIC X.
    03 Facility-ID PIC XXX.
    02 I-S-Info PIC S9(9) BINARY.
PROCEDURE DIVISION.
PARA-IBCT002.
    MOVE 0 TO MANVAR1
    COMPUTE MANVAR1 = MANVAR1 + 100
    DISPLAY "The value of MANVAR1 is " , MANVAR1
*****
* CALL CEETEST FOR FIRST TIME. *
*****
    MOVE 70 TO Vstring-length of CEETEST-PARMS.
    MOVE "DESC PROGRAM AT ENTRY IBCT002:>SUBRTN"
      TO Vstring-text of CEETEST-PARMS(1:37).
    move " PERFORM Q LOC GO END-PERFORM GO "
      TO Vstring-text of CEETEST-PARMS(38:33).
    CALL "CEETEST" USING CEETEST-PARMS, FC.
    IF NOT CEE000 of FC THEN
        DISPLAY "CEETEST(1st call) failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
    END-IF.

```

Figure 199. COBOL Example of CEETEST (Part 1 of 2)

```

*****
* CALL CEETEST A SECOND TIME.                                     *
*****
      MOVE 4 TO Vstring-length of CEETEST-PARMS.
      MOVE "QUIT "
        TO Vstring-text of CEETEST-PARMS.
      CALL "CEETEST" USING CEETEST-PARMS, FC.
      IF NOT CEE000 of FC THEN
        DISPLAY "CEETEST(2nd call) failed with msg "
          Msg-No of FC UPON CONSOLE
        STOP RUN
      END-IF.
*****
      GOBACK.
*****
IDENTIFICATION DIVISION.
PROGRAM-ID. SUBRTN.
DATA DIVISION.
WORKING-STORAGE SECTION.
01  MANVAR1                      PIC S9(9) BINARY.
01  MVAR                        PIC S9(9) BINARY.
PROCEDURE DIVISION.
  PARA-SUBRTN.
    COMPUTE MVAR = MVAR + 100 .
    COMPUTE MANVAR1 = MANVAR1 + 100 .

    GOBACK.
  END PROGRAM SUBRTN.
END PROGRAM IBCT002.

```

Figure 199. COBOL Example of CEETEST (Part 2 of 2)

```

*PROCESS MACRO;
/* Module/File Name: IBMTEST */
/*****
/**                               */
/** Function: CEETEST - Invoke a Debug Tool */
/**                               */
*****/
PLITEST: PROC OPTIONS(MAIN);

    %INCLUDE CEEIBMAW;
    %INCLUDE CEEIBMCT;

    DCL DBGCMD CHAR(255) VARYING;
    DCL 01 FC, /* Feedback token */
        03 MsgSev REAL FIXED BINARY(15,0),
        03 MsgNo REAL FIXED BINARY(15,0),
        03 Flags,
            05 Case BIT(2),
            05 Severity BIT(3),
            05 Control BIT(3),
        03 FacID CHAR(3), /* Facility ID */
        03 ISI /* Instance-Specific Information */
            REAL FIXED BINARY(31,0);

    DBGCMD = 'QUERY PROGRAMMING LANGUAGE';

    CALL CEETEST ( DBGCMD, FC );
    IF FBCHECK( FC, CEE000) THEN DO;
        PUT SKIP LIST('Debug tool called with command: '
            || DBGCMD );
        END;
    ELSE DO;
        DISPLAY('CEETEST failed with msg ' || FC.MsgNo);
        STOP;
        END;

END PLITEST;

```

Figure 200. PL/I Example of CEETEST

CEEUTC—Get Coordinated Universal Time

CEEUTC is an alias of CEEGMT. See “CEEGMT—Get current Greenwich Mean Time” on page 326.

Chapter 5. Bit manipulation routines

This section contains an alphabetical list of the Language Environment bit manipulation routines.

In this section, bits are numbered from right to left, starting from 0.

CEESICLR—Bit clear

CEESICLR returns a copy of its *parm1* input, but with a single bit selectively set to 0.

Syntax

►►CEESICLR(—*parm1*—,—*parm2*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The first input to the Bit Clear routine. The input can be any 32-bit integer.

parm2 (input)

The second input to the Bit Clear routine. The input is a 32-bit integer in the range $0 \leq \textit{parm2} \leq 31$.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

result (output)

The result of the Bit Clear routine. The output is a copy of *parm1*, but with the bit numbered *parm2* (counting from the right) set to 0.

CEESISSET—Bit set

CEESISSET returns a copy of its *parm1* input, but with a single bit selectively set to 1.

Syntax

►►CEESISSET(—*parm1*—,—*parm2*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The first input to the Bit Set routine. The input can be any 32-bit integer.

parm2 (input)

The second input to the Bit Set routine. The input is a 32-bit integer in the range $0 \leq \textit{parm2} \leq 31$.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

result (output)

The result of the Bit Set routine. The output is a copy of *parm1*, but with the bit numbered *parm2* (counting from the right) set to 1.

CEESISHF—Bit shift

CEESISHF returns a copy of its *parm1* input right- or left-shifted by the number of bits indicated by *parm2*.

Syntax

```
►►CEESISHF(—parm1—,—parm2—,—fc—,—result—)◄◄
```

parm1 (input)

The first input to the Bit Shift routine. The input can be any 32-bit integer.

parm2 (input)

The second input to the Bit Shift routine. The input is a 32-bit integer in the range $-32 \leq \textit{parm2} \leq 32$.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

result (output)

The result of the Bit Shift routine. The output is a 32-bit integer whose value depends upon the value of *parm2*:

If $\textit{parm2} \geq 0$, *result* is a copy of *parm1* shifted left by *parm2* bits.

If $\textit{parm2} < 0$, *result* is a copy of *parm1* shifted right by $|\textit{parm2}|$ bits.

In either case, vacated bits are set to 0.

CEESITST—Bit test

CEESITST selectively tests a bit in its *parm1* input to determine if the bit is on.

Syntax

```
►►CEESITST(—parm1—,—parm2—,—fc—,—result—)◄◄
```

parm1 (input)

The first input to the Bit Test routine. The input can be any 32-bit integer.

parm2 (input)

The second input to the Bit Test routine. The input is a 32-bit integer in the range $0 \leq \textit{parm2} \leq 31$.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

result (output)

The result of the Bit Test routine. The output is a 32-bit integer with value:

- 1, if bit number *parm2* in *parm1* is 1
- 0, if bit number *parm2* in *parm1* is 0

Bits are counted from the right.

Chapter 6. Language Environment math services

Language Environment math services provide standard math computations. You can call them from Language Environment-conforming languages or from assembler routines by using the call interface (defined below and shown throughout this chapter), or the syntax specific to the HLL of your application.

Math services do not depend on enclave-level resources. You can invoke them from any thread.

If your application uses extended-precision arithmetic and runs on a 370-mode machine under VM, you must specify the TRAP(ON) run-time option (the default) and add the CMSLIB TXTLIB with the GLOBAL TXTLIB command.

This chapter contains the following sections:

- “Call interface to math services”
- “Sample calls to math services” on page 506
- “Examples of math services” on page 542
- “Math services” on page 507

Call interface to math services

The syntax for math services has two forms, depending on how many input parameters the routine requires. The first four letters of the math services are always CEES. The fifth character is *x*, which you replace according to the parameter types listed in “Parameter types: parm1 Type and parm2 type.” The last three letters name the math function performed. In the following examples, the first function performed is the absolute value (ABS), and the second function is the positive difference (DIM).

One Parameter

```
►►CEESxABS(—parm1—,—fc—,—result—)◄◄
```

Two Parameters

```
►►CEESxDIM(—parm1—,—parm2—,—fc—,—result—)◄◄
```

Parameter types: parm1 Type and parm2 type

The first parameter (*parm1*) is mandatory. The second parameter (*parm2*) is used only when you use a math service with two parameters. The *x* in the fifth space of CEESx must be replaced by a parameter type for input and output. Substitute I, S, D, Q, T, E, or R for *x*:

I	32-bit binary integer
S	32-bit single floating-point number
D	64-bit double floating-point number
Q	128-bit extended floating-point number

- T** 32-bit single floating-point complex number. This parameter type consists of a real part and an imaginary part, each of which is a 32-bit single floating-point number.
- E** 64-bit double floating-point complex number. This parameter type consists of a real part and an imaginary part, each of which is a 64-bit double floating-point number.
- R** 128-bit extended floating-point complex number. This parameter type consists of a real part and an imaginary part, each of which is a 128-bit extended floating-point number.

Language Environment math services expect normalized input.

In the routines described in this chapter, the output range for complex-valued functions can be determined from the input range. For functions of complex variables, the image of the input is generally a non-rectangular shape. For this reason, the output range is not provided .

Feedback code parameter (*fc*)

The *fc* value is a feedback code that indicates the result of the math service. If you specify *fc* as an argument, feedback information in the form of a condition token is returned to the calling routine. The condition token indicates whether the routine completed successfully or whether a condition was encountered while the routine was running. If you do not specify *fc* as an argument and the requested service does not successfully complete, the condition is signaled. Math services call other services that might generate feedback codes.

Language-specific built-in math services

C/C++, COBOL, Fortran, and PL/I offer built-in math services that you can also use under Language Environment. For a description of these functions, see one of the language references listed in the bibliography.

Sample calls to math services

This section contains sample calls to Language Environment math services from C/C++, COBOL, and PL/I.

C/C++ call to CEESLOG—logarithm base e

```
#include <leawi.h>
#include <string.h>
#include <stdio.h>

int main (void) {

    float int1, intr;

    _FEEDBACK fc;
    #define SUCCESS "\0\0\0\0"

    int1 = 39;
    CEESLOG(&int1,&fc,&intr);

    if (memcmp(&fc,SUCCESS,4) != 0) {
        printf("CEESLOG failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    printf("Log base e of %f is %f\n",int1,intr);
}
```

COBOL call to CEESLOG—logarithm base e

```

:
77  ARG1RS  COMP-1.
77  FBCODE  PIC X(12).
77  RESLTRS COMP-1.

      CALL "CEESLOG" USING ARG1RS , FBCODE , RESLTRS.
:
```

PL/I call to CEESLOG—logarithm base e

```

:
DCL ARG1 RESULT REAL FLOAT DEC (6);
DCL FC  CHARACTER (12);

CALL CEESLOG (ARG1, FC, RESULT)
:
```

Math services

This section contains an alphabetical list of the Language Environment math services.

CEESxABS—Absolute value

CEESxABS returns the absolute value of the parameter by using the equation *result* = |*parm1*|.

The following routines are provided for the various data types supported:

CEESIABS	32-bit binary integer
CEESSABS	32-bit single floating-point number
CEESDABS	64-bit double floating-point number
CEESQABS	128-bit extended floating-point number
CEESTABS	32-bit single floating-point complex number

CEESEABS 64-bit double floating-point complex number
CEESRABS 128-bit extended floating-point complex number

Syntax

►►—CEESxABS—(—*parm1*—,—*fc*—,—*result*—)————►►

parm1 (input)

The input to the absolute value routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1V9	1	2025	An underflow has occurred in math routine <i>routine-name</i> .

result (output)

The result of the absolute value routine. The output range is the non-negative numbers

$\leq \Omega$

Omega varies depending on the precision of *parm1*

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
 For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
 For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxACS—Arccosine

CEESxACS returns the arccosine of the parameter by using the equation *result* = *arccos* (*parm1*).

The following routines are provided for the various data types supported:

CEESSACS 32-bit single floating-point number
CEESDACS 64-bit double floating-point number
CEESQACS 128-bit extended floating-point number

Syntax

►►—CEESxACS—(—*parm1*—,—*fc*—,—*result*—)————►►

parm1 (input)

The input to the arccosine routine. The input range is

$$|parm1| \leq 1$$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1V0	2	2016	The absolute value of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result, in radians, of the arccosine routine.

$$0 \leq result \leq \pi$$

CEESxASN—Arcsine

CEESxASN returns the arcsine of the parameter by using the equation $result = \arcsin(parm1)$.

The following routines are provided for the various data types supported:

CEESSASN	32-bit single floating-point number
CEESDASN	64-bit double floating-point number
CEESQASN	128-bit extended floating-point number

Syntax

►► CEESxASN (—*parm1*—, —*fc*—, —*result*—) ◀◀

parm1 (input)

The input to the arcsine routine. The input range is

$$|parm1| \leq 1$$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1V0	2	2016	The absolute value of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result, in radians, of the arcsine routine. The output range is

$$|result| < \pi/2$$

CEESxATH—Hyperbolic arctangent

CEESxATH returns the hyperbolic arctangent of the parameter by using the equation

$$result = \tanh^{-1}(parm1)$$

The following routines are provided for the various data types supported:

CEESSATH	32-bit single floating-point number
CEESDATH	64-bit double floating-point number
CEESQATH	128-bit extended floating-point number
CEESTATH	32-bit single floating-point complex number
CEESEATH	64-bit double floating-point complex number
CEESRATH	128-bit extended floating-point complex number

Syntax

►► CEESxATH (—*parm1*—, —*fc*—, —*result*—) ◀◀

parm1 (input)

The input to the hyperbolic arctangent routine.

The input range for real variables is:

$$|parm1| \leq 1$$

For complex variables, *parm1* cannot be equal to 1 or –1.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code (fc)	Severity	Message number	Message text
CEE000	0	—	The service completed successfully.
CEE1V1	2	2017	The absolute value of the argument was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V6	2	2022	The value of the argument was plus or minus <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the hyperbolic arctangent routine. The output range for functions of real variables is

$|result| \leq \Omega$

Omega varies depending on the precision of *parm1*:

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxATN—Arctangent

CEESxATN returns the arctangent of the parameter by using the equation *result* = arctan(*parm1*).

The following routines are provided for the various data types supported:

- CEESSATN** 32-bit single floating-point number
- CEESDATN** 64-bit double floating-point number
- CEESQATN** 128-bit extended floating-point number
- CEESTATN** 32-bit single floating-point complex number
- CEESEATN** 64-bit double floating-point complex number
- CEESRATN** 128-bit extended floating-point complex number

Syntax

►►CEESxATN(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input to the arctangent routine. The input range for real variables is not restricted. The input range of complex variables in *parm1* is not equal to i or -i, where

$i = \sqrt{-1}$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1V6	2	2022	The value of the parameter was plus or minus <i>limit</i> in math routine <i>routine-name</i> .
CEE1V9	1	2025	An underflow has occurred in math routine <i>routine-name</i> .

result (output)

The result, in radians, of the arctangent routine. The output range for functions of real variables is

$$|result| < \Pi/2$$

CEESxAT2—Arctangent2

CEESxAT2 calculates a result by using the equation $result = \text{the angle (in radians) between the positive X axis and a vector defined by } (parm2, parm1)$ with a range from

$-\Pi$ to Π , with Π ,

For example, if $parm1$ and $parm2$ are positive, then $result = \arctan (parm1/parm2)$.

The following routines are provided for the various data types supported:

CEESSAT2 32-bit single floating-point number
CEESDAT2 64-bit double floating-point number
CEESQAT2 128-bit extended floating-point number

Syntax

►►CEESxAT2—(— $parm1$ —,— $parm2$ —,— fc —,— $result$ —)◄◄

$parm1$ (input)

The first input to the arctangent2 routine. The input range is $parm1$ cannot equal 0 if $parm2$ equals 0.

$parm2$ (input)

The second parameter to the arctangent2 routine. The input range is $parm2$ cannot equal 0 if $parm1$ equals 0.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UU	2	2014	Both parameters were equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V9	1	2025	An underflow has occurred in math routine <i>routine-name</i> .

$result$ (output)

The result, in radians, of the arctangent2 routine. The output range is

$$|result| \leq \Pi$$

CEESxCJG—Conjugate of complex

CEESxCJG returns the conjugate of the complex number by using the equation $result = u - vi$, where $parm1 = u + vi$.

The following routines are provided for the various data types supported:

CEESTCJG 32-bit single floating-point complex number
CEESECJG 64-bit double floating-point complex number
CEESRCJG 128-bit extended floating-point complex number

Syntax

►►—CEESxCJG—(—*parm1*—,—*fc*—,—*result*—)—————►►

parm1 (input)

The input to the math service. Any representable complex number can be used as input.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the conjugate of complex routine.

CEESxCOS—Cosine

CEESxCOS returns the cosine of the parameter by using the equation *result* = *cos(parm1)*.

The following routines are provided for the various data types supported:

CEESSCOS 32-bit single floating-point number
CEESDCOS 64-bit double floating-point number
CEESQCOS 128-bit extended floating-point number
CEESTCOS 32-bit single floating-point complex number
CEESECOS 64-bit double floating-point complex number
CEESRCOS 128-bit extended floating-point complex number

Syntax

►►—CEESxCOS—(—*parm1*—,—*fc*—,—*result*—)—————►►

parm1 (input)

The type is determined by the fifth character of the service name. The input range for real variables is:

for single floating-point numbers,

$$|parm1| < (2^{18} \bullet \Pi)$$

for double floating-point numbers, and

$$|parm1| < (2^{50} \bullet \Pi)$$

for extended floating-point numbers.

$$|parm1| < 2^{100}$$

For complex functions, the input range differs for the imaginary and real parts of the input. For the imaginary part, the input range is:

$$| \operatorname{Im} (parm1) | < 174.673$$

For the real part, it is

$$| \operatorname{Re} (parm1) | < (2^{18} \bullet \Pi)$$

for single floating-point complex numbers,

$$| \operatorname{Re} (parm1) | < (2^{50} \bullet \Pi)$$

for double floating-point complex numbers, and

$$| \operatorname{Re} (parm1) | < 2^{100}$$

for extended floating-point complex numbers.

For complex functions, the input range differs for the imaginary and real parts of the input. For the imaginary part, the input range is

$$| \operatorname{Im} (parm1) | < 174.673$$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UT	2	2013	The absolute value of the imaginary part of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .

Code	Severity	Message Number	Message Text
CEE1V1	2	2017	The absolute value of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V3	2	2019	The absolute value of the real part of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the cosine routine. The output range for functions of real variables is

$$|result| \leq 1$$

CEESxCOSH—Hyperbolic cosine

CEESxCOSH returns the hyperbolic cosine of the parameter by using the equation $result = \cosh(parm1)$.

The following routines are provided for the various data types supported:

CEESSCSH	32-bit single floating-point number
CEESDCSH	64-bit double floating-point number
CEESQCSH	128-bit extended floating-point number
CEESTCSH	32-bit single floating-point complex number
CEESECSH	64-bit double floating-point complex number
CEESRCSH	128-bit extended floating-point complex number

Syntax

►►—CEESxCOSH—(—*parm1*—,—*fc*—,—*result*—)—————►►

parm1 (input)

The input to the hyperbolic cosine routine.

The input range for the functions of real variables is:

$$|parm1| < 175.366$$

For complex functions, the input range differs for the imaginary and real parts. For the real part of complex numbers, it is

$$|Re(parm1)| < 174.673$$

For the imaginary part of complex numbers, the input range is

$$| \operatorname{Im}(\operatorname{parm1}) | < (2^{18} \bullet \Pi)$$

for single floating-point complex numbers,

$$| \operatorname{Im}(\operatorname{parm1}) | < (2^{50} \bullet \Pi)$$

for double floating-point complex numbers, and

$$| \operatorname{Im}(\operatorname{parm1}) | < 2^{100}$$

for extended floating-point complex numbers.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1V0	2	2016	The absolute value of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the hyperbolic cosine routine. The output range for functions of real variables is

$$1 \leq \operatorname{result} \leq \Omega$$

for single-precision routines,

$$\Omega = 16^{63}(1 - 16^6)$$

$$16^{63}(1 - 16^{-14})$$

for double-precision routines, and for extended-precision routines.

$$16^{63}(1 - 16^{-28})$$

CEESxCTN—Cotangent

CEESxCTN returns the cotangent of the parameter by using the equation $\operatorname{result} = \cot(\operatorname{parm1})$.

The following routines are provided for the various data types supported:

CEESSCTN 32-bit single floating-point number
CEESDCTN 64-bit double floating-point number
CEESQCTN 128-bit extended floating-point number

Syntax

►—CEESxCTN—(—*parm1*—,—*fc*—,—*result*—)——►

parm1 (input)

The input, in radians, into the cotangent routine.

If *parm1* is a 32-bit single floating-point number, input range is

$$|parm1| < (2^{18} \bullet \Pi)$$

If *parm1* is a 64-bit double floating-point number, input range is

$$|parm1| < (2^{50} \bullet \Pi)$$

If *parm1* is a 128-bit extended floating-point number, the input range is

$$|parm1| < 2^{100}$$

If this is an extended floating-point number, this argument cannot approach a multiple of π . Single floating-point numbers and double floating-point numbers cannot approach zero.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UI	2	2002	The parameter value was too close to one of the singularities (plus or minus $\pi/2$, plus or minus $3\pi/2$, for the tangent; or plus or minus π , plus or minus 2π , for the cotangent) in math routine <i>routine-name</i> .
CEE1V1	2	2017	The absolute value of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the cotangent routine. The output range is

$$|result| \leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

The output range is

$result \leq \Omega$

CEESxDIM—Positive difference

CEESxDIM returns the positive difference between two numbers by using one of the following equations:

if
then $result = parm1 - parm2$

$parm1 > parm2$

if
then $result = 0$

$parm1 \leq parm2$

The following routines are provided for the various data types supported:

- CEESIDIM** 32-bit binary integer
- CEESSDIM** 32-bit single floating-point number
- CEESDDIM** 64-bit double floating-point number
- CEESQDIM** 128-bit extended floating-point number

Syntax

►►CEESxDIM(—parm1—,—parm2—,—fc—,—result—)◄◄

parm1 (input)

The first input to the positive difference routine. The input range is not restricted.

parm2 (input)

The second parameter to the positive difference routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the positive difference routine. The output range is the non-negative numbers

$$\leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
 For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
 For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxDVD—Floating-point complex divide

CEESxDVD performs the mathematical function of floating-point complex divide by using the equation:

$$result = \frac{parm1}{parm2}$$

The following routines are provided for the various data types supported:

CEESTDVD 32-bit single floating-point complex number
CEESEDVD 64-bit double floating-point complex number
CEESRDVD 128-bit extended floating-point complex number

Syntax

►►CEESxDVD(—parm1—,—parm2—,—fc—,—result—)◄◄

parm1 (input)

The first input to the math service. Any representable complex number can be used as input.

parm2 (input)

The second parameter to the math service. Do not set *parm2* to 0.

fc (output)

A 12-byte feedback code passed by reference indicating the result of the service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the floating-point complex divide routine.

CEESxERC—Error function complement

CEESxERC calculates the error function complement by using the equation:

$$result = (1 - (\frac{2}{\sqrt{\Pi}} \int_0^{parm1} e^{-u^2} du))$$

complement.

The following routines are provided for the various data types supported:

CEESSERC 32-bit single floating-point number
CEEDERC 64-bit double floating-point number
CEESQERC 128-bit extended floating-point number

Syntax

►►—CEESxERC—(—*parm1*—,—*fc*—,—*result*—)—————◄◄

parm1 (input)

The input to the error function complement routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the error function complement routine. The output range is

$$0 < result < 2$$

CEESxERF—Error function

CEESxERF calculates the error function by using the equation:

$$result = \frac{2}{\sqrt{\Pi}} \int_0^{parm1} e^{-u^2} du$$

The following routines are provided for the various data types supported:

CEESSERF 32-bit single floating-point number
CEEDERF 64-bit double floating-point number
CEESQERF 128-bit extended floating-point number

Syntax

►►—CEESxERF—(—*parm1*—,—*fc*—,—*result*—)—————◄◄

parm1 (input)

The input to the error function. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the error function. The output range is

$$|result| \leq 1$$

CEESxEXP—Exponential base e

CEESxEXP calculates the mathematical function of e raised to a power by using the equation:

$$result = e^{parm1}$$

The following routines are provided for the various data types supported:

CEESSEXP	32-bit single floating-point number
CEESDEXP	64-bit double floating-point number
CEESQEXP	128-bit extended floating-point number
CEESTEXP	32-bit single floating-point complex number
CEESEEXP	64-bit double floating-point complex number
CEESREXP	128-bit extended floating-point complex number

Syntax

►►CEESxEXP(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input to the exponential base e routine. The input range for functions of real variables is:

$$|parm1| \leq 174.673$$

For complex functions, the input range differs for the imaginary and real parts of the function. The input ranges are

for the real part of complex numbers.

$$|Re(parm1)| < 174.673$$

For the imaginary part, the ranges are

$$|\operatorname{Im}(parm1)| < 2^{18} \Pi$$

for single floating-point complex numbers,

$$|\operatorname{Im}(parm1)| < 2^{50} \Pi$$

for double floating-point complex numbers, and

$$|\operatorname{Im}(parm1)| < 2^{100}$$

for extended floating-point complex numbers.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UP	2	2009	The value of the real part of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .
CEE1UR	2	2011	The parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .
CEE1UT	2	2013	The absolute value of the imaginary part of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .
CEE1UV	2	2015	The absolute value of the imaginary part of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V9	1	2025	An underflow has occurred in math routine <i>routine-name</i> .

result (output)

The result of the exponential base e routine. The output range for functions of real variables is

$$0 < \text{result} \leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
 For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
 For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxGMA—Gamma function

CEESxGMA performs the mathematical gamma function by using the equation:

$$result = \int_0^{\infty} u_{parm1-1} e^{-u} du$$

The following routines are provided for the various data types supported:

CEESSGMA 32-bit single floating-point number
CEESDGMA 64-bit double floating-point number

Syntax

►► CEESxGMA (—*parm1*—, —*fc*—, —*result*—) ◄◄

parm1 (input)

The input to the gamma function. The input range is

$$2^{-252} < parm1 < 57.5744$$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UL	2	2005	The value of the parameter was outside the valid range <i>range</i> in math routine <i>routine-name</i> .

result (output)

The result of the gamma function. The output range is

$$0.88560 \leq result \leq \Omega$$

$$\Omega = 16^{63} (1-16^6)$$

for single-precision routines and

$$\Omega = 16^{63} (1-16^{-14})$$

for double-precision routines.

CEESxIMG—Imaginary part of complex

CEESxIMG returns the imaginary part of a complex number using the equation $result = v$, where $parm1 = u + vi$.

The following routines are provided for the various data types supported:

CEESTIMG 32-bit single floating-point complex number
CEESEIMG 64-bit double floating-point complex number
CEESRIMG 128-bit extended floating-point complex number

Syntax

►►CEESxIMG(—*parm1*—,—*fc*—,—*result*—)►►

parm1 (input)

The input to the math service. Any complex number can be used as input.

fc (output)

A 12-byte feedback code passed by reference indicating the result of the service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the math service is

$$|result| \leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
 For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
 For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxINT—Truncation

CEESxINT returns the truncated value of the parameter by using the equation:

$$result = (\text{sign of } parm1) \bullet n, \text{ where } n = |parm1|$$

$$|parm1| = |m|$$

where M is the greatest integer satisfying the relationship and the result is expressed as a floating-point number.

$$|m| \leq |parm1|$$

The following routines are provided for the various data types supported:

CEE5SINT 32-bit single floating-point number
CEE5DINT 64-bit double floating-point number
CEE5QINT 128-bit extended floating-point number

Syntax

►►CEESxINT(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input to the truncation routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the truncation routine. The output range is

$$|result| \leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$

For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$

For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxLGM—Log gamma

CEESxLGM performs the mathematical function of log gamma by using the equation:

$$result = \log_e \Gamma(parm1)$$

or

$$result = \log_e \int_0^{\infty} u^{parm1-1} e^{-u} du$$

The following routines are provided for the various data types supported:

CEESSLGM 32-bit single floating-point number

CEESDLGM 64-bit double floating-point number

Syntax

►►CEESxLGM(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input to the log gamma routine. The input range is

$$parm1 < 4.2913 \bullet 10^{73}$$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UL	2	2005	The value of the parameter was outside the valid range <i>range</i> in math routine <i>routine-name</i> .

result (output)

The result of the log gamma routine. The output range is

$$-0.12149 \leq result \leq \Omega$$

for single-precision routines and

$$\Omega = 16^{63} (1 \cdot 16^6)$$

$$\Omega = 16^{63} (1 \cdot 16^{-14})$$

for double-precision routines.

CEESxLG1—Logarithm base 10

CEESxLG1 returns the logarithm base 10 of the input parameter by using the equation

$$result = \log_{10} parm1$$

The following routines are provided for the various data types supported:

CEESSLG1	32-bit single floating-point number
CEESDLG1	64-bit double floating-point number
CEESQLG1	128-bit extended floating-point number

Syntax

►► CEESxLG1 (—*parm1*—, —*fc*—, —*result*—) ◀◀

parm1 (input)

The input to the log base 10 routine. The input range is *parm1* > 0.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1US	2	2012	The parameter was less than or equal to <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the log base 10 routine. The output range is

$$-78.268 \leq result \leq 75.859$$

CEESxLG2—Logarithm base 2

CEESxLG2 performs the mathematical function logarithm base 2 by using the equation

$$result = \log_2 parm1$$

The following routines are provided for the various data types supported:

CEESSLG2	32-bit single floating-point number
CEESDLG2	64-bit double floating-point number
CEESQLG2	128-bit extended floating-point number

Syntax

►►CEESxLG2(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input to the log base 2 routine. The input range is *parm1* > 0.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1US	2	2012	The parameter was less than or equal to <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the log base 2 routine. The output range is

$$-260 \leq result \leq 252$$

CEESxLOG—Logarithm base e

CEESxLOG performs the mathematical function logarithm base e by using the equation

$result = \log_e parm1 \text{ (} result = \ln parm1 \text{)}$

The following routines are provided for the various data types supported:

- CEESSLOG** 32-bit single floating-point number
- CEEDLOG** 64-bit double floating-point number
- CEESQLOG** 128-bit extended floating-point number
- CEESTLOG** 32-bit single floating-point complex number
- CEESELOG** 64-bit double floating-point complex number
- CEESRLOG** 128-bit extended floating-point complex number

Syntax

►►CEESxLOG(—parm1—,—fc—,—result—)◄◄

parm1 (input)
The input to the log base e routine. The input range for reals is

parm1 > 0

The input range for complex numbers is

parm1 ≠ 0

fc (output)
A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1US	2	2012	The parameter was less than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V2	2	2018	The real and imaginary parts of the parameter were equal to <i>limit</i> in math routine <i>routine-name</i> .

result (output)
The result of the log base e routine. The output range for functions of real variables is

$-180.218 \leq result \leq 174.673$

CEESxMLT—Floating-point complex multiply

CEESxMLT performs the mathematical function floating-point complex multiply by using the equation

$result = parm1 \bullet parm2$

The following routines are provided for the various data types supported:

- CEESTMLT** 32-bit single floating-point complex number
- CEESEMLT** 64-bit double floating-point complex number
- CEESRMLT** 128-bit extended floating-point complex number

Syntax

►►CEESxMLT(—parm1—,—parm2—,—fc—,—result—)◄◄

parm1 (input)
The first input to the math service. Any representable complex number can be used as input.

parm2 (input)
The second parameter to the math service. Any representable complex number can be used as input.

fc (output)
A 12-byte feedback code passed by reference indicating the result of the service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)
The result of the floating-point complex multiply routine.

CEESxMOD—Modular arithmetic

CEESxMOD performs the mathematical function modular arithmetic by using the equation

$result = parm1 \text{ (modulo } parm2 \text{)}$

The expression

$parm1 \text{ (modulo } parm2 \text{)}$

is defined as

$$parm1 - [(parm1/parm2) \bullet parm2]$$

with the brackets indicating an integer part, that is, the largest integer whose magnitude does not exceed the magnitude of

$$parm1/parm2$$

is used. The sign of the integer is the same as the sign of

$$parm1 \bullet parm2$$

The following routines are provided for the various data types supported:

CEESIMOD	32-bit binary integer
CEESSMOD	32-bit single floating-point number
CEESDMOD	64-bit double floating-point number
CEESQMOD	128-bit extended floating-point number

Syntax

►►—CEESxMOD—(—parm1—,—parm2—,—fc—,—result—)—————◄◄

parm1 (input)

The first parameter to the modular arithmetic routine. The input range is not restricted.

parm2 (input)

The second parameter to the modular arithmetic routine. The input range is

$parm2 \neq 0$

If $parm2 = 0$, the modulus routine is undefined. In addition, a divide exception is recognized and an interrupt occurs.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the mod routine. The output range is

$$|result| \leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
 For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
 For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxNIN—Nearest integer

CEESxNIN performs the mathematical function nearest integer by using the equation:

$$result = (\text{sign of } parm1) \bullet n$$

If $parm1 \geq 0$, then $n = \lfloor parm1 + .5 \rfloor$
 If $parm1 < 0$, then $n = \lfloor parm1 - .5 \rfloor$

$n = |m|$, where m is the greatest integer satisfying the relationship $|m| \leq \lfloor parm1 + .5 \rfloor$, or $|m| \leq \lfloor parm1 - .5 \rfloor$, respectively.

The following routines are provided for the various data types supported:

CEESSNIN 32-bit single floating-point number
CEESDNIN 64-bit double floating-point number

Syntax

►► CEESxNIN (—*parm1*—, —*fc*—, —*result*—) ◀◀

parm1 (input)

The input to the nearest integer routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the nearest integer routine. The output parameter is an unrestricted type I, a 32-bit binary integer.

CEESxNWN—Nearest whole number

CEESxNWN performs the mathematical function nearest whole number by using the equation

$$result = (\text{sign of } parm1) \bullet v$$

If $parm1 \geq 0$, then $v = [parm1 + .5]$. If $parm1 < 0$, then $v = [parm1 - .5]$.

$v = |m|$, where m is the greatest integer satisfying the relationship $|m| \leq |parm1 + .5|$, or $|m| \leq |parm1 - .5|$, respectively.

and the resulting v is expressed as a floating-point number.

The following routines are provided for the various data types supported:

CEESSNWN 32-bit single floating-point number

CEESDNWN 64-bit double floating-point number

Syntax

►►—CEESxNWN—(—*parm1*—,—*fc*—,—*result*—)—————◄◄

parm1 (input)

The input to the nearest whole number routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the nearest whole number routine. The output range is

$$|result| \leq \Omega$$

$$\Omega = 16^{63} (1-16^6)$$

for single-precision routines, and

$$\Omega = 16^{63} (1-16^{-14})$$

for double-precision routines.

CEESxSGN—Transfer of sign

CEESxSGN performs the mathematical function transfer of sign by using either of the two equations:

$result = |parm1|$ if $parm2 \geq 0$ or $result = -|parm1|$ if $parm2 < 0$.

The following routines are provided for the various data types supported:

CEESISGN 32-bit binary integer
CEESSGN 32-bit single floating-point number
CEESDSGN 64-bit double floating-point number
CEESQSGN 128-bit extended floating-point number

Syntax

►►CEESxSGN(—parm1—,—parm2—,—fc—,—result—)◄◄

parm1 (input)

The first input to the transfer of sign routine. The input range is not restricted.

parm2 (input)

The second parameter to the transfer of sign routine. The input range is not restricted.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the transfer of sign routine. The output range is

$$|result| \leq \Omega$$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$

For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$

For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxSIN—Sine

CEESxSIN returns the sine of the parameter by using the equation $result = \sin(parm1)$.

The following routines are provided for the various data types supported:

CEESSIN 32-bit single floating-point number
CEESDSIN 64-bit double floating-point number
CEESQSIN 128-bit extended floating-point number
CEESTSIN 32-bit single floating-point complex number
CEEESIN 64-bit double floating-point complex number
CEESRSIN 128-bit extended floating-point complex number

Syntax

►► CEESxSIN (—*parm1*—, —*fc*—, —*result*—) ◄◄

parm1 (input)

The input, in radians, to the sine routine.

For real functions, if *parm1* is a 32-bit single floating-point number, the input range is

$$|parm1| < (2^{18} \bullet \Pi)$$

If *parm1* is a 64-bit double floating-point number, the input range is

$$|parm1| < (2^{50} \bullet \Pi)$$

If *parm1* is an extended floating-point number, the input range is

$$|parm1| < 2^{100}$$

For complex functions, the input range differs for the imaginary and real parts of the input. For the imaginary part, the input range is

$$| \text{Im} (parm1) | < 174.673$$

For the real part, it is

$$| \text{Re} (parm1) | < (2^{18} \bullet \Pi)$$

for single floating-point complex numbers,

$$| \text{Re} (parm1) | < (2^{50} \bullet \Pi)$$

for double floating-point complex numbers, and

$$| \text{Re} (parm1) | < 2^{100}$$

for extended floating-point complex numbers.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UT	2	2013	The absolute value of the imaginary part of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .
CEE1V1	2	2017	The absolute value of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V3	2	2019	The absolute value of the real part of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the sine routine. The output range for functions of real variables is

$$-1 \leq \text{result} \leq 1$$

CEESxSNH—Hyperbolic sine

CEESxSNH performs the mathematical function hyperbolic sine by using the equation $\text{result} = \sinh(\text{parm1})$.

The following routines are provided for the various data types supported:

CEESSNH	32-bit single floating-point number
CEESDSNH	64-bit double floating-point number
CEESQSNH	128-bit extended floating-point number
CEESTSNH	32-bit single floating-point complex number
CEEESNH	64-bit double floating-point complex number
CEESRSNH	128-bit extended floating-point complex number

Syntax

►►CEESxSNH(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input to the hyperbolic sine routine. Input range for reals is:

$$|\text{parm1}| < 175.366$$

For complex functions, the input range differs for the imaginary and real parts of the input. For the real part, the input range is:

$$|\text{Re}(\text{parm1})| < 174.673$$

The input range of the imaginary part differs depending on the precision of *parm1*:

$$|\operatorname{Im}(parm1)| < 2^{18} \cdot \Pi$$

for single floating-point complex numbers,

$$|\operatorname{Im}(parm1)| < 2^{50} \cdot \Pi$$

for double floating-point complex numbers, and

$$|\operatorname{Im}(parm1)| < 2^{100}$$

for extended floating-point complex numbers.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1V0	2	2016	The absolute value of the parameter was greater than <i>limit</i> in math routine <i>routine-name</i> .

result (output)

The result of the hyperbolic sine routine. The output range for functions of real variables is

$$|\operatorname{result}| \leq \Omega$$

CEESxSQT—Square root


CEESxSQT returns the square root of *parm1* by using the equation

$$\operatorname{result} = \sqrt{\operatorname{parm1}}$$

The following routines are provided for the various data types supported:

CEESSQT	32-bit single floating-point number
CEEDSQT	64-bit double floating-point number
CEESQSQT	128-bit extended floating-point number
CEESTSQT	32-bit single floating-point complex number
CEEESQT	64-bit double floating-point complex number
CEERSQT	128-bit extended floating-point complex number

Syntax



parm1 (input)
The input to the square root routine. The input range for real number functions is

$parm1 \geq 0$

For complex numbers, the input range is not restricted.

fc (output)
A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UQ	2	2010	The parameter was less than <i>limit</i> in math routine <i>routine-name</i> .

result (output)
The result of the square root routine. The output range for functions of real variables is

$0 \leq result \leq \Omega^{1/2}$

For single-precision routines, $\Omega = 16^{63}(1 - 16^{-6})$
For double-precision routines, $\Omega = 16^{63}(1 - 16^{-14})$
For extended-precision routines, $\Omega = 16^{63}(1 - 16^{-28})$

CEESxTAN—Tangent

CEESxTAN returns the tangent of the parameter by using the equation $result = \tan(parm1)$.

The following routines are provided for the various data types supported:

CEESSTAN	32-bit single floating-point number
CEESDTAN	64-bit double floating-point number
CEESQTAN	128-bit extended floating-point number
CEESTTAN	32-bit single floating-point complex number
CEESETAN	64-bit double floating-point complex number
CEESRTAN	128-bit extended floating-point complex number

Syntax

►►CEESxTAN(—*parm1*—,—*fc*—,—*result*—)◄◄

parm1 (input)

The input, in radians, to the tangent routine.

If *parm1* is a single floating-point number, the input range is:

$$|parm1| < 2^{18} \cdot \Pi$$

If *parm1* is a double floating-point number, the input range is

$$|parm1| < 2^{50} \cdot \Pi$$

If *parm1* is an extended floating-point number, the input range is <

$$|parm1| < 2^{100}$$

Also, for extended as well as complex functions, this argument cannot approach odd multiples of

$$\Pi/2$$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UI	2	2002	The parameter value was too close to one of the singularities (plus or minus pi/2, plus or minus 3pi/2, for the tangent; or plus or minus pi, plus or minus 2pi, for the cotangent) in math routine <i>routine-name</i> .
CEE1V1	2	2017	The absolute value of the parameter was greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V9	1	2025	An underflow has occurred in math routine <i>routine-name</i> .

result (output)

The result of the tangent routine. The output range for functions of real variables is

$|result| \leq \Omega$

CEESxTNH—Hyperbolic tangent

CEESxTNH performs the mathematical function hyperbolic tangent by using the equation: $result = \tanh (parm1)$.

The following routines are provided for the various data types supported:

- CEESSTNH 32-bit single floating-point number
- CEESDTNH 64-bit double floating-point number
- CEESQTNH 128-bit extended floating-point number
- CEESTTNH 32-bit single floating-point complex number
- CEESETNH 64-bit double floating-point complex number
- CEESRTNH 128-bit extended floating-point complex number

Syntax

►►CEESxTNH(—parm1—,—fc—,—result—)◄◄

parm1 (input)

The input to the hyperbolic tangent routine. The input range is not restricted for real functions. For complex functions, parm1 must not approach odd multiples of

$\Pi/2 \bullet i$, where $i = \sqrt{-1}$

where

$i = \sqrt{-1}$

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.

result (output)

The result of the hyperbolic tangent routine. The output range for functions of real variables is:

$|result| < 1$

CEESxXPx—Exponentiation

CEESxXPx performs the mathematical function exponentiation by using the equation

$$result = parm1^{parm2}$$

The following routines are provided for the various data types supported:

CEESIXPI	32-bit binary integer raised to a 32-bit binary integer
CEESSXPI	32-bit single floating-point number raised to a 32-bit binary integer
CEESDXPI	64-bit double floating-point number raised to a 32-bit binary integer
CEESQXPI	128-bit extended floating-point number raised to a 32-bit binary integer
CEESTXPI	32-bit single floating-point complex number raised to a 32-bit binary integer
CEESEXPI	64-bit double floating-point complex number raised to a 32-bit binary integer
CEESRXPI	128-bit extended floating-point complex number raised to a 32-bit binary integer
CEESSXPS	32-bit single floating-pointing point raised to a 32-bit single floating-point
CEESDXPD	64-bit double floating-point raised to a 64-bit double floating-point
CEESQXPQ	128-bit extended floating-point raised to a 128-bit extended floating-point
CEESTXPT	32-bit single floating-point complex raised to a 32-bit single floating-point complex
CEESEXPE	64-bit double floating-point complex raised to a 64-bit double floating-point complex
CEESRXPR	128-bit extended floating-point complex raised to a 128-bit extended floating-point complex

Syntax

►► CEESxXPx (—parm1—, —parm2—, —fc—, —result—) ◄◄

parm1 (input)

The input for the base of the exponentiation routine. The input range for functions of real variables is as follows:

if → *parm1* = 0, then *parm2* > 0.

If *parm1* is a 32-bit number and *parm1* < 0, then
and *parm2* = 'awholenumber'.

$$|parm1| \leq (16^6 - 1)$$

If *parm1* is a 64-bit number and *parm1* < 0, then
and *parm2* = 'awholenumber'.

$$|parm1| \leq (16^{14} - 1)$$

If *parm1* is a 128-bit number and *parm1* < 0, then
and *parm2* = 'awholenumber'.

$$|Parm1| \leq (16^{28} - 1)$$

The input range for functions of complex variables: If $\text{Re}(parm1) = 0$ and $\text{Im}(parm1) = 0$, then $\text{Re}(parm2)$ must be positive.

parm2 (input)

The input for the power of the exponentiation routine. The type is determined by the eighth character of the service name.

fc (output)

A 12-byte feedback code, optional in some languages, that indicates the result of this service.

The following symbolic conditions can result from this service:

Code	Severity	Message Number	Message Text
CEE000	0	—	The service completed successfully.
CEE1UJ	2	2003	For an exponentiation operation ($I^{**}J$) where I and J are integers, I was equal to zero and J was less than or equal to zero in math routine <i>routine-name</i> .
CEE1UK	2	2004	For an exponentiation operation ($R^{**}I$) where R is real and I is an integer, R was equal to zero and I was less than or equal to zero in math routine <i>routine-name</i> .
CEE1UL	2	2005	The value of the parameter was outside the valid range <i>range</i> in math routine <i>routine-name</i> .
CEE1UM	2	2006	For an exponentiation operation ($R^{**}S$) where R and S are real values, R was equal to zero and S was less than or equal to zero in math routine <i>routine-name</i> .
CEE1UN	2	2007	The exponent exceeded <i>limit</i> in math routine <i>routine-name</i> .
CEE1UO	2	2008	For an exponentiation operation ($Z^{**}P$) where the complex base Z equals zero, the real part of the complex exponent P , or the integer exponent P was less than or equal to zero in math routine <i>routine-name</i> .
CEE1V4	2	2020	For an exponentiation operation ($R^{**}S$) where R and S are real values, either R is equal to zero and S is negative, or R is negative and S is not an integer whose absolute value is less than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V5	2	2021	For an exponentiation operation ($X^{**}Y$), the parameter combination of $Y \cdot \log_2(X)$ generated a number greater than or equal to <i>limit</i> in math routine <i>routine-name</i> .
CEE1V8	2	2024	An overflow has occurred in math operation ($X^{**}Y$).
CEE1V9	1	2025	An underflow has occurred in math routine <i>routine-name</i> . The output value from the math routine is undefined.
CEE1VF	2	2031	The value of the argument was a non-positive whole number in math routine ($X^{**}Y$).

result (output)

The result of the exponentiation routine. The output range for functions of real variables is

$$|result| \leq \Omega$$

Examples of math services

This section contains representative calls to math services from each supported language.

C/C++ math service example

The following are C/C++ examples.

Log base 10 and modular arithmetic (CEESDGL1 and CEESIMOD)

```
#include <leawi.h>
#include <string.h>
#include <stdio.h>

int main (void) {

    _FLOAT8 f1,result;
    _INT4 int1, int2, intr;

    _FEEDBACK fc;
    #define SUCCESS "\0\0\0\0"

    f1 = 1000.0;

    CEESDLG1(&f1,&fc,&result);

    if (memcmp(&fc,SUCCESS,4) != 0) {
        printf("CEESDLG1 failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    printf("%f log base 10 is %f\n",f1,result);

    int1 = 39;
    int2 = 7;
    CEESIMOD(&int1,&int2,&fc,&intr);

    if (memcmp(&fc,SUCCESS,4) != 0) {
        printf("CEESIMOD failed with message number %d\n",
            fc.tok_msgno);
        exit(2999);
    }

    printf("%d modulo %d is %d\n",int1,int2,intr);
}
```

COBOL math service examples

The following are COBOL examples.

Log base e (CEESSLG)

```

77  ARG1RS  COMP-1.
77  FBCODE  PIC X(12).
77  RESLTRS COMP-1.

      CALL "CEESSLG" USING ARG1RS , FBCODE ,
      RESLTRS.

```

Log base 10 (CEESDLG1)

```

77  ARG1RL  COMP-2.
77  FBCODE  PIC X(12).
77  RESLTRL COMP-2.

      CALL "CEESDLG1" USING ARG1RL , FBCODE ,
      RESLTRL.

```

Exponentiation (CEESIXPI)

```

77  ARG1IS  PIC S9(9) COMP.
77  ARG2IS  PIC S9(9) COMP.
77  FBCODE  PIC X(12).
77  RESLTIS PIC S9(9) COMP.

      CALL "CEESIXPI" USING ARG1IS , ARG2IS ,
      FBCODE , RESLTIS.

```

Exponentiation (CEESEXPI)

```

77  ARG1RS  COMP-1.
77  ARG2IS  PIC S9(9) COMP.
77  FBCODE  PIC X(12).
77  RESLTRS COMP-1.

      CALL "CEESEXPI" USING ARG1RS , ARG2IS ,
      FBCODE , RESLTRS.

```

Arctangent2 (CEEESAT2)

```

77  ARG1RS  COMP-1.
77  ARG2RS  COMP-1.
77  FBCODE  PIC X(12).
77  RESLTRS COMP-1.

      CALL "CEEESAT2" USING ARG1RS , ARG2RS ,
      FBCODE , RESLTRS.

```

PL/I math service examples

The following are PL/I examples.

EXAMPLES

Modular arithmetic and log base e (CEESIMOD and CEESLOG)

```
PLIMATH: PROC OPTIONS(MAIN);

    DCL CEESLOG ENTRY OPTIONS(ASM) EXTERNAL;
    DCL CEESIMOD ENTRY OPTIONS(ASM) EXTERNAL;

    DCL ARG1 RESULT REAL FLOAT DEC (6);
    DCL ARGM1 ARGM2 RES2 FLOAT BINARY(21)
    DCL FC CHARACTER (12);

    /* Call log base e routine, which has */
    /* only one input parameter */
    CALL CEESLOG (ARG1, FC, RESULT)

    IF ( FC = '000000000000000000000000'X )
        THEN DO;
            PUT SKIP LIST
                ( 'Error occurred in call to CEESLOG.' );
        ELSE;

    /* Call modular arithmetic routine, */
    /* which has two input parameters */
    CALL CEESIMOD (ARGM1, ARGM2, FC, RES2);

    IF ( FC = '000000000000000000000000'X )
        THEN DO;
            PUT SKIP LIST
                ( 'Error occurred in call to CEESIMOD.' );
        ELSE;
    END;
```

Double-precision complex tangent (CEESETAN)

```
TRYETAN: PROCEDURE OPTIONS( MAIN );

    DECLARE FC CHARACTER(12);
    DECLARE PARM1 COMPLEX FLOAT BINARY(53);
    DECLARE RESULT COMPLEX FLOAT BINARY(53);

    DECLARE CEESETAN ENTRY(COMPLEX FLOAT BINARY(53),
        *, COMPLEX FLOAT BINARY(53))
        OPTIONS(ASSEMBLER) EXTERNAL;

    PARM1 = COMPLEX(7,1.1);
    CALL CEESETAN ( PARM1, FC, RESULT);
    IF ( FC ^= '000000000000000000000000'X ) THEN
        PUT SKIP LIST( 'Error in call to CEESETAN.' );
    ELSE
        PUT SKIP LIST( 'Result is ' || RESULT);
    END TRYETAN;
```

Part 3. Appendixes

Appendix A. IBM-supplied country code defaults

Table 28 contains the currency symbols and default picture strings for the *country_code* parameters of the COUNTRY run-time option and the national language support callable services. See “COUNTRY” on page 22 and the services listed in Table 17 on page 105 for more information.

Note: In the table, some currency symbols are shown as hexadecimal strings. How these are displayed depends on the codeset in use by the terminal device. For example, X'9F404040' is displayed as the Euro symbol followed by three blanks when using Code Page 01140.

Table 28. Defaults Currency and Picture Strings Based on COUNTRY Setting

Country/ Region	Country Code	Decimal Separator	Thousand Separator	Currency Symbol	Time Picture String	Date Picture String	Date and Time Picture String
Afghanistan	AF	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Albania	AL	,	.	Lek	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Algeria	DZ	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Andorra	AD	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Angola	AO	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Antigua and Barbuda	AG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Argentina	AR	,	.	A	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Australia	AU	.	,	\$	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Austria	AT	,	.	X'9F404040'	HH:MI:SS,999	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS,999
Bahamas	BS	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Bahrain	BH	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Bangladesh	BD	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Barbados	BB	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Belgium	BE	,	.	X'9F404040'	HH:MI:SS,999	DD/MM/YY	DD/MM/YY HH:MI:SS,999
Benin	BJ	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Bermuda	BM	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Bolivia	BO	,	.	BS	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Bosnia/ Herzegovina	BA	,	.	Din	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Botswana	BW	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Brazil	BR	,	.	NCz\$	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Brunei Darussalam	BN	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Bulgaria	BG	,	.	Lv	HH:MI:SS	YYYY-RRRZ-DD	YYYY-RRRZ-DD HH:MI:SS
Burkina Faso (Upper Volta)	BF	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Burma	BU	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Canada	CA	.	,	\$	HH:MI:SS.99	YY-MM-DD	YY-MM-DD HH:MI:SS.99
Cayman Islands	KY	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Chad	TD	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Chile	CL	,	.	\$	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Colombia	CO	,	.	\$	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Costa Rica	CR	,	.	c/	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Croatia	HR	,	.	Din	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Cuba	CU	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Cyprus	CY	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Czech Republic	CZ	,	.	X'D247A240'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS

Table 28. Defaults Currency and Picture Strings Based on COUNTRY Setting (continued)

Country/ Region	Country Code	Decimal Separator	Thousand Separator	Currency Symbol	Time Picture String	Date Picture String	Date and Time Picture String
Denmark	DK	,	.	kr	HH:MI:SS,99	DD-MM-YY	DD-MM-YY HH:MI:SS,99
Dominican Republic	DO	.	,	\$	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Ecuador	EC	,	.	\$	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Egypt	EG	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
El Salvador	SV	.	,	c/.	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Estonia	EE	,		Kr	HH:MI:SS	DD-MM-YYYY	DD-MM-YYYY HH:MI:SS
Ethiopia	ET	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Finland	FI	,		X'5A404040'	HH:MI:SS,999	DD.MM.YYYY	DD.MM.YYYY HH:MI:SS,99
France	FR	,		X'9F404040'	HH:MI:SS,9	DD.MM.YYYY	DD.MM.YYYY HH:MI:SS,9
Gabon	GA	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Gambia	GM	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Germany	DE	,	.	X'9F404040'	HH:MI:SS	DD.MM.YYYY	DD.MM.YYYY HH:MI:SS
Ghana	GH	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Greece	GR	,	.	X'FC404040'	HH:MI:SS,999	DD/MM/YY	DD/MM/YY HH:MI:SS,999
Guatemala	GT	.	,	Q	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Guinea- Bissau	GW	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Guyana	GY	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Haiti	HT	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Honduras	HN	.	,	L.	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
China (Hong Kong S.A.R.)	HK	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Hungary	HU	,		FT	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Iceland	IS	,	.	kr	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
India	IN	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Indonesia	ID	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Iran	IR	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Iraq	IQ	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Ireland	IE	,	,	X'9F404040'	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Israel	IL	.	,	NIS	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Italy	IT	,	.	X'9F404040'	HH:MI:SS,999	DD/MM/YY	DD/MM/YY HH:MI:SS,999
Jamaica	JM	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Japan	JP	.	,	X'5B404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Jordan	JO	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Kenya	KE	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Korea, Republic of	KR	.	,	X'E0404040'	HH:MI:SS	YYYY.MM.DD	YYYY.MM.DD HH:MI:SS
Kuwait	KW	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Latvia	LV	,		Ls	HH:MI:SS	YYYY.DD.RRRZ	YYYY.DD.RRRZ HH:MI:SS
Lebanon	LB	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Lesotho	LS	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Liberia	LR	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Libya	LY	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Liecht- enstein							
Lithuania	LT	,	.	Lt	HH:MI:SS	YYYY.MM.DD	YYYY.MM.DD HH:MI:SS
Luxembourg	LU	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
China (Macau S.A.R.)	MO	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Macedonia, Former Yugoslav Republic of	MK	,	.	Den	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS

Table 28. Defaults Currency and Picture Strings Based on COUNTRY Setting (continued)

Country/ Region	Country Code	Decimal Separator	Thousand Separator	Currency Symbol	Time Picture String	Date Picture String	Date and Time Picture String
Madagascar	MG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Malawi	MW	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Malaysia	MY	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Mali	ML	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Mauritania	MR	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Mauritius	MU	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Mexico	MX	.	,	\$	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Monaco	MC	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Morocco	MA	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Mozam- bique	MZ	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD HH:MI:SS	
Namibia	NA	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Netherlands	NL	,	.	X'9F404040'	HH:MI:SS	DD-MM-YY	DD-MM-YY HH:MI:SS
Netherlands Antilles	AN	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
New Caledonia	NC	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
New Zealand	NZ	.	,	\$	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Nicaragua	NI	.	,	X'9F404040'	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Niger	NE	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Nigeria	NG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Norway	NO	,	.	kr	HH:MI:SS,999	DD.MM.YY	DD.MM.YY HH:MI:SS,999
Oman	OM	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Pakistan	PK	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Panama	PA	.	,	B/	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Papua New Guinea	PG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Paraguay	PY	,	.	Gs.	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
People's Republic of China	CN	.	,	X'5B404040'	HH:MI:SS	YYYY.MM.DD	YYYY.MM.DD HH:MI:SS
Peru	PE	.	,	I/.	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Philippines	PH	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Poland	PL	,	.	X'E99A4040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Portugal	PT	,	.	X'9F404040'	HH:MI:SS	DD-MM-YYYY	DD-MM-YYYY HH:MI:SS
Puerto Rico	PR	.	,	\$	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Qatar	QA	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Taiwan	TW	.	,	\$	HH:MI:SS,999	YY/MM/DD	YY/MM/DD HH:MI:SS,999
Romania	RO	,	.	Lei	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Russia	RU	,	.	Rub	HH:MI:SS	DD mmm. YYYY g.	DD mmm. YYYY g. HH:MI:SS
Saint Lucia	LC	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Saudi Arabia	SA	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Senegal	SN	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Seychelles	SC	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Sierra Leone	SL	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Singapore	SG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Slovakia	SK	,	.	X'D247A240'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Slovenia	SI	,	.	tol	HH:MI:SS	DD.MM.YYYY	DD.MM.YYYY HH:MI:SS
Somalia	SO	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
South Africa	ZA	.	.	R	HHhMI:SS.999	YYYY-MM-DD	YYYY-MM-DD HHhMI:SS.999
Spain	ES	,	.	X'9F404040'	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Sri Lanka	LK	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS

Table 28. Defaults Currency and Picture Strings Based on COUNTRY Setting (continued)

Country/ Region	Country Code	Decimal Separator	Thousand Separator	Currency Symbol	Time Picture String	Date Picture String	Date and Time Picture String
Sudan	SD	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Surinam	SR	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Swaziland	SZ	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Sweden	SE	,	.	kr	kl HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD kl HH:MI:SS
Switzer- land							
Syria	SY	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Tanzania	TZ	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Thailand	TH	.	,	X'70404040'	HH:MI:SS	DD/MM/YYYY	DD/MM/YYYY HH:MI:SS
Togo	TG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Tunisia	TN	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Turkey	TR	,	.	TL	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Uganda	UG	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Union of Soviet Socialist Republics (See note below)	SU	,	.	Rub	HH:MI:SS	DD mmm. YYYY g.	DD mmm. YYYY g. HH:MI:SS
United Arab Emirates	AE	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
United Kingdom	GB	.	,	X'5B404040'	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
United States	US	.	,	\$	ZH:MI:SS AP	MM/DD/YY	MM/DD/YY ZH:MI:SS AP
Uruguay	UY	,	.	N\$	HH:MI:SS	DD/MM/YY	DD/MM/YY HH:MI:SS
Vanuatu	VU	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Venezuela	VE	,	.	Bs.	ZH:MI:SS AP	DD/MM/YY	DD/MM/YY ZH:MI:SS AP
Western Samoa	WS	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Yemen	YE	,	.		HH:MI:SS	YYYY/MM/DD	YYYY/MM/DD HH:MI:SS
Yugoslavia	YU	,	.	Din	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Zaire	ZR	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Zambia	ZM	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS
Zimbabwe	ZW	,	.	X'9F404040'	HH:MI:SS	YYYY-MM-DD	YYYY-MM-DD HH:MI:SS

Note:

The Czechoslovakia country code CS is obsolete: Use either the Czech Republic country code CZ, or the Slovakia country code SK.

Country code DE was used for the former Federal Republic of Germany and now represents the settings for Germany. The DD country code, used in the past for the German Democratic Republic, is obsolete and should be replaced by DE.

The SU country code is obsolete. Use the following country codes for the appropriate country: Estonia, EE; Latvia, LV; Lithuania, LT; Russian Federation, RU.

Appendix B. Date and time services tables

This appendix contains information to help you use Language Environment date and time callable services. Included are tables for picture term and national language era usage.

Table 29. Picture Character Terms Used in Picture Strings for Date and Time Services

Picture Terms	Explanations	Valid Values	Notes
Y	1-digit year	0-9	Y valid for output only.
YY	2-digit year	00-99	YY assumes range set by CEESSEN.
YYY	3-digit year	000-999	YYY and ZYY valid only if
ZYY	3-digit year within era	1-999	used with <JJJJ>, <CCCC>, or <CCCCCCCC>.
YYYY	4-digit year	1582-9999	
<JJJJ>	Japanese era name in DBCS characters	Heisei (X'0E458D45BA0F') Showa (X'0E45B3457A0F') Taisho (X'0E455B45770F') Meiji (X'0E45A645840F')	Affects YY field: if <JJJJ> specified, YY means the year within Japanese era, for example, 1988 equals Showa 63. See example in Table 30 on page 552.
<CCCC> <CCCCCCCC>	Era name in DBCS characters	(X'0E4D8256CE0F') (X'0E4C845ADD4D8256CE0F')	Affects YY field: if <CCCC> specified, YY means the year within the era. See example in Table 30 on page 552.
MM ZM	2-digit month 1- or 2-digit month	01-12 1-12	For output, leading zero suppressed. For input, ZM treated as MM.
RRRR RRRZ	Roman numeral month	Ibbb-XIIb (Left justified)	For input, source string is folded to uppercase. For output, uppercase only. I=Jan, II=Feb, ..., XII=Dec.
MMM	3-char month, uppercase	JAN-DEC	For input, source string always folded to uppercase. For output, M generates uppercase and m generates lowercase. Output is padded with blanks (b) (unless Z specified) or truncated to match the number of M's, up to 20.
Mmm	3-char month, mixed case	Jan-Dec	
Mmmm...m	3-20 char mo., mixed case	January-December	
MMMM...M	3-20 char mo., uppercase	JANUARY-DECEMBER	
MMMMMMMMMMZ	trailing blanks suppressed	JANUARYbbb-DECEMBERb	
Mmmmmmmmmz	trailing blanks suppressed	Januarybbb-Decemberb	
DD ZD DDD	2-digit day of month 1- or 2-digit day of mo. day of year (Julian day)	01-31 1-31 001-366	For output, leading zero is always suppressed. For input, ZD treated as DD.
HH ZH	2-digit hour 1- or 2-digit hour	00-23 0-23	For output, leading zero suppressed. For input, ZH treated as HH. If AP specified, valid values are 01-12.
MI	minute	00-59	
SS	second	00-59	
9 99 999	tenths of a second hundredths of a second thousandths of a second	0-9 00-99 000-999	No rounding.
AP ap A.P. a.p.	AM/PM indicator	AM or PM am or pm A.M. or P.M. a.m. or p.m.	AP affects HH/ZH field. For input, source string always folded to uppercase. For output, AP generates uppercase and ap generates lowercase.
W	1-char day-of-week	S, M, T, W, T, F, S	For input, Ws are ignored. For output, W generates uppercase and w generates lowercase. Output padded with blanks (unless Z specified) or truncated to match the number of Ws, up to 20.
WWW	3-char day, uppercase	SUN-SAT	
Www	3-char day, mixed case	Sun-Sat	
WWW...W	3-20 char day, uppercase	SUNDAY-SATURDAY	
Www...w	3-20 char day, mixed case	Sunday-Saturday	
WWWWWWWWWWZ	trailing blanks suppressed	SUNDAYbbb-SATURDAYb	
Wwwwwwwwwz	trailing blanks suppressed	Sundaybbb-Saturdayb	
All others	Delimiters Constants	X'01'-X'FF' (X'00' reserved for Language Environment use)	For input, treated as delimiters between the month, day, year, hour, minute, second, and fraction of a second. For output, copied exactly as is to the target string. Constant designating year in Russia, Estonia, Latvia, Lithuania, and the Russian Federation. Constant designating time in Sweden.

Table 29. Picture Character Terms Used in Picture Strings for Date and Time Services (continued)

Picture Terms	Explanations	Valid Values	Notes
Note: If a Z/z could be interpreted as belonging to the preceding character string <i>and</i> to the following string, then it is always considered part of the following string, even if it would be legal with the preceding string but illegal with the following string. For clarity, you should always use a delimiter to define which string the Z/z belongs with. See Table 30 for an example.			

Table 30. Examples of Picture Strings Recognized by Date and Time Services

Picture Strings	Examples	Notes
YYMMDD	880516	1988-5-16 would also be valid input. <i>Showa</i> is a Japanese Era name. <i>Showa</i> 63 equals 1988.
YYYYMMDD	19880516	
YYYY-MM-DD	1988-05-16	
<JJJ> YY.MM.DD	<i>Showa</i> 63.05.16	
<CCCC> YY.MM.DD	<i>MinKow</i> 77.05.16	
MMDDYY	050688	Accepts imbedded blanks 1-digit year format (Y) valid for output only
MM/DD/YY	05 688	
ZM/ZD/YY	05/06/88	
MM/DD/YYYY	5/6/88	
MM/DD/Y	05/06/1988 05/06/8	
DD.MM.YY	09.06.88	Z suppresses zeros/blanks
DD-RRRR-YY	09-VI -88	
DD MMM YY	09 JUN 88	
DD Mmmmmmmmm YY	09 June 88	
ZD Mmmmmmmmmz YY	9 June 88	
Mmmmmmmmmz ZD, YYYY	June 9, 1988	
YY.DDD	88.137	Julian date
YYDDD	88137	
YYYY/DDD	1988/137	
YYMMDDHHMISS	880516204229	Timestamp valid only for CEESECS and CEEDATM. If used with CEEDATE, time positions are left blank. If used with CEEDAYS, HH, MI, SS, and 999 fields are ignored.
YYYYMMDDHHMISS	19880516204229	
YYYY-MM-DD HH:MI:SS.999	1988-05-16 20:42:29.046	
WWW, ZM/ZD/YY HH:MI AP	MON, 5/16/88 08:42 PM	
Wwwwwwwwwz DD Mmm YYYY ZH:MI AP	Monday, 16 May 1988, 8:42 PM	

Note: Lowercase characters must be used only for alphabetic picture terms.

Table 31. Japanese Eras Used by Date/Time Services When <JJJJ> Specified

First Date of Japanese Era	Era Name	Era Name in IBM Japanese DBCS Code	Valid Year Values
1868-09-08	Meiji	X'0E45A645840F'	01-45
1912-07-30	Taisho	X'0E455B45770F'	01-15
1926-12-25	Showa	X'0E45B3457A0F'	01-64
1989-01-08	Heisei	X'0E458D45BA0F'	01-999 (01 = 1989)

Appendix C. Controlling storage allocation

To generate a report of the storage a routine (or more specifically, an enclave) used during its run, specify the RPTSTG(ON) run-time option. The storage report, generated during enclave termination, provides statistics that can help you understand how space is being consumed as the enclave runs. If storage management tuning is desired, the statistics can help you set the corresponding storage-related run-time options for future runs.

Neither the storage report nor the corresponding run-time options include the storage that Language Environment acquires during early initialization, before run-time options processing, and before the start of space management monitoring.

Storage statistics

Attention: This section does not apply to AMODE 64 applications. For information on AMODE 64 statistics, see “Storage statistics for AMODE 64 applications” on page 557.

The following run-time options control storage allocation:

- ANYHEAP
- BELOWHEAP
- HEAP
- HEAPPOOLS
- LIBSTACK
- STORAGE
- STACK
- THREADHEAP
- THREADSTACK

Ensure that these options are tuned appropriately to avoid performance problems. Tuning tips are provided in the *z/OS Language Environment Programming Guide*. For an example and complete description of the storage report, see *z/OS Language Environment Debugging Guide*.

The statistics for initial and incremental allocations of storage types that have a corresponding run-time option differ from the run-time option settings when their values have been rounded up by the implementation, or when allocations larger than the amounts specified were required during execution. All of the following are rounded up to an integral number of double-words:

- Initial STACK allocations
- Initial allocations of all types of heap
- Incremental allocations of all types of stack and heap

Stack storage statistics

Language Environment stack storage is managed at the thread level—each thread has its own stack-type resources.

STACK, THREADSTACK, and LIBSTACK statistics

- Initial size—the actual size of the initial segment assigned to each thread. (If a pthread-attributes-table is provided on the invocation of pthread-create, then the stack size specified in the pthread-attributes-table will take precedence over the STACK run-time option.)

- Increment size—the size of each incremental segment acquired, as determined by the increment portion of the corresponding run-time option.
- Maximum used by all concurrent threads—the maximum amount allocated in total at any one time by all concurrently executing threads.
- Largest used by any thread—the largest amount allocated ever by any single thread.
- Number of segments allocated—the number of incremental segments allocated by all threads.
- Number of segments freed—the number of incremental segments freed by all threads.

The number of incremental segments freed could be less than the number allocated if any of the segments were not freed individually during the life of the thread, but rather were freed implicitly in the course of thread termination.

Determining the applicable threads

If the application is not a multithreading or PL/I multitasking application, then the STACK statistics are for the one and only thread that executed, and the THREADSTACK statistics are all zero.

If the application is a multithreading or PL/I multitasking application, and THREADSTACK was not suppressed, then the STACK statistics are for the initial thread (the IPT), and the THREADSTACK statistics are for the other threads. However, if THREADSTACK was suppressed, then the STACK statistics are for all of the threads, initial and other.

Allocating stack storage

Another type of stack, called the reserve stack, is allocated for each thread and used to handle out-of-storage conditions. Its size is controlled by the 4th subparameter of the STORAGE run-time option, but its usage is neither tracked nor reported in the storage report.

In a multithreaded environment, including PL/I multitasking applications, the initial allocations for all types of stack are made from library heap storage. Library stack and reserve stack are always allocated from BELOWHEAP. User stack is allocated from BELOWHEAP if STACK(,BELOW) is specified or if ALL31(OFF) is specified; otherwise, it is allocated from ANYHEAP.

Language Environment acquires some initial storage, which is neither stack nor heap, at thread creation time; this storage is allocated from BELOWHEAP if ALL31(OFF) is in effect, or from ANYHEAP if ALL31(ON) is in effect.

Heap storage statistics

Language Environment heap storage, other than what is explicitly defined using THREADHEAP, is managed at the enclave level—each enclave has its own heap-type resources, which are shared by the threads that execute within the enclave. Heap storage defined using THREADHEAP is controlled at the thread level.

HEAP, HEAP24, THREADHEAP, ANYHEAP, and BELOWHEAP statistics

- Initial size—the default initial allocation, as specified by the corresponding run-time option. For HEAP24, the initial size indicates the value specified for the initsz24 suboption of the HEAP option.

- Increment size—the minimum incremental allocation, as specified by the corresponding run-time option. For HEAP24, the increment size is the value of the incrsz24 suboption of the HEAP option.

THREADHEAP statistics

- Maximum used by all concurrent threads—the maximum total amount used by all concurrent threads at any one time.
- Largest used by any thread—the largest amount used by any single thread.

HEAP, HEAP24, ANYHEAP, BELOWHEAP, and additional heap statistics

- Total heap storage used—the largest total amount used by the enclave at any one time.

HEAP, HEAP24, THREADHEAP, ANYHEAP, BELOWHEAP, and additional heap statistics

- Successful Get Heap requests—the number of Get Heap requests.
- Successful Free Heap requests—the number of Free Heap requests.
- Number of segments allocated—the number of incremental segments allocated.
- Number of segments freed—the number of incremental segments individually freed.

The number of Free Heap requests could be less than the number of Get Heap requests if the pieces of heap storage acquired by individual Get Heap requests were not freed individually, but rather were freed implicitly in the course of enclave termination.

The number of incremental segments individually freed could be less than the number allocated if the segments were not freed individually, but rather were freed implicitly in the course of enclave termination.

These statistics, in all cases, specify totals for the whole enclave. For THREADHEAP, they indicate the total across all threads in the enclave.

Additional heap statistics

Besides the fixed types of heap, additional types of heap can be created, each with its own heap ID. You can create and discard these additional types of heap by using the CEECRHP

- Successful Create Heap requests—the number of successful Create Heap requests.
- Successful Discard Heap requests—the number of successful Discard Heap requests.

The number of Discard Heap requests could be less than the number of Create Heap requests if the special heaps allocated by individual Create Heap requests were not freed individually, but rather were freed implicitly in the course of enclave termination.

Heap pools storage statistics

The HEAPPOOLS run-time option controls usage of the heap pools storage algorithm at the enclave level. The heap pools algorithm allows for the definition of one to six heap pools, each consisting of a number of storage cells of a specified length.

Heap pools statistics

- Pool *p* size: *ssss*
 - *p* — the number of the pool
 - *ssss* — the cell size specified for the pool.
- Successful Get Heap requests: *xxxx-yyyy n*
 - *xxxx* — the low side of the 8 byte range
 - *yyyy* — the high side of the 8 byte range
 - *n* — the number of requests in the 8 byte range.
- Requests greater than the largest cell size — the number of storage requests that are not satisfied by heap pools.

Note: Values displayed in the heap pools statistics report are not serialized when collected, therefore the values are not necessarily exact.

Heap pools summary

The Heap pools summary displays a report of the heap pool statistics and provides suggested percentages for current cell sizes as well as suggested cell sizes.

- Cell Size — the size of the cell specified in the HEAPPOOLS run-time option
- Extent Percent — the cell pool percent specified by the HEAPPOOLS run-time option
- Cells Per Extent — the number of cells per extent. This number is calculated using the following formula:

$$\text{Initial Heap Size} * (\text{Extent Percent}/100) / (8 + \text{Cell Size})$$

with a minimum of one cell.

Note: Having only one cell per extent is not recommended since the pool could allocate many extents, which would cause the heap pool algorithm to perform inefficiently.

- Extents Allocated — the number of times that each pool allocated an extent.
In order to optimize storage usage, the extents allocated should be either one or two. If the number of extents allocated is too high, then increase the percentage for the pool.
- Maximum Cells Used — the maximum number of cells used for each pool.
- Cells In Use — the number of cells that were never freed.

Note: A large number in this field could indicate a storage leak.

- Suggested Percentages for current Cell Sizes — percentages calculated to find the optimal size of the cell pool extent. The calculation is based on the following formula:

$$(\text{Maximum Cells Used} * (\text{Cell Size} + 8) * 100) / \text{Initial Heap Size}$$

With a minimum of 1% and a maximum of 90%

Make sure that your cell pool extents are neither too large nor too small. If your percentages are too large then additional, unreferenced virtual storage will be allocated, thereby causing the program to exhaust the region size. If the percentages are too small (only one cell per extent — the worst case scenario) then the heap pools algorithm will run inefficiently.

- Suggested Cell Sizes: — sizes that are calculated to optimally use storage (assuming that the application will malloc/free with the same frequency).

Note: The suggested cell sizes are given with no percentages because the usage of each new cell pool size is not known. If there are less than 6 pool sizes calculated then the last pool will be set at 2048.

For more information about stack and heap storage, see *z/OS Language Environment Programming Guide*.

Storage statistics for AMODE 64 applications

The following run-time options control storage allocation:

- HEAP64
- HEAPPOOLS64
- IOHEAP64
- LIBHEAP64
- STACK64
- THREADSTACK64

Ensure that these options are tuned appropriately to avoid performance problems. Tuning tips are provided in the *z/OS Language Environment Programming Guide for 64-bit Virtual Addressing Mode*. For an example and complete description of the storage report, see *z/OS Language Environment Debugging Guide*.

The statistics for initial and incremental allocations of storage types that have a corresponding run-time option differ from the run-time option settings when their values have been rounded up by the implementation, or when allocations larger than the amounts specified were required during execution. See the descriptions of the run-time options for information about rounding.

Stack storage statistics for AMODE 64 applications

Language Environment stack storage is managed at the thread level—each thread has its own stack-type resources.

STACK64 and THREADSTACK64 statistics

- Initial size—the actual size of the initial stack area assigned to each thread. If a pthread-attributes-table is provided on the invocation of pthread-create, the stack size specified in the pthread-attributes-table takes precedence over the stack run-time options.
- Increment size—the size of each incremental stack area made available, as determined by the increment portion of the corresponding run-time option.
- Maximum used by all concurrent threads—the maximum amount allocated in total at any one time by all concurrently executing threads.
- Largest used by any thread—the largest amount allocated ever by any single thread.
- Number of increments allocated—the number of incremental segments allocated by all threads.

Determining the applicable threads

If the application is not a multithreading application, the STACK64 statistics are for the one and only thread that executed, and the THREADSTACK64 statistics are all zero.

If the application is a multithreading application, and THREADSTACK64 was not suppressed, the STACK64 statistics are for the initial thread (IPT), and the

THREADSTACK64 statistics are for the other threads. However, if THREADSTACK64 was suppressed, the STACK64 statistics are for all of the threads, initial and other.

Allocating stack storage

The allocation of the stack for each thread, including the initial processing thread (IPT), is part of a storage request to the system when the thread is first created. Other storage, not part of the stack, is also acquired at this time. These storage allocations are not shown in the storage report. The size of the stack portion of this storage is the stack maximum size plus a one megabyte (1M) guard area. After allocation, the guard area follows the stack initial size and runs through the end of the stack maximum size plus the 1M guard area. Increments to the stack for each thread do not result in additional storage requests to the system. They result in the movement of the beginning of the guard area no further than the maximum size of the stack. The stack initial, increment, and maximum sizes are controlled through the STACK64 and THREADSTACK64 run-time options.

Heap storage statistics

Language Environment heap storage is managed at the enclave level. Each enclave has its own heap type resources, which are shared by the threads that execute within the enclave. The heap resources have 64-bit, 31-bit, and 24-bit addressable areas, each of which can be tuned separately.

HEAP64, LIBHEAP64, and IOHEAP64 statistics

- Initial size—the default initial allocation, as specified by the corresponding run-time option.
- Increment size—the minimum incremental allocation, as specified by the corresponding run-time option.
- Total heap storage used—the largest total amount used by the enclave at any one time.
- Successful Get Heap requests—the number of get heap requests.
- Successful Free Heap requests—the number of free heap requests.
- Number of segments allocated—the number of incremental segments allocated.
- Number of segments freed—the number of incremental segments individually freed.

The number of Free Heap requests could be less than the number of Get Heap requests if the pieces of heap storage acquired by individual Get Heap requests were not explicitly freed, but were freed implicitly during enclave termination. The number of incremental segments individually freed could be less than the number allocated if the segments were not explicitly freed, but were freed implicitly during enclave termination. The initial segment is included in *Number of segments allocated* for each 31-bit and 24-bit addressable heap resource, and for the 64-bit addressable IOHEAP64 resource. A disposition of KEEP always causes 0 to be reported for the *Number of segments freed*. These statistics, in all cases, specify totals for the entire enclave.

Heap pools storage statistics

The HEAPPOOLS64 run-time option controls usage of the heap pools storage algorithm at the enclave level. The heap pools algorithm allows for the definition of one to twelve heap pools, each consisting of a number of storage cells of a specified length.

Heap pools statistics

- Pool *p* size: *ssss*
 - *p* — the number of the pool
 - *ssss* — the cell size specified for the pool.
- Successful Get Heap requests: *xxxx-yyyy n*
 - *xxxx* — the low side of the 8 byte range
 - *yyyy* — the high side of the 8 byte range
 - *n* — the number of requests in the 8 byte range.
- Requests greater than the largest cell size — the number of storage requests that are not satisfied by heap pools.

Note: Values displayed in the heap pools statistics report are not serialized when collected, therefore the values are not necessarily exact.

Heap pools summary

The heap pools summary displays a report of the heap pool statistics and provides suggested cell counts for current cell sizes as well as suggested cell sizes.

- Cell Size — the size of the cell specified in the HEAPPOOLS64 run-time option
- Cells Per Extent — the cell pool count specified by the HEAPPOOLS64 run-time option
- Extents Allocated — the number of times that each pool allocated an extent.
In order to optimize storage usage, the extents allocated should be either one or two. If the number of extents allocated is too high, increase the cell count for the pool.
- Maximum Cells Used — the maximum number of cells used for each pool.
- Cells In Use — the number of cells that were never freed.

Note: A large number in this field could indicate a storage leak.

- Suggested Cell Sizes: — sizes that are calculated to optimally use storage (assuming that the application will malloc/free with the same frequency).

Note: The suggested cell sizes are given with no cell counts because the usage of each new cell pool size is not known. If there are less than 12 pool sizes calculated then the last pool size is set at 65536.

For more information about stack and heap storage for AMODE 64 applications, see *z/OS Language Environment Programming Guide for 64-bit Virtual Addressing Mode*.

Appendix D. Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The major accessibility features in z/OS enable users to:

- Use assistive technologies such as screen readers and screen magnifier software
- Operate specific or equivalent features using only the keyboard
- Customize display attributes such as color, contrast, and font size

Using assistive technologies

Assistive technology products, such as screen readers, function with the user interfaces found in z/OS. Consult the assistive technology documentation for specific information when using such products to access z/OS interfaces.

Keyboard navigation of the user interface

Users can access z/OS user interfaces using TSO/E or ISPF. Refer to *z/OS TSO/E Primer*, *z/OS TSO/E User's Guide*, and *z/OS ISPF User's Guide Vol I* for information about accessing TSO/E and ISPF interfaces. These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

z/OS information

z/OS information is accessible using screen readers with the BookServer/Library Server versions of z/OS books in the Internet library at:

www.ibm.com/servers/eserver/zseries/zos/bkserv/

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
USA

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation
Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
Mail Station P300
2455 South Road
Poughkeepsie, NY 12601-5400
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. You may copy, modify, and distribute these sample programs in any form without payment to IBM for the purposes of developing, using, marketing, or distributing application programs conforming to IBM's application programming interfaces.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

Programming Interface information

This book documents intended Programming Interfaces that allow the customer to write programs to obtain the services of Language Environment in z/OS.

Trademarks

The following terms are trademarks of the IBM Corporation in the United States or other countries or both:

AD/Cycle
AIX
AS/400
BookManager
C/370
CICS
COBOL/370
DB2
IBM
IBMLink
IMS
Language Environment
MVS
MVS/ESA
OS/2
OS/390
Resource Link
S/370
SAA
VisualAge
z/OS
z/OS.e
z/VM
zSeries

Java and all Java-based trademarks and logos are trademarks of Sun Microsystems, Inc. in the United States and/or other countries.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States and/or other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Other company, product, and service names may be trademarks or service marks of others.

Index

Special characters

- / (slash)
 - NOEXECOPS alters behavior of 32
 - specifying in parameters of TEST run-time option 82
- * (asterisk) 81, 83
- argc parameter for C
 - ARGPARSE run-time option's effect on 18
- argv parameter for C
 - ARGPARSE run-time option's effect on 18
- calloc() function 36
- fprintf function 144
- setlocale() function
 - CEE3CTY callable service and 133
 - COUNTRY run-time option and 23
- = (equal sign)
 - in ENVAR run-time option 29
- ' (straight single quote)
 - initializing storage with 72, 74
 - specifying in parameters of TEST run-time option 82, 83
- " (straight double quote)
 - initializing storage with 72, 74
 - specifying in parameters of TEST run-time option 82, 83

Numerics

- 0 type_of_move 415, 419
- 1 type_of_move 415, 419
- 16M line
 - ALL31 run-time option and 15
 - allocating library heap storage not restricted to below 16, 17
 - ANYHEAP run-time option and 16, 17
 - HEAP run-time option and 37
 - storage received from CEEGTST and 351
- 2-digit years
 - querying within 100-year range (CEEQCEN) 439
 - examples of 440
 - setting within 100-year range (CEESCEN) 454
 - examples of 455
- 24-bit addressing
 - ANYHEAP run-time option and 17

A

- abbreviating run-time options 11
- abcode parameter 11, 12, 118, 122
- abend codes
 - abend 4088, reason code 1004 73
 - abend 4091, reason code 21 25
 - dumping 118, 123
 - ERRCOUNT run-time option and 482
 - in CEE3DMP callable service 142
 - percolating in ABPERC run-time option 11

- abends
 - bad filenames in CEEBLDTX macro can cause 433
 - .dumps, getting when enclave terminates with abend (CEE3ABD) 118, 123
 - ERRCOUNT run-time option and 31
 - in CEEFRST callable service 314
 - in CEEGTST callable service 351
 - not handled if initiated by SVC 13 91
 - options report not generated (RPTOPTS run-time option) 64
 - out-of-storage condition, cause 73
 - percolating
 - ABPERC run-time option and 12
 - CEE3XITA and 91
 - percolating certain abends in CEE3XITA 91
 - side effects if encountered using TRAP(OFF) 91
 - storage report not generated (RPTSTG run-time option) 65
 - system abends
 - ABPERC run-time option and 12
 - percolating in the assembler user exit 91
 - terminating enclave with (CEE3ABD) 117
 - trapping 90
 - user
 - using ABPERC run-time option to percolate 12
 - when nested condition exceeded (DEPTHCONDLMT run-time option) 25
- ABPERC run-time option
 - CICS ignores this option 12
 - S0Cx abends can't be percolated 12
 - syntax 11
- absolute value math service (CEESxABS) 508
- ABTERMENC run-time option
 - abend codes and 12
 - choosing between abend codes and return codes 12
 - syntax 12
- access method service (AMS) 13
- accessibility 561
- active condition
 - CEEGPID callable service and 334
 - dumping information related to 142
- additional heap
 - creating (CEECRHP) 239
 - discarding (CEEDSHP) 280
 - reducing the amount of storage you need to run an application 313
- address parameter
 - CEE3ZST callable service and 244
 - CEEFRST callable service and 314
 - CEEGTST callable service and 352
- addressing exception 216
- aggregate
 - dumping arrays and structures 140
- AIXBLD run-time option
 - syntax 13

- alignment
 - PL/I structures and Language Environment storage callable services 353
- ALL31 run-time option
 - ALL31(ON) default under CICS 16
 - syntax 14
- allocating
 - storage
 - additional heap, setting size of (CEECRHP) 239
 - anywhere heap, setting size of (ANYHEAP run-time option) 16, 17
 - below heap, setting size of (BELOWHEAP run-time option) 19, 20
 - gett heap storage (CEEGTST) 352, 354, 356
 - initial heap, setting size of (HEAP run-time option) 36, 47
 - initializing when allocating (STORAGE run-time option) 72, 74
 - library stack storage, setting size of (LIBSTACK run-time option) 49
 - stack storage, setting size of (STACK run-time option) 68, 71, 72, 88
- alternate indices, building with AIXBLD I NOAIXBLD run-time option 14
- AMODE
 - ALL31 run-time option and 14, 15
 - callable services and 108
 - heap storage 38
 - STACK run-time option and 15
 - under CICS 353
- AMS (access method service) 13
- ANYHEAP run-time option
 - syntax 16
- anywhere heap
 - allocating storage from 16, 17
 - ANYHEAP run-time option and 16, 17
 - controlling whether storage is freed from 17
- ANYWHERE suboption
 - ANYHEAP run-time option and 17
 - HEAP run-time option and 37
- application writer interface (AWI) 107
- arccosine math service (CEESxACS) 508
- arcsine math service (CEESxASN) 509
- arctangent math service (CEESxATN) 511
- arctangent2 math service (CEESxAT2) 512
- AREA storage for PL/I 353
- ARGPARSE run-time option
 - CICS ignores this option 18
 - syntax 17
- argument
 - dumping 140
 - format of in invoked routine 58
 - list format
 - effect of EXECOPS run-time option on 32
- arithmetic
 - calculation on dates
 - convert date to COBOL Lilian format (CEECLDY) 227, 229
 - convert date to Lilian format (CEEDAYS) 266, 268

- arithmetic (*continued*)
 - calculation on dates (*continued*)
 - convert timestamp to number of seconds (CEESECS) 467, 470
 - get current Greenwich Mean Time (CEEGMT) 326, 327
 - examples using 506, 542, 544
 - parameter types 505
 - services
 - Quick Reference Tables 104, 105
 - syntax variations of 104, 105, 505
- array 140
- assembler language
 - routines
 - calling math services from 505
 - invoking callable services from 109
- asterisk (*) 81, 83
- AT OCCURRENCE debug command for Debug Tool 81
- AT TERMINATION debug command for Debug Tool 81
- attention processing
 - handling with a debug tool (TEST run-time option) 81
 - handling with INTERRUPT run-time option 46
- AUTOTASK run-time option
 - syntax 18

B

- BASED storage for PL/I 36
- below heap
 - allocating storage from 19, 20
 - BELOWHEAP run-time option and 19, 20
 - controlling whether storage is freed 19
- BELOW suboption
 - ANYHEAP run-time option and 17
- BELOWHEAP run-time option
 - syntax 19
- BIF (built-in functions), in CEE3DMP 142
- bimodal addressing
 - ANYHEAP run-time option 17
 - HEAP run-time option 37
- binary-valued flags 93
- bit manipulation services 501
 - CEESICLR—bit clear 501
 - CEESISSET—bit set 501
 - CEESISHF—bit shift 502
 - CEESITST—bit test 502
- buffer
 - dumping contents of buffers used by files 140
 - storing messages in
 - examples of 400
 - syntax description 396
- building condition token
 - examples of 435, 438
 - syntax description 432
- built-in functions (BIF) for PL/I, in CEE3DMP 138

C

calloc() function 36
 leawi.h header files and 275, 434
 malloc() function 36
 realloc() function 36
 system() function
 CEE3DMP ENCLAVE considerations 142
 applications, specifying operating system for 28, 29
 CEE3PRM callable service considerations 202, 205
 declares for Language Environment data types 114
 examples
 CEE3ABD—terminate enclave with abend 120
 CEE3CTY—set default country 134
 CEE3DMP—generate dump 144
 CEE3GRC—get enclave return code 148
 CEE3GRN—get name of routine that incurred condition 161
 CEE3LNG—set national language 184
 CEE3MCS—get default currency 191
 CEE3MDS—get default decimal separator 195
 CEE3MTS—get default thousands separator 199
 CEE3PRM—query parameter string 202
 CEE3RPH—set report heading 211
 CEE3SPM—query and modify Language Environment hardware condition enablement 217
 CEE3SRC—set enclave return code 148
 CEE3USR—set or query user area fields 225
 CEE3CMI—store and load message insert data 235
 CEE3CRHP—create new additional heap 242
 CEE3CZST—reallocate storage 247
 CEE3DATE—convert Lilian date to character format 254
 CEE3DATM—convert seconds to character timestamp 261
 CEE3DCOD—decompose a condition token 276
 CEE3DSHP—discard heap 284
 CEE3DYWK—calculate day of week from Lilian date 287
 CEE3FMDA—get default date format 298
 CEE3FMTM—get default time format 311
 CEE3FRST—free heap storage 316
 CEE3GMT—get current GMT 328
 CEE3GPID—retrieve the Language Environment version/platform ID 337
 CEE3GQDT—retrieve q_data_token 343
 CEE3GTST—get heap storage 247, 276, 354
 CEE3HDLR—register user-written condition handler 148, 161, 358
 CEE3HDLU—unregister user-written condition handler 368
 CEE3ISEC—convert integers to seconds 375
 CEE3ITOK—return initial condition token 381
 CEE3LOCT—get current local date or time 394
 CEE3MGET—get a message 400
 CEE3MOUT—dispatch a message 405
 CEE3MRCR—move resume cursor 420
 CEE3MSG—get, format, and dispatch a message 428

C (continued)

examples (continued)

CEENCOD—construct a condition token 435
 CEEQCEN—query century window 440
 CEERAN0—calculate uniform random numbers 451
 CEEScen—set century window 455
 CEESDLG1—logarithm base 10 542
 CEESECI—convert seconds to integers 464
 CEESECS—convert timestamp to seconds 471
 CEESGL—signal a condition 161, 484
 CEESIMOD—modular arithmetic 542
 CEETEST—invoke debug tool 496
 fc parm, omitting 111
 hardware interrupts that cannot be enabled 216
 HEAP considerations 38
 invoking callable services from 111
 mapping SPIE and STAE to TRAP 91
 MSGFILE run-time option and 52
 perror() function 52
 PLIST setting under IMS differs depending on version of C compiler 58
 run-time options specific to Language Environment
 ARGPARSE 17
 ENV 28, 29
 EXECOPS 32
 PLIST 58
 REDIR 62
 run-time options, specifying on the command line 32
 stderr
 MSGFILE run-time option and 52
 REDIR run-time option and 62
 redirecting output from 52
 variables, where stored 36
 call return point 414
 CALL statement for PL/I
 fetchable main
 CEE3DMP ENCLAVE considerations 142
 callable services
 AMODE switching across calls to 15
 CEE3ABD—terminate enclave with an abend 117
 CEE3CIB—return pointer to condition information block 122, 126
 CEE3CTY—set default country 131
 CEE3DMP—generate dump 138
 CEE3GRC—get the enclave return code 146
 CEE3GRN—get name of routine that incurred condition 159
 CEE3GRO—get offset of condition 167
 CEE3LNG—set national language 181
 CEE3MCS—get default currency symbol 189
 CEE3MDS—get default decimal separator 193
 CEE3MTS—get default thousands separator 197
 CEE3PRM—query parameter string 201
 CEE3RPH—set report heading 210
 CEE3SPM—query and modify Language Environment hardware condition enablement 213
 CEE3SRC—set the enclave return code 220
 CEE3SRP—set resume point 221
 CEE3USR—set or query user area fields 222

callable services (*continued*)

CEECBLDY—convert date to COBOL Lilian format 227
 CEEECMI—store and load message insert data 232
 CEEECRHP—create new additional heap 239
 CEEECZST—reallocate (change size of) storage 244
 CEEDATE—convert Lilian date to character format 251
 CEEDATM—convert seconds to character timestamp 258
 CEEDAYS—convert date to Lilian format 266
 CEEDCOD—decompose a condition token 273
 CEEDSHP—discard heap 280
 CEEDYWK—calculate day of week from Lilian date 285
 CEEFMDA—get default date format 297
 CEEFMDT—get default date and time format 300
 CEEFMON—format monetary string 304
 CEEFMTM—get default time format 310
 CEEFRST—free heap storage 313
 CEEFTDS—format date and time into character string 319
 CEEGMT—get current Greenwich Mean Time 326
 CEEGMT0—get offset from Greenwich Mean Time to local time 330
 CEEGPID—retrieve Language Environment version and platform ID 334
 CEEGQDT—retrieve q_data_token 340
 CEEGTST—get heap storage 351
 CEEHDLR—register user condition handler 356
 CEEHDLU—unregister user condition handler 366
 CEEISEC—convert integers to seconds 372
 CEEITOK—return initial condition token 379
 CEELCNV—query locale numeric conventions 385
 CEELOCT—get current local time 392
 CEEMGET—get a message 396
 CEEMOUT—dispatch a message 403
 CEEMRCE—move resume cursor explicit 408
 CEEMRCR—move resume cursor relative to handle cursor 414
 CEEMSG—get, format, and dispatch a message 426
 CEENCOD—construct a condition token 432
 CEEQCEN—query the century window 439
 CEEQDTC—query locale date and time conventions 442
 CEEQRYL—query active locale environment 448
 CEERAN0—calculate uniform random numbers 450
 CEESCEN—set the century window 453
 CEESCOL—compare string collation weight 458
 CEESECI—convert seconds to integers 462
 CEESECS—convert timestamp to number of seconds 467
 CEESETL—set the locale operating environment 475
 CEESGL—signal a condition 481
 CEESICLR—bit clear 501
 CEESISSET—bit set 501
 CEESISHF—bit shift 502
 CEESITST—bit test 502

callable services (*continued*)

CEESTXF—transform string characters into collation weights 487
 CEESxABS—absolute value 507
 CEESxACS—arccosine 508
 CEESxASN—arcsine 509
 CEESxAT2—artangent of two arguments 512
 CEESxATH—hyperbolic arctangent 510
 CEESxATN—arctangent 511
 CEESxCJG—conjugate complex 512
 CEESxCOS—cosine 513
 CEESxCSH—hyperbolic cosine 515
 CEESxCTN—cotangent 516
 CEESxDIM—positive difference 518
 CEESxDVD—division 519
 CEESxERC—error function 519
 CEESxERF—error function complement 520
 CEESxEXP—exponent (base e) 521
 CEESxGMA—gamma function 522
 CEESxIMG—imaginary part of complex 523
 CEESxINT—truncation 524
 CEESxLG1—logarithm base 10 526
 CEESxLG2—logarithm base 2 527
 CEESxLGM—log gamma function 525
 CEESxLOG—logarithm base e 528
 CEESxMLT—floating complex multiply 529
 CEESxMOD—modular arithmetic 529
 CEESxNIN—nearest integer 531
 CEESxNWN—nearest whole number 531
 CEESxSGN—transfer of sign 532
 CEESxSIN—sine 533
 CEESxSNH—hyperbolic sine 535
 CEESxSQT—square root 536
 CEESxTAN—tangent 537
 CEESxTNH—hyperbolic tangent 539
 CEESxXPx—exponential (* *) 539
 CEETDLI—invoke IMS 491
 CEETEST—invoke debug tool 494
 data types allowed in 114, 117
 feedback code parameter 114
 invoking 109
 in C 108, 111
 in COBOL 112
 in PL/I 112, 114
 Quick Reference Tables 101, 104
 case 1 condition token 434
 case 2 condition token 434
 cause code condition 434
 CBLOPTS run-time option
 syntax 20
 CBLPSHPOP run-time option
 EXEC CICS PUSH and EXEC CICS POP commands and 21
 syntax 20
 CBLQDA run-time option
 CICS ignores this option 22
 relationship to dump and message file 21
 syntax 21
 CEE_ENTRY Language Environment data type and HLL equivalents 114
 CEE3 prefix, meaning of 108

CEE3ABD—terminate enclave with an abend
 CICS considerations 118, 122
 examples using 120, 122
 syntax 117

CEE3CIB—return pointer to condition information
 block 122, 126
 syntax 122, 126

CEE3CTY—set default country
 COUNTRY run-time option and 23
 date and time services and 131
 examples using 134, 137
 other national language support services and 131
 RPTOPTS run-time option and 131
 RPTSTG run-time option and 131
 setlocale() and 133
 syntax 131
 table of default values for specified
 country_code 547

CEE3DMP—generate dump
 default dump file of 138
 examples using 144, 146
 options used in TERMTHDACT run-time option 80
 syntax 138
 using TEST compile-time option with 140

CEE3GRC—get the enclave return code
 examples using 148, 158
 syntax 146

CEE3GRN—get name of routine that incurred condition
 examples using 161, 167
 syntax 159

CEE3GRO—get offset of condition
 examples using 169
 syntax 167

CEE3LNG—set national language
 default if invalid national language specified 181
 examples using 184, 188
 messages and 181
 NATLANG run-time option and 54
 syntax 181

CEE3MCS—get default currency symbol
 CEE3CTY callable service 189
 COUNTRY run-time option and 189
 default if invalid country_code specified 190
 examples using 191, 193
 syntax 189
 table of default values for specified
 country_code 547

CEE3MDS—get default decimal separator
 CEE3CTY callable service and 194
 COUNTRY run-time option and 194
 default if invalid country_code specified 194
 defaults of country_code parameter 547
 examples using 195, 197
 syntax 193

CEE3MTS—get default thousands separator
 CEE3CTY callable service and 198
 COUNTRY run-time option and 198
 default if invalid country_code specified 198
 examples using 199
 syntax 197

CEE3MTS—get default thousands separator
 (continued)
 table of default values for specified
 country_code 547

CEE3PRM—query parameter string 439
 examples using 202, 204
 syntax 201

CEE3RPH—set report heading
 examples using 210
 syntax 210

CEE3SPM—query and modify Language Environment
 hardware condition enablement
 examples using 217, 219
 syntax 213

CEE3SRC—set the enclave return code
 examples using 221
 syntax 220

CEE3SRP—set resume point
 examples using 222
 syntax 221

CEE3USR—set or query user area fields
 examples using 225, 227
 syntax 222

CEEBLDTX EXEC
 use caution when creating new facility ID for 433

CEEBXITA assembler user exit
 percolating certain abends with TRAP(ON) 91

CEECBLDY—convert date to COBOL Lilian
 format 227
 examples using 228
 syntax 227

CEECMI—store and load message insert data 232
 examples using 235, 238
 syntax 232

CEECRHP—create new additional heap
 examples using 242, 244
 HEAP run-time option and 352
 syntax 239

CEECZST—reallocate (change size of) storage
 CEEGTST callable service and 245
 examples using
 example with CEEGTST and CEEFRST 247
 examples with CEEHDLR, CEEGTST, and
 CEEMRCR 247, 250
 syntax 245

CEEDATE—convert Lilian date to character format
 CEEDAYS callable service and 251
 CEEFMDA callable service and 252
 COUNTRY run-time option and 252
 examples using 254, 258
 syntax 251
 table of sample output 258

CEEDATM—convert seconds to character timestamp
 CEEFMDT callable service and 259
 CEESECI callable service and 462
 CEESECS callable service and 258
 COUNTRY run-time option and 259
 examples using 261, 266
 syntax 258
 table of sample output 266

CEEDAYS—convert date to Lilian format
 CEEDATE callable service and 266
 CEESCEN callable service and 227, 267
 syntax 266

CEEDCOD—decompose a condition token
 examples using
 C example showing alternative to using 484
 examples with CEEGTST 276, 279
 syntax 273

CEEDOPT
 CBLOPTS run-time option must be specified in
 CEEDOPT or CEEUOPT 20
 COUNTRY run-time option consideration 23
 country_code and 23
 ENVAR run-time option and 30
 national language codes and 54, 181
 specifying nonexistent national language code in 54
 specifying UPSI run-time option in 93

CEEDSHP—discard heap
 can overrule HEAP run-time option 281
 CEECRHP callable service and 280
 examples with CEECRHP 282, 284
 HEAP run-time option and 281
 syntax 280

CEEDUMP default dump file
 CBLQDA run-time option and 21
 CEE3DMP callable service and 138

CEEDYWK—calculate day of week from Lilian date
 examples using 287, 290
 syntax 285

CEEEBMAW file, description of 109

CEEEEDCCT file, description of 109

CEEFMDA—get default date format
 CEE3CTY callable service 297
 COUNTRY run-time option and 297
 default if invalid country_code specified 297
 defaults of country_code parameter 547
 examples using 298, 300
 syntax 297

CEEFMDT—get default date and time format
 CEE3CTY callable service and 301
 COUNTRY run-time option and 301
 default if invalid country_code specified 301
 defaults of country_code parameter 547
 examples using 302, 304
 syntax 300

CEEFMON—format monetary string
 about 304
 examples using 307

CEEFMTM—get default time format
 CEE3CTY callable service and 310
 COUNTRY run-time option and 310
 default if invalid country_code specified 310
 defaults of country_code parameter 547
 examples using 311, 313
 syntax 310

CEEFRST—free heap storage
 CEECRHP callable service and 314
 CEEGTST callable service and 313
 examples with CEEGTST 316, 318
 HEAP run-time option and 314

CEEFRST—free heap storage (*continued*)
 syntax 313

CEEFTDS—format date and time into character string
 syntax 319

CEEGMT—get current Greenwich Mean Time 499
 CEEDATE callable service and 327
 CEEDATM callable service and 327
 CEEGMTO callable service and 326
 examples using 328, 330
 syntax 326

CEEGMTO—get offset from Greenwich Mean Time to local time
 CEEDATM callable service and CEEDATM and 331
 examples using 333, 334
 syntax 330

CEEGPID—retrieve the Language Environment version and platform ID
 examples using 337, 340
 syntax 334

CEEGQDT—retrieve q_data_token
 CEESGL callable service and 340
 examples using
 CEEGQDT by itself 343
 examples with CEEHDLR and CEESGL 343
 instance specific information (ISI) and 340
 syntax 340

CEEGTST—get heap storage
 CEECRHP callable service and 352
 CEEDSHP callable service and 351
 CEEFRST callable service and 351
 CEESGL callable service and 351
 examples using
 examples with CEECZST and CEEFRST 247
 examples with CEEFRST 316, 354, 356
 HEAP run-time option and 352
 syntax 351
 using STORAGE run-time option to initialize storage received from 351

CEEHDLR—register user condition handler
 CEEHDLU callable service and 367
 condition handling example 358
 examples using
 CEEHDLR by itself 358, 365
 examples with CEE3SRC and CEE3GRC 161, 167
 syntax 356

CEEHDLU—unregister user condition handler
 CEEHDLR callable service and 367
 examples with CEEHDLR 368, 371
 syntax 366

CEEIBMCI file, description of 109

CEEIBMCT file, description of 109

CEEIGZCI file, description of 109

CEEIGZCT file, description of 109

CEEISEC—convert integers to seconds
 CEESECI callable service and 373
 examples using 375, 378
 syntax 372

CEEITOK—return initial condition token
 examples using 381, 385
 syntax 379

CEELCNV—query locale numeric conventions
syntax 385

CEELOCT—get current local time
CEEDATM callable service and 393
CEEGMT callable service and 393
CEEGMTO callable service and 393
examples using 394, 396
syntax 392

CEEMGET—get a message
examples using
CEEMGET by itself 400, 403
examples with CEEMOUT 400
syntax 396

CEEMOUT—dispatch a message
examples using 405, 407
MSGFILE run-time option and 404
syntax 403

CEEMRCE—move resume cursor explicit
examples using 412, 413
syntax 408

CEEMRCR—move resume cursor relative to handle cursor
examples with CEEHDLR and CEESGL 420, 425
illustrations of 417
syntax 414

CEEMSG—get, format, and dispatch a message
examples using 428, 431
MSGFILE run-time option and 427
MSGQ run-time option and 54
syntax 426

CEENCOD—construct a condition token
CEEDCOD callable service and 273
examples using 435, 438
how C users can use CEESGL callable service instead of 484
syntax 432

CEEQCEN—query the century window
CEESCEN callable service and 439
examples using 440, 442
syntax 439

CEEQDTC—query locale, date, and time conventions
syntax 442

CEEQRYL—query active locale environment
syntax 448

CEERANO—calculate uniform random numbers
examples using 451, 453
syntax 450

CEESCEN—set the century window
CEEDAYS callable service and 453
CEESECS callable service and 453
examples using 455, 458
syntax 453

CEESCOL—compare string collation weight
syntax 458

CEESECI—convert seconds to integers
examples using 464, 467
relationship to CEEISEC callable service 463
syntax 462

CEESECS—convert timestamp to number of seconds
CEEDATM callable service and 468
CEEISEC callable service and 373

CEESECS—convert timestamp to number of seconds
(continued)
CEESCEN callable service and 453
COUNTRY run-time option and 469
syntax 467

CEESETL—set locale operating environment
syntax 475

CEESGL—signal a condition
CEEQDTC callable service and 340
examples using 484, 487
HLL-specific condition handlers and 482
q_data_token and 340, 482
setting of ERRCOUNT run-time option can cause abend 482
syntax 481
TRAP run-time option does not affect 90
using to create an ISI 481, 482

CEESTXF—transform string into collation weights
syntax 487

CEETDLI interface to IMS
syntax 491

CEETEST—invoke debug tool
examples using 496, 498
NOTEST run-time option and 83
syntax 494

CEEUOPT
CBLOPTS run-time option must be specified in CEEUOPT or CEEDOPT 20
COUNTRY run-time option considerations 23
country_code and 23
national language codes and 54, 181
specifying nonexistent national language code in 23
specifying UPSI run-time option in 24, 93

century window
CEEDAYS callable service and 227, 267
CEEQCEN callable service and 439
examples of 440, 442
CEESCEN callable service and 454
examples of 440, 442, 455, 458
CEESECS callable service and 468

CESE transient data queue
CEEMOUT callable service and 404
TERMTHDACT run-time option and 80
char_parm_string parameter 202, 204
character timestamp
converting Lilian seconds to (CEEDATM) 258
examples of 261, 266
converting to COBOL Lilian seconds (CEECLDY) 227
examples of 231
converting to Lilian seconds (CEESECS)
examples of 467

CHARn Language Environment data type and HLL equivalents 114

CHECK run-time option
syntax 22
using while debugging 22
checking errors, flagging with CHECK run-time option 22

ChuHwaMinKow era 553

CIB (Condition Information Block) 122, 126

CICS

- callable service behavior under
 - abend codes in CEE3ABD callable service 118, 122
 - storage considerations 353
- CBLPSHPOP run-time option and 20
- CEE3DMP ENCLAVE considerations 142
- CESE transient data queue and 52
- PLIST setting 57
- storage and 353

class code condition 434

clean-up parameter 118, 122

clearing storage 72

CMS

- CEE3DMP special considerations 142
- CMSSTOR OBTAIN/RELEASE commands 65
- OSRUN command 58
- PLIST run-time option settings to specify when running under 57
- specifying a C application is running under 28, 32

CMSCALL

- CEE3DMP ENCLAVE considerations 142

CMSSTOR OBTAIN/RELEASE 65

COBOL

- batch debugging features 24
- callable services, invoking from 112
- declares for Language Environment data types 114
- examples

- CEE3ABD—terminate enclave with abend 120
- CEE3CTY—set default country 134
- CEE3DMP—generate dump 144
- CEE3GRC—get enclave return code 148, 157
- CEE3GRN—get name of routine that incurred condition 162
- CEE3LNG—set national language 184
- CEE3MCS—get default currency 191
- CEE3MDS—get default decimal separator 195
- CEE3MTS—get default thousands separator 199
- CEE3PRM—query parameter string 202
- CEE3RPH—set report heading 211
- CEE3SPM—query and modify Language Environment hardware condition enablement 217
- CEE3SRC—set enclave return code 148, 157
- CEE3USR—set or query user area fields 225
- CEE3CMI—store and load message insert data 235
- CEE3CRHP—create new additional heap 242
- CEE3CZST—reallocate storage 247
- CEEDATE—convert Lilian date to character format 254
- CEEDATM—convert seconds to character timestamp 262
- CEEDAYS—convert date to Lilian format 231
- CEEDCOD—decompose a condition token 276
- CEE3FMON—format monetary string 307
- CEE3FTDS—format date and time into character string 323
- CEE3GPID—retrieve Language Environment version/platform ID 337
- CEE3GQDT—retrieve q_data_token 343

COBOL (continued)

examples (continued)

- CEE3GTST—get heap storage 247, 354
 - CEE3HDLR—register user-written condition handler 148, 157, 358
 - CEE3HDLU—unregister user-written condition handler 368
 - CEE3ISEC—convert integers to seconds 375
 - CEE3ITOK—return initial condition token 381
 - CEE3LCNV—query locale numeric conventions 390
 - CEE3LOCT—get current local date or time 394
 - CEE3MGET—get a message 400
 - CEE3MOUT—dispatch a message 405
 - CEE3MRCR—move resume cursor 421
 - CEE3MSG—get, format, and dispatch a message 428
 - CEE3NCOD—construct a condition token 435
 - CEE3QCEN—query century window 440
 - CEE3QDTC—return locale date and time 445
 - CEE3QRYL—query active locale environment 450
 - CEE3SCEN—set century window 455
 - CEE3SCOL—compare string collation weight 458
 - CEE3SECI—convert seconds to integers 464
 - CEE3SECS—convert timestamp to seconds 471
 - CEE3SETL—set locale operating environment 460, 478
 - CEE3SGL—signal a condition 484
 - CEE3SSLOG—calculate logarithm base e 542
 - CEE3STXF—transform string characters into collation weights 489
 - CEE3TEST—invoke a debug tool 496
- GOBACK statement
- RTEREUS run-time option and 67
- hardware conditions that cannot be enabled under 216
- options, mapping
- mapping STAE to TRAP 90
- reusability of an environment when COBOL is main 66
- run-time options specific to
- AIXBLD—invoke AMS 13, 14
 - CBLOPTS—specify format of argument string 20
 - CBLPSHPOP—control usage of CICS commands 20
 - CBLQDA—control QSAM dynamic allocation 21
 - CHECK—allow for checking errors 22
 - DEBUG—activate COBOL batch debugging 24
 - FLOW—control OS/VS COBOL FLOW output 36
 - RTEREUS—make first COBOL routine reusable 66
 - SIMVRD—specify VSAM KSDS 67
 - UPSI—set UPSI switches 92
- severity 0 and 1 conditions, ERRCOUNT run-time option and 31
- space management tuning table, using HEAP run-time option with 38
- STOP RUN statement 67
- tuning, with HEAP run-time option 38
- using VSAM KSDS to simulate variable length relative organization data sets 13

- COBOL (*continued*)
 - variables, where stored 36, 68, 71
- command
 - syntax diagrams 7
- command line
 - parsing of C arguments (ARGPARSE run-time option) 17
 - specifying whether C redirections are allowed from (REDIR run-time option) 62
 - specifying whether run-time options can be specified on (EXECOPS run-time option) 32
- commands_file parameter 82
- compatibility
 - CICS 20
- complex numbers
 - complex number math services
 - conjugate of complex (CEESxCJG) 512
 - floating complex divide (CEESxDVDF) 519
 - floating complex multiply (CEESxMLT) 529
 - imaginary part of complex (CEESxIMG) 523
- cond_rep parameter
 - CEECMI callable service and 233
 - CEEGQDT callable service and 341
 - CEESGL callable service and 482
- cond_str parameter 215
- cond_token parameter
 - CEEMGET callable service and 397
 - CEEMSG callable service and 427
 - CEENCOD callable service and 434
- condition
 - active
 - CEEGPID callable service and 334
 - dumping information related to 141
 - specifying how much information produced for 80
 - cause code 434
 - class code 434
 - enabled 481
 - getting name of routine that incurred condition (CEE3GRN) 159
 - examples of 161, 167
 - getting offset of condition 167
 - initial
 - allowing the handling of 25
 - returning initial condition token for (CEEITOK) 379
 - nested, allowing levels of 24
 - original 80
 - promoted 80
 - providing q_data_token for (in CEESGL)
 - examples of 484, 487
 - syntax description 481
 - safe conditions 482
 - severity
 - CEESGL callable service and 482
 - ERRCOUNT run-time option and 31
 - severity levels that cause the debug tool to gain control 81
 - tolerating a given number of 25

- condition handler
 - C signal handlers
 - CEEMRCR callable service and 414
 - CEESGL callable service and 482
 - HLL semantics
 - ABPERC run-time option and 12
 - TRAP run-time option and 91
 - Language Environment condition handler 90
 - PL/I ON-units
 - CEESGL callable service and 482
 - user-written
 - allowing nested conditions in 24
 - CEE3SPM callable service and 214
 - moving the resume cursor from a 414
 - registering with CEEHDLR 356
 - retrieving q_data_token 340
 - TRAP run-time option and 91
 - unregistering 367
 - vector facility and 94
- condition handling
 - callable services for
 - CEE3ABD—terminate enclave with an abend 117
 - CEE3GRN—get name of routine that incurred condition 159
 - CEE3GRO—get offset of condition 167
 - CEE3SPM—query and modify Language Environment hardware condition enablement 213
 - CEE3SRP—set resume point 221
 - CEEDCOD—decompose a condition token 273
 - CEEGPID—retrieve the Language Environment version and platform ID 334
 - CEEGQDT—retrieve q_data_token 340
 - CEEHDLR—register user condition handler 356
 - CEEHDLU—unregister user condition handler 366
 - CEEITOK—return initial condition token 379
 - CEEMRCE—move resume cursor explicit 408
 - CEEMRCR—move resume cursor relative to handle cursor 414
 - CEENCOD—construct a condition token 432
 - CEESGL—signal a condition 481
 - Quick Reference Tables 101, 102
 - CICS, under 20
 - depth of conditions allowed 24
 - dumps, handling of conditions that arise when processing 138
 - run-time options for
 - ABPERC 11
 - DEPTHCONDLMT 24
 - ERRCOUNT 31
 - TRAP 90
 - XUFLOW 97
 - signaling condition with CEESGL 481
 - user-written condition handler
 - allowing nested conditions in (DEPTHCONDLMT run-time option) 24
 - moving the resume cursor from a (CEEMRCR) 414
 - registering (CEEHDLR) 356

- condition handling (*continued*)
 - user-written condition handler (*continued*)
 - retrieving q_data token (CEEQDGT) 340
 - TRAP run-time option and 91
 - unregistering (CEEHDLU) 367
 - vector facility and 94
- condition information block
 - dumping information related to 141
 - returning initial condition token for (CEEITOK) 379
 - examples of 381, 385
- Condition Information Block (CIB) 122, 126
- condition token
 - altering (CEEDCOD) 273, 275
 - constructing (CEENCOD) 432
 - examples of 435, 438
 - decomposing (CEEDCOD) 273
 - dumping information associated with (CEE3DMP) 141
 - input to CEESGL, using as 482
 - message corresponding to, getting
 - get, format, and dispatch message (CEEMSG) 426, 431
 - get, format, and store message in a buffer (CEEMGET) 396, 403
 - q_data_token from the ISI, using to retrieve (CEEQDGT) 340
 - examples of 343, 350
 - returning initial condition token (CEEITOK) 379
 - examples of 381, 385
 - SCEESAMP files for 109
- condition_ID portion of condition token 434
- conjugate of complex math service (CEESxCJG) 512, 513
- constructing a condition token (CEENCOD) 432
- control portion of condition token 274, 433
- CONTROLLED storage for PL/I 36
- convert character format to Lilian date (CEEDAYS) 266
 - examples of 266
- convert Lilian date to character format (CEEDATE) 251
 - examples of 254, 258
- COPY statement, in COBOL 109
- cosine math service (CEESxCOS) 513
- cotangent math service (CEESxCTN) 517
- COUNTRY run-time option
 - defaults of country_code parameter 547
 - relationship to setlocale() 23
 - syntax 22
- country setting
 - default, querying with CEE3CTY callable service 131
 - default, setting with CEE3CTY callable service 131
- country_code
 - country codes defaults table 547
 - in CEE3MCS callable service 189
 - examples of 191, 193
 - in CEE3MDS callable service 193
 - examples of 195, 197
 - in CEE3MTS callable service 197
 - examples of 199, 201

- country_code (*continued*)
 - in CEEFMDA callable service 297
 - examples of 298, 300
 - in CEEFMDT callable service 300
 - examples of 302, 304
 - in CEEFMTM callable service 310
 - examples of 311, 313
 - nonexistent country_code, specifying a 23
 - parameter 547
 - popping country_code off stack with CEE3CTY 132
 - pushing prior country_code to top of stack with CEE3CTY 132
 - querying (CEE3CTY) 131
 - examples of 134, 137
 - setting
 - with CEE3CTY callable service 131, 137
 - with COUNTRY run-time option 22
- currency symbol
 - currency symbol defaults for a given country 547
 - default, obtaining with CEE3MCS callable service 189
 - examples of 191, 193
 - setting defaults for
 - with CEE3CTY callable service 131
 - with COUNTRY run-time option 22, 131

D

- data types
 - definitions of Language Environment and HLL data types 114
- data, external
 - relationship to ALL31 run-time option 15
- DATAFIELD built-in function, in CEE3DMP 142
- date and time
 - format
 - converting from character format to COBOL Lilian format (CEECLDY) 227, 266
 - converting from character format to Lilian format (CEEDAYS) 266
 - converting from integers to seconds (CEEISEC) 372
 - converting from Lilian format to character format (CEEDATE) 251
 - converting from seconds to character timestamp (CEEDATM) 258
 - converting from seconds to integers (CEESECI) 462
 - converting from timestamp to number of seconds (CEESECS) 467
 - default formats for given country 547
 - setting default country (CEE3CTY) 131
 - setting default country (COUNTRY run-time option) 22
 - getting date and time (CEELOCT) 392
- services
 - CEEDATE—convert Lilian date to character format 251
 - CEEDATM—convert seconds to character timestamp 258

date and time (*continued*)

- services (*continued*)
 - CEEDAYS—convert date to Lilian format 227, 266
 - CEEDYWK—calculate day of week from Lilian date 285
 - CEEGMT—get current Greenwich Mean Time 326
 - CEEGMTO—get offset from Greenwich Mean Time to local time 330
 - CEEISEC—convert integers to seconds 372
 - CEELOCT—get current local time 392
 - CEEQCEN—query the century window 439, 440
 - CEESCEN—set the century window 453
 - CEESECI—convert seconds to integers 462
 - CEESECS—convert timestamp to number of seconds 467
 - Quick Reference Tables 102
- day of week, calculating with CEEDYWK 285
- DB2
 - POSIX run-time option and 59
- DEBUG run-time option
 - syntax 24
- Debug Tool
 - CEETEST callable service, invoking with 494
 - giving control to with TEST run-time option 81
 - invoking with CEETEST callable service 494
 - TEST run-time option and 81
- debugging
 - COBOL batch 24
- decimal separator
 - default, obtaining with CEE3MDS callable service 193
 - for countries, defaults 547
 - setting defaults for with CEE3CTY callable service 22, 131
 - table of defaults for a given country_code 547
- DECIMAL-OVERFLOW condition 214, 215
- DEPTHCONDLMT run-time option
 - syntax 25
- disability 561
- dump
 - CEE3ABD callable service and
 - abend with clean-up can generate Language Environment dump 118, 123
 - abend without clean-up generates only system dump 118, 123
 - Language Environment dump, requesting
 - CEEDUMP default dump file 138, 141
 - examples of 144, 146
 - syntax description 138, 142
 - TEST compile-time option and 140
 - language written in 138
 - TERMTHDACT run-time option and 75
- dynamic storage
 - allocating
 - additional heap, setting size of 239
 - initial heap, setting size of 36, 47
 - callable services for
 - CEE3RPH—set report heading 210, 213

dynamic storage (*continued*)

- callable services for (*continued*)
 - CEE3RHP—create new additional heap 239, 244
 - CEE3ZST—reallocate heap storage 247
 - CEEDSHP—discard heap 280, 284
 - CEEFRST—free heap storage 313, 318
 - CEEGTST—get heap storage 351, 356
 - Quick Reference Tables 103
- initializing (STORAGE run-time option) 72
- DYNDUMP run-time option 26

E

enablement

- condition handling step
 - TRAP run-time option and 90

enabling exceptions

- CEE3SPM callable service and 213, 219
- CEESGL callable service and 481
- XUFLOW run-time option and 97

enclave

- return code of
 - obtaining current value of 146, 161, 167
 - setting new value of 161, 167, 220
- termination with abend
 - using CEE3ABD for 117

enclave return code 146, 161, 167

ENV run-time option

- syntax 28

ENVAR run-time option

- overriding 29
- POSIX run-time option and 29
- syntax 29

equal (=)

- in ENVAR run-time option 29

ERRCOUNT run-time option

- CEESGL and 482
- syntax 31

error function compliment math service (CEESxERC) 520

error function math service (CEESxERF) 520

ERRUNIT run-time option

- syntax 32

ESPIE 90

- TRAP run-time option and 90

ESTAE

- TRAP run-time option and 90

examples

- CEE3ABD—terminate enclave with an abend 120, 122, 124
- CEE3CTY—set default country 134, 137
- CEE3DMP—generate dump 144, 146
- CEE3GRC—get enclave return code 148, 158
- CEE3GRN—get name of routine that incurred condition 161, 167
- CEE3LNG—set national language 184, 188
- CEE3MCS—get default currency symbol 191, 193
- CEE3MDT—get default decimal separator 195, 197
- CEE3MTS—get default thousands separator 199, 201

examples (continued)

CEE3PRM—query parameter string 202, 204
 CEE3RPH—set report heading 211, 213
 CEE3SPM—query and modify Language Environment hardware condition enablement 217, 219
 CEE3SRC—set enclave return code 221
 CEE3USR—set or query user area fields 225, 227
 CEECM1—store and load message insert data 235, 238
 CEECRHP—create new additional heap 242, 244
 CEECZST—reallocate (change size of) storage 247, 250
 CEEDATE—convert Lilian date to character format 254, 258
 CEEDATM—convert seconds to character format 261, 266
 CEEDCOD—decompose a condition token 276, 279
 CEEDSHP—discard heap 282, 284
 CEEDYWK—calculate day of week from Lilian date 287, 290
 CEEFMDA—get default date format 298, 300
 CEEFMDT—get default date and time format 302, 304
 CEEFMON—format monetary string 307
 CEEFMTM—get default time format 311, 313
 CEEFRST—free heap storage with CEEGTST 316, 318
 CEEFTDS—format date and time into character string 323
 CEEGMT—get current GMT 328, 330
 CEEGMO—get offset from GMT 334
 CEEGPID—retrieve Language Environment version/platform ID 337, 340
 CEEGQDT—get q_data_token 343, 350
 CEEGTST—get heap storage 354, 356
 CEEHDLR—register user-written condition handler by itself 356 with CEE3GRC and CEE3SRC 148, 158
 CEEHDLU—unregister user-written condition handler with CEEHDLR 368, 371
 CEEISEC—convert integers to seconds 375, 378
 CEEITOK—return initial condition token 381, 385
 CEELCNV—query locale numeric conventions 390
 CEEOCT—get current local time 394
 CEEMGET—get a message 400, 403
 CEEMOUT—dispatch a message with CEEMGET 405
 CEEMRCR—move resume cursor with CEEHDLR and CEEHDLU 420, 425
 CEEMSG—get, format, and dispatch a message 428, 431
 CEENCOD—construct a condition token 438
 CEEQCEN—query century window 440, 442
 CEEQDTC—query locale, date, and time conventions 445
 CEEQRYL—query active locale environment 450
 CEEScen—set century window 455, 458
 CEESCOL—compare string collation weight 460
 CEESDLG1—calculate logarithm base 10 542

examples (continued)

CEESECI—convert seconds to integers 464, 467
 CEESECS—convert timestamp to number of seconds 471, 475
 CEESETL—set locale operating environment 478
 CEESGL—signal a condition 484, 487
 CEESIMOD—perform modular arithmetic 506
 CEESAT2—calculate arctangent of 2 arguments 543
 CEESLOG—calculate logarithm base e 507
 CEESTXF—transform string characters into collation weights 489
 CEETEST—invoke debug tool 496, 498 declares in COBOL and PL/I for Language Environment data types 114
 math services 506
 exceptions
 S/370 interrupt codes 216
 EXEC CICS command
 HANDLE ABEND
 CBLPSHPOP run-time option and 20
 HANDLE AID
 CBLPSHPOP run-time option and 20
 HANDLE CONDITION
 CBLPSHPOP run-time option and 20
 POP HANDLE
 CBLPSHPOP run-time option and 20
 PUSH HANDLE
 CBLPSHPOP run-time option and 20
 EXECOPS run-time option
 syntax 32
 exponent underflow 97, 214, 215
 exponential base e math service (CEESxEXP) 521
 exponentiation math service (CEESxXPx) 539
 external data
 relationship to ALL31 run-time option 15

F

facility ID
 CEENCOD callable service and 433
 IGZ severity 0 and 1 conditions and the ERRCOUNT run-time option 31
 feedback code
 FEEDBACK data type 114
 in callable services 114
 omitting 114
 FETCH statement for PL/I
 fetchable main
 CEE3DMP ENCLAVE considerations 142
 FILEDEF command for CMS
 SYSABEND PRINTER 118, 123
 SYSUDUMP PRINTER 118, 123
 FILEHIST run-time option
 syntax 33
 FILETAG run-time option 34
 fixed-overflow condition, in CEE3SPM 214, 215
 floating complex divide math service (CEESxDVD) 519
 floating complex multiply math service (CEESxMLT) 529

FLOW run-time option
syntax 36

G

gamma function math service (CEESxGMA) 523
general callable services
CEE3GRC—get enclave return code 146, 158
CEE3PRM—query parameter string 201, 204
CEE3SRC—set enclave return code 220, 221
CEE3USR—set or query user area fields 222, 227
CEERAN0—calculate uniform random numbers 450, 453
CEETEST—invoke debug tool 494, 499
Quick Reference Tables 103
GOBACK statement
RTEREUS run-time option and 67
Greenwich Mean Time (GMT)
as seed parameter of CEERAN0 callable service 450
getting offset to local time from (CEEGMT0) 330
examples of 333, 334
return Lilian date and Lilian seconds (CEEGMT) 326
examples of 328, 330
Gregorian character string
returning local time as a (CEELOCT) 392
examples of 394

H

HANDLE ABEND EXEC CICS command
CBLPSHPOP run-time option and 20
handle cursor
moving resume cursor relative to (CEEMRCR) 414
examples of 420
header files
leawi.h (C)
callable service declarations and 108
condition token structure and 434
HEAP run-time option
ALL31 run-time option and 14
CEECRHP and 240
different treatment under CICS 38
STORAGE run-time option and 72
syntax 36, 47
heap storage
allocating
from anywhere heap (ANYHEAP run-time option) 16, 17
from below heap (BELOWHEAP run-time option) 19, 20
from initial heap segment (CEEGTST) 352
of initial heap storage (HEAP run-time option) 36, 47
thread-level heap storage (THREADHEAP run-time option) 83
AMODE considerations of 15, 38
callable services for
CEE3RPH—set report heading 210
CEECRHP—create new additional heap 239

heap storage (*continued*)
callable services for (*continued*)
CEE3ZST—reallocate heap storage 245
CEEDSHP—discard heap 280
CEEFRST—free heap storage 313
CEEGTST—get heap storage 351
Quick Reference Tables 103
clearing after freeing, in STORAGE run-time option 72
discarding an entire heap (CEEDSHP) 280
examples of 282
freeing (CEEFRST) 313
getting (CEEGTST) 351
heap element, changing size of (CEE3ZST) 245
heap ID
heap ID 0 invalid in CEEDSHP 280
returned by CEECRHP 239
using to indicate which heap to discard, in CEEDSHP 280
using to receive storage from a given heap, in CEEGTST 351
heap increment
determining size of, with HEAP run-time option 37
HEAP run-time option and 36, 47
initial heap segment
determining size of (HEAP run-time option) 37
initializing (STORAGE run-time option) 72
managing allocation of (HEAP run-time option) 36, 47
types of variables stored in 36, 47
HEAP64 run-time option 38
HEAPOOLS64 run-time option 43
Heisei era 552
hyperbolic
math services
arctangent (CEESxATH) 510
cosine (CEESxCOSH) 515
sine (CEESxSNH) 535
tangent (CEESxTANH) 539
hyperbolic arctangent math service (CEESxATH) 510
hyperbolic cosine math service (CEESxCOSH) 515
hyperbolic sine math service (CEESxSNH) 535
hyperbolic tangent math service (CEESxTANH) 539

I

I/O
BELOWHEAP run-time option and 19
IGZ Facility ID
ERRCOUNT run-time option and 31
imaginary part of complex math service (CEESxIMG) 523, 524
IMS (Information Management System)
PLIST run-time option and 58
POSIX run-time option and 59, 88
specifying a C application is running under 28, 29
include statement, in C and PL/I 109
INFMSGFILTER run-time option 44
INFMSGFILTER—eliminates unwanted informational messages 44

- initial heap
 - allocating storage from (HEAP run-time option, CEEGTST) 36, 47, 352
 - restrictions against discarding 281
- initial heap segment
 - determining size of (HEAP run-time option) 36, 47
 - reallocating (changing size of) 244
- initializing storage
 - using options of CEECRHP callable service 240
 - using STORAGE run-time option 72, 74
- input/output
 - See I/O
- INQPCOPN run-time option
 - syntax 45
- insert data
 - Language Environment-generated 433
 - user-created
 - cannot use CEEMOUT callable service to create 404
 - storing and loading 232
- INSPREF preference file 83
- instance specific information (ISI)
 - CEEDCOD callable service and 274
 - creating, when building a condition token 433
 - insert data is part of 433
 - maintaining a number of 53
 - overwriting 233
 - retrieving q_data_token from (CEEQDTC) 340
 - examples of 343, 350
 - storing address of message insert data in 232
 - using CEESGL callable service to create 481, 482
 - examples of 484, 487
- integers
 - converting Lilian seconds to (CEESECI) 462
 - examples of 467
 - converting to Lilian seconds (CEEISEC) 373
 - examples of 375, 378
- INTERRUPT run-time option
 - debug tool and 46
 - syntax 46
 - TEST run-time option and 46
- intrinsic functions, compatibility with CEELOCT callable service 392
- invoking
 - Debug Tool
 - with CEETEST callable service 494, 499
 - with TEST run-time option 81
- IOHEAP64 run-time option 47

J

- Japanese
 - eras 552

K

- keyboard 561

L

- language-specific condition handlers, use with XUFLOW
 - run-time option 95
- leawi file, description of 109
- library
 - stack storage
 - specifying size of (LIBSTACK run-time option) 49
- LIBSTACK run-time option
 - syntax 49
- Lilian date
 - calculate day of week from (CEEDYWK) 285
 - convert date to (CEEDAYS) 227, 266
 - convert output_seconds to (CEEISEC) 373
 - convert to character format (CEEDATE) 251
 - get current local date or time as a (CEELOCT) 392
 - get GMT as a (CEEGMT) 326
 - using as input to CEESECI callable service 463
- local time
 - getting (CEELOCT) 392
- locale services
 - CEEFMON—format monetary string 304
 - CEEFTDS—format date and time into character string 319
 - CEELCNV—query locale numeric conventions 385
 - CEEQDTC—return locale date and time 442
 - CEEQRYL—query active locale environment 448
 - CEESCOL—compare string collation weight 458
 - CEESETL—set locale operating environment 475
 - CEESTXF—transform string character into collation weight 487
- log gamma math service (CEESxLGM) 525
- logarithm base 10 math service (CEESxLG1) 526
 - examples using 542
- logarithm base 2 math service (CEESxLG2) 527
- logarithm base e math service (CEESxLOG) 528
 - examples using 542
- logarithm routines
 - base 10 (CEESxLG1) 526
 - base 2 (CEESxLG2) 527
 - base e (CEESxLOG) 528
 - log gamma (CEESxLGM) 525
- LookAt message retrieval tool xix

M

- math services
 - absolute value (CEESxABS) 507
 - arccosine (CEESxACS) 508
 - arcsine (CEESxASN) 509
 - arctangent (CEESxATN) 511
 - arctangent2 (CEESxAT2) 512
 - conjugate of complex (CEESxCJG) 512
 - cosine (CEESxCOS) 513
 - cotangent (CEESxCTN) 516
 - error function (CEESxERF) 520
 - error function compliment (CEESxERC) 519
 - exponential base e (CEESxEXP) 521
 - exponentiation (CEESxXPx) 539
 - floating complex divide (CEESxDVD) 519
 - floating complex multiply (CEESxMLT) 529

- math services (*continued*)
 - gamma function (CEESxGMA) 522
 - hyperbolic arctangent (CEESxATH) 510
 - hyperbolic cosine (CEESxCSH) 515
 - hyperbolic sine (CEESxSNH) 535
 - hyperbolic tangent (CEESxTANH) 539
 - imaginary part of complex (CEESxIMG) 523
 - log gamma (CEESxLGM) 525
 - logarithm base 10 (CEESxLG1) 526
 - logarithm base 2 (CEESxLG2) 527
 - logarithm base e (CEESxLOG) 528
 - modular arithmetic (CEESxMOD) 529
 - nearest integer (CEESxNIN) 531
 - nearest whole number (CEESxNWN) 531
 - positive difference (CEESxDIM) 518
 - sine (CEESxSIN) 533
 - square root (CEESxSGT) 536
 - tangent (CEESxTAN) 537
 - transfer of sign (CEESxSGN) 532
 - truncation (CEESxINT) 524
- Meiji era 552
- message
 - get, format, and dispatch a message (CEEMSG) 426, 428, 431
 - get, format, and store message in a buffer(CEEMGET) 396, 403
 - obtaining 396, 426
 - truncated 397
- message file
 - pre-Language Environment options to Language Environment options 98
 - relationship to CBLQDA run-time option 21
- message handling
 - nested conditions and 53
 - quick reference of callable services for 105
- message retrieval tool, LookAt xix
- MinKow era 553
- modular arithmetic math service (CEESxMOD) 530
 - examples using 542
- MSGFILE run-time option
 - different treatment under CICS 52
 - RPTOPTS options report and 50
 - RPTSTG storage report and 50
- MSGQ run-time option
 - relationship to Instance Specific Information (ISIs) 53
 - syntax 53
- MTF (Multitasking Facility)
 - allocating heap storage under (HEAP run-time option) 38
- multithreading
 - RPTSTG run-time option and 64

N

- national language
 - querying (CEE3LNG) 181
 - setting (NATLANG run-time option, CEE3LNG) 54, 181
- national language support (NLS)
 - default values for a specified country 547

- national language support (NLS) (*continued*)
 - quick reference of callable services for 104, 105
 - specifying national language (NATLANG run-time option) 54
- NATLANG run-time option
 - default of 54
 - syntax 54
- natural log math service (CEESxLOG) 528
- nearest integer math service (CEESxNIN) 531
- nearest whole number math service (CEESxNWN) 532
- nested condition
 - getting name of routine that incurred a condition (CEE3GRN) 159
 - limiting (DEPTHCONDLMT run-time option) 24
 - MSGQ run-time options and 53
- Notices 563

O

- OCSTATUS run-time option
 - syntax 55
- offset of condition, getting (CEE3GRO) 167, 169, 222
- omitted parameter
 - how C indicates omission 111
- ONCHAR built-in function, in CEE3DMP 142
- ONCOUNT built-in function, in CEE3DMP 142
- ONFILE built-in function, in CEE3DMP 142
- ONKEY built-in function, in CEE3DMP 142
- ONSOURCE built-in function, in CEE3DMP 142
- options report, generating (RPTOPTS run-time option) 63
- osplist macro 202, 205
- OSRUN command for CMS
 - PLIST run-time option and 57
- out-of-storage condition 72, 73

P

- parameter
 - list 439
 - querying 201
 - list format
 - PLIST run-time option and 57
- PC run-time option
 - syntax 56
- perror() function 52
- picture string
 - defaults 547
 - tables of valid 256, 258
- PL/I
 - built-in functions
 - DATAFIELD 142
 - ONCHAR 142
 - ONCOUNT 142
 - ONFILE 142
 - ONKEY 142
 - ONSOURCE 142
 - callable services, invoking from 107, 117
 - CEE3DMP callable service considerations
 - built-in function information dumped 142
 - traceback information 140

PL/I (continued)

CEE3DMP callable service considerations
(continued)
variables 140

CEE3RPH callable service equivalent to
PLIXHD 210

CEEHDLR callable service not allowed with 358

CEEHDLU callable service not allowed with 358

CEESGL callable service restriction 481

ERRCOUNT run-time option consideration 32

examples

- CEE3ABD—terminate enclave with an
abend 121, 125
- CEE3CTY—set default country 136
- CEE3DMP—generate dump 145
- CEE3GRC—get enclave return code 157
- CEE3GRN—get name of routine that incurred
condition 166
- CEE3LNG—set national language 186
- CEE3MCS—get default currency symbol 192
- CEE3MDS—get default decimal separator 196
- CEE3MTS—get default thousands separator 200
- CEE3PRM—query parameter string 203, 208
- CEE3SPM—query and modify Language
Environment hardware condition
enablement 218
- CEE3SRC—set enclave return code 157
- CEE3USR—set or query user area fields 226
- CEECMI—store and load message insert
data 237
- CEECRHP—create new additional heap 243
- CEEZST—reallocate (change size of)
storage 249
- CEEDATE—convert Lilian date to character
format 256
- CEEDATM—convert seconds to character
timestamp 264
- CEEDAYS—convert date to Lilian format 271
- CEEDCOD—decompose a condition token 278
- CEEDSHP—discard heap 284
- CEEDYWK—calculate day of week from Lilian
date 289
- CEEFMDA—get default date format 299
- CEEFMDT—get default date and time
format 303
- CEEFMON—format monetary string 308
- CEEFMTM—get default time format 312
- CEEFRST—free heap storage 318
- CEEFTDS—format date and time into character
string 324
- CEEGMT—get current Greenwich Mean
Time 329
- CEEGMTO—get offset from Greenwich Mean
Time to local time 334
- CEEGQDT—get q_data_token 346
- CEEGTST—get heap storage 318
- CEEISEC—convert integers to seconds 377
- CEEITOK—return initial condition token 384
- CEELCNV—query locale numeric
conventions 391
- CEELOCT—get current local time 395

PL/I (continued)

examples (continued)

- CEEMGET—get a message 402
- CEEMOUT—dispatch a message 406
- CEEMSG—get, format, and dispatch a
message 430
- CEENCOD—construct a condition token 437
- CEEQCEN—query century window 441
- CEEQDTC—return locale date and time 446
- CEEQRYL—query active locale environment 450
- CEESCEN—set century window 457
- CEESCOL—compare string collation weight 461
- CEESECI—convert seconds to integers 466
- CEESECS—convert timestamp to number of
seconds 474
- CEESETL—set locale operating
environment 479
- CEESGL—signal a condition 486
- CEESTXF—transform string characters into
collation weights 490
- CEESxLOG—calculate log base e 543
- CEESxMOD—perform modular arithmetic 543

fetchable main

- CEE3DMP ENCLAVE considerations 142

information produced after return from ERROR or
FINISH ON-unit 75

INTERRUPT option and 46

mapping pre-Language Environment run-time options
to Language Environment run-time options 98

mapping SPIE to TRAP 90

MSGFILE run-time option and SYSPRINT 52

MTF (Multitasking Facility)

- allocating heap storage under (HEAP run-time
option) 38
- controlling number of tasks (PLITASKCOUNT
run-time option) 80

omitting fc parameter 112

ON-units

- ZERODIVIDE 157

semantics require exponent underflow be
signaled 98

variables, where stored 36

XUFLOW run-time option considerations 98

PLIST run-time option

- CICS ignores this option 58
- syntax 58

PLITASKCOUNT—control the maximum number of
active tasks

- syntax 58

POP function

- using to change the current country setting, in
CEE3CTY 132
- using to change the current national language
setting, in CEE3LNG 181, 182
- using to query or modify the enablement of hardware
conditions, in CEE3SPM 215

positive difference math service (CEESxDIM) 518

POSIX run-time option

- ANSI C routines and 59, 89
- service routine vector in PIPI interface and 59, 89
- syntax 89

- previously allocated storage, changing size of (CEE3CZST) 245
 - examples of 247, 250
- program interrupts
 - CEE3SPM and 213
 - math services and 524, 530
 - table of S/370 interrupt codes 216
 - TRAP run-time option and 90
 - XUFLOW run-time option and 97
- program mask 214
- PRTUNIT run-time option
 - syntax 60
- PUNUNIT run-time option
 - syntax 61
- PUSH function
 - using to change the current country setting, in CEE3CTY 132
 - using to change the current national language, in CEE3LNG 181, 182
 - using to query or modify the enablement of hardware conditions, in CEE3SPM 215

Q

- q_data_token, in CEESGL
 - creating 482
 - retrieving from the ISI (CEEGQDT) 340
- QUERY function
 - using to check the current country setting, in CEE3CTY 132
 - using to check the current national language, in CEE3LNG 182
 - using to check the enablement of hardware conditions, in CEE3SPM 214
- Quick Reference Tables 3

R

- random numbers
 - generation of (CEERAN0) 450
- RDRUNIT run-time option
 - syntax 61
- reason code
 - CEE3DMP callable service and 142
 - dumps and 142
- RECPAD run-time option
 - syntax 62
- REDIR run-time option
 - syntax description 62
- redirections
 - of stderr, stdout and stdin output 52, 62
 - REDIR run-time option and 62
- register
 - save area, as component of dsa_alloc_value 73
- report
 - generating options report (RPTOPTS run-time option) 63
- resume
 - cursor
 - moving (CEEMRCR) 414
 - setting resume point (CEE3SRP) 221

- reusability of an environment 66
- routine that incurred condition, getting (CEE3GRN) 159, 161, 167
- RPTOPTS run-time option
 - relationship to MSGFILE run-time option 63
 - sample options report generated by 64
 - syntax 64
- RPTSTG run-time option
 - CEE3TST and 352
 - storage report generated by
 - setting heading for 210
- RTEREUS run-time option
 - CICS ignores this option 67
 - syntax 66
- run-time options
 - ABPERC—percolate an abend 11
 - AIXBLD—invoke AMS for COBOL 13
 - ALL31—indicate whether application runs in AMODE(31) 14
 - ANYHEAP—control unrestricted library heap storage 16
 - ARGPARSE—specify whether arguments are parsed 17
 - AUTOTASK—specify whether Fortran MTF is to be used 18
 - BELOWHEAP—control library heap storage below 16M 19
 - CBLOPTS—specify format of COBOL argument 20
 - CBLPSPHPOP—control CICS commands 20
 - CBLQDA—control COBOL QSAM 21
 - CHECK—detect checking errors 22
 - COUNTRY—specify default date/time formats 22
 - DEBUG—activate COBOL batch debugging 24
 - DEPTHCONDLMT—limit extent of nested conditions 24
 - ENV—specify operating environment for C application 29
 - ERRCOUNT—specify number of errors allowed 31
 - ERRUNIT—specify unit number to which error information is directed 32
 - EXECOPS—let run-time options be specified on command line 32
 - FILEHIST—specify whether to allow a file definition to be changed at run time 33
 - FILETAG—specify whether to allow AUTOTAG / AUTOCVT. 34
 - FLOW—control FLOW output for OS/VS COBOL 36
 - HEAP—control allocation of heaps 36, 47
 - HEAP64 — controls allocation of user heap storage 38
 - HEAPOOLS64 — controls optional user heap storage management algorithm 43
 - INQPCOPN—control value in OPENED specifier of INQUIRE by unit statement 45
 - INTERRUPT—cause attentions to be recognized by Language Environment 46
 - IOHEAP64 — controls allocation of I/O heap storage 47
 - LIBSTACK—control library stack storage 49
 - MSGQ—specify number of ISI blocks allocated 53

run-time options (*continued*)

NATLANG—specify national language 54
OCSTATUS—control checking of file existence and whether file deletion occurs 55
PC—control whether Fortran status common blocks are shared among load modules 56
PLIST—specify format of C arguments 58
PLITASKCOUNT—control the maximum number of active tasks 58
PRTUNIT—specifies unit number used for PRINT and WRITE statements 60
PUNUNIT—specifies unit number used for PUNCH statements 61
Quick Reference Tables 3, 5, 7
RDRUNIT—specifies unit number used for READ statements 61
RECPAD—specifies whether a formatted input record is padded with blanks 62
REDIR—specify redirections for C output 62
report of options specified
 generating heading for 210
 language report is written in 54, 63, 64
 not generated if application abends 64
 sample of 64
RPTOPTS—generate a report of run-time options used 63
RTEREUS—initialize a reusable COBOL environment 66
SIMVRD—specify VSAM KSDS for COBOL 67
STACK—allocate stack storage 68, 71
STORAGE—control storage 72
TERMTHDACT—specify type of information generated with unhandled error 74
TEST—indicate debug tool to gain control 81
TRACE—activate Language Environment run-time library tracing 88
TRAP—handle abends and program interrupts 90
UPSI—set UPSI switches 92
USRHDLR—register a user condition handler at stack frame 0 93
VCTRSAVE—use vector facility 94
XUFLOW—specify program interrupt due to exponent underflow 97

S

safe condition 482
SCEESAMP sample library
 declaration files in 109
sending product messages to a file (CEEMSG) 426
 examples of 428, 431
sending user-defined message string to file (CEEMOUT) 403
 examples of 405, 407
SET function
 changing the COUNTRY setting with 132
 changing the enablement of hardware conditions with 214
 changing the national language with 181

severity
 of a condition
 CEESGL and 482
 ERRCOUNT run-time option and 31
 severity levels that cause the debug tool to gain control 81
shortcut keys 561
Showa era 552
SIGNIFICANCE condition 214, 215
SIMVRD run-time option
 syntax 67
sine math service (CEESxSIN) 534
slash (/)
 NOEXECOPS alters behavior of 32
 specifying in parameters of TEST run-time option 82
SPIE run-time option 90
square root math service (CEESxSQT) 537
SSRANGE option for VS COBOL II 22
stack
 frame
 CEE3DMP callable service and 141
 library, allocating (LIBSTACK run-time option) 49
 storage
 ALL31 run-time option and 14
 allocating (STACK run-time option) 68, 71
 initializing (STACK run-time option) 72
 RPTSTG run-time option and 65
 setting initial stack segment (STACK run-time option) 68, 71
 threads and 65
 user, allocating (STACK run-time option) 68, 71
STACK run-time option
 syntax 68, 71
 using with RPTSTG to tune the stack 65
STAE
 C options 90
 VS COBOL II options 90
stderr
 MSGFILE run-time option and 52
 REDIR run-time option and 62
 redirecting output from 62
stdin 62
 MSGFILE run-time option and 62
 REDIR run-time option and 62
 redirecting output from 62
stdout 62
 MSGFILE run-time option and 62
 REDIR run-time option and 62
 redirecting output from 62
storage
 additional heaps, creating new (CEECRHP) 239
 discarding an entire heap (CEEDSHP) 280
 freeing
 clearing after freeing (STORAGE run-time option) 72
 discarding an entire heap (CEEDSHP) 280, 284
 freeing additional heap (CEEFRST) 313, 318
 getting
 heap storage (CEEGTST) 351
 initializing (STORAGE run-time option) 72

storage (*continued*)

options for

- ANYHEAP—control library heap 16
- BELOWHEAP—control library heap below 16M 19
- HEAP—control initial heap 36, 47
- LIBSTACK—control library stack storage 49
- STACK—control thread stack storage 68, 71
- STORAGE—control initial heap or stack 72

report

- language written in 54, 63, 64
- not generated if application abends 65
- setting heading for 210
- STACK run-time option and 65

services

- CEE3RPH—set report heading 210
- CEECRHP—create new additional heap 239
- CEECZST—reallocate (change size of) storage 245
- CEEDSHP—discard heap 280
- CEEFRST—free heap storage 314
- CEEGTST—get heap storage 351

thread-level heap, controlling (THREADHEAP run-time option) 83

tuning

- additional heap, setting size of (CEECRHP) 239
- anywhere heap, setting size of (ANYHEAP) 16
- below heap, setting size of (BELOWHEAP) 19
- initial heap, setting size of (HEAP) 36, 47
- initial stack segment, setting size of (STACK) 68, 71
- library stack storage, setting size of (LIBSTACK) 49
- with CEEGTST 351
- with STORAGE run-time option 72

STORAGE run-time option

- CEECZST callable service and 245
- CEEFRST callable service and 314
- syntax 72

straight double quote (")

- initializing storage with 72, 74
- specifying in parameters of TEST run-time option 82, 83

straight single quote (')

- initializing storage with 72, 74
- specifying in parameters of TEST run-time option 82, 83

symbol

- table, generated by CEE3DMP 140

syntax diagrams

- how to read 7

SYSABEND PRINTER 118, 123

SYSOUT

- default destinations of MSGFILE run-time option 51

SYSUDUMP PRINTER 118, 123

T

Taisho era 552

Taiwan era 553

tangent math service (CEESxTAN) 538

task

- controlling number of tasks under MTF (PLITASKCOUNT option) 80

termination

- enclave CEE3ABD and 117

termination imminent step

- TERMTHDACT run-time option and 80

TERMTHDACT run-time option

- CEE3DMP and 80
- CESE transient data queue and 80
- different treatment under CICS 80

TEST compile-time option 140

TEST run-time option

- syntax 81

thousands separator

- obtaining default of (CEE3CTY) 131
- setting defaults for (COUNTRY) 22

thread

- multiple storage report for (RPTSTG run-time option) 65

THREADHEAP—control the allocation of thread-level

heap storage

- syntax 83

time, getting local (CEELOCT) 392

timestamp 258, 467

TRACE run-time option

- syntax 88

trace, generating a 75

transfer of sign math service (CEESxSGN) 533

TRAP run-time option

- ABPERC run-time option and 11
- syntax 90

truncation math service (CEESxINT) 525

U

UNDERFLOW condition 97, 214, 215

UPSI run-time option

- syntax 92

USE FOR DEBUGGING declarative 24

user

- area fields 220, 222, 224
- heap (initial heap)
 - allocating storage from 36, 47, 352
 - restrictions against discarding 281
- stack, controlling (STACK run-time option) 65

user-written condition handler

- CEE3SPM callable service and 214
- CEEMRCR callable service and 414
- registering with CEEHDLR callable service 356
- unregistering 367
- VCTRSVE run-time option and 94

USRHDLR run-time option

- syntax 93

V

valid condition 481

VCTRSVE run-time option

- syntax 94

vector facility 94

VSAM

 KSDS 13, 67

 RRDS 13

W

WITH DEBUGGING MODE clause for COBOL 24

X

XPLINK run-time option 95

 XPLink 95

XUFLOW run-time option

 syntax 97

Readers' Comments — We'd Like to Hear from You

**z/OS
Language Environment
Programming Reference**

Publication No. SA22-7562-08

Overall, how satisfied are you with the information in this book?

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction	☐	☐	☐	☐	☐

How satisfied are you that the information in this book is:

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate	☐	☐	☐	☐	☐
Complete	☐	☐	☐	☐	☐
Easy to find	☐	☐	☐	☐	☐
Easy to understand	☐	☐	☐	☐	☐
Well organized	☐	☐	☐	☐	☐
Applicable to your tasks	☐	☐	☐	☐	☐

Please tell us how we can improve this book:

Thank you for your responses. May we contact you? ☐ Yes ☐ No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you state on this form.

Name

Address

Company or Organization

Phone No.



Cut or Fold
Along Line

Fold and Tape

Please do not staple

Fold and Tape




NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation
Department 55JA, Mail Station P384
2455 South Road
Poughkeepsie, NY
12601-5400



Fold and Tape

Please do not staple

Fold and Tape

Cut or Fold
Along Line



Program Number: 5694-A01, 5655-G52

Printed in USA

SA22-7562-08

