

CICS Transaction Server for z/OS
Version 5 Release 3



Application Programming Reference

CICS Transaction Server for z/OS
Version 5 Release 3



Application Programming Reference

Note

Before using this information and the product it supports, read the information in "Notices" on page 969.

This edition applies to the IBM CICS Transaction Server for z/OS Version 5 Release 3 (product number 5655-Y04) and to all subsequent releases and modifications until otherwise indicated in new editions.

© **Copyright IBM Corporation 1989, 2015.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

| | |
|--------------------------------------------------|------------|
| What this manual is about | vii |
| Who should read this manual | vii |
| What you need to know to understand this manual | vii |
| How to use this manual | vii |
| What this manual does not cover | vii |
| Location of topics in the Knowledge Center . . . | viii |

| | |
|---------------------------------------|-----------|
| Notes on terminology | ix |
|---------------------------------------|-----------|

| | |
|-----------------------------------------------------------------------------------|-----------|
| Changes in CICS Transaction Server for z/OS, Version 5 Release 3 | xi |
|-----------------------------------------------------------------------------------|-----------|

| | |
|-----------------------------------------------|----------|
| About the CICS API commands | 1 |
| CICS API command format | 1 |
| CICS command syntax notation | 2 |
| CICS command argument values | 4 |
| CICS command restrictions | 11 |
| LENGTH options in CICS commands. | 11 |
| NOHANDLE option | 11 |
| RESP and RESP2 options | 11 |
| Translated code for CICS commands | 12 |
| COBOL translation output | 13 |
| C translation output | 13 |
| PL/I translation output | 13 |
| Assembler translation output | 14 |
| CICS-value data areas (cvdas) | 16 |
| CICS threadsafe commands in the API | 17 |
| Threadsafe commands. | 17 |

| | |
|----------------------------------------|-----------|
| CICS command summary. | 23 |
| ABEND | 32 |
| ACQUIRE | 34 |
| ADD SUBEVENT | 37 |
| ADDRESS | 39 |
| ADDRESS SET | 41 |
| ALLOCATE (APPC) | 42 |
| ALLOCATE (LUTYPE6.1). | 46 |
| ALLOCATE (MRO). | 48 |
| ASKTIME | 50 |
| ASSIGN | 51 |
| BIF DEEDIT | 67 |
| BIF DIGEST | 69 |
| BUILD ATTACH (LUTYPE6.1) | 71 |
| BUILD ATTACH (MRO) | 74 |
| CANCEL | 77 |
| CANCEL (BTS) | 79 |
| CHANGE PHRASE. | 82 |
| CHANGE PASSWORD | 84 |
| CHANGE TASK. | 86 |
| CHECK ACQPROCESS | 87 |
| CHECK ACTIVITY | 89 |
| CHECK TIMER | 92 |
| CONNECT PROCESS | 94 |
| CONVERSE (default) | 97 |

| | |
|------------------------------------------------|-----|
| CONVERSE (APPC) | 98 |
| CONVERSE (LUTYPE2/LUTYPE3) | 99 |
| CONVERSE (LUTYPE4). | 100 |
| CONVERSE (LUTYPE6.1) | 101 |
| CONVERSE (SCS). | 102 |
| CONVERSE (3270 logical) | 103 |
| CONVERSE (3600-3601) | 104 |
| CONVERSE (3600-3614). | 105 |
| CONVERSE (3650 interpreter). | 106 |
| CONVERSE (3650-3270). | 107 |
| CONVERSE (3650-3653). | 108 |
| CONVERSE (3650-3680). | 109 |
| CONVERSE (3767). | 110 |
| CONVERSE (3770). | 111 |
| CONVERSE (3790 full-function or inquiry) . . . | 112 |
| CONVERSE (3790 3270-display) | 113 |
| CONVERSE: z/OS Communications Server options | 114 |
| CONVERSE (non-z/OS Communications Server | |
| default) | 119 |
| CONVERSE (MRO) | 120 |
| CONVERSE (2260) | 121 |
| CONVERSE: non-z/OS Communications Server | |
| options | 122 |
| CONVERTTIME | 127 |
| DEFINE ACTIVITY | 129 |
| DEFINE COMPOSITE EVENT. | 132 |
| DEFINE COUNTER and DEFINE DCOUNTER . . . | 134 |
| DEFINE INPUT EVENT. | 138 |
| DEFINE PROCESS | 139 |
| DEFINE TIMER | 142 |
| DELAY | 145 |
| DELETE | 148 |
| DELETE ACTIVITY | 156 |
| DELETE CHANNEL | 158 |
| DELETE CONTAINER (BTS) | 160 |
| DELETE CONTAINER (CHANNEL) | 162 |
| DELETE COUNTER and DELETE DCOUNTER . . . | 163 |
| DELETE EVENT | 165 |
| DELETE TIMER | 166 |
| DELETEQ TD | 167 |
| DELETEQ TS | 169 |
| DEQ | 171 |
| DOCUMENT CREATE | 173 |
| DOCUMENT DELETE | 177 |
| DOCUMENT INSERT | 178 |
| DOCUMENT RETRIEVE | 182 |
| DOCUMENT SET | 184 |
| DUMP TRANSACTION. | 187 |
| ENDBR | 192 |
| ENDBROWSE ACTIVITY | 195 |
| ENDBROWSE CONTAINER | 196 |
| ENDBROWSE EVENT | 197 |
| ENDBROWSE PROCESS | 198 |
| ENQ | 199 |
| ENTER TRACENUM. | 202 |
| EXTRACT ATTACH (LUTYPE6.1) | 204 |

| | | | |
|----------------------------------------|-----|---------------------------------------------------|-----|
| EXTRACT ATTACH (MRO) | 208 | ISSUE ENDFILE | 355 |
| EXTRACT ATTRIBUTES (APPC) | 212 | ISSUE ENDOUTPUT | 356 |
| EXTRACT ATTRIBUTES (MRO) | 214 | ISSUE EODS | 357 |
| EXTRACT CERTIFICATE | 216 | ISSUE ERASE | 358 |
| EXTRACT LOGONMSG. | 219 | ISSUE ERASEAUP | 360 |
| EXTRACT PROCESS | 221 | ISSUE ERROR | 362 |
| EXTRACT TCPIP | 223 | ISSUE LOAD | 364 |
| EXTRACT TCT | 227 | ISSUE NOTE | 365 |
| EXTRACT WEB | 228 | ISSUE PASS | 367 |
| FORCE TIMER | 233 | ISSUE PREPARE | 369 |
| FORMATIME | 234 | ISSUE PRINT | 371 |
| FREE | 239 | ISSUE QUERY | 372 |
| FREE (APPC) | 240 | ISSUE RECEIVE | 374 |
| FREE (LUTYPE6.1) | 242 | ISSUE REPLACE | 376 |
| FREE (MRO) | 243 | ISSUE RESET | 379 |
| FREEMAIN | 245 | ISSUE SEND | 380 |
| FREEMAIN64 | 248 | ISSUE SIGNAL (APPC) | 383 |
| GDS ALLOCATE | 250 | ISSUE SIGNAL (LUTYPE6.1) | 385 |
| GDS ASSIGN | 253 | ISSUE WAIT. | 386 |
| GDS CONNECT PROCESS. | 254 | JOURNAL | 388 |
| GDS EXTRACT ATTRIBUTES | 257 | LINK | 389 |
| GDS EXTRACT PROCESS | 259 | LINK ACQPROCESS. | 398 |
| GDS FREE | 261 | LINK ACTIVITY | 401 |
| GDS ISSUE ABEND | 263 | LOAD | 405 |
| GDS ISSUE CONFIRMATION. | 265 | MONITOR | 408 |
| GDS ISSUE ERROR | 267 | MOVE CONTAINER (BTS) | 411 |
| GDS ISSUE PREPARE | 269 | MOVE CONTAINER (CHANNEL) | 414 |
| GDS ISSUE SIGNAL | 271 | POINT | 417 |
| GDS RECEIVE | 273 | POP HANDLE | 418 |
| GDS SEND | 276 | POST | 419 |
| GDS WAIT | 279 | PURGE MESSAGE | 423 |
| GET CONTAINER (BTS) | 281 | PUSH HANDLE | 424 |
| GET CONTAINER (CHANNEL) | 284 | PUT CONTAINER (BTS) | 425 |
| GET COUNTER and GET DCOUNTER | 289 | PUT CONTAINER (CHANNEL) | 428 |
| GETMAIN | 294 | PUT64 CONTAINER | 432 |
| GETMAIN64 | 299 | QUERY CHANNEL | 436 |
| GETNEXT ACTIVITY | 303 | QUERY COUNTER and QUERY DCOUNTER | 437 |
| GETNEXT CONTAINER | 305 | QUERY SECURITY | 440 |
| GETNEXT EVENT | 306 | READ | 444 |
| GETNEXT PROCESS | 308 | READNEXT | 456 |
| GET64 CONTAINER | 309 | READPREV | 467 |
| HANDLE ABEND. | 314 | READQ TD | 477 |
| HANDLE AID | 316 | READQ TS | 481 |
| HANDLE CONDITION | 318 | RECEIVE (z/OS Communications Server default) | 485 |
| IGNORE CONDITION | 320 | RECEIVE (APPC) | 486 |
| INQUIRE ACTIVITYID | 321 | RECEIVE (LUTYPE2/LUTYPE3) | 487 |
| INQUIRE CONTAINER | 324 | RECEIVE (LUTYPE4) | 488 |
| INQUIRE EVENT | 326 | RECEIVE (LUTYPE6.1) | 489 |
| INQUIRE PROCESS | 328 | RECEIVE (3270 logical) | 490 |
| INQUIRE TIMER | 329 | RECEIVE (3600 pipeline) | 491 |
| INVOKE APPLICATION | 331 | RECEIVE (3600-3601) | 492 |
| INVOKE SERVICE | 335 | RECEIVE (3600-3614) | 493 |
| INVOKE WEBSERVICE | 340 | RECEIVE (3650) | 494 |
| ISSUE ABEND | 341 | RECEIVE (3767) | 495 |
| ISSUE ABORT | 343 | RECEIVE (3770) | 496 |
| ISSUE ADD | 345 | RECEIVE (3790 full-function or inquiry) | 497 |
| ISSUE CONFIRMATION | 347 | RECEIVE: z/OS Communications Server options | 498 |
| ISSUE COPY (3270 logical) | 349 | RECEIVE (non-z/OS Communications Server | |
| ISSUE DISCONNECT (default) | 350 | default) | 502 |
| ISSUE DISCONNECT (LUTYPE6.1) | 352 | RECEIVE (MRO) | 503 |
| ISSUE END | 353 | RECEIVE (2260) | 504 |

| | | | |
|--------------------------------------------------------------|-----|--------------------------------------|-----|
| RECEIVE (2980) | 505 | SOAPFAULT CREATE | 650 |
| RECEIVE (3790 3270-display) | 508 | SOAPFAULT DELETE | 654 |
| RECEIVE: non-z/OS Communications Server options | 509 | SPOOLCLOSE | 655 |
| RECEIVE MAP | 513 | SPOOLOPEN INPUT | 657 |
| RECEIVE MAP MAPPINGDEV | 517 | SPOOLOPEN OUTPUT | 660 |
| RECEIVE PARTN | 520 | SPOOLREAD | 665 |
| RELEASE | 523 | SPOOLWRITE | 668 |
| REMOVE SUBEVENT | 525 | START | 671 |
| REQUEST PASSTICKET | 526 | START ATTACH | 682 |
| RESET ACQPROCESS | 528 | START BREXIT | 684 |
| RESET ACTIVITY | 530 | START CHANNEL | 687 |
| RESETBR | 532 | STARTBR | 692 |
| RESUME | 537 | STARTBROWSE ACTIVITY | 699 |
| RETRIEVE | 539 | STARTBROWSE CONTAINER | 701 |
| RETRIEVE REATTACH EVENT | 543 | STARTBROWSE EVENT | 703 |
| RETRIEVE SUBEVENT | 545 | STARTBROWSE PROCESS | 705 |
| RETURN | 547 | SUSPEND | 707 |
| REWIND COUNTER and REWIND DOUNTER | 551 | SUSPEND (BTS) | 708 |
| REWRITE | 554 | SYNCPOINT | 710 |
| ROUTE | 559 | SYNCPOINT ROLLBACK | 711 |
| RUN | 563 | TEST EVENT | 713 |
| SEND (z/OS Communications Server default) .. | 568 | TRANSFORM DATATOXML | 714 |
| SEND (APPC) | 569 | TRANSFORM XMLTODATA | 717 |
| SEND (LUTYPE2/LUTYPE3) | 570 | UNLOCK | 721 |
| SEND (LUTYPE4) | 571 | UPDATE COUNTER and UPDATE DOUNTER | 725 |
| SEND (LUTYPE6.1) | 572 | VERIFY PASSWORD | 728 |
| SEND (SCS) | 573 | VERIFY PHRASE | 732 |
| SEND (3270 logical) | 574 | VERIFY TOKEN | 736 |
| SEND (3600 pipeline) | 575 | WAIT CONVID (APPC) | 739 |
| SEND (3600-3601) | 576 | WAIT EVENT | 741 |
| SEND (3600-3614) | 577 | WAIT EXTERNAL | 743 |
| SEND (3650 interpreter) | 578 | WAIT JOURNALNAME | 746 |
| SEND (3650-3270) | 579 | WAIT JOURNALNUM | 748 |
| SEND (3650-3653) | 580 | WAIT SIGNAL | 749 |
| SEND (3650-3680) | 581 | WAIT TERMINAL | 750 |
| SEND (3767) | 582 | WAITCICS | 752 |
| SEND (3770) | 583 | WEB CLOSE | 754 |
| SEND (3790 full-function or inquiry) | 584 | WEB CONVERSE | 757 |
| SEND (3790 SCS) | 585 | WEB ENDBROWSE FORMFIELD | 771 |
| SEND (3790 3270-display) | 586 | WEB ENDBROWSE HTTPHEADER | 772 |
| SEND (3790 3270-printer) | 587 | WEB ENDBROWSE QUERYPARM | 773 |
| SEND: z/OS Communications Server options .. | 588 | WEB EXTRACT | 774 |
| SEND (non-z/OS Communications Server default) | 592 | WEB OPEN | 779 |
| SEND (MRO) | 593 | WEB PARSE URL | 785 |
| SEND (2260) | 594 | WEB READ FORMFIELD | 788 |
| SEND (2980) | 595 | WEB READ HTTPHEADER | 791 |
| SEND: non-z/OS Communications Server options | 596 | WEB READ QUERYPARM | 793 |
| SEND CONTROL | 600 | WEB READNEXT FORMFIELD | 795 |
| SEND MAP | 605 | WEB READNEXT HTTPHEADER | 797 |
| SEND MAP MAPPINGDEV | 613 | WEB READNEXT QUERYPARM | 799 |
| SEND PAGE | 616 | WEB RECEIVE (Server) | 801 |
| SEND PARTNSET | 620 | WEB RECEIVE (Client) | 808 |
| SEND TEXT | 621 | WEB RETRIEVE | 815 |
| SEND TEXT MAPPED | 628 | WEB SEND (Server) | 817 |
| SEND TEXT NOEDIT | 630 | WEB SEND (Client) | 825 |
| SIGNAL EVENT | 634 | WEB STARTBROWSE FORMFIELD | 836 |
| SIGNOFF | 636 | WEB STARTBROWSE HTTPHEADER | 838 |
| SIGNON | 637 | WEB STARTBROWSE QUERYPARM | 839 |
| SIGNON TOKEN | 642 | WEB WRITE HTTPHEADER | 841 |
| SOAPFAULT ADD | 647 | WRITE | 844 |
| | | WRITE JOURNALNAME | 852 |

| | |
|-----------------------------|-----|
| WRITE JOURNALNUM | 856 |
| WRITE OPERATOR | 857 |
| WRITEQ TD. | 860 |
| WRITEQ TS. | 863 |
| WSACONTEXT BUILD | 868 |
| WSACONTEXT DELETE | 873 |
| WSACONTEXT GET | 874 |
| WSAEPR CREATE | 879 |
| XCTL | 882 |

| | |
|----------------------------------------------------------|------------|
| Appendix A. EXEC interface block fields | 887 |
|----------------------------------------------------------|------------|

| | |
|-------------------------------------------------------|------------|
| Appendix B. Codes returned by ASSIGN | 907 |
| ASSIGN TERMCODE | 907 |
| ASSIGN FCI. | 908 |

| | |
|--------------------------------------------|------------|
| Appendix C. National language codes | 909 |
|--------------------------------------------|------------|

| | |
|----------------------------------------------------------------|------------|
| Appendix D. Terminal control | 911 |
| Commands and options for terminals and logical units | 911 |
| Teletypewriter programming | 913 |
| Display device operations | 914 |
| Print displayed information (ISSUE PRINT) .. | 914 |
| Copy displayed information (ISSUE COPY) .. | 915 |
| Erase all unprotected fields (ISSUE ERASEAUP) | 915 |
| Handle input without data (RECEIVE) | 916 |

| | |
|------------------------------------------|------------|
| Appendix E. SAA Resource Recovery | 917 |
|------------------------------------------|------------|

| | |
|-----------------------------------------------------------------------------------------------|------------|
| Appendix F. Common Programming Interface Communications (CPI Communications) | 919 |
|-----------------------------------------------------------------------------------------------|------------|

| | |
|--------------------------------------------------------------------|------------|
| Appendix G. Exception conditions for LINK command | 921 |
|--------------------------------------------------------------------|------------|

| | |
|------------------------------------------------------------------------|------------|
| Appendix H. BMS-related constants | 925 |
| Magnetic slot reader (MSR) control value constants, DFHMSRCA | 928 |

| | |
|--------------------------------------------------|-----|
| MSR control byte values. | 928 |
| Attention identifier constants, DFHAID | 929 |

| | |
|-----------------------------------------|------------|
| Appendix I. BMS macros | 931 |
|-----------------------------------------|------------|

| | |
|----------------------------------------------|-----|
| Map set, map, and field definition | 931 |
| Partition set definition | 932 |
| Field groups. | 932 |
| DFHMDF | 934 |
| DFHMDI. | 946 |
| DFHMSD. | 955 |
| DFHPDI | 966 |
| DFHPSD | 968 |

| | |
|--------------------------|------------|
| Notices | 969 |
| Trademarks | 971 |

| | |
|------------------------------------------------------------------|------------|
| Bibliography. | 973 |
| CICS books for CICS Transaction Server for z/OS | 973 |
| CICSplex SM books for CICS Transaction Server for z/OS | 974 |
| Other CICS publications. | 975 |
| Other IBM publications | 976 |

| | |
|-------------------------------|------------|
| Accessibility. | 977 |
|-------------------------------|------------|

| | |
|------------------------|------------|
| Index | 979 |
|------------------------|------------|

What this manual is about

This manual documents intended Programming Interfaces that allow the customer to write programs to obtain the services of IBM® CICS® Transaction Server Version 5 Release 3.

This manual describes the CICS Transaction Server for z/OS®, Version 5 Release 3 EXEC application programming interface. It contains *reference* information needed to prepare COBOL, C, PL/I, and assembler-language application programs, using EXEC CICS commands, to be executed under CICS. Guidance information is in the *CICS Application Programming Guide*. For information about debugging CICS applications, see the *CICS Problem Determination Guide*.

Who should read this manual

The manual is intended primarily for use by application programmers, but will also be useful to system programmers and systems analysts.

What you need to know to understand this manual

We assume that you have some experience in writing programs in COBOL, C, PL/I, or S370 assembler language. The *CICS Application Programming Primer* and the *CICS Application Programming Guide* will help you to design and write CICS applications using the commands described in this manual.

How to use this manual

This manual is for reference. Each of the commands has a standard format, as follows:

- The syntax of the command
- A description of what the command does
- An alphabetical list of the options and their functions
- An alphabetical list of conditions, and their causes, that can occur during execution of a command.

What this manual does not cover

The EXEC CICS commands for system programming; that is COLLECT, CREATE, DISABLE, ENABLE, INQUIRE, PERFORM, RESYNC, and SET are not covered in this book. You will find them in the *CICS System Programming Reference*.

The EXEC CICS FEPI commands available for use with the CICS Front End Programming Interface feature are not discussed in this book, but in the *CICS Front End Programming Interface User's Guide*.

The CICS C++ OO programming interface is not described in this book. It is defined in the *CICS C++ OO Class Libraries* manual.

The CICS Java™ programming interface is not described here, it is defined in Javadoc HTML provided in the CICS Information Center.

Location of topics in the Knowledge Center

The topics in this publication can also be found in the CICS Transaction Server for z/OS Knowledge Center. The Knowledge Center uses content types to structure how the information is displayed.

The Knowledge Center content types are generally task-oriented, for example: upgrading, configuring, and installing. Other content types include reference, overview, and scenario or tutorial-based information. The following mapping shows the relationship between topics in this publication and the Knowledge Center content types, with links to the external Knowledge Center:

Table 1. Mapping of PDF topics to Knowledge Center content types. This table lists the relationship between topics in the PDF and topics in the content types in the Knowledge Center

| Set of topics in this publication | Location in the Knowledge Center |
|-----------------------------------|------------------------------------------------|
| All content | Application development reference in Reference |

Notes on terminology

- **CICS** refers to IBM CICS Transaction Server for z/OS, Version 5 Release 3
- **VTAM**[®] refers to IBM ACF/VTAM
- **IMS**[™] refers to IBM IMS
- **TCAM** refers to the DCB interface of ACF/TCAM.

Changes in CICS Transaction Server for z/OS, Version 5 Release 3

For information about changes that have been made in this release, please refer to *What's New* in the Knowledge Center, or the following publications:

- *CICS Transaction Server for z/OS What's New*
- *CICS Transaction Server for z/OS Upgrading to CICS TS Version 5.3*

Any technical changes that are made to the text after release are indicated by a vertical bar (|) to the left of each new or changed line of information.

About the CICS API commands

General information which applies to all the CICS API commands.

CICS API command format

The general format of a CICS command is EXECUTE CICS (or EXEC CICS) followed by the name of the required **command**, and possibly by one or more **options**.

The command format is as follows:

```
EXEC CICS command option(arg)....
```

where:

command

describes the operation required (for example, READ).

option describes any of the many optional facilities available with each function. Some options are followed by an argument in parentheses. You can write options (including those that require arguments) in any order.

arg (**short for argument**) is a value such as “data-value” or “name”. A “data-value” can be a constant, this means that an argument that sends data to CICS is generally a “data-value”. An argument that receives data from CICS must be a “data-area”.

Some arguments described as “data-area” can both send and receive data. In these cases, you must ensure that the “data-area” is not in protected storage.

An example of a CICS command is as follows:

```
EXEC CICS READ
      FILE('FILEA')
      INTO(FILEA)
      RIDFLD(KEYNUM)
      UPDATE
```

You must add the appropriate end-of-command delimiter; see “CICS command syntax notation” on page 2.

Note: If you want to add comments against CICS commands, you can do this, in assembler only, by using a period or a comma as a delimiter after the last argument. For example:

```
EXEC CICS ADDRESS EIB(MYUEIB),      @F1A
```

If a period or a comma is used with an EXEC CICS command, the following line must begin between column 2 and column 16, with the continuation character in column 72. The following line cannot start after column 17. If there is no comma or






period added, the following line must begin at or after column 2 and end by column 71, with the continuation character in column 72.


CICS command syntax notation

In CICS documentation, CICS commands are presented in a standard way. You interpret the syntax by following the arrows from left to right.

The “EXEC CICS” that always precedes each command’s keyword is not included; nor is the “END-EXEC” statement used in COBOL or the semicolon (;) used in PL/I and C that you must code at the end of each CICS command. In the C language, a null character can be used as an end-of-string marker, but CICS does not recognize this; you must therefore never have a comma or period followed by a space (X'40') in the middle of a coding line.

The conventions are:

| Symbol | Action |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
|  | A set of alternatives—one of which you <i>must</i> code. |
|  | A set of alternatives—one of which you <i>must</i> code. You <i>may</i> code more than one of them, in any sequence. |
|  | A set of alternatives—one of which you <i>may</i> code. |
|  | A set of alternatives — any number (including none) of which you may code once, in any sequence. |
|  | Alternatives where A is the default. |

| Symbol | Action |
|-----------------------------------------------------------------------------------|---------------------------------------------------------|
|  | Use with the named section in place of its name. |
| Punctuation and uppercase characters | Code exactly as shown. |
| Lowercase characters | Code your own text, as appropriate (for example, name). |

CICS command argument values

The data associated with a command option is called its *argument*. Each type of argument can contain different data types; some arguments return information from CICS to the program and others are set by the program.

Options in a CICS command can take the following argument values:

- *data-value*
- *data-area*
- *cvda* (CICS-value data area)
- *ptr-value*
- *ptr-ref*
- *name*
- *filename*
- *systemname*
- *label*
- *hmmss*

For AMODE(64) programs only, options in a CICS command can also take the following argument values:

- *data-area64*
- *ptr-value64*
- *ptr-ref64*

Data areas and data values

Data areas and data values are the basic argument types. The difference between them is the direction in which information flows when a task executes a command. A *data-value* is always, can only be, a sender; it conveys data to CICS that CICS uses to process the command. A *data-area* is a receiver; CICS uses it to return information to the caller. A *data-area* can also be a sender, for example when the data to convey to CICS is variable length (as in FROM), or where a field is used both for input and output.

COBOL argument values

The argument values can be replaced as follows:

- *data-value* can be replaced by any COBOL data name of the correct data type for the argument, or by a constant that can be converted to the correct type for the argument. The following table shows how to define the correct data type:

| Data type | COBOL definition |
|-----------------------------------|---------------------------------------------------------|
| Halfword binary | PIC S9(4) COMP |
| Fullword binary | PIC S9(8) COMP |
| Doubleword <i>unsigned</i> binary | PIC 9(18) COMP |
| Character string | PIC X(<i>n</i>) where <i>n</i> is the number of bytes |
| UTF-8 character string | PIC X(<i>n</i>) where <i>n</i> is the number of bytes |

- *data-area* can be replaced by any COBOL data name of the correct data type for the argument. The following table shows how to define the correct data type:

| Data type | COBOL definition |
|-----------------------------------|---------------------------------------------------------|
| Halfword binary | PIC S9(4) COMP |
| Fullword binary | PIC S9(8) COMP |
| Doubleword <i>unsigned</i> binary | PIC 9(18) COMP |
| Character string | PIC X(<i>n</i>) where <i>n</i> is the number of bytes |
| UTF-8 character string | PIC X(<i>n</i>) where <i>n</i> is the number of bytes |

Where the data type is unspecified, *data-area* can refer to an elementary or group item.

- *cvda* is described in “CICS-value data areas (cvdas)” on page 16.
- *ptr-value* can be replaced by a pointer variable or ADDRESS special register.
- *ptr-ref* can be replaced by a pointer variable or ADDRESS special register.
- *name* can be replaced by either of the following values:
 - A character string specified as an alphanumeric literal. If this string is shorter than the required length, it is padded with blanks.
 - A COBOL data area with a length equal to the required length for the name. The value in *data-area* is the name to be used by the argument. If *data-area* is shorter than the required length, the excess characters are undefined, which might cause unpredictable results.

filename, as used in FILE(*filename*), specifies the name of the file. The name must contain 1–8 characters from the range A–Z, 0–9, \$, @, and #.

systemname, as used in SYSID(*systemname*), specifies the name of the system to which the request is directed. The name must contain 1–4 characters from the range A–Z, 0–9, \$, @, and #.

- *label* can be replaced by any COBOL paragraph name or a section name.
- *hhmmss* can be replaced by a decimal constant or by a data name of the form PIC S9(7) COMP-3. The value must be of the form 0HHMMSS+ where:

HH Represents hours from 00 through 99.

MM Represents minutes from 00 through 59.

SS Represents seconds from 00 through 59.

In COBOL, you do not need to code the LENGTH option unless you want the program to read or write data of a length that is different from that of the referenced variable.

C argument values

The argument values can be replaced as follows:

- *data-value* can be replaced by any C expression that can be converted to the correct data type for the argument. The following table shows how to define the correct data type:

| Data type | C definition |
|------------------------|--------------------------------------------------------|
| Halfword binary | short int |
| Fullword binary | long int |
| Doubleword binary | char[8] |
| Character string | char[<i>n</i>] where <i>n</i> is the number of bytes |
| UTF-8 character string | char[<i>n</i>] where <i>n</i> is the number of bytes |

data-value includes *data-area* as a subset.

- *data-area* can be replaced by any C data reference that has the correct data type for the argument. The following table shows how to define the correct data type:

| Data type | C definition |
|------------------------|--------------------------------------------------------|
| Halfword binary | short int |
| Fullword binary | long int |
| Doubleword binary | char[8] |
| Character string | char[<i>n</i>] where <i>n</i> is the number of bytes |
| UTF-8 character string | char[<i>n</i>] where <i>n</i> is the number of bytes |

If the data type is unspecified, *data-area* can refer to a scalar data type, array, or structure. The reference must be to contiguous storage.

- *cvda* is described in “CICS-value data areas (cvdas)” on page 16.
- *ptr-value* (which includes *ptr-ref* as a subset) can be replaced by any C expression that can be converted to an address.
- *ptr-ref* can be replaced by any C pointer type reference.
- *name* can be replaced by either of the following values:
 - A character string in double quotation marks (that is, a literal constant).
 - A C expression or reference whose value can be converted to a character array with a length equal to the maximum length allowed for the name. The value of the character array is the name to be used by the argument.

filename, as used in FILE(*filename*), specifies the name of the file. The name must have 1–8 characters from the range A–Z, 0–9, \$, @, and #.

systemname, as used in SYSID(*systemname*), specifies the name of the system to which the request is directed. The name must have 1–4 characters from the range A–Z, 0–9, \$, @, and #.

- *label* is not supported in the C language.
- *hmmss* can be replaced by an integer constant; otherwise the application is responsible for ensuring that the value passed to CICS is in packed decimal format. The language does not provide a packed decimal type.

HH Represents hours from 00 through 99.

MM Represents minutes from 00 through 59.

SS Represents seconds from 00 through 59.

Many commands involve the transfer of data between the application program and CICS. In most cases, if SET is used, the LENGTH option must be specified; the syntax of each command and its associated options show whether this rule applies.

PL/I argument values

The argument values can be replaced as follows:

- *data-value* can be replaced by any PL/I expression that can be converted to the correct data type for the argument. The following table shows how to define the correct data type:

| Data type | PL/I definition |
|-----------------|-----------------|
| Halfword binary | FIXED BIN(15) |

| Data type | PL/I definition |
|------------------------|--------------------------------------------------------|
| Fullword binary | FIXED BIN(31) |
| Doubleword binary | CHAR (8) |
| Character string | CHAR(<i>n</i>) where <i>n</i> is the number of bytes |
| UTF-8 character string | CHAR(<i>n</i>) where <i>n</i> is the number of bytes |

data-value includes *data-area* as a subset.

- *data-area* can be replaced by any PL/I data reference that has the correct data type for the argument. The following table shows how to define the correct data type:

| Data type | PL/I definition |
|------------------------|--------------------------------------------------------|
| Halfword binary | FIXED BIN(15) |
| Fullword binary | FIXED BIN(31) |
| Doubleword binary | CHAR (8) |
| Character string | CHAR(<i>n</i>) where <i>n</i> is the number of bytes |
| UTF-8 character string | CHAR(<i>n</i>) where <i>n</i> is the number of bytes |

If the data type is unspecified, *data-area* can refer to an element, array, or structure; for example, FROM(P->STRUCTURE) LENGTH(LNG). The reference must be to connected storage.

The data area must also have the correct PL/I alignment attribute: ALIGNED for binary items, and UNALIGNED for strings.

If you use a varying data string without an explicit length, the data passed begins with a two-byte length field, and its length is the maximum length declared for the string. If you explicitly specify a length in the command, the data passed has this length; that is, the two-byte length field followed by data up to the length you specified.

- *cvda* is described in “CICS-value data areas (cvdas)” on page 16.
- *ptr-value* (which includes *ptr-refas* as a subset) can be replaced by any PL/I expression that can be converted to POINTER.
- *ptr-ref* can be replaced by any PL/I reference of type POINTER ALIGNED.
- *name* can be replaced by either of the following values:
 - A character string in single quotation marks (that is, a literal constant).
 - A PL/I expression or reference whose value can be converted to a character string with a length equal to the maximum length allowed for the name. The value of the character string is the name to be used by the argument.

filename, as used in FILE(*filename*), specifies the name of the file. The name must have 1-8 characters from the range A–Z, 0–9, \$, @, and #.

systemname, as used in SYSID(*systemname*), specifies the name of the system to which the request is directed. The name must have 1-4 characters from the range A–Z, 0–9, \$, @, and #.

- *label* can be replaced by any PL/I expression whose value is a label.
- *hhmmss* can be replaced by a decimal constant or an expression that can be converted to a FIXED DECIMAL(7,0). The value must be of the form 0HHMMSS+ where:

HH Represents hours from 00 through 99.

MM Represents minutes from 00 through 59.

SS Represents seconds from 00 through 59.

If the UNALIGNED attribute is added to the ENTRY declarations generated by the CICS translator by a DEFAULT DESCRIPTORS statement, data-area or pointer-reference arguments to CICS commands must also be UNALIGNED. Similarly for the ALIGNED attribute, data-area or pointer-reference arguments must be ALIGNED.

Many commands involve the transfer of data between the application program and CICS. In most cases, the length of the data to be transferred must be provided by the application program. However, if a data area is specified as the source or target, it is not necessary to provide the length explicitly, because the command-language translator generates a default length value of either STG(data-area) or CSTG(data-area), as appropriate.

Assembler-language argument values for AMODE(24) and AMODE(31) programs

In general, an argument can be either the address of the data or the data itself (in assembler language terms, either a relocatable expression or an absolute expression).

A relocatable expression must not contain unmatched brackets (outside quotation marks) or unmatched quotation marks (apart from length-attribute references). If this rule is obeyed, any expression can be used, including literal constants, such as =AL2(100), forms such as 20(0,R11), and forms that use the macro-replacement facilities.

An absolute expression must be a single term that is either a length-attribute reference, or a self-defining constant.

Use care with equated symbols, which should be used only when referring to registers (pointer references). For example, if an equated symbol is used for a length, it is treated as the address of the length and an unpredictable error occurs.

For AMODE(24) and AMODE(31) assembler language programs, the argument values can be replaced as follows:

- *data-value* can be replaced by a relocatable expression that is an assembler-language reference to data of the correct type for the argument, or by a constant of the correct type for the argument.
- *data-area* can be replaced by a relocatable expression that is an assembler-language reference to data of the correct type for the argument.
- *cvda* is described in “CICS-value data areas (cvdas)” on page 16.
- *ptr-value* can be replaced by an absolute expression that is an assembler-language reference to a register.
- *ptr-ref* can be replaced by an absolute expression that is an assembler-language reference to a register.
- *name* can be replaced either by a character string in single quotation marks, or by an assembler-language language relocatable expression reference to a character string. The length is equal to the maximum length allowed for the name. The value of the character string is the name to be used by the argument. *filename*, as used in FILE(*filename*), specifies the name of the file. The name must have 1–8 characters from the range A–Z, 0–9, \$, @, and #.

systemname, as used in `SYSID(systemname)`, specifies the name of the system to which the request is directed. The name must have 1–4 characters from the range A–Z, 0–9, \$, @, and #.

- *label* refers to a destination address to which control is transferred. It can be replaced by the label of the destination instruction or by the label of an address constant for the destination. This constant must not specify a length.

You can also use the expression `=A(dest)` where *dest* is a relocatable expression denoting the destination.

For example, the following commands are equivalent:

```
HANDLE CONDITION ERROR(DEST)
HANDLE CONDITION ERROR(ADCON)
HANDLE CONDITION ERROR(=A(DEST))
:
DEST BR 14
ADCON DC A(DEST)
```

- *hhmmss* can be replaced by a self-defining decimal constant, or an assembler-language reference to a field defined as PL4. The value must be of the form 0HHMMSS+ where:

HH Represents hours from 00 through 99

MM Represents minutes from 00 through 59

SS Represents seconds from 00 through 59

Many commands involve the transfer of data between the application program and CICS. In most cases, the application program must provide the length of the data to be transferred. However, if a data area is specified as the source or target, it is not necessary to provide the length explicitly, because the command-language translator generates a default length. For example:

```
xxx DC CL8
.
.
EXEC CICS ... LENGTH(L'xxx)
```

Assembler-language argument values for AMODE(64) programs

In general, an argument can be either the address of the data or the data itself (in assembler language terms, either a relocatable expression or an absolute expression).

A relocatable expression must not contain unmatched brackets (outside quotation marks) or unmatched quotation marks (apart from length-attribute references). If this rule is obeyed, any expression can be used, including literal constants, such as `=AL2(100)`, forms such as `20(0,R11)`, and forms that use the macro-replacement facilities.

An absolute expression must be a single term that is either a length-attribute reference, or a self-defining constant.

Use care with equated symbols, which should be used only when referring to registers (pointer references). For example, if an equated symbol is used for a length, it is treated as the address of the length and an unpredictable error occurs.

For non-Language Environment® (LE) AMODE(64) assembler language programs, argument values can be replaced as follows:

- *data-value* can be replaced by a relocatable expression that is an assembler-language reference to data of the correct type for the argument, or by a constant of the correct type for the argument.
- *data-area* can be replaced by a relocatable expression that is an assembler-language reference to data of the correct type for the argument.
- *data-area64* can be replaced by a relocatable expression that is an assembler-language 64-bit reference to data of the correct type for the argument.
- *cvda* is described in “CICS-value data areas (cvdas)” on page 16.
- *ptr-value* can be replaced by an absolute expression that is an assembler-language reference to a register.
- *ptr-value64* can be replaced by an absolute expression that is an assembler-language 64-bit reference to a register.
- *ptr-ref* can be replaced by an absolute expression that is an assembler-language reference to a register.
- *ptr-ref64* can be replaced by an absolute expression that is an assembler-language 64-bit reference to a register.
- *name* can be replaced either by a character string in single quotation marks, or by an assembler-language language relocatable expression reference to a character string. The length is equal to the maximum length allowed for the name. The value of the character string is the name to be used by the argument.
filename, as used in FILE(*filename*), specifies the name of the file. The name must have 1–8 characters from the range A–Z, 0–9, \$, @, and #.
systemname, as used in SYSID(*systemname*), specifies the name of the system to which the request is directed. The name must have 1–4 characters from the range A–Z, 0–9, \$, @, and #.
- *hhmmss* can be replaced by a self-defining decimal constant, or an assembler-language reference to a field defined as PL4. The value must be of the form 0HHMMSS+ where:

HH Represents hours from 00 through 99

MM Represents minutes from 00 through 59

SS Represents seconds from 00 through 59

label is not supported for AMODE(64) programs.

Many commands involve the transfer of data between the application program and CICS. In most cases, the application program must provide the length of the data to be transferred. However, if a data area is specified as the source or target, it is not necessary to provide the length explicitly, because the command-language translator generates a default length. For example:


```
xxx DC CL8  
.  
.  
EXEC CICS ... LENGTH(L'xxx)
```

CICS command restrictions

Some general restrictions apply to all CICS commands that access user data.

- The program must be in primary addressing mode when invoking any CICS service. The primary address space must be the home address space. All parameters passed to CICS must reside in the primary address space.
- If your program uses access registers, CICS preserves only access registers 2 through 13, because CICS code can use access registers 0, 1, 14 and 15 for z/OS macro calls.

LENGTH options in CICS commands

In COBOL, PL/I, and Assembler language, the translator defaults certain lengths, if the NOLENGTH translator option is not specified. This means they are optional in programs that specify data areas. In C, all LENGTH options must be specified.

When a CICS command offers the LENGTH option, it is expressed as a signed halfword binary value. This puts a theoretical upper limit of 32 763 bytes on LENGTH. In practice, depending on issues of recoverability, function shipping, and other factors, assume a 24 KB limit.

This advisory 24 KB limit does not apply to the FLENGTH option on CICS commands (except for terminal-related **SEND** and **RECEIVE** commands, because of architectural limitations). The FLENGTH option is used on commands that relate to containers and journals, among others.

For temporary storage, transient data, and file control commands, the data set definitions themselves might impose further restrictions.

NOHANDLE option

Use the NOHANDLE option with any command to specify that you want no action to be taken for any condition or AID resulting from the execution of that command.

For further information about the NOHANDLE option, see the *CICS Application Programming Guide*.

Using the C or C++ language implies NOHANDLE on all commands.

RESP and RESP2 options

You can use the RESP option with any command to test whether a condition was raised during its execution. With some commands, when a condition can be raised for more than one reason, if you have already specified RESP, you can use the RESP2 option to determine exactly why a condition occurred.

RESP(*xxx*)

xxx is a user-defined fullword binary data area. On return from the command, it contains a value that corresponds to the condition that might be raised, or to a normal return, that is, *xxx*=DFHRESP(NORMAL). You can test this value by means of DFHRESP, as follows:

```
EXEC CICS WRITEQ TS FROM(abc)
      QUEUE(qname)
      NOSUSPEND
      RESP(xxx)
      RESP2(yyy)
      .
      .
IF xxx=DFHRESP(NOSPACE) THEN ...
```

This form of DFHRESP applies to both COBOL and PL/I.

The following example is a similar test in C:

```
switch (xxx) {
  case DFHRESP(NORMAL) : break;
  case DFHRESP(INVREQ) : Invreq_Cond();
                        break;
  default               : Errors();
}
```

The following example is a similar test in assembler language:

```
CLC   xxx,DFHRESP(NOSPACE)
```

The translator changes this code to:

```
CLC   xxx,=F'18'
```

Because the use of RESP implies NOHANDLE, use care when you use RESP with the RECEIVE command. NOHANDLE overrides both the HANDLE AID and the HANDLE CONDITION command, with the result that PF key responses are ignored.

RESP2(*yyy*)

yyy is a user-defined fullword binary data area. On return from the command, it contains a value that further qualifies the response to certain commands. Unlike the RESP values, RESP2 values have no associated symbolic names and there is no translator built-in function that corresponds to DFHRESP, so you must test the fullword binary value itself.

Translated code for CICS commands

Application programs can be written in COBOL, C, PL/I, or assembler language, and contain CICS commands. CICS translates these programs and creates an equivalent source program where each command is now translated into a call macro or statement in the language of the original source program.

COBOL translation output

EXEC CICS commands are converted to calls to the CICS interface DFHEI1.

The following example shows how the EXEC statement:
is translated to:

```
EXEC CICS RETURN TRANSID('fred')  
      COMMAREA(mycommarea) END-EXEC.
```

```
Move length of mycommarea to dfhb0020  
Call 'DFHEI1' using by content  
      x'0e08e0000700001000f0f0f2f7404040'  
      by content 'fred' by reference mycommarea  
      by reference dfhb0020 end-call.
```

Copybook DFHEIBLC

This new copybook is a lower case version of the existing DFHEIBLK copybook.

A difference is that in DFHEIBLK the top level name is

```
01 EIBLK.
```

whereas in DFHEIBLC the top level name is

```
01 dfheiblk.
```

This is consistent with the name generated by the translator today, and also conforms to the rule that CICS reserved words should start with DFH.

C translation output

For a C application program, each command is replaced by reassignment statements followed by a dfhexec statement that passes the parameters.

PL/I translation output

For a PL/I application program, each command is always replaced by a DO statement, a declaration of a generated entry name, a CALL statement, and an END statement. The ENTRY declaration ensures that the appropriate conversions for argument values take place.

If a PL/I on-unit consists of a single EXEC CICS command, the command should be inside a BEGIN block, for example:

```
ON ERROR BEGIN;  
  EXEC CICS RETURN;  
END;
```

In a similar way, if an EXEC CICS command is associated with a PL/I condition prefix, the command should be inside a BEGIN block, for example:

```
(NOZERODIVIDE): BEGIN;  
EXEC CICS GETMAIN  
SET(ptr-ref)  
LENGTH(data-value);  
END;
```

If OPTIONS(MAIN) is specified, the translator modifies the parameter list by inserting the EIB structure pointer as the first parameter. If OPTIONS(MAIN) is not specified (that is, if the program is to be link-edited to the main module), the parameter list is not modified, and it is the application programmer's responsibility to address the EIB structure in the link-edited program if access to it is required. In either case, where a program commences with a valid PL/I PROCEDURE statement, the translator inserts the declaration of the EIB structure.

Assembler translation output

The invocation of a CICS assembler language application program obeys system standards.

On entry to the application program, registers 1, 15, 14, and 13 contain the following addresses:

- Register 1 contains the address of the parameter list. This list has at least two entries:
 - Address of the EIB (EXEC interface block)
 - Address of the COMMAREA; if no COMMAREA, entry is X'00000000'
- Register 15 contains the address of the entry point.
- Register 14 contains the address of the return point.
- Register 13 contains the address of the save area.

All other registers are undefined.

DFHECALL macro

For an assembler language application program, when the CICS translator detects a CICS command, each command is replaced by an invocation of the DFHECALL macro. The DFHECALL macro sets up the command parameters and calls the initial CICS command processor to handle the command.

This macro expands to a system-standard call sequence that uses registers 15, 14, 0, and 1. The contents of these registers are as follows:

- Register 15 contains the address of the entry point in the EXEC interface program.
- Register 14 contains the address of the return point in your application program.
- Register 0 is undefined.
- Register 1 contains the address of the parameter list.

The entry point held in register 15 is resolved in the EXEC interface processor that must be link-edited with your application program. For AMODE(24) and AMODE(31) applications, this EXEC interface processor is DFHEAI; for AMODE(64) applications, it is DFHEAG.

You can specify the exit from the application program by an EXEC CICS RETURN command in your source program. Alternatively, you can use the DFHEIRET macro, which restores the registers and returns control to the address in register 14. The translator inserts the DFHEIRET macro, with no parameters specified, immediately before the END statement, unless you specify the NOEPILOG translator option. You can use this macro to return from a top-level program, but is not advisable from a lower-level program.

During assembly, the DFHECALL macro builds an argument list in dynamic storage, so that the application program is reentrant. Then the macro invokes the EXEC interface program DFHEIP for AMODE(24) or AMODE(31) applications, or DFHEIG for AMODE(64) applications. These programs also obey system standards, as previously described.

For AMODE(64) applications, although the application and the initial command processor run in 64-bit addressing mode, the parameters that the DFHECALL macro sets up and passes to the initial command processor contain 31-bit addresses. Therefore, the storage in which the call parameters are built, the DFHEISTG storage, must be 31-bit storage (above 16 MB but below 2 GB).

In addition to the invocation of the DFHECALL macro, the translator also inserts the following macros into your source program:

DFHEIGBL

This macro sets globals if you are using EXEC DLI in either a batch or an online CICS application program. Within DFHEIGBL, if DFHEIDL is set to 1, this means that the program contains EXEC DLI commands. If DFHEIDB is set to 1, this means that the program is batch DL/I. If you are not using DL/I, it is commented and set to 0.

DFHEIENT

This macro is inserted after the first CSECT or START instruction. It performs prolog code to allocate working storage to hold any user variables and for CICS use:

- It saves registers
- It gets an initial allocation of the storage that is defined by DFHEISTG
- It sets up a base register (default register 3)
- It sets up a dynamic storage register (default register 13)
- It sets up a register to address the EIB (default register 11)

DFHEIRET

This macro performs epilog code to release the working storage of the application program:

- It restores registers.
DFHEIRET RCREG=nn, where *nn* (any register number other than 13) contains the return code to be placed in register 15 after the registers are restored.
- It returns control to the address in register 14.

DFHEISTG and DFHEIEND

These macros define dynamic storage:

- They define the storage required for the parameter list
- They define a save area.

For further details about these macros with AMODE(64) applications, see Coding the EXEC CICS(r) assembler interface.

A copybook, DFHEIBLK, that contains a DSECT that describes the EIB, is also included automatically.

The program must have an END statement because the translator does not otherwise insert the default macros. Also CSECT or START and END must be in uppercase for the translator to recognize them.

The example in Figure 1 shows a simple assembler language application program that uses the BMS command SEND MAP to send a map to a terminal, followed by the output after program INSTRUCT is translated.

Source program

```
INSTRUCT CSECT
        EXEC CICS SEND MAP('DFH$AGA') MAPONLY ERASE
        END
```

This source program is translated to:

```
          DFHEIGBL ,           INSERTED BY TRANSLATOR
INSTRUCT CSECT
          DFHEIENT             INSERTED BY TRANSLATOR
*      EXEC CICS SEND MAP('DFH$AGA') MAPONLY ERASE
          DFHECALL =X'1804C00008000000000046204000020',
              (CHA7,=CL7'DFH$AGA*'),(____RF,DFHEIV00)
          DFHEIRET             INSERTED BY TRANSLATOR
          DFHEISTG             INSERTED BY TRANSLATOR
          DFHEIEND             INSERTED BY TRANSLATOR
          END
```

Figure 1. Source program and translated code for a CICS command

CICS-value data areas (cvdas)

There are options on a number of commands that describe or define a resource. CICS supplies, in CICS-value data areas, the values associated with these options. The options are shown in the syntax of the commands with the term *cvda* in parentheses.

You pass a CVDA value in two different ways:

- You can assign a CVDA value with the translator routine DFHVALUE. This allows you to change a CVDA value in the program as the result of other run-time factors.

For example:

```
MOVE DFHVALUE(NOTPURGEABLE) TO AREA-A.
EXEC CICS WAIT EXTERNAL ECBLIST() NUMEVENTS()
        PURGEABILITY(AREA-A)
```

- If the required action is always the same, you can declare the value directly. For example:

```
EXEC CICS WAITCICS ECBLIST() NUMEVENTS() PURGEABLE
```

You receive a CVDA value by defining a fullword binary data area and then testing the returned value with the translator routine DFHVALUE. For example:

```
EXEC CICS CONNECT PROCESS .... STATE(AREA-A)
IF AREA-A = DFHVALUE(ALLOCATED) ....
IF AREA-A = DFHVALUE(CONFFREE) ....
```

The *CICS System Programming Reference* lists the CVDA values and their numeric equivalents.

CICS threadsafe commands in the API

If your application program is defined as threadsafe, it can receive control on an open transaction environment (OTE) TCB.

This happens if a program in the task issues a DB2® SQL request that causes CICS to pass control to the CICS DB2 adapter on an L8 open TCB. Although the task is attached and runs initially on the CICS QR TCB, CICS switches it to an L8 TCB for the execution of the DB2 request. If you define the application program issuing the SQL request as threadsafe, CICS leaves the task running on the L8 open TCB on return from DB2, to avoid a costly TCB switch. For more information, see the *CICS DB2 Guide*.

To obtain the maximum performance benefit from OTE, write your CICS DB2 application programs in a threadsafe manner to avoid CICS having to switch TCBs. However, be aware that not all EXEC CICS commands are threadsafe, and issuing any of the non-threadsafe commands causes CICS to switch your task back to the QR TCB to ensure serialization. The commands that are threadsafe are indicated in the command syntax diagrams in this programming reference with the statement: “This command is threadsafe”, and are listed in “Threadsafe commands.”

For information about writing threadsafe application programs, see the *CICS Application Programming Guide*.

Threadsafe commands

The commands that are threadsafe, or threadsafe in certain conditions, are listed.

Not all **EXEC CICS** commands are threadsafe, and issuing any of the non-threadsafe commands causes CICS to use the QR TCB to ensure serialization. See Threadsafe programs in Developing applications for information about writing threadsafe application programs.

In the following list of threadsafe commands, an asterisk (*) indicates commands that are threadsafe only in certain conditions:

- These program link, file control, temporary storage, and transient data commands are threadsafe in the following circumstances:
 - The program, file, or queue to which the command refers is defined as local.

- The program, file, or queue to which the command refers is defined as remote, and the resource is accessed by distributed program link or function shipping to a remote CICS region over an IPIC connection.
- For file control commands, as an additional condition, the file to which the command refers is VSAM in RLS mode.
- These commands are not threadsafe in the following circumstances:
 - The resource is accessed by distributed program link or function shipping to a remote CICS region over another type of connection.
 - For file control commands, the file to which the command refers is a shared data table, coupling facility data table, or BDAM file.

Invoking DL/I by using the applicable language interface, for example the COBOL statement **CALL CBLTDLI**, is threadsafe when used with IMS Version 12 or later.

Threadsafe command list

- **ABEND**
- **ADDRESS**
- **ASKTIME**
- **ASSIGN**
- **BIF DEEDIT**
- **BIF DIGEST**
- **CHANGE PASSWORD**
- **CHANGE PHRASE**
- **CHANGE TASK**
- **CONVERTTIME**
- **DEFINE COUNTER** and **DEFINE DCOUNTER**
- **DELETE ***
- **DELETE CHANNEL**
- **DELETE CONTAINER (CHANNEL)**
- **DELETE COUNTER** and **DELETE DCOUNTER**
- **DELETEQ TD***
- **DELETEQ TS***
- **DEQ** (This command is threadsafe if it is defined as LOCAL. It is non-threadsafe if it is defined as GLOBAL.)
- **DOCUMENT CREATE**
- **DOCUMENT DELETE**
- **DOCUMENT INSERT**
- **DOCUMENT RETRIEVE**
- **DOCUMENT SET**
- **ENDBR ***
- **ENQ** (This command is threadsafe if it is defined as LOCAL. It is non-threadsafe if it is defined as GLOBAL.)
- **ENTER TRACENUM**
- **EXEC DLI**
- **EXTRACT CERTIFICATE**
- **EXTRACT TCPIP**
- **EXTRACT WEB**

- FORMATTIME
- FREEMAIN
- FREEMAIN64
- GET CONTAINER (CHANNEL)
- GET COUNTER and GET DCOUNTER
- GETMAIN
- GETMAIN64
- GET64 CONTAINER
- HANDLE ABEND
- HANDLE AID
- HANDLE CONDITION
- IGNORE CONDITION
- INVOKE APPLICATION
- INVOKE SERVICE
- INVOKE WEBSERVICE
- LINK *
- LOAD
- MONITOR
- MOVE CONTAINER (CHANNEL)
- POP HANDLE
- PUSH HANDLE
- PUT CONTAINER (CHANNEL)
- PUT64 CONTAINER
- QUERY CHANNEL
- QUERY COUNTER and QUERY DCOUNTER
- QUERY SECURITY
- READ *
- READNEXT *
- READPREV *
- READQ TD*
- READQ TS*
- RELEASE
- REQUEST PASSTICKET
- RESETBR *
- RETURN
- REWIND COUNTER and REWIND DCOUNTER
- REWRITE *
- SIGNAL EVENT
- SIGNOFF
- SIGNON
- SIGNON TOKEN
- SOAPFAULT ADD
- SOAPFAULT CREATE
- SOAPFAULT DELETE
- STARTBR *

- **SUSPEND**
- **SYNCPOINT** (The Recovery Manager processes this command on an open TCB wherever possible to minimize TCB switching.)
- **SYNCPOINT ROLLBACK** (The Recovery Manager processes this command on an open TCB wherever possible to minimize TCB switching.)
- **TRANSFORM DATATOXML**
- **TRANSFORM XMLTODATA**
- **UNLOCK ***
- **UPDATE COUNTER** and **UPDATE DCOUNTER**
- **VERIFY PASSWORD**
- **VERIFY PHRASE**
- **VERIFY TOKEN**
- **WAIT EXTERNAL**
- **WAIT JOURNALNAME**
- **WAIT JOURNALNUM**
- **WEB CLOSE**
- **WEB CONVERSE**
- **WEB ENDBROWSE FORMFIELD**
- **WEB ENDBROWSE HTTPHEADER**
- **WEB ENDBROWSE QUERYPARM**
- **WEB EXTRACT**
- **WEB OPEN**
- **WEB PARSE URL**
- **WEB READ FORMFIELD**
- **WEB READ HTTPHEADER**
- **WEB READNEXT FORMFIELD**
- **WEB READNEXT HTTPHEADER**
- **WEB READ QUERYPARM**
- **WEB READNEXT QUERYPARM**
- **WEB RECEIVE**
- **WEB RETRIEVE**
- **WEB SEND**
- **WEB STARTBROWSE FORMFIELD**
- **WEB STARTBROWSE HTTPHEADER**
- **WEB STARTBROWSE QUERYPARM**
- **WEB WRITE HTTPHEADER**
- **WRITE ***
- **WRITE JOURNALNAME**
- **WRITE JOURNALNUM**
- **WRITE OPERATOR**
- **WRITEQ TD***
- **WRITEQ TS***
- **WSACONTEXT BUILD**
- **WSACONTEXT DELETE**
- **WSACONTEXT GET**

- WSAEPR CREATE
- XCTL

CICS command summary

The **EXEC CICS** commands categorized according to the function they perform.

Abend support

- ABEND
- HANDLE ABEND

APPC basic conversation

- GDS ALLOCATE
- GDS ASSIGN
- GDS CONNECT PROCESS
- GDS EXTRACT ATTRIBUTES
- GDS EXTRACT PROCESS
- GDS FREE
- GDS ISSUE ABEND
- GDS ISSUE CONFIRMATION
- GDS ISSUE ERROR
- GDS ISSUE PREPARE
- GDS ISSUE SIGNAL
- GDS RECEIVE
- GDS SEND
- GDS WAIT

APPC mapped conversation

- ALLOCATE (APPC)
- CONNECT PROCESS
- CONVERSE (APPC)
- EXTRACT ATTRIBUTES (APPC)
- EXTRACT PROCESS
- FREE (APPC)
- ISSUE ABEND
- ISSUE CONFIRMATION
- ISSUE ERROR
- ISSUE PREPARE
- ISSUE SIGNAL (APPC)
- RECEIVE (APPC)
- SEND (APPC)
- WAIT CONVID (APPC)

Authentication

- CHANGE PASSWORD
- SIGNOFF
- SIGNON

- SIGNON TOKEN
- VERIFY PASSWORD
- VERIFY PHRASE
- VERIFY TOKEN

Batch data interchange

- ISSUE ABORT
- ISSUE ADD
- ISSUE END
- ISSUE ERASE
- ISSUE NOTE
- ISSUE QUERY
- ISSUE RECEIVE
- ISSUE REPLACE
- ISSUE SEND
- ISSUE WAIT

BMS

- PURGE MESSAGE
- RECEIVE MAP
- RECEIVE MAP MAPPINGDEV
- RECEIVE PARTN
- ROUTE
- SEND CONTROL
- SEND MAP
- SEND MAP MAPPINGDEV
- SEND PAGE
- SEND PARTNSET
- SEND TEXT
- SEND TEXT MAPPED
- SEND TEXTNOEDIT

Built-in functions

- BIF DEEDIT
- BIF DIGEST

CICS business transaction services (BTS)

- ACQUIRE
- ADD SUBEVENT
- CANCEL
- CHECK ACQPROCESS
- CHECK ACTIVITY
- CHECK TIMER
- DEFINE ACTIVITY
- DEFINE COMPOSITE EVENT
- DEFINE INPUT EVENT

- DEFINE PROCESS
- DEFINE TIMER
- DELETE ACTIVITY
- DELETE CONTAINER (BTS)
- DELETE EVENT
- DELETE TIMER
- ENDBROWSE ACTIVITY
- ENDBROWSE CONTAINER
- ENDBROWSE EVENT
- ENDBROWSE PROCESS
- FORCE TIMER
- GET CONTAINER (BTS)
- GETNEXT ACTIVITY
- GETNEXT CONTAINER
- GETNEXT EVENT
- GETNEXT PROCESS
- INQUIRE ACTIVITYID
- INQUIRE CONTAINER
- INQUIRE EVENT
- INQUIRE PROCESS
- INQUIRE TIMER
- LINK ACQPROCESS
- LINK ACTIVITY
- MOVE CONTAINER(BTS)
- PUT CONTAINER (BTS)
- REMOVE SUBEVENT
- RESET ACQPROCESS
- RESET ACTIVITY
- RESUME
- RETRIEVE REATTACH EVENT
- RETRIEVE SUBEVENT
- RUN
- STARTBROWSE ACTIVITY
- STARTBROWSE CONTAINER
- STARTBROWSE EVENT
- STARTBROWSE PROCESS
- SUSPEND (BTS)
- TEST EVENT

Channel commands

- DELETE CHANNEL
- DELETE CONTAINER (CHANNEL)
- GET CONTAINER (CHANNEL)
- GET64 CONTAINER
- MOVE CONTAINER (CHANNEL)

I

- PUT CONTAINER (CHANNEL)
- PUT64 CONTAINER
- QUERY CHANNEL
- START CHANNEL

Console support

- WRITE OPERATOR

Diagnostic services

- DUMP TRANSACTION
- ENTER TRACENUM

Document services

- DOCUMENT CREATE
- DOCUMENT DELETE
- DOCUMENT INSERT
- DOCUMENT RETRIEVE
- DOCUMENT SET

Environment services

- ADDRESS
- ADDRESS SET
- ASSIGN

Event processing

- SIGNAL EVENT

Exception support

- HANDLE CONDITION
- IGNORE CONDITION
- POP HANDLE
- PUSH HANDLE

File control services

- DELETE
- ENDBR
- READ
- READNEXT
- READPREV
- RESETBR
- REWRITE
- STARTBR
- UNLOCK
- WRITE

Interval control services

- ASKTIME
- CANCEL

- DELAY
- FORMATTIME
- POST
- RETRIEVE
- START
- WAIT EVENT

Journaling

- WAIT JOURNALNAME
- WAIT JOURNALNUM
- WRITE JOURNALNAME
- WRITE JOURNALNUM

Monitoring

- MONITOR

Named counter server

- DEFINE COUNTER and DELETE DCOUNTER
- DELETE COUNTER and DELETE DCOUNTER
- GET COUNTER and GET DCOUNTER
- QUERY COUNTER and QUERY DCOUNTER
- REWIND COUNTER and REWIND DCOUNTER
- UPDATE COUNTER and UPDATE DCOUNTER

Program control

- “INVOKE APPLICATION” on page 331
- LINK
- LOAD
- RELEASE
- RETURN
- XCTL

Scheduling services

- START ATTACH
- START BREXIT

Security services

- REQUEST PASSTICKET
- QUERY SECURITY

Spool Interface (JES)

- SPOOLCLOSE
- SPOOLOPEN INPUT
- SPOOLOPEN OUTPUT
- SPOOLREAD
- SPOOLWRITE

|

Storage control

- FREEMAIN
- FREEMAIN64
- GETMAIN
- GETMAIN64

Syncpoint

- SYNCPOINT
- SYNCPOINT ROLLBACK

Task control

- CHANGE TASK
- DEQ
- ENQ
- SUSPEND
- WAIT EXTERNAL
- WAITCICS

TCP/IP services

- EXTRACT CERTIFICATE
- EXTRACT TCPIP

Temporary storage control

- DELETEQ TS
- READQ TS
- WRITEQ TS

Terminal control

- ALLOCATE (LUTYPE6.1)
- ALLOCATE (MRO)
- BUILD ATTACH (LUTYPE6.1)
- BUILD ATTACH (MRO)
- CONVERSE (APPC)
- CONVERSE (LUTYPE2/LUTYPE3)
- CONVERSE (LUTYPE4)
- CONVERSE (LUTYPE6.1)
- CONVERSE (MRO)
- CONVERSE (SCS)
- CONVERSE (2260)
- CONVERSE (3270 logical)
- CONVERSE (3600-3601)
- CONVERSE (3600-3614)
- CONVERSE (3650 interpreter)
- CONVERSE (3650-3270)
- CONVERSE (3650-3653)
- CONVERSE (3650-3680)
- CONVERSE (3767)

- CONVERSE (3770)
- CONVERSE (3790 full-function or inquiry)
- CONVERSE (3790 3270-display)
- EXTRACT ATTACH (LUTYPE6.1)
- EXTRACT ATTACH (MRO)
- EXTRACT ATTRIBUTES (MRO)
- EXTRACT LOGONMSG
- EXTRACT TCT
- FREE (LUTYPE6.1)
- FREE
- FREE (MRO)
- HANDLE AID
- ISSUE COPY (3270 logical)
- ISSUE DISCONNECT
- ISSUE ENDFILE
- ISSUE ENDOUTPUT
- ISSUE EODS
- ISSUE ERASEAUP
- ISSUE LOAD
- ISSUE PASS
- ISSUE PRINT
- ISSUE RESET
- ISSUE SIGNAL (LUTYPE6.1)
- POINT
- RECEIVE (APPC)
- RECEIVE (LUTYPE2/LUTYPE3)
- RECEIVE (LUTYPE4)
- RECEIVE (LUTYPE6.1)
- RECEIVE (MRO)
- RECEIVE (2260)
- RECEIVE (2980)
- RECEIVE (3270 logical)
- RECEIVE (3600-3601)
- RECEIVE (3600-3614)
- RECEIVE (3650)
- RECEIVE (3767)
- RECEIVE (3770)
- RECEIVE (3790 full-function or inquiry)
- RECEIVE (3790 3270-display)
- SEND (APPC)
- SEND (LUTYPE2/LUTYPE3)
- SEND (LUTYPE4)
- SEND (LUTYPE6.1)
- SEND (MRO)
- SEND (SCS)

- SEND (2260)
- SEND (2980)
- SEND (3270 logical)
- SEND (3600 pipeline)
- SEND (3600-3601)
- SEND (3600-3614)
- SEND (3650 interpreter)
- SEND (3650-3270)
- SEND (3650-3653)
- SEND (3650-3680)
- SEND (3767)
- SEND (3770)
- SEND (3790 full-function or inquiry)
- SEND (3790 SCS)
- SEND (3790 3270-display)
- SEND (3790 3270-printer)
- WAIT SIGNAL
- WAIT TERMINAL

Transient data

- DELETEQ TD
- READQ TD
- WRITEQ TD

Web support

- CONVERTTIME
- EXTRACT WEB
- WEB CLOSE
- WEB CONVERSE
- WEB ENDBROWSE FORMFIELD
- WEB ENDBROWSE HTTPHEADER
- WEB EXTRACT
- WEB OPEN
- WEB PARSE URL
- WEB READ FORMFIELD
- WEB READ HTTPHEADER
- WEB READNEXT FORMFIELD
- WEB READNEXT HTTPHEADER
- WEB RECEIVE (Server)
- WEB RECEIVE (Client)
- WEB RETRIEVE
- WEB SEND (Server)
- WEB SEND (Client)
- WEB STARTBROWSE FORMFIELD
- WEB STARTBROWSE HTTPHEADER
- WEB WRITE HTTPHEADER

Web services


- INVOKE SERVICE
- INVOKE WEBSERVICE

- SOAPFAULT ADD
- SOAPFAULT CREATE
- SOAPFAULT DELETE
- TRANSFORM DATATOXML
- TRANSFORM XMLTODATA
- WSACONTEXT BUILD
- WSACONTEXT DELETE
- WSACONTEXT GET
- WSAEPR CREATE

ABEND

Terminate a task abnormally.

ABEND



This command is threadsafe.

Description

The **ABEND** command terminates a task abnormally.

CICS releases the main storage associated with the terminated task; optionally, you can obtain a transaction dump of this storage.

Invoking the **ABEND** command causes the current transaction to abend. The Language Environment is informed that an abend has occurred and the following message is written out to CEEMSG followed by a dump report:

```
CEE3250C The system or user abend XXXX was issued
```

XXXX is the transaction dump code specified on the ABCODE option. The Language Environment attempts to access register addresses to dump out the referenced storage as part of the dump report written to CEEMSG. If the Language Environment does not have access to the storage addressed by these registers, an 0C4 abend can occur. You can eliminate 0C4 abends by setting the Language Environment runtime option TERMTHDACT to QUIET, MSG, or UAONLY. For more information, see TERMTHDACT.

Options

ABCODE(*name*)

Specifies that main storage related to the terminating task is dumped. The ABCODE is used as a transaction dump code to identify the dump. ABCODE follows the format rules for DUMPCODE. The “DUMP TRANSACTION” on page 187 command gives the format rules that apply to DUMPCODE, if these rules are not followed, ABEND does not produce a dump.

Do not start the name with the letter A, because this is reserved for CICS itself.

Note: If ABCODE is not used, the effect is the same as NODUMP.

CANCEL

Specifies that exits established by HANDLE ABEND commands are ignored. An **ABEND CANCEL** command cancels all exits at any level in the task and terminates the task abnormally. If the PL/I STAE execution-time option is specified, an abnormal termination exit is established by PL/I. This exit is revoked by the CANCEL option.

NODUMP

Specifies that an abend occurs without causing a dump to be taken. For programs link-edited using the Language Environment SCEELKED library, when NODUMP is specified, a dump is never taken, regardless of any setting in the transaction dump table. For programs not link-edited with Language

Environment, if the transaction dump table already has an entry for the abend code, or if the abend is in Language Environment run-unit initialization or termination, the NODUMP option is ignored.

Examples


The following example shows how to terminate a task abnormally:

```
EXEC CICS ABEND ABCODE('BCDE')
```

ACQUIRE

Acquire access to a BTS activity from outside the process that contains it.

ACQUIRE PROCESS



Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED, NOTAUTH, PROCESSBUSY, PROCESSERR

Description

ACQUIRE enables a program that is executing outside a particular BTS process to access an activity within the process. It allows the program to:

- Read and write to the activity's data-containers
- Issue various commands, such as RUN and LINK, against the activity.¹

An activity that a program gains access to by means of an ACQUIRE command is known as an **acquired activity**. A program can acquire only one activity per unit of work. The activity remains acquired until the next syncpoint.

ACQUIRE ACTIVITYID acquires the specified descendant (non-root) activity.

ACQUIRE PROCESS acquires the root activity of the specified process.

Note: When a program defines a process, it is automatically given access to the process's root activity. (This enables the defining program to access the process containers and root activity containers before running the process.) When a program gains access to a root activity by means of *either* a DEFINE PROCESS or an ACQUIRE PROCESS command, the process is known as the **acquired process**.

Rules

1. A program can acquire only one activity within the same unit of work. The activity remains acquired until the next syncpoint. This means, for example, that a program:
 - Cannot issue both a DEFINE PROCESS and an ACQUIRE PROCESS command within the same unit of work.
 - Cannot issue both an ACQUIRE PROCESS and an ACQUIRE ACTIVITYID command within the same unit of work. That is, it can acquire *either* a descendant activity or a root activity, not one of each.
2. If a program is executing as an activation of an activity, it cannot:
 - Acquire an activity in the same process as itself. It cannot, for example, issue ACQUIRE PROCESS for the current process.
 - Use a LINK command to activate the activity that it has acquired.
3. An acquired activity's process is accessible in the same way as the activity itself can access it. Thus, if the acquired activity is a descendant activity:
 - Its process's containers may be read but not updated.

1. If the acquired activity is a root activity, against the process.

- The process may not be the subject of any command—such as RUN, LINK, SUSPEND, RESUME, or RESET—that directly manipulates the process or its root activity.

Conversely, if the acquired activity is a root activity:

- Its process's containers may be both read and updated.
- The process may be the subject of commands such as RUN, LINK, SUSPEND, RESUME, or RESET. The ACQPROCESS keyword on the command identifies the subject process as the one the program that issues the command has acquired in the current unit of work.

Options

ACTIVITYID(data-value)

specifies the identifier (1–52 characters) of the descendant activity to be acquired.

PROCESS(data-value)

specifies the name (1–36 characters) of the process whose root activity is to be acquired.

PROCESSTYPE(data-value)

specifies the process-type (1–8 characters) of the process whose root activity is to be acquired.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity referred to by the ACTIVITYID option could not be found.

16 INVREQ

RESP2 values:

- 22 The unit of work that issued the ACQUIRE command has already acquired an activity; a unit of work can acquire only one activity.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to access the file associated with the BTS repository data set on which details of the process are stored.

106 PROCESSBUSY

RESP2 values:

- 13 The request timed out. It may be that another task using this process-record has been prevented from ending.

108 PROCESSERR

RESP2 values:

- 5 The process named in the PROCESS option could not be found.
- 9 The process-type named in the PROCESSTYPE option could not be found.

Usage examples

ACQUIRE ACTIVITYID can be used to implement user-related activities. For example, on its first activation an activity might:

1. Define an input event to represent a particular user-interaction
2. Issue an ASSIGN command to obtain the identifier of its own activity-instance
3. Save the input event and activity identifier on a data base
4. Return without completing.

Later, when a user is ready to process the work represented by the activity, he or she starts a transaction. This transaction, which executes outside the BTS process:

1. Retrieves the input event and activity identifier from the data base
2. Uses the ACQUIRE ACTIVITYID command to acquire access to the activity
3. Places the information required to complete the activity in an input data-container, and runs the activity. The INPUTEVENT option of the RUN command tells the activity why it is being activated.

ACQUIRE PROCESS can be used to implement client/server processing. For example, a client program might use the DEFINE PROCESS and RUN commands to create and run a server process, which carries out some work, defines one or more input events, and returns without completing. The client issues a syncpoint or returns. To run the same server process again, the client uses the ACQUIRE PROCESS and RUN commands.

ADD SUBEVENT

Add a sub-event to a BTS composite event.

ADD SUBEVENT

►►—ADD—SUBEVENT(*data-value*)—EVENT(*data-value*)—————►►

Conditions: EVENTERR, INVREQ

Description

ADD SUBEVENT adds a sub-event to a BTS composite event. The sub-event:

- Must be an atomic (not a composite) event
- Cannot be a system event
- Must not currently be part of a composite event
- Cannot, if the predicate of the composite event uses the AND Boolean operator, be an input event.

Adding a sub-event causes the composite's predicate to be re-evaluated.

Options

EVENT(*data-value*)

specifies the name (1–16 characters) of the composite event. This must previously have been defined to the current activity, using the DEFINE COMPOSITE EVENT command.

SUBEVENT(*data-value*)

specifies the name (1–16 characters) of the atomic event to be added to the composite event as a sub-event. The sub-event must previously have been defined to the current activity, using one of the following commands:

- DEFINE ACTIVITY
- DEFINE INPUT EVENT
- DEFINE TIMER

It:

- Must not currently be part of a composite event
- Cannot, if the predicate of the composite event uses the AND Boolean operator, be an input event.

Conditions

111 EVENTERR

RESP2 values:

- 4 The event specified on the EVENT option is not recognized by BTS.
- 5 The sub-event specified on the SUBEVENT option is not recognized by . BTS.

16 INVREQ

RESP2 values:


- 1 The command was issued outside the scope of an activity.

- 2 The event specified on the EVENT option is invalid—it is not a composite event.
- 3 The sub-event specified on the SUBEVENT option is invalid. Specifying any of the following as a sub-event produces this error:
 - A composite event
 - A system event
 - A sub-event of another composite event
 - A sub-event of this composite event—that is, an atomic event that has already been added to this composite event
 - An input event, if the composite uses the AND Boolean operator.

ADDRESS

Obtain access to CICS storage areas.

ADDRESS

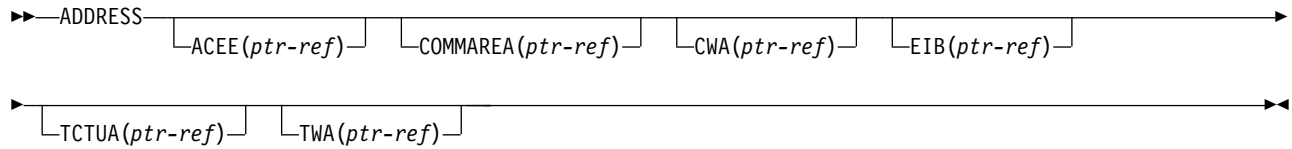

This command is threadsafe.

Note for dynamic transaction routing: Using ADDRESS with CWA could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

ADDRESS accesses the following areas:

- The access control environment element (ACEE)
- The communication area available to the invoked program (COMMAREA)
- The common work area (CWA)
- The EXEC interface block (EIB)
- The terminal control table user area (TCTUA)
- The transaction work area (TWA)

In assembler language, no more than four options may be specified in one ADDRESS command.

Options

ACEE(ptr-ref)

returns a pointer to the access control environment element, the control block that is generated by an external security manager (ESM) when the user signs on. If the user is not signed on, the address of the CICS DFLTUSER's ACEE is returned. If an ACEE does not exist, CICS sets the pointer reference to the null value, X'FF000000'.

For information on how to map the ACEE data area, see the mapping macro IHAACEE supplied in SYS1.MACLIB.

Note: Take care when addressing an ACEE in a server program invoked by a distributed program link. The ACEE address returned depends on the link security and may not be the same as the address of the user signed on at the local system.

COMMAREA(ptr-ref)

returns a pointer reference, set to the address of the communication area (COMMAREA) available to the currently executing program. COMMAREA is used to pass information between application programs. If the COMMAREA does not exist, the pointer reference is set to the null value, X'FF000000'.

In C, you must use ADDRESS COMMAREA to get the address of the communication area, because this is not passed as an argument to a C main function.

CWA(*ptr-ref*)

returns a pointer reference, set to the address of the common work area (CWA). This area makes information available to applications running in a single CICS system. If a CWA does not exist, CICS sets the pointer reference to the null value, X'FF000000'.

EIB(*ptr-ref*)

returns a pointer reference set to the address of the EXEC interface block (EIB). You must use this option to get addressability to the EIB in application routines other than the first invoked by CICS (where addressability to the EIB is provided automatically). If the application program is translated with SYSEIB in the XOPTS parameter list, this option returns the address of the system EIB.

If TASKDATALOC(ANY) is defined on the transaction definition, the address of the data may be above or below the 16MB line.

If TASKDATALOC(BELOW) is defined on the transaction definition, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

C functions must use ADDRESS EIB to get the address of the EXEC interface block, because this address is not passed as an argument to a C main function. You must code an ADDRESS EIB statement at the beginning of each application if you want access to the EIB, or if you are using a command that includes the RESP or RESP2 option.

TCTUA(*ptr-ref*)

returns a pointer reference, set to the address of the terminal control table user area (TCTUA) for the principal facility, not that for any alternate facility that may have been allocated. This area is used for passing information between application programs, but only if the same terminal is associated with the application programs involved. If a TCTUA does not exist, the pointer reference is set to the null value, X'FF000000'.

TWA(*ptr-ref*)

returns a pointer reference, set to the address of the transaction work area (TWA). This area is used for passing information between application programs, but only if they are in the same task. If a TWA does not exist, the pointer reference is set to the null value, X'FF000000'.


If TASKDATALOC(ANY) is defined on the transaction definition, the address of the data may be above or below the 16MB line.

If TASKDATALOC(BELOW) is defined on the transaction definition, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

ADDRESS SET

Set the address of a structure or pointer.

ADDRESS SET



Description

The value from the USING option is used to set the reference in the SET option.

Options

SET(*data-area/ptr-ref*)
sets a pointer reference.

USING(*ptr-ref/data-area*)
supplies a pointer value.

COBOL example of ADDRESS SET

To set the address of a structure to a known pointer value:

```
EXEC CICS ADDRESS SET(address of struc)
      USING(ptr)
```


To set a pointer variable to the address of a structure:

```
EXEC CICS ADDRESS SET(ptr)
      USING(address of struc01)
```

ALLOCATE (APPC)

Allocate a session to a remote APPC logical unit for use by an APPC mapped conversation.

ALLOCATE (APPC)



Conditions: CBIDERR, INVREQ, NETNAMEIDERR, PARTNERIDERR, SYSBUSY, SYSIDERR

Description

ALLOCATE makes one of the sessions associated with the named system available to the application program, and optionally selects a set of session-processing options.

CICS returns, in EIBRSRCE in the EIB, the 4-byte CONVID (conversation identifier) that the application program uses in all subsequent commands that relate to the conversation.

If a session to the requested APPC LU is not available, the application is suspended until a session does become available. In such a case, the suspension of the application can be prevented by specifying either the NOQUEUE or the NOSUSPEND option. NOSUSPEND is still supported as an equivalent for NOQUEUE, but NOQUEUE is the preferred keyword.

A session is immediately available for allocation only if it is all of the following:

- A contention winner
- Already bound
- Not already allocated

CICS attempts to satisfy a request for a session by choosing among sessions in the following order of preference:

1. Contention winner that is bound and not already allocated (CICS allocates it). This is a session that is immediately available.
2. Contention winner that is unbound (CICS binds it and allocates it).
3. Contention loser that is bound and not already allocated (CICS bids for it).
4. Contention loser that is unbound (CICS binds it and bids for it).

The action taken by CICS if no session is immediately available depends on whether you specify NOQUEUE (or the equivalent NOSUSPEND option), and also on whether your application has executed a HANDLE command for the SYSBUSY condition. In these situations, CICS does not bid for sessions or bind additional sessions. It looks for a session that is immediately available (that is, a contention winner that is bound and not already allocated), and if one is not available, the SYSBUSY condition is returned. The possible combinations are shown below:

HANDLE for SYSBUSY condition issued

The command is not queued and control is returned immediately to the label specified in the HANDLE command, whether or not you have specified NOQUEUE.

No HANDLE issued for SYSBUSY condition

If you have specified NOQUEUE (or NOSUSPEND), the request is not queued and control is returned immediately to your application program. The SYSBUSY code (X'D3') is set in the EIBRCODE field of the EXEC interface block. You should test this field immediately after issuing the ALLOCATE command.

The HANDLE for SYSBUSY condition therefore has the same effect as the NOQUEUE option, except for where control is returned in the application. If the HANDLE command is used, control is returned to the label, and if it is not used, control is returned to the instruction following the ALLOCATE command.

If you have omitted the NOQUEUE option, and you have not issued a HANDLE command for the SYSBUSY option, then if no session is immediately available, CICS queues the request (and your application waits) until a session is available. The request is allocated a session either when a winner session has become available, or when CICS has successfully bid for a loser session. Omit the NOQUEUE option when you want all winner or loser sessions to be considered for allocation to the request. You can use the QUEUELIMIT and MAXQTIME attributes of the CONNECTION resource definitions to limit the length of the queue of requests, and the time that requests spend on the queue. Managing allocate queues in the *CICS Intercommunication Guide* has more information about allocate queues. The DTIMOUT value specified on the transaction definition can be used to limit the wait time for individual requests.

Options

NOQUEUE

overrides the default action when a SYSBUSY condition arises. This indicates that a session is not immediately available. The default action is to suspend application execution until a session is available. NOQUEUE inhibits this waiting; control returns immediately to the application program instruction following the command.

Note, however, that if a HANDLE CONDITION for SYSBUSY is active when the command is executed, this also overrides the default action, and control is passed to the user label supplied in the HANDLE CONDITION. This takes precedence over the NOQUEUE option but is, of course, negated by either NOHANDLE or RESP.

If an APPC ALLOCATE request is issued against a single session connection from the contention loser end, the NOQUEUE option always causes SYSBUSY to be returned rather than allowing the request to bid for the session. If the NOQUEUE option is absent, the request is able to bid for the session.

If an APPC ALLOCATE request is issued against a parallel session connection, and the NOQUEUE option is specified, only sessions that are immediately available (that is, a contention winner that is bound and not already allocated) can be allocated to the request. If no such session is available, then SYSBUSY is returned. If the NOQUEUE option is absent, the request is able to bid for a loser session, or bind unbound winner sessions.

PARTNER(name)

specifies the name (8 characters) of a set of definitions that include the names

of a remote LU (NETNAME) and a communication profile to be used on the allocated session. You can use this option as an alternative to specifying SYSID and PROFILE explicitly.

PROFILE(*name*)

specifies the name (1-8 characters) of a set of session-processing options that are to be used during the execution of mapped commands for the session specified in the SYSID option. If you specify SYSID and omit PROFILE, a default profile (DFHCICSA) is selected.

STATE(*cvda*)

gets the state of the current conversation. The cvda value returned by CICS is ALLOCATED.

SYSID(*systemname*)

specifies the name (1-4 characters) by which the remote APPC LU is known to this CICS. This option requests that one of the sessions to the named system is to be allocated.

Conditions

62 CBIDERR

occurs if the requested PROFILE cannot be found.

Default action: terminate the task abnormally.

16 INVREQ

occurs if the ALLOCATE command is not valid for the device to which it is directed.

Default action: terminate the task abnormally.

99 NETNAMEIDERR

occurs if the name specified in the NETNAME parameter of the RDO definition for the PARTNER specified on the allocate command is invalid.

Default action: terminate the task abnormally.

97 PARTNERIDERR

occurs if the name specified in the PARTNER option is not recognized by CICS.

Default action: terminate the task abnormally.

59 SYSBUSY

occurs for one of the following reasons:

- The request for a session cannot be serviced immediately. This is only possible if the NOQUEUE option is set, or a HANDLE CONDITION for SYSBUSY is active.
- The ALLOCATE command is issued when persistent session recovery is still in process and the sessions needed to satisfy the command are not yet recovered.

Default action: ignore the condition.

53 SYSIDERR

occurs if CICS is unable to provide the application program with a suitable session, for one of the following reasons:

- The name specified in the SYSID option is not recognized by CICS.
- The mode name derived from the PROFILE option is not one of the mode names defined for the APPC system entry.

- All the sessions in the group specified by SYSID and mode name are out of service, or all sessions are out of service.
- The AID (automatic initiate descriptor) representing your ALLOCATE has been canceled.
- All the sessions are busy and the (queued) allocates have been purged or rejected.

Default action: terminate the task abnormally.

ALLOCATE (LUTYPE6.1)

Acquire a session to a remote LUTYPE6.1 logical unit.

ALLOCATE (LUTYPE6.1)

►►—ALLOCATE—
└─SESSION(*name*)—
└─SYSID(*systemname*)—└─PROFILE(*name*)—└─NOQUEUE—►►

Conditions: CBIDERR, EOC, INVREQ, SESSBUSY, SESSIONERR, SYSBUSY, SYSIDERR

Description

ALLOCATE acquires an alternate facility and optionally selects a set of session-processing options. If SYSID is specified, CICS makes available to the application program one of the sessions associated with the named system. The name of this session can be obtained from EIBRSRCE in the EIB. If SESSION is specified, CICS makes the named session available.

If the session requested is not available, the application is suspended until the session does become available. In such a case, the suspension of the application can be prevented by specifying either the NOQUEUE or the NOSUSPEND option. NOSUSPEND is still supported as an equivalent for NOQUEUE, but NOQUEUE is the preferred keyword.

Options

NOQUEUE

overrides the default action when a SESSBUSY or SYSBUSY condition arises. These conditions indicate that the session requested is not immediately available. The default action is to suspend application execution until the session is available. NOQUEUE inhibits this waiting; control returns immediately to the application program instruction following the command.

Note, however, that if a HANDLE CONDITION for SESSBUSY or SYSBUSY is active when the command is executed, this also overrides the default action, and control is passed to the user label supplied in the HANDLE CONDITION. This takes precedence over the NOQUEUE option but is, of course, negated by either NOHANDLE or RESP.

PROFILE(*name*)

specifies the name (1–8 characters) of a set of session-processing options that are to be used during execution of terminal control commands for the session specified in the SYSID or SESSION options. If the PROFILE option is omitted, a default profile (DFHCICSA) is selected.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

SYSID(*systemname*)

specifies the name (1–4 characters) of a system TCTSE. This option specifies that one of the sessions to the named system is to be allocated.

Conditions

62 CBIDERR

occurs if the requested PROFILE cannot be found.

Default action: terminate the task abnormally.

06 EOC

occurs when a request/response unit (RU) is received with the end-of-chain indicator set. Field EIBEOC also contains this indicator.

Default action: ignore the condition.

16 INVREQ

occurs when the specified session is already allocated to this task, or the session is an APPC session.

Default action: terminate the task abnormally.

60 SESSBUSY

occurs if the request for the specified session cannot be serviced immediately. This is only possible if the NOQUEUE option is set, or a HANDLE CONDITION for SESSBUSY is active.

Default action: ignore the condition.

58 SESSIONERR

occurs if the name specified in the SESSION option is not that of an LUTYPE6.1 session TCTTE, or if the session cannot be allocated because it is out of service.

Default action: terminate the task abnormally.

59 SYSBUSY

occurs for one of the following reasons:

- The request for a session cannot be serviced immediately. This is only possible if the NOQUEUE option is set, or a HANDLE CONDITION for SYSBUSY is active.
- The ALLOCATE command is issued when persistent session recovery is still in process and the sessions needed to satisfy the command are not yet recovered.

Default action: ignore the condition.

53 SYSIDERR

occurs if CICS is unable to provide the application program with a suitable session, for one of the following reasons:

- The name specified in the SYSID option is not recognized by CICS.
- All sessions are out of service.
- The AID (automatic initiate descriptor) representing your ALLOCATE has been canceled.
- All the sessions are busy and the (queued) allocates have been purged or rejected.

Default action: terminate the task abnormally.

ALLOCATE (MRO)

Acquire an MRO session.

ALLOCATE (MRO)

►►—ALLOCATE—SYSID(*systemname*)—PROFILE(*name*)—NOQUEUE—STATE(*cvda*)—►►

Conditions: INVREQ, SYSBUSY, SYSIDERR

Description

ALLOCATE acquires an alternate facility. CICS makes available to the application program one of the sessions associated with the system named in the SYSID option. The name of this session can be obtained from EIBRSRCE in the EIB.

If the session requested is not available, the application is suspended until the session does become available. In such a case, the suspension of the application can be prevented by specifying the NOQUEUE option.

Options

NOQUEUE

overrides the default action when a SYSBUSY condition arises. This condition indicates that the session requested is not immediately available. The default action is to suspend application execution until the session is available. NOQUEUE inhibits this waiting; control returns immediately to the application program instruction following the command.

Note, however, that if a HANDLE CONDITION for SYSBUSY is active when the command is executed, this also overrides the default action, and control is passed to the user label supplied in the HANDLE CONDITION. This takes precedence over the NOQUEUE option but is, of course, negated by either NOHANDLE or RESP.

PROFILE(*name*)

specifies the name (1–8 characters) of a set of session-processing options that are to be used during execution of terminal control commands for the session specified in the SYSID option. If the PROFILE option is omitted, a default profile (DFHCICSA) is selected.

STATE(*cvda*)

gets the state of the current conversation. The cvda value returned by CICS is ALLOCATED.

SYSID(*systemname*)

specifies the name (1–4 characters) of a system TCTSE. This option specifies that one of the sessions to the named system is to be allocated.

Conditions

16 INVREQ

occurs if an incorrect command has been issued for the LU or terminal in use.

Default action: terminate the task abnormally.

59 SYSBUSY

occurs if the request for a session cannot be serviced immediately. This is only possible if the NOQUEUE option is set, or a HANDLE CONDITION for SYSBUSY is active.

Default action: ignore the condition.

53 SYSIDERR

occurs if CICS is unable to provide the application program with a suitable session, for one of the following reasons:


- The name specified in the SYSID option is not recognized by CICS.
- All sessions are out of service.
- The AID (automatic initiate descriptor) representing your ALLOCATE has been canceled.
- All the sessions are busy and the (queued) allocates have been purged or rejected.

Default action: terminate the task abnormally.

ASKTIME

Request current date and time of day.

ASKTIME



This command is threadsafe.

Description

ASKTIME updates the date (EIBDATE) and CICS time-of-day clock (EIBTIME) fields in the EIB. These two fields initially contain the date and time when the task started.

In response to an ASKTIME command, CICS issues an MVS™ STCK macro and modifies this by a local time difference. For example, if your MVS TOD (hardware) clock is set to GMT, and the local time is defined as British Summer Time (BST), it is BST that is stored in the EIBTIME field.

For details of the EIB, see EIB fields in Reference -> Application development.

Options

ABSTIME(*data-area*)

Specifies the data area for the number of milliseconds since 00:00 on 1 January 1900, which is known as absolute time. The time is taken from the system time-of-day clock, adjusted for leap seconds and to apply the local timezone offset (including daylight saving time), truncated to the millisecond, and returned as a packed decimal of length 8 bytes.

You can use FORMATTIME to change the data into other familiar formats.

Example

For example, after the following command runs:

```
EXEC CICS ASKTIME ABSTIME(utime)
```

utime contains a value similar in format to 002837962864820.

The format of *data-area* is:

```
COBOL: PIC S9(15) COMP-3
C      char data_area[8];
PL/I:  FIXED DEC(15)
ASM:   PL8
```

ASSIGN

Request values from outside the local environment of the application program.

ASSIGN

| | | |
|--------------------------|--------------------------|--|
| ASSIGN | | |
| ABCODE (data-area) | MAPLINE (data-area) | |
| ABDUMP (data-area) | MAPWIDTH (data-area) | |
| ABOFFSET (data-area) | MICROVERSION (data-area) | |
| ABPROGRAM (data-area) | MINORVERSION (data-area) | |
| ACTIVITY (data-area) | MSRCONTROL (data-area) | |
| ACTIVITYID (data-area) | NATLANGINUSE (data-area) | |
| ALTSCRNHT (data-area) | NETNAME (data-area) | |
| ALTSCRNWD (data-area) | NEXTTRANSID (data-area) | |
| APLKYBD (data-area) | NUMTAB (data-area) | |
| APLTEXT (data-area) | OPCLASS (data-area) | |
| APPLICATION (data-area) | OPERATION (data-area) | |
| APPLID (data-area) | OPERKEYS (data-area) | |
| ASRAINTRPT (data-area) | OPID (data-area) | |
| ASRAKEY (cvda) | OPSECURITY (data-area) | |
| ASRAPSW (data-area) | ORGABCODE (data-area) | |
| ASRAPSW16 (data-area) | OUTLINE (data-area) | |
| ASRAREGS (data-area) | PAGENUM (data-area) | |
| ASRAREGS64 (data-area) | PARTNPAGE (data-area) | |
| ASRASPC (cvda) | PARTNS (data-area) | |
| ASRASTG (cvda) | PARTNSET (data-area) | |
| BRIDGE (data-area) | PLATFORM (data-area) | |
| BTRANS (data-area) | PRINSYSID (data-area) | |
| CHANNEL (data-area) | PROCESS (data-area) | |
| CMDSEC (data-area) | PROCESSTYPE (data-area) | |
| COLOR (data-area) | PROGRAM (data-area) | |
| CWALENG (data-area) | PS (data-area) | |
| DEFSCRNHT (data-area) | QNAME (data-area) | |
| DEFSCRNWD (data-area) | RESSEC (data-area) | |
| DELIMITER (data-area) | RESTART (data-area) | |
| DESTCOUNT (data-area) | RETURNPROG (data-area) | |
| DESTID (data-area) | SCRNHT (data-area) | |
| DESTIDLENG (data-area) | SCRNWD (data-area) | |
| DS3270 (data-area) | SIGDATA (data-area) | |
| DS3270 (data-area) | SOSI (data-area) | |
| ERRORMSG (data-area) | STARTCODE (data-area) | |
| ERRORMSGLEN (data-area) | STATIONID (data-area) | |
| EWASUPP (data-area) | SYSID (data-area) | |
| EXTDS (data-area) | TASKPRIORITY (data-area) | |
| FACILITY (data-area) | TCTUALENG (data-area) | |
| FCI (data-area) | TELLERID (data-area) | |
| GCHARS (data-area) | TERMCODE (data-area) | |
| GCODES (data-area) | TERMPRIORITY (data-area) | |
| GMMI (data-area) | TEXTKYBD (data-area) | |
| HIGHLIGHT (data-area) | TEXTPRINT (data-area) | |
| INITPARM (data-area) | TRANPRIORITY (data-area) | |
| INITPARMLEN (data-area) | TWALENG (data-area) | |
| INPARTN (data-area) | UNATTEND (data-area) | |
| INPUTMSGLEN (data-area) | USERID (data-area) | |
| INVOKINGPROG (data-area) | USERNAME (data-area) | |
| KATAKANA (data-area) | USERPRIORITY (data-area) | |
| LANGINUSE (data-area) | VALIDATION (data-area) | |
| LDCMNEM (data-area) | | |
| LDCNUM (data-area) | | |
| LINKLEVEL (data-area) | | |
| MAJORVERSION (data-area) | | |
| MAPCOLUMN (data-area) | | |
| MAPHEIGHT (data-area) | | |

Description

The **ASSIGN** command gets values from outside the local environment of the application program. The data obtained depends on the specified options. You can specify up to 16 options in one **ASSIGN** command.

For options that apply to terminals or terminal-related data, the reference is always to the principal facility.

If the principal facility is a remote terminal, the data returned is obtained from the local copy of the information; the request is not routed to the system to which the remote terminal is attached.

Transaction routing is, as far as possible, transparent to the **ASSIGN** command. In general, the values returned are the same whether the transaction is local or remote.

For more details on these options, see Developing in an intersystem environment in the Intercommunication Guide.

Options

ABCODE(*data-area*)

Returns a 4-character current abend code. Abend codes are documented in Transaction abend codes in Reference -> Diagnostics. If an abend has not occurred, the variable is set to blanks.

ABDUMP(*data-area*)

Returns a 1-byte value. X'FF' indicates that an **EXEC CICS ABEND ABCODE** command was issued without the NODUMP option and that ABCODE contains an abend code. X'00' indicates that either no dump was produced, or ABCODE contains blanks.

ABOFFSET(*data-area*)

Returns a fullword binary offset in bytes of an abend when the latest abend with a code ASRA, ASRB, or ASRD occurred. If the abend is outside the current program, a value of X'FFFFFFFF' is returned. The data area is set to binary zeros if no ASRA, ASRB, or ASRD abend occurred during the execution of the issuing transaction, or if the abend originally occurred in a remote DPL server program.

ABPROGRAM(*data-area*)

Returns an 8-character name of the failing program for the latest abend.

If the abend originally occurred in a DPL server program running in a remote system, ABPROGRAM returns the DPL server program name.

This field is set to binary zeros if it is not possible to determine the failing program at the time of the abend.

When the latest abend is an APCT (resulting from an unsuccessful attempt to load a program, mapset or partitionset), the name is taken from the program, mapset, or partitionset that was not loaded.

ACTIVITY(*data-area*)

Returns, if this program is running on behalf of a CICS business transaction services (BTS) activity, the 16-character name of the activity.

BTS is described in Overview of BTS in Product overview.

ACTIVITYID(*data-area*)

Returns, if this program is running on behalf of a BTS activity, the 52-character, CICS-assigned, identifier of the activity-instance.

If a program that is running outside the current process wants to acquire control of this activity-instance, it must specify this identifier on an **ACQUIRE ACTIVITYID** command.

BTS is described in Overview of BTS in Product overview.

ALTSCRNHT(*data-area*)

Returns the alternate screen height defined for the terminal as a halfword binary variable. If the task is not initiated from a terminal, INVREQ occurs.

ALTSCRNWD(*data-area*)

Returns the alternate screen width defined for the terminal as a halfword binary variable. If the task is not initiated from a terminal, INVREQ occurs.

APLKYBD(*data-area*)

Returns a 1-byte indicator that shows whether the terminal keyboard has the APL keyboard feature (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

APLTEXT(*data-area*)

Returns a 1-byte indicator that shows whether the terminal keyboard has the APL text feature (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

APPLICATION(*data-area*)

Returns the 64 character name of the current application associated with the task. It is part of the application context that is made up of the application name, the platform name, the operation name and the major, minor and micro version number of the application. If there is no application context associated with the task, then blanks are returned.

APPLID(*data-area*)

Returns an 8-character APPLID of the CICS system that owns the transaction.

If your system is using XRF, the value returned is the generic APPLID. An application program is unaffected by a takeover from the active to the alternate.

ASRAINTRPT(*data-area*)

Returns an 8-character data-area that contains the ILC (instruction length code) and the PIC (program interrupt code) at the point when the latest abend with a code of AICA, ASRA, ASRB, ASRD, or ASRE occurred. The field contains binary zeros if no AICA, ASRA, ASRB, ASRD, or ASRE abend occurred during the execution of the issuing transaction, or if the abend originally occurred in a remote DPL server program. When valid, the contents of the 8 bytes returned are as follows:

- ILC (2 bytes binary)
- PIC (2 bytes binary)
- filler (4 bytes binary, always zero)

ASRAKEY(*cvda*)

Returns the execution key at the time of the last AEYD, AEYF, AICA, ASRA, or ASRB abend, if any. CVDA values are as follows:

CICSEXECKEY

This value is returned if the task was running in CICS-key at the time

of the last AEYD, AEYF, AICA, ASRA, or ASRB abend. Note that if CICS subsystem storage protection is not active, all programs run in CICS key.

USEREXECKEY

This value is returned if the task was running in user-key at the time of the last AEYD, AEYF, AICA, ASRA, or ASRB abend.

NONCICS

This value is returned if the execution key at the time of the last abend was not one of the CICS keys; for example, not key 8 or key 9.

NOTAPPLIC

This value is returned if there was not an AEYD, AEYF, AICA, ASRA, or ASRB abend.

ASRAPSW(*data-area*)

Returns an 8-byte data area that contains the program status word (PSW) at the point when the latest abend with a code of AICA, ASRA, ASRB, ASRD, or ASRE occurred.

The field contains binary zeros if no AICA, ASRA, ASRB, ASRD, or ASRE abend occurred during the execution of the issuing transaction, or if the abend originally occurred in a remote DPL server program.

ASRAPSW16(*data-area*)

Returns a 16-byte data area that contains the 128-bit program status word (PSW) at the point when the latest abend with a code of AICA, ASRA, ASRB, ASRD, or ASRE occurred.

The field contains binary zeros if no AICA, ASRA, ASRB, ASRD, or ASRE abend occurred during the execution of the issuing transaction, or if the abend originally occurred in a remote DPL server program.

ASRAREGS(*data-area*)

Returns the contents of general registers 0 - 15 at the point when the latest AICA, ASRA, ASRB, ASRD, or ASRE abend occurred.

The contents of the registers are returned in the data area (64 bytes long) in the order 0, 1, ..., 14, 15.

The data area is set to binary zeros if no AICA, ASRA, ASRB, ASRD, or ASRE abend occurred during the execution of the issuing transaction, or if the abend originally occurred in a remote DPL server program.

ASRAREGS64(*data-area*)

Returns the contents of the 64-bit general registers 0 - 15 at the point when the latest AICA, ASRA, ASRB, ASRD, or ASRE abend occurred.

The contents of the registers are returned in the data area (128 bytes long) in the order 0, 1, ..., 14, 15.

The data area is set to binary zeros if no AICA, ASRA, ASRB, ASRD, or ASRE abend occurred during the execution of the issuing transaction, or if the abend originally occurred in a remote DPL server program.

ASRASPC(*cvda*)

Returns the type of space in control at the time of the last AEYD, AEYF, AICA, ASRA, or ASRB abend, if any. CVDA values are as follows:

SUBSPACE

This value is returned if the task was running in either its own subspace or the common subspace at the time of the last AEYD, AEYF, AICA, ASRA, or ASRB abend.

BASESPACE

This value is returned if the task was running in the base space at the time of the last AEYD, AEYF, AICA, ASRA, or ASRB abend. All tasks run in base space if transaction isolation is not active.

NOTAPPLIC

This value is returned if there was not an AEYD, AEYF, AICA, ASRA, or ASRB abend.

ASRASTG(*cvda*)

Returns the type of storage being addressed at the time of the last AEYD, AEYF, AICA, ASRA, or ASRB abend, if any. The CVDA values are as follows:

CICS This value is returned if the storage being addressed is CICS-key storage. This can be in one of the CICS dynamic storage areas (CDSA, ECDSA, ETDSA, or GCDSA). This can be in one of the read-only dynamic storage areas (RDSA or ERDSA) when CICS is running with the NOPROTECT option on the **RENTPGM** system initialization parameter, or when storage protection is not active.

USER This value is returned if the storage being addressed is user-key storage in one of the user dynamic storage areas (UDSA, EUDSA, or GUDSA).

READONLY

This value is returned if the storage being addressed is read-only storage in one of the read-only dynamic storage areas (RDSA or ERDSA) when CICS is running with the PROTECT option on the **RENTPGM** system initialization parameter.

NOTAPPLIC

This value is returned in the following conditions:

- There is no AEYD, AEYF, AICA, ASRA, or ASRB abend found for this task.
- The affected storage in an abend is not managed by CICS.
- The ASRA abend is not caused by an 0C4 abend.

BRIDGE(*data-area*)

Returns the 4-character TRANSID of the bridge monitor transaction that issued a **START BREXIT TRANSID** command to start the user transaction that issued this command. Blanks are returned in the following situations:

- The user transaction was not started by a bridge monitor transaction.
- This command was issued by a program started by a distributed program link (DPL) request.

Note: If the **START BREXIT** command was issued from a bridge exit, the TRANSID returned is the that of the bridge monitor that issued a **START BREXIT** naming the bridge exit.

BTRANS(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the background transparency capability (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

CHANNEL(*data-area*)

Returns the 16-character name of the current channel of the program, if one exists; otherwise blanks.

CMDSEC(*data-area*)

Returns a 1-byte indicator that shows whether command security checking is defined for the current task. (X for yes, blank for no.)

COLOR(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the extended color capability (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

CWALENG(*data-area*)

Returns a halfword binary field that indicates the length of the common work area (CWA). If no CWA exists, a zero length is returned.

DEFSCRNHT(*data-area*)

Returns a halfword binary variable that contains the default screen height defined for the terminal. If the task is not initiated from a terminal, INVREQ occurs.

DEFSCRNWD(*data-area*)

Returns a halfword binary variable that contains the default screen width defined for the terminal. If the task is not initiated from a terminal, INVREQ occurs.

DELIMITER(*data-area*)

Returns a 1-byte data-link control character for a 3600. Possible values are as follows:

- X'80' Input ended with end-of-text (ETX).
- X'40' Input ended with end-of-block (ETB).
- X'20' Input ended with inter-record separator (IRS).
- X'10' Input ended with start of header (SOH).
- X'08' Transparent input.

If the task is not initiated from a terminal, INVREQ occurs.

DESTCOUNT(*data-area*)

Returns a halfword binary field. This option has the following uses:

- Following a BMS **ROUTE** command, it shows that the value required is the number of different terminal types in the route list, and hence the number of overflow control areas that might be required.
- Within BMS overflow processing, it shows that the value required is the relative overflow control number of the destination that has encountered overflow. If this option is specified when overflow processing is not in effect, the value obtained is meaningless. If no BMS commands have been issued, INVREQ occurs.

DESTID(*data-area*)

Returns an 8-byte identifier of the outboard destination, padded with blanks on the right to eight characters. If this option is specified before a batch data interchange command is issued in the task, INVREQ occurs.

DESTIDLENG(*data-area*)

Returns a halfword binary length of the destination identifier obtained by DESTID. If this option is specified before a batch data interchange command is issued in the task, INVREQ occurs.

DSSCS(*data-area*)

Returns a 1-byte indicator that shows whether the principal facility is a basic SCS data stream device (X'FF') or not (X'00').

If the task is not initiated from a terminal, INVREQ occurs.

DS3270(*data-area*)

Returns a 1-byte indicator that shows whether the principal facility is a 3270 data stream device (X'FF') or not (X'00').

If the task is not initiated from a terminal, INVREQ occurs.

ERRORMSG(*data-area*)

Returns the error message up to a maximum of 500 bytes that is currently referenced in the transaction abend control block for the CICS task. Following a failure of a DPL request, the message is that returned from the remote system. For messages shorter than 500 bytes the message is padded with nulls.

If no message is present, the 500 byte area contains nulls.

ERRORMSGLEN(*data-area*)

Returns a halfword binary value representing the length of the message returned for ERRORMSG. If the message referenced in the transaction abend control block exceeds 500 bytes, the message is truncated and the length is set to 500.

If no message is present the length returned is 0.

EWASUPP(*data-area*)

Returns a 1-byte indicator that shows whether Erase Write Alternative is supported (X'FF') or not (X'00').

If the task is not initiated from a terminal, INVREQ occurs.

EXTDS(*data-area*)

Returns a 1-byte indicator that shows whether the terminal accepts the 3270 extended data stream, (X'FF') or not (X'00'). Extended data stream capability is required for a terminal that supports the query feature, color, extended highlighting, programmed symbols or validation. A terminal that accepts the query structured field command also has this indicator set. If extended data stream is on, the device supports the write structured field COMMAND and Outbound Query Structured field.

For guidance information about query structured fields, see the IBM 3270 Data Stream Device Guide.

If the task is not initiated from a terminal, INVREQ occurs.

FACILITY(*data-area*)

Returns a 4-byte identifier of the principal facility that initiated the transaction issuing this command. If this option is specified, and there is no allocated facility, INVREQ occurs.

Note: You can use the QNAME option to get the name of the transient data intrapartition queue if the transaction was initiated by expiry of a transient data trigger level.

FCI(*data-area*)

Returns a 1-byte facility control indicator. For more information see Appendix B, “Codes returned by ASSIGN,” on page 907. This indicates the type of facility associated with the transaction; for example, X'01' indicates a terminal or logical unit. The obtained value is always returned.

GCHARS(*data-area*)

Returns a halfword binary graphic character set global identifier (the GCSGID). The value is a number in the range 1 through 65534 representing the set of graphic characters that can be input or output at the terminal. If the task is not initiated from a terminal, INVREQ occurs.

GCODES(*data-area*)

Returns a halfword binary code page global identifier (the CPGID). The value is a number in the range 1 through 65534 representing the EBCDIC or ASCII code page defining the code points for the characters that can be input or output at the terminal. If the task is not initiated from a terminal, INVREQ occurs.

GMMI(*data-area*)

Returns a 1-byte indicator that shows whether a “good morning” message applies to the terminal associated with the running transaction (X'FF') or not (X'00'). If this option is specified and the current task is not associated with a terminal, the INVREQ condition occurs.

HIGHLIGHT(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the extended highlight capability (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

INITPARM(*data-area*)

Returns the 60-character data-area that contains any initialization parameters that are specified for the program on the **INITPARM** system initialization parameter. The values are only returned if the name of the program that issues the command matches a program name that is specified on the **INITPARM** system initialization parameter. If there are no parameters for the program, the area is not updated and its contents are undefined. Use INITPARMLEN with **INITPARM** to determine whether a parameter was specified or not; the value that is returned by **ASSIGN INITPARM** alone cannot be used to indicate whether a system initialization parameter was specified. For more information, see **INITPARM** system initialization parameter in **Reference > System definition**, here INITPARM system initialization parameter in Reference -> System definition.

INITPARMLEN(*data-area*)

Returns a halfword binary length of the INITPARM. If there is no parameter for it, INITPARMLEN contains binary zeros.

INPARTN(*data-area*)

Returns the 1- or 2-character name of the most recent input partition. If no map is yet positioned, or if BMS routing is in effect, or if the task is not initiated from a terminal, INVREQ occurs.

INPUTMSGLEN(*data-area*)

Returns a halfword binary length of the terminal input string, in bytes. If there is no terminal input data, a length of zero is returned.

INVOKINGPROG(*data-area*)

Returns the 8-character name of the application program that used the **LINK** or **XCTL** command to link or transfer control to the current program:

- If you issue the **ASSIGN INVOKINGPROG** command in a remote program that was invoked by a distributed program link (DPL) command, CICS returns the name of the program that issued the DPL command.
- If you issue the **ASSIGN INVOKINGPROG** command in an application program at the highest level, CICS returns eight blanks.
- If you issue the **ASSIGN INVOKINGPROG** command in a user-replaceable program, a Bridge Exit program or a program list table program, CICS returns eight blanks.
- If you issue the **ASSIGN INVOKINGPROG** command from a global user exit, task-related exit, or application program linked to from such an exit, CICS returns the name of the most recent invoking program that was not a global user exit or task-related user exit.

KATAKANA(*data-area*)

Returns a 1-byte indicator that shows whether the principal facility supports Katakana (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

LANGINUSE(*data-area*)

Returns a 3-byte mnemonic code that shows the language in use. The 3-byte mnemonic has a 1:1 correspondence with the 1-byte NATLANGINUSE option. See Appendix C, "National language codes," on page 909 for possible values of the code.

LDCMNEM(*data-area*)

Returns a 2-byte logical device code (LDC) mnemonic of the destination that has encountered overflow. If this option is specified when overflow processing is not in effect, the value obtained not significant. If no BMS commands have been issued, INVREQ occurs.

LDCNUM(*data-area*)

Returns a 1-byte LDC numeric value of the destination that has encountered overflow. This indicates the type of the LDC, such as printer or console. If this option is specified when overflow processing is not in effect, the value obtained is not significant.

LINKLEVEL(*data-area*)

Returns a halfword binary value representing the program link level in the local system. The topmost link level is level one and for each EXEC CICS LINK the link level is incremented by one. The link level is not incremented for a language CALL statement. If a program is the target of a DPL request, the link level returned is that within the CICS region it is executing and not the wider distributed transaction. If a program is DPLed to, then link level one will be the CICS mirror program DFHMIRS.

MAJORVERSION(*data-area*)

Returns the fullword binary value representing the major version of the current application associated with the task, which is part of the application context. If there is no application context associated with the task, then -1 is returned.

MAPCOLUMN(*data-area*)

Returns a halfword binary number of the column on the display that contains the origin of the most recently positioned map. If no map is yet positioned, or if BMS routing is in effect, or if the task is not initiated from a terminal, INVREQ occurs.

MAPHEIGHT(*data-area*)

Returns a halfword binary height of the most recently positioned map. If no

map is yet positioned, or if BMS routing is in effect, or if the task is not initiated from a terminal, INVREQ occurs.

MAPLINE(*data-area*)

Returns a halfword binary number of the line on the display that contains the origin of the most recently positioned map. If no map is yet positioned, or if BMS routing is in effect, or if the task is not initiated from a terminal, INVREQ occurs.

MAPWIDTH(*data-area*)

Returns a halfword binary width of the most recently positioned map. If no map is yet positioned, or if BMS routing is in effect, or if the task is not initiated from a terminal, INVREQ occurs.

MICROVERSION(*data-area*)

Returns the fullword binary value representing the micro version of the current application associated with the task, which is part of the application context. If there is no application context associated with the task, then -1 is returned.

MINORVERSION(*data-area*)

Returns the fullword binary value representing the minor version of the current application associated with the task, which is part of the application context. If there is no application context associated with the task, then -1 is returned.

MSRCONTROL(*data-area*)

Returns a 1-byte indicator that shows whether the terminal supports magnetic slot reader (MSR) control (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

NATLANGINUSE(*data-area*)

Returns a 1-byte mnemonic code that shows the national language associated with the USERID for the current task (which could be the default USERID). Refer to the **SIGNON** command for an explanation of how this value is derived. (NATLANGINUSE does not show the system default language as specified on the **NATLANG** system initialization parameter.)

See Appendix C, "National language codes," on page 909 for possible values of the code.

NETNAME(*data-area*)

Returns the 8-character name of the logical unit in the z/OS Communications Server network. If the task is not initiated from a terminal, INVREQ occurs. If the principal facility is not a local terminal, CICS no longer returns a null string but the netname of the remote terminal.

If this command was issued by a user transaction that was started by a 3270 bridge transaction, the value returned is the termid of the bridge facility.

If the CICS region supports z/OS Communications Server LU aliases, the NETNAME returned by CICS could be an LU alias, either dynamically allocated by z/OS Communications Server or predefined on the **LUALIAS** parameter of a CDRSC definition.

NEXTTRANSID(*data-area*)

Returns the 4-character next transaction identifier as set by **SET NEXTTRANSID** or **RETURN TRANSID**. It returns blanks if there are no more transactions.

NUMTAB(*data-area*)

Returns a 1-byte number of the tabs required to position the print element in the correct passbook area of the 2980. If the task is not initiated from a terminal, INVREQ occurs.

OPCLASS(*data-area*)

Returns, in a 24-bit string, the operator class used by BMS for routing terminal messages, as defined in the CICS segment of the External Security Manager.

OPERATION(*data-area*)

Returns the 64 character name of the current operation associated with the task, which is part of the application context. If there is no application context associated with the task, then blanks are returned.

OPERKEYS(*data-area*)

This option is accepted for compatibility with previous releases. If specified, a 64-bit null string is returned.

OPID(*data-area*)

Returns the 3-character operator identification. This is used by BMS for routing terminal messages, as defined in the CICS segment of the External Security Manager.

If the task is initiated from a remote terminal, the OPID returned by this command is not necessarily that associated with the user that is signed on at the remote terminal. If you want to know the OPID of the signed on user, use the INQUIRE TERMINAL system programming command.

The OPID can also be different from the OPID of the user currently signed on, if it was changed with the SET TERMINAL command.

OPSECURITY(*data-area*)

This option is accepted for compatibility with previous releases. If specified, a 24-bit null string is returned.

ORGABCODE(*data-area*)

Returns a 4-byte original abend code in cases of repeated abends.

OUTLINE(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the field outlining capability (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

PAGENUM(*data-area*)

Returns a halfword binary current page number for the destination that has encountered an overflow. If this option is specified when overflow processing is not in effect, the value obtained is meaningless. If no BMS commands have been issued, INVREQ occurs.

PARTNPAGE(*data-area*)

Returns a 2-byte name of the partition that most recently caused page overflow. If no BMS commands have been issued, INVREQ occurs.

PARTNS(*data-area*)

Returns a 1-byte indicator that shows whether the terminal supports partitions (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

PARTNSET(*data-area*)

Returns the name (1–6 characters) of the application partition set. A blank value is returned if there is no application partition set. If the task is not initiated from a terminal, INVREQ occurs.

PLATFORM(*data-area*)

Returns the 64 character name of the platform associated with the task, which is part of the application context. If there is no application context associated with the task, then blanks are returned.

PRINSYSID(*data-area*)

Returns the 4-character name by which the other system is known in the local system; that is, the CONNECTION definition that defines the other system. For a single-session APPC device defined by a terminal definition, the returned value is the terminal identifier.

This only applies when the principal facility is one of the following:

- An MRO session to another CICS system
- An LU6.1 session to another CICS or IMS system
- An APPC session to another CICS system, or to another APPC system or device

If the principal facility is not an MRO, LU6.1, or APPC session, or if the task has no principal facility, INVREQ occurs.

Note: Special considerations apply generally when transaction routing. In particular an **ASSIGN PRINSYSID** command cannot be used in a routed transaction to find the name of the terminal-owning region. For more information, see CICS transaction routing in Getting started.

PROCESS(*data-area*)

Returns, if this program is running on behalf of a CICS business transaction services (BTS) activity, the 36-character name of the BTS process that contains the activity.

BTS is described in Overview of BTS in Product overview.

PROCESSTYPE(*data-area*)

Returns, if this program is running on behalf of a BTS activity, the 8-character process type of the BTS process that contains the activity.

BTS is described in Overview of BTS in Product overview.

PROGRAM(*data-area*)

Returns an 8-character name of the currently running program.

PS(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the programmed symbols capability (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

QNAME(*data-area*)

Returns a 4-character name of the transient data intrapartition queue that caused this task to be initiated by reaching its trigger level. If the task is not initiated by automatic transaction initiation (ATI), INVREQ occurs.

RESSEC(*data-area*)

Returns a 1-byte indicator that shows whether resource security checking is defined for the transaction running. (X for yes, blank for no.)

RESTART(*data-area*)

Returns a 1-byte indicator that shows whether a restart of the task (X'FF'), or a normal start of the task (X'00'), has occurred.

RETURNPROG(*data-area*)

Returns the 8-character name of the program to which control is to be returned when the current program has finished running. The values returned depend on how the current program was given control, as follows:

- If the current program was invoked by a **LINK** command, including a distributed program link, RETURNPROG returns the same name as INVOKINGPROG.

- If the current program was invoked by an **XCTL** command, **RETURNPROG** returns the name of the application program in the chain that last issued a **LINK** command.
If the program that invoked the current program with an **XCTL** command is at the highest level, CICS returns eight blanks.
- If the **ASSIGN RETURNPROG** command is issued in the program at the top level, CICS returns eight blanks.
- If the **ASSIGN RETURNPROG** command is issued in a user-replaceable module, or a program list table program, CICS returns eight blanks.
- If the **ASSIGN RETURNPROG** command is issued in a global user exit, task-related exit, or application program linked to from such an exit, CICS returns the name of the program that control is returned to when all intermediate global user exit and task-related user exit programs have completed.

SCRNHT(*data-area*)

Returns a halfword binary variable that contains the height of the 3270 screen defined for the current task. If the task is not initiated from a terminal, **INVREQ** occurs.

SCRNWD(*data-area*)

Returns a halfword binary variable that contains the width of the 3270 screen defined for the current task. If the task is not initiated from a terminal, **INVREQ** occurs.

SIGDATA(*data-area*)

Returns a 4-byte character string that contains the inbound signal data received from a logical unit. If the task is not initiated from a terminal, **INVREQ** occurs.

SOSI(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the mixed EBCDIC/DBCS fields capability (X'FF') or not (X'00'). The DBCS subfields within an EBCDIC field are delimited by SO (shift-out) and SI (shift-in) characters. If the task is not initiated from a terminal, **INVREQ** occurs.

STARTCODE(*data-area*)

Returns a 2-character value that indicates how the transaction that issued the request was started. Possible values are as follows:

Code Transaction started by

- | | |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D | A distributed program link (DPL) request that did not specify the SYNCONRETURN option. The task cannot issue I/O requests against its principal facility, or any sync point requests. |
| DS | A distributed program link (DPL) request, as in code D, that did specify the SYNCONRETURN option. The task can issue sync point requests. |
| QD | Transient data trigger level. |
| S | START command that did not pass data in the FROM option. It might or might not have passed a channel. |
| SD | START command that passed data in the FROM option. |
| SZ | FEPI START command. |
| TD | Terminal input or permanent transid. |
| U | User-attached task. |

STATIONID(*data-area*)

Returns a 1-byte station identifier of a 2980. If the task is not initiated from a terminal, INVREQ occurs.

SYSID(*data-area*)

Returns the 4-character name given to the local CICS system. This value can be specified in the SYSID option of a file control, interval control, temporary storage, or transient data command, in which case the resource to be accessed is assumed to be on the local system.

TASKPRIORITY(*data-area*)

Returns a halfword binary field that indicates the current priority of the issuing task (0–255). When the task is first attached, this is the sum of the user, terminal, and transaction priorities. This value can be changed during execution by a **CHANGE TASK** command.

TCTUALENG(*data-area*)

Returns a halfword binary length of the terminal control table user area (TCTUA). If no TCTUA exists, a zero length is returned.

TELLERID(*data-area*)

Returns a 1-byte teller identifier of a 2980. If the task is not initiated from a terminal, INVREQ occurs.

TERMCODE(*data-area*)

Returns a 2-byte code giving the type and model number of the terminal associated with the task.

The first byte is a code identifying the terminal type, derived from the TERMINAL resource. For a description of the resource attributes, see TERMINAL attributes in Reference -> System definition . The second byte is a single-character model number as specified in the TERMMODEL attribute.

The meanings of the type codes are given in Appendix B, “Codes returned by ASSIGN,” on page 907.

TERMPRIORITY(*data-area*)

Returns a halfword binary terminal priority (0–255).

TEXTKYBD(*data-area*)

Returns a 1-byte indicator that shows whether the principal facility supports TEXTKYBD (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

TEXTPRINT(*data-area*)

Returns a 1-byte indicator that shows whether the principal facility supports TEXTPRINT (X'FF') or not (X'00'). If the task is not initiated from a terminal, INVREQ occurs.

TRANPRIORITY(*data-area*)

Returns a halfword binary transaction priority (0–255).

TWALENG(*data-area*)

Returns a halfword binary length of the transaction work area (TWA). If no TWA exists, a zero length is returned.

UNATTEND(*data-area*)

Returns a 1-byte indicator that shows whether the mode of operation of the terminal is unattended, that is to say that no person is attending the terminal. These indicators are X'FF' for unattended and X'00' for attended. If the task is not initiated from a terminal, INVREQ occurs.

USERID(*data-area*)

Returns an 8-byte user ID of the signed-on user. If no user is explicitly signed on, CICS returns the default user ID. Special considerations apply if you are using an intercommunication environment. See the Getting started with intercommunication in Getting started for more information about the **ASSIGN** command for LUTYPE6.1, APPC, and MRO.

USERNAME(*data-area*)

Returns a 20-character name of the user obtained from the external security manager (ESM).

USERPRIORITY(*data-area*)

Returns a halfword binary operator priority (0–255).

VALIDATION(*data-area*)

Returns a 1-byte indicator that shows whether the terminal is defined as having the validation capability (X'FF') or not (X'00'). Validation capability consists of the mandatory fill, mandatory enter, and trigger attributes. If the task is not initiated from a terminal, INVREQ occurs.

Conditions

The ASSIGN command always returns the exception condition INVREQ under CECI or in a REXX program. Even though CECI or the REXX program might return the information you requested correctly, it also attempts to get information from other options, some of which are invalid.

16 INVREQ

RESP2 values:

- 1 The task does not have a signed-on user.
- 2 No BMS command has yet been issued, BMS routing is in effect, or no map has yet been positioned.
- 3 No batch data interchange (BDI) command has yet been issued.
- 4 The task is not initiated by automatic transaction initiation (ATI).
- 5 The task is not associated with a terminal; or the task has no principal facility; or the principal facility is not an MRO, LU6.1, or APPC session.
- 6 A CICS BTS request was issued from outside the CICS BTS environment. Therefore, the transaction is not running on behalf of a BTS activity.
- 200 Command syntax options are not allowed in a server program invoked by a distributed program link.

Default action: terminate the task abnormally.

Examples

An example of RETURNPROG:

```

Program A links to program B
Program B links to program C
Program C transfers control to program D
Program D issues an ASSIGN RETURNPROG command,
and CICS returns the name of Program B.
```

BIF DEEDIT

Provide the DEEDIT function that removes special characters from an EBCDIC data field.

BIF DEEDIT

►►—BIF DEEDIT—FIELD(*data-area*)—LENGTH(*data-value*)—►►

Condition: LENGERR

This command is threadsafe.

Description

BIF DEEDIT provides the built-in function DEEDIT. It specifies that alphabetic and special characters are removed from an EBCDIC data field, and the remaining digits right-aligned and padded to the left with zeros as necessary.

If the field ends with a minus sign or a carriage-return (CR), a negative zone (X'D') is placed in the rightmost (low-order) byte.

If the zone portion of the rightmost byte contains one of the characters X'A' through X'F', and the numeric portion contains one of the hexadecimal digits X'0' through X'9', the rightmost byte is returned unaltered (see the example). This permits the application program to operate on a zoned numeric field. The returned value is in the field that initially contained the unedited data.

A 1 byte field is returned unaltered, no matter what the field contains.

Options

FIELD(*data-area*)
specifies the field to be edited.

LENGTH(*data-value*)
specifies the field length in bytes.

Conditions

22 LENGERR
Occurs if the LENGTH value is less than 1.
Default action: terminate the task abnormally.

Examples

```
EXEC CICS BIF DEEDIT  
      FIELD(CONTG)  
      LENGTH(9)
```

This removes all characters other than digits from CONTG, a 9 byte field, and returns the edited result in that field to the application program.

Two examples of the contents of CONTG before and after execution of the command are:


| Original value | Returned value |
|-----------------------|-----------------------|
| 14-6704/B | 00146704B |
| \$25.68 | 000002568 |

A decimal point is an EBCDIC special character and as such is removed.

BIF DIGEST

Calculate the SHA-1 digest of a string of data.

BIF DIGEST

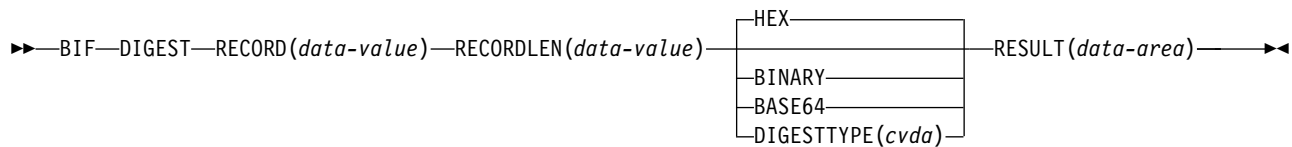

Conditions: INVREQ, LENGERR

This command is threadsafe.

Description

The **BIF DIGEST** command is a CICS built-in function that calculates the SHA-1 digest of a string of data. The result can be returned as binary (20 bytes long), hexadecimal (40 bytes long), or base64-encoded (28 bytes long). The SHA-1 digest is a cryptographically strong checksum of the string, so for practical purposes it is unique for each string.

This command uses z/Architecture[®] message security assist (MSA) functions that require z Systems[™] cryptographic hardware with CP Assist for Cryptographic Functions (CPACF). For more information, see the *z/OS Cryptographic Services Integrated Cryptographic Service Facility Overview*.

Options

RECORD(*data-value*)

Specifies the string of data for which the digest is to be calculated.

RECORDLEN(*data-value*)

Specifies the length, as a fullword binary value, of the data string.

DIGESTTYPE(*cvda*)

Specifies the format in which the digest is returned.

HEX Hexadecimal, which produces a result 40 bytes long, encoded as hexadecimal characters (0 - 9, A - F).

BINARY

Binary, which produces a result 20 bytes long.

BASE64

Base64 encoding, which produces a result 28 bytes long, using the characters A - Z, a - z, 0 - 9, +, /, =.

RESULT(*data-area*)

Returns the SHA-1 digest of the data string in the format specified by the DIGESTTYPE option. The length of the result depends on the requested format.

Conditions

16 INVREQ

RESP2 values:

- 1 DIGESTTYPE has an invalid CVDA value.
- 3 z/Architecture message security assist (MSA) is not available.

22 LENGERR


RESP2 values:

- 2 The RECORDLEN value is less than 1.

BUILD ATTACH (LUTYPE6.1)

Specify values for an LUTYPE6.1 attach header.

BUILD ATTACH (LUTYPE6.1)

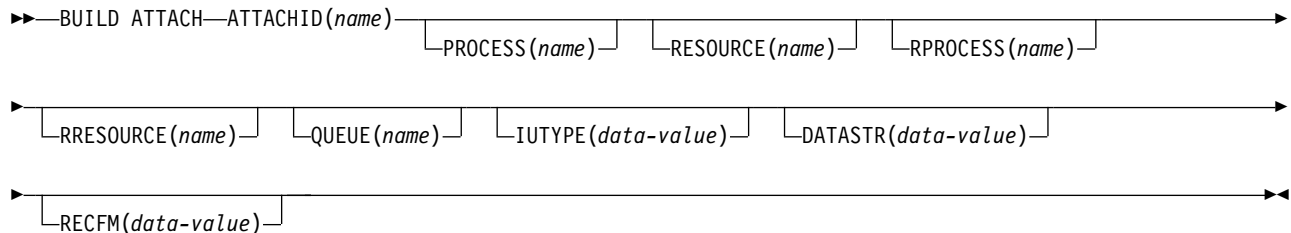

Description

BUILD ATTACH (LUTYPE6.1) specifies a set of values to be placed in the named attach header control block. This control block contains values that are to be sent in an LUTYPE6.1 attach FMH (Function Management Header) that is constructed by CICS, and is sent only when a SEND ATTACHID or CONVERSE ATTACHID command is executed. The specified values override existing values in the control block; unspecified values are set to default values.

Options

ATTACHID(*name*)

specifies that the set of values is to be placed in an attach header control block identified by the specified name (1–8 characters).

DATASTR(*data-value*)

corresponds to the data stream profile field, ATTDSP, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the data stream profile field in an attach FMH. For most CICS applications, the option can be omitted.

. For details of communication between a CICS system and any other subsystem, including details of structured fields and logical record management, refer to documentation supplied by the subsystem about how to use the data stream profile field in an attach FMH.

The “data-value” is a halfword binary. Only the low-order byte is used. The SNA-defined meanings of the bits are as follows:

| | |
|-------|--------------------------------------------------------------------------------------------|
| 0–7 | reserved - must be set to zero |
| 8–11 | 0000 - user-defined |
| | 1111 - SCS data stream |
| | 1110 - 3270 data stream |
| | 1101 - structured field |
| | 1100 - logical record management |
| 12–15 | defined by the user if bits 8–11 are set to 0000; otherwise reserved (must be set to zero) |

A value of “structured field” indicates that chains begin with four bytes of data that are used to interpret the following data: overall length (2 bytes), class

identifier (1 byte), and subclass identifier (1 byte). A value of “logical record management” indicates that chains can be split into separate fields by the data receiver.

If the option is omitted, a value of “user-defined” is assumed.

IUTYPE(*data-value*)

corresponds to the interchange unit field, ATTIU, in an LUTYPE6.1 attach FMH.

The “data-value” is a halfword binary. Only the low-order 7 bits are used. The SNA-defined meanings of the bits are as follows:

| | |
|-------|--------------------------------------------|
| 0–10 | reserved - must be set to zero |
| 11 | 0 - not end of multichain interchange unit |
| | 1 - end of multichain interchange unit |
| 12,13 | reserved - must be set to zero |
| 14,15 | 00 - multichain interchange unit |
| | 01 - single-chain interchange unit |
| | 10 - reserved |
| | 11 - reserved |

If the option is omitted, values of “not end of multichain interchange unit” and “multichain interchange unit” are assumed.

PROCESS(*name*)

corresponds to the process name, ATTDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, a transaction running in one system can acquire a session to the second system and can identify the transaction to be attached; in the second system, the identification is carried in the first chain of data sent across the session.

In general, the first four bytes of data identify the transaction to be attached. However an attach FMH, identifying the transaction to be attached, can be built and sent; the PROCESS option is used to specify the transaction name. (Note that the receiving CICS system uses just the first four bytes of the process name as a transaction name.)

No significance is attached by CICS to process names in attach FMHs sent in chains of data other than the first.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the process name field in an attach FMH.

QUEUE(*name*)

corresponds to the queue name, ATTDQN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the queue name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the queue name field in an attach FMH.

RECFM(*data-value*)

corresponds to the deblocking algorithm field, ATTDBA, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the deblocking algorithm field in an attach FMH. For most CICS applications, the option can be omitted.

The “data-value” is a halfword binary value. Only the low-order byte is used. The SNA-defined meanings of the bits are as follows:

| | |
|------|--------------------------------|
| 0–7 | reserved - must be set to zero |
| 8–15 | X'00' - reserved |
| | X'01' - variable-length |
| | variable-blocked |
| | X'02' - reserved |
| | X'03' - reserved |
| | X'04' - chain of RUs |
| | X'05' through X'FF' - reserved |

If the option is omitted, a value of “chain of RUs” is assumed.

RESOURCE(*name*)

corresponds to the resource name, ATTPRN, in an LUTYPE6.1 attach FMH.

RPROCESS(*name*)

corresponds to the return-process name, ATTRDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the return-process name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return-process name field in an attach FMH.

RRESOURCE(*name*)

corresponds to the return-resource name, ATTRPRN, in an LUTYPE6.1 attach FMH.


For communication between two CICS systems, no significance is attached by CICS to the return-resource name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return-resource name field in an attach FMH.

BUILD ATTACH (MRO)

Specify values for an MRO attach header.

BUILD ATTACH (MRO)

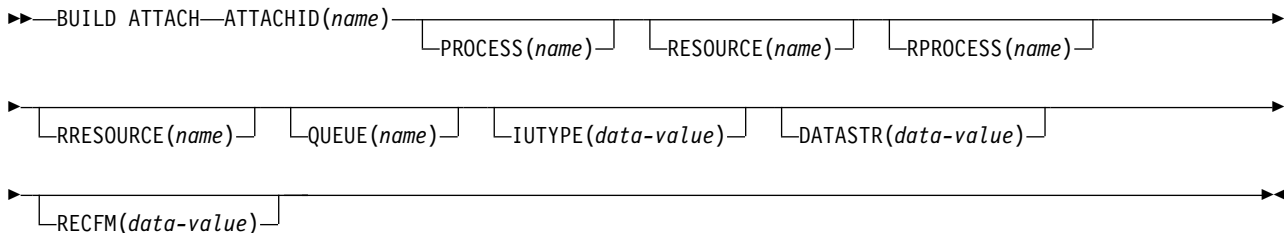

Description

BUILD ATTACH (MRO) specifies a set of values to be placed in the named attach header control block. This control block contains values that are to be sent in an MRO attach FMH (Function Management Header) that is constructed by CICS, and is sent only when a **SEND ATTACHID** or **CONVERSE ATTACHID** command is executed. The specified values override existing values in the control block; unspecified values are set to default values.

For more information about MRO and IRC, see the Introduction to CICS intercommunication in the *CICS Intercommunication Guide*.

Options

ATTACHID(*name*)

specifies that the set of values is to be placed in an attach header control block identified by the specified name (1–8 characters).

DATASTR(*data-value*)

corresponds to the data stream profile field, ATTDSP, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the data stream profile field in an attach FMH. For most CICS applications, the option can be omitted.

The “data-value” is a binary halfword. Only the low-order byte is used. The SNA-defined meanings of the bits are as follows:

| | |
|-------|--------------------------------------------------------------------------------------------------|
| 0-7 | reserved - must be set to zero |
| 8-11 | 0000 - user-defined |
| | 1111 - SCS data stream |
| | 1110 - 3270 data stream |
| | 1101 - structured field |
| | 1100 - logical record management |
| 12-15 | defined by the user if bits 8-11 are set to 0000; otherwise reserved (must be set to zero) |

A value of “structured field” indicates that chains begin with four bytes of data that are used to interpret the following data; overall length (2 bytes), class

identifier (1 byte), and subclass identifier (1 byte). A value of “logical record management” indicates that chains can be split into separate fields by the data receiver.

If the option is omitted, a value of “user-defined” is assumed.

IUTYPE(*data-value*)

corresponds to the interchange unit field, ATTIU, in an LUTYPE6.1 attach FMH.

The “data-value” is a halfword binary. Only the low-order 7 bits are used. The SNA-defined meanings of the bits are as follows:

| | |
|-------|----------------------------------------------------------------------------------------------------------|
| 0–10 | reserved - must be set to zero |
| 11 | 0 - not end of multichain interchange unit 1 - end of multichain interchange unit |
| 12,13 | reserved - must be set to zero |
| 14,15 | 00 - multichain interchange unit 01 - single chain interchange unit 10 - reserved 11 - reserved |

If the option is omitted, values of “not end of multichain interchange unit” and “multichain interchange unit” are assumed.

PROCESS(*name*)

corresponds to the process name, ATTDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, a transaction running in one system can acquire a session to the second system and can identify the transaction to be attached; in the second system the identification is carried in the first chain of data sent across the session. In general, the first four bytes of data identify the transaction to be attached. However an attach FMH, identifying the transaction to be attached, can be built and sent; the PROCESS option is used to specify the transaction name. (Note that the receiving CICS system uses just the first four bytes of the process name as a transaction name.)

No significance is attached by CICS to process names in attach FMHs sent in chains of data other than the first.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the process name field in an attach FMH.

QUEUE(*name*)

corresponds to the queue name, ATTDQN, in an attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the queue name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the queue name field in an attach FMH.

RECFM(*data-value*)

corresponds to the deblocking algorithm field, ATTDDBA, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the deblocking algorithm field in an attach FMH. For most CICS applications, the option can be omitted.

The “data-value” is a halfword binary value. Only the low-order 8 bits are used. The SNA-defined meanings of the bits are as follows:

0-7 reserved - must be set to zero
8-15 X'00' - reserved
 X'01' - variable-length
 variable-blocked
 X'02' - reserved
 X'03' - reserved
 X'04' - chain of RUs
 X'05' to X'FF' - reserved

If the option is omitted, a value of “chain of RUs” is assumed.

RESOURCE(*name*)

corresponds to the resource-name, ATTPRN, in an LUTYPE6.1 attach FMH.

RPROCESS(*name*)

corresponds to the return-process name, ATTRDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the return-process name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return-process name field in an attach FMH.

RRESOURCE(*name*)

corresponds to the return-resource name, ATTRPRN, in an LUTYPE6.1 attach FMH.


For communication between two CICS systems, no significance is attached by CICS to the return-resource name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return-resource name field in an attach FMH.

CANCEL

Cancel interval control requests.

CANCEL



Conditions: ISCINVREQ, NOTAUTH, NOTFND, SYSIDERR

Note for dynamic transaction routing: Using CANCEL with REQID (of a POST, DELAY, or START) could create intertransaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

CANCEL cancels a previously issued DELAY, POST, or START command. The CANCEL command cannot be used to remove a request that is queued locally. If you include the SYSID option, the command is shipped to a remote system. If you omit SYSID, the TRANSID option, if present, indicates where the command is to be executed. The effect of the cancellation varies depending on the type of command being canceled, as follows:

- A DELAY command can be canceled only before it has expired, and only by a task other than the task that issued the DELAY command (which is suspended for the duration of the request). The REQID used by the suspended task must be specified. The effect of the cancellation is the same as an early expiration of the original DELAY. That is, the suspended task becomes dispatchable as though the original expiration time had been reached.
- When a POST command issued by the same task is to be canceled, no REQID need be specified. Cancellation can be requested either before or after the original request has expired. The effect of the cancellation is as if the original request had never been made.
- When a POST command issued by another task is to be canceled, the REQID of that command must be specified. The effect of the cancellation is the same as an early expiration of the original POST request. That is, the timer event control area for the other task is posted as though the original expiration time had been reached.
- When a START command is to be canceled, the REQID associated with the original command must be specified. The effect of the cancellation is as if the original command had never been issued. The cancellation is effective only before the original command has been honored.
- When you use a START command with the PROTECT option, CANCEL will cancel the START command only if the START command has been committed.

Note: A NOTFND response to a CANCEL command of a START with REQID signifies that the start request is no longer outstanding. It does not imply that the task to be started has completed by this point in time; neither does it imply that the started task has issued a RETRIEVE command to read the FROM data from the

REQID queue. A subsequent START command reusing the same REQID value may fail with an AEIQ abend (IOERR condition), if the REQID queue still exists at this time.

Options

REQID(*name*)

specifies a name (1–8 characters), which should be unique, to identify a command. This name is used as a temporary storage identifier. The temporary storage queue thus identified must be defined as a local queue on the CICS system where the CANCEL command is processed.

This option cannot be used to cancel a POST command issued by the same task (for which, the REQID option is ignored if it is specified).

SYSID(*systemname*)

(remote systems only) specifies the name (1–4 characters) of the system for the CANCEL command.

TRANSID(*name*)

specifies the symbolic identifier (1–4 characters) of a transaction to be used to determine where the CANCEL command is to be executed, if SYSID is not specified. If the TRANSID is defined as REMOTE, the CANCEL request is function-shipped to the remote system.

Conditions

54 ISCVREQ

occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

70 NOTAUTH

occurs when a resource security check has failed on the specified TRANSID or on the TRANSID of the START command that corresponds to the request identification.

Default action: terminate the task abnormally.

13 NOTFND

occurs if the request identifier specified fails to match an unexpired interval control command.

Default action: terminate the task abnormally.

53 SYSIDERR


occurs when the SYSID option specifies a name that is neither the local system nor a remote system (made known to CICS by defining a CONNECTION). It also occurs when the link to the remote system is closed.

Default action: terminate the task abnormally.

CANCEL (BTS)

Cancel a BTS activity or process.

CANCEL (BTS)



Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED, NOTAUTH, PROCESSBUSY, PROCESSERR

Description

CANCEL (BTS) forces a BTS activity or process, and all its descendant activities, into COMPLETE mode.

Options

ACQACTIVITY

specifies that the activity to be canceled is the one that the current unit of work has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the process that the current unit of work has acquired is to be canceled.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the child activity to be canceled.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 One or more of the descendant activities of the activity to be canceled are inaccessible or in CANCELLING mode.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.
- 14 The activity to be canceled is not in INITIAL or DORMANT mode.

16 INVREQ

RESP2 values:

- 4 The ACTIVITY option was used to name a child activity, but the command was issued outside the scope of a currently-active activity.
- 15 The ACQPROCESS option was used, but the issuing task has not acquired a process.
- 24 The ACQACTIVITY option was used, but the issuing task has not acquired an activity.

17 IOERR

RESP2 values:

29 The repository file is unavailable.

30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

70 NOTAUTH

RESP2 values:

101 The user associated with the issuing task is not authorized to access the file associated with the BTS repository data set on which details of the process or activity are stored.

106 PROCESSBUSY

RESP2 values:

13 One or more of the activities that make up the process to be canceled are inaccessible or in CANCELLING mode.

108 PROCESSERR

RESP2 values:

9 The process—type could not be found.

14 The process to be canceled is not in INITIAL, DORMANT, or COMPLETE mode.

Activities

The only activities a program can cancel are as follows:

- If it is running as the activation of an activity, its own child activities. It can cancel several of its child activities within the same unit of work.
- The activity it has acquired, by means of an ACQUIRE ACTIVITYID command, in the current unit of work.

To be canceled successfully, an activity must be in INITIAL or DORMANT mode. CICS tries to cancel activities synchronously. However, if one or more descendant activities of the activity to be canceled are inaccessible (due, for example, to the failure of a communications link):

- The subtree of descendant activities is canceled asynchronously.
- The activity to be canceled is placed in CANCELLING mode.

The completion event associated with a canceled activity is not deleted from the parent's event pool. On normal completion of this command, the activity still exists, and can be reset and run again, if necessary.

When an acquired activity is canceled, its parent is reactivated because of the firing of the canceled activity's completion event.

Processes

The only process a program can cancel is the one it has acquired in the current unit of work. If it does so, it cannot acquire another process within the current unit of work.

To be canceled successfully, a process must be in INITIAL, DORMANT, or COMPLETE mode.

CICS tries to cancel the process synchronously, in the way described for activities.

CHANGE PHRASE

Change the password or password phrase recorded by an external security manager (ESM) for a specified user ID.

CHANGE PHRASE

```
►►—CHANGE PHRASE(data-area)—PHRASELEN(data-value)—NEWPHRASE(data-area)—NEWPHRASELEN(data-value)—►  
►—USERID(data-value)—┐—┐—►  
                  └─ESMREASON(data-area)—┐—ESMRESP(data-area)—┐
```

Conditions: INVREQ, LENGERR, NOTAUTH, USERIDERR

This command is threadsafe.

Description

A user ID can have both a password and a password phrase. If PHRASELEN is between 1 and 8 characters, the phrase is treated as a password. If the length is between 9 and 100 characters, it is treated as a password phrase. You cannot use a 1- to 8-character password to change a password phrase. Similarly, you cannot use a 9- to 100-character password phrase to change a 1- to 8-character password.

Unlike the SIGNON command, CHANGE PHRASE does not depend upon the principal facility, therefore it can be issued in non-terminal environments such as Web applications and APPC sessions.

Attention: To ensure that passwords are not revealed in system or transaction dumps, clear the password or password phrase fields on the EXEC CICS commands that have a password or password phrase option as soon as possible after use.

Options

Options ESMRESP and ESMREASON return the response and reason codes, if any, from the external security manager.

ESMREASON(*data-area*)

returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF®, this field is the RACF reason code.

ESMRESP(*data-area*)

returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF return code.

NEWPHRASE(*data-area*)

specifies an optional 1- to 8-character new password or a 9- to 100-character new password phrase required by the ESM. The password is changed only if the current password is correctly specified. The password phrase is changed only if the current password phrase is correctly specified.

NEWPHRASELEN(*data-area*)

specifies the length, as a fullword binary value, of the new password or password phrase.

PHRASE(*data-area*)

specifies the current password or password phrase of the specified user ID.

PHRASELEN(*data-area*)

specifies the length, as a fullword binary value, of the current password or password phrase.

USERID(*data-value*)

specifies the user ID of the user whose password or password phrase is being changed.

Conditions**16 INVREQ**

RESP2 values:

- 2 You cannot use a password to change a password phrase or a password phrase to change a password.
- 13 The external security manager has issued an unknown return code in ESMRESP.
- 18 The CICS external security manager interface is not initialized.
- 29 The external security manager is not responding.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 1 PHRASELEN was out-of-range.
- 2 NEWPHRASELEN was out-of-range.

70 NOTAUTH

RESP2 values:

- 2 The supplied password or password phrase is wrong. If the external security manager is RACF , the revoke count maintained by RACF is incremented.
- 4 The new password or password phrase is not acceptable.
- 19 The user ID is revoked.
- 20 The connection to the user's default group has been revoked.
- 22 The change password request failed during SECLABEL processing.
- 31 The user is revoked in the connection to the default group.

Default action: terminate the task abnormally.

69 USERIDERR

RESP2 values:


- 8 The USERID is not known to the external security manager.

Default action: terminate the task abnormally.

CHANGE PASSWORD

Change the password recorded by an external security manager (ESM) for a specified user ID.

CHANGE PASSWORD



Conditions: INVREQ, NOTAUTH, USERIDERR

This command is threadsafe.

Description

Unlike the SIGNON command, CHANGE PASSWORD does not depend upon the principal facility, therefore it can be issued in non-terminal environments such as Web applications and APPC sessions.

Attention: You should clear the password fields on the EXEC CICS commands that have a password option as soon as possible after use. This is to ensure that passwords are not revealed in system or transaction dumps.

Options

Options ESMRESP and ESMREASON return the response and reason codes, if any, from the external security manager.

ESMREASON(*data-area*)

returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF reason code.

ESMRESP(*data-area*)

returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF return code.

NEWPASSWORD(*data-value*)

specifies the new password, 8 characters, for the specified userid. The password is changed only if the current password is correctly specified.

PASSWORD(*data-value*)

specifies the current password, 8 characters, for the specified userid.

USERID(*data-value*)

specifies the userid, 8 characters, of the user whose password is being changed.

Conditions

16 INVREQ

RESP2 values:

13 There is an unknown return code in ESMRESP from the external security manager.

18 The CICS external security manager interface is not initialized.

29 The external security manager is not responding.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

2 The supplied password is wrong. If the external security manager is RACF , the revoke count maintained by RACF is incremented.

4 The new password is not acceptable.

19 The USERID is revoked.

22 The change password request failed during SECLABEL processing.

31 The user is revoked in the connection to the default group.

Default action: terminate the task abnormally.

69 USERIDERR

RESP2 values:

8 The USERID is not known to the external security manager.

Default action: terminate the task abnormally.

CHANGE TASK

Change priority of a task.

CHANGE TASK

►►—CHANGE TASK—┐
 └─PRIORITY(*data-value*)—┘

Condition: INVREQ

This command is threadsafe.

Description

CHANGE TASK changes the priority of the issuing task. It has immediate effect (unlike SET TASK), because control is relinquished during execution of the command so that the current task has to be redispached. The redispach does not happen until tasks that are of higher or equal priority, and that are also ready to run, are dispatched.

If you omit the PRIORITY option, the task does not lose control and the priority remains the same. This is effectively a no-op.

Options

PRIORITY(*data-value*)

specifies a fullword binary value in the range 0–255, defining the priority of the task. You can also have a value of -1 but this does not change the priority or cause a redispach.

Conditions

16 INVREQ


RESP2 values:

- 1 Your PRIORITY value is outside the range -1–255.

CHECK ACQPROCESS

Check the completion status of a BTS process.

CHECK ACQPROCESS

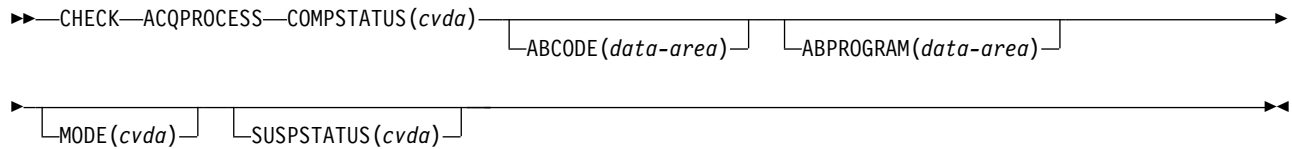

Conditions: INVREQ

Description

CHECK ACQPROCESS returns the completion status of the currently-acquired BTS process. Typically, it is used to check the success of a previous RUN ACQPROCESS or LINK ACQPROCESS command. It allows the requestor to discover whether the process completed successfully, or whether, for example, it needs to be reactivated in order to complete its processing.

The only process a program can check is the one that it has acquired in the current unit of work - see Acquiring processes and activities in *CICS Business Transaction Services*.

The RESP and RESP2 options on this command reflect whether the command is understood by CICS - for example, PROCESSERR occurs if the process is not currently acquired by the requestor.

The COMPSTATUS option returns a CVDA value indicating the completion status of the process's root activity - for example, NORMAL is returned if the root activity has successfully completed all its processing steps, while INCOMPLETE is returned if it has returned from an activation but needs to be reattached in order to complete its processing.

Options

ABCODE(data-area)

returns, if the process's root activity terminated abnormally, the 4-character abend code.

ABPROGRAM(data-area)

returns, if the process's root activity terminated abnormally, the 8-character name of the program that was in control at the time of the abend.

ACQPROCESS

specifies that the process that is currently acquired by the requestor is to be checked.

COMPSTATUS(cvda)

indicates the completion status of the process. CVDA values are:

ABEND

The program that implements the process's root activity abended. Any children of the root activity have been canceled.

FORCED

The process was forced to complete—for example, it was canceled with a CANCEL ACQPROCESS command.

INCOMPLETE

The process is incomplete. This could mean:

- That it has not yet been run
- That it has returned from one or more activations but needs to be reattached in order to complete all its processing steps
- That it is currently active.

NORMAL

The process completed successfully.

MODE (cvda)

indicates the processing state of the process. CVDA values are:

ACTIVE

An activation of the process is running.

CANCELLING

CICS is waiting to cancel the process. A CANCEL ACQPROCESS command has been issued, but CICS cannot cancel the process immediately because one or more of the root activity's children are inaccessible.

COMPLETE

The process has completed.

DORMANT

The process is waiting for an event to fire its next activation.

INITIAL

No RUN or LINK command has yet been issued against the process.

SUSPSTATUS (cvda)

indicates whether the process is currently suspended. CVDA values are:

SUSPENDED

The process is currently suspended. If a reattachment event occurs, it will not be reactivated.

NOTSUSPENDED

The process is not currently suspended. If a reattachment event occurs, it will be reactivated.

Conditions**16 INVREQ**


RESP2 values:

- 15** The unit of work that issued the request has not acquired a process.

CHECK ACTIVITY

Check the completion status of a BTS activity.

CHECK ACTIVITY

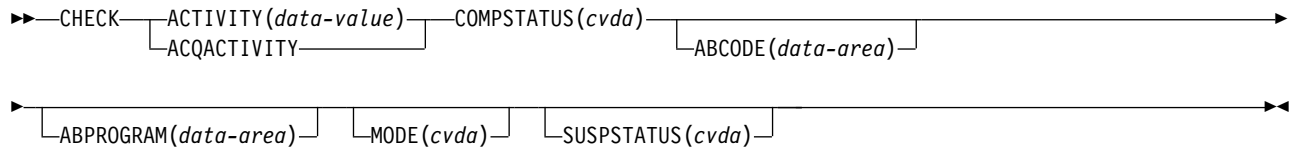

Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED

Description

CHECK ACTIVITY returns the completion status of a BTS activity. Typically, it is used to check the success of a previous RUN ACTIVITY or LINK ACTIVITY command. It allows the requestor to discover whether an activity completed successfully, or whether, for example, it needs to be reactivated in order to complete its processing.

CHECK ACTIVITY can be issued:

1. By a parent activity, to check the completion status of one of its children
2. By a program that has acquired an activity by means of an ACQUIRE ACTIVITYID command.

It can be used to check descendant (not root) activities:

- That have completed
- That have not completed
- That were requested to run asynchronously
- That were requested to run synchronously.

The RESP and RESP2 options on this command reflect whether the command is understood by CICS—for example, ACTIVITYERR occurs if the child named on the ACTIVITY option has not been defined to the parent.

The COMPSTATUS option returns a CVDA value indicating the completion status of the activity—for example, NORMAL is returned if the activity has successfully completed all its processing steps, while INCOMPLETE is returned if it has returned from an activation but needs to be reattached in order to complete its processing.

If this command is issued by a parent activity in respect of one of its children, and the child has completed, on return from the command CICS deletes the child's completion event from the parent's event pool.

For further guidance on the use of the CHECK ACTIVITY command, see Dealing with BTS errors and response codes in the *CICS Business Transaction Services*.

Options

ABCODE(data-area)

returns, if the activity terminated abnormally, the 4-character abend code.

ABPROGRAM(data-area)

returns, if the activity terminated abnormally, the 8-character name of the program that was in control at the time of the abend.

ACQACTIVITY

specifies that the activity to be checked is the one that the current unit of work has acquired by means of an ACQUIRE ACTIVITYID command.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the activity to be checked.

Use this option to check the state of a child of the current activity.

COMPSTATUS(cvda)

indicates the completion status of the activity. CVDA values are:

ABEND

The program that implements the activity abended. Any children of the activity have been canceled.

The activity's completion event is deleted from the parent's event pool.

FORCED

The activity was forced to complete—for example, it was canceled with a CANCEL ACTIVITY command.

The activity's completion event is deleted from the parent's event pool.

INCOMPLETE

The named activity is incomplete. This could mean:

- That it has not yet been run
- That it has returned from one or more activations but needs to be reattached in order to complete all its processing steps
- That it is currently active.

The activity's completion event is **not** deleted from the parent's event pool.

NORMAL

The named activity completed successfully.

The activity's completion event is deleted from the parent's event pool.

MODE(cvda)

indicates the processing state of the activity. CVDA values are:

ACTIVE

An activation of the activity is running.

CANCELLING

CICS is waiting to cancel the activity. A CANCEL ACTIVITY command has been issued, but CICS cannot cancel the activity immediately because one or more of the activity's children are inaccessible.

COMPLETE

The activity has completed.

DORMANT

The activity is waiting for an event to fire its next activation.

INITIAL

No RUN or LINK command has yet been issued against the activity; or the activity has been reset by means of a RESET ACTIVITY command.

SUSPSTATUS(cvda)

indicates whether the activity is currently suspended. CVDA values are:

SUSPENDED

The activity is currently suspended. If a reattachment event occurs, it will not be reactivated.

NOTSUSPENDED

The activity is not currently suspended. If a reattachment event occurs, it will be reactivated.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named in the ACTIVITY option could not be found.

16 INVREQ

RESP2 values:

- 4 The ACTIVITY option was used to name a child activity, but the command was issued outside the scope of a currently-active activity.
- 24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

CHECK TIMER

Check the status of a BTS timer.

CHECK TIMER

►►—CHECK—TIMER(*data-value*)—STATUS(*cvda*)—————►◄

Conditions: INVREQ, IOERR, TIMERERR

Description

CHECK TIMER returns the status of a BTS timer. It allows the requestor to discover whether a timer has expired and, if so, whether it expired normally or whether its expiry was forced by means of a FORCE TIMER command.

On return from this command, if the timer has expired its associated event is deleted from the current activity's event pool.

The only timers a program can check are those owned by the current activity.

Options

STATUS(*cvda*)

indicates the status of the timer. CVDA values are:

EXPIRED

The timer expired normally.

Its associated event is deleted from the current activity's event pool.

FORCED

The timer expired because a FORCE TIMER command was issued against it.

Its associated event is deleted from the current activity's event pool.

UNEXPIRED

The timer has not yet expired.

Its associated event is not deleted from the current activity's event pool.

TIMER(*data-value*)

specifies the name (1–16 characters) of the timer to be checked.

Conditions

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of a currently-active activity.

17 IOERR

An input/output error has occurred on the repository file.

115 TIMERERR


RESP2 values:

- 13** The timer specified on the TIMER option does not exist.

CONNECT PROCESS

Initiate an APPC mapped conversation.

CONNECT PROCESS (APPC)

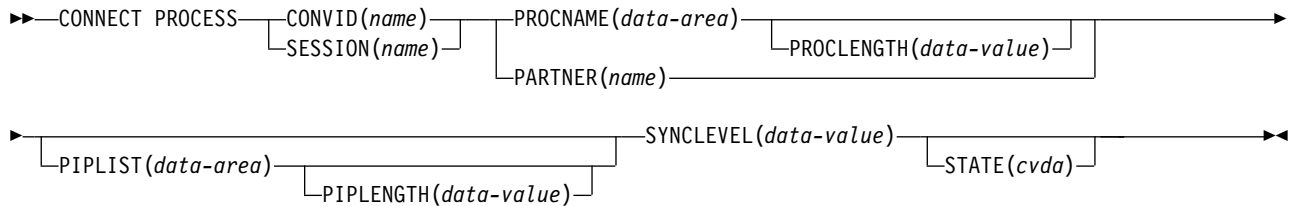

Conditions: INVREQ, LENGERR, NOTALLOC, PARTNERIDERR, TERMERR

Description

CONNECT PROCESS allows an application to specify a process name and synchronization level to be passed to CICS and used when the remote partner is attached.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name specifies the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB.

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

PARTNER(*name*)

specifies the name (8 characters) of a set of definitions that includes the name (or extended name) of a remote partner transaction (TPNAME or XTPNAME). You can use this option as an alternative to PROCNAME and PROCLNGTH.

PIPLNGTH(*data-value*)

specifies the total length (halfword binary value) of the specified process initialization parameter (PIP) list.

PIPLIST(*data-area*)

specifies the PIP data to be sent to the remote system. The PIP list consists of variable-length records, each containing a single PIP. A PIP starts with a 2-byte inclusive length field (LL), followed by a 2-byte reserved field, and then the parameter data.

PROCLNGTH(*data-value*)

specifies the length (as a halfword binary value in the range 1–64) of the name specified by the PROCNAME option.

PROCNAME(*data-area*)

specifies the partner process (that is, the transaction) to be attached in the remote system.

One byte is sufficient to identify a CICS transaction. The APPC architecture allows a range of 1–64 bytes but leaves each product free to set its own maximum. CICS complies by allowing a range of 1–64 bytes. If the remote system is CICS, this option can specify the 4-byte transaction identifier or the TPNAM value given in the relevant TRANSACTION definition. Alternatively, you can examine the full identifier by coding the user exit XZCATT.

No character checking is performed on the TPN by CICS.

For programming information about the user exit XZCATT, see the CICS statistics record format in the *CICS Customization Guide*.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

SYNCLEVEL(*data-value*)

specifies the synchronization level (halfword binary value) for the current conversation. The possible values are:

- 0 None
- 1 Confirm
- 2 Syncpoint

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- A synchronization level other than 0, 1, or 2, has been requested in the SYNCLEVEL option.
- The command is not valid for the terminal or LU in use.
- The command has been used on a conversation that is in use by CPI-Communications or that is an APPC basic conversation. In the latter case, GDS CONNECT PROCESS should have been used.

Default action: terminate the task abnormally.

22 LENGERR

occurs in any of the following situations:

- An out-of-range value is supplied in the PROCLength option.
- The value specified in the PIPLength option is less than 0.
- The value specified in the PIPLength option exceeds the CICS implementation limit of 32 763.
- A PIPLIST length element (LL) has a value less than 4.
- The sum of the length elements (LLs) in the PIPLIST does not equal the value specified by PIPLength.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the specified CONVID value does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

97 PARTNERIDERR

occurs if the name specified in the PARTNER option is not recognized by CICS.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE causes an ATCV abend.


A CANCEL TASK request by a user node error program (NEP) can cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

CONVERSE (default)

Communicate on standard CICS terminal support.

CONVERSE (default)

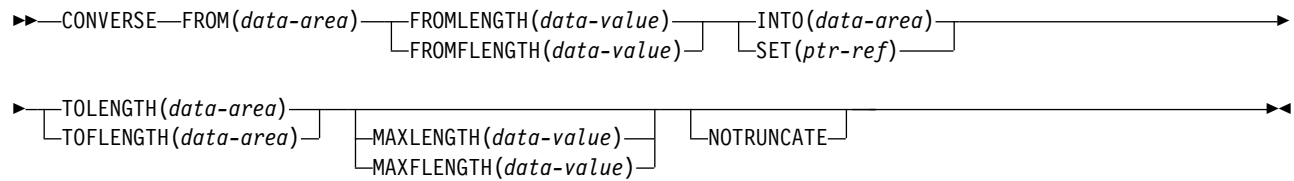

Conditions: LENGERR


Description

This form of the CONVERSE command is used by all CICS-supported z/OS Communications Server terminals for which the other CONVERSE descriptions are not appropriate.

CONVERSE (APPC)

Communicate on an APPC mapped conversation

CONVERSE (APPC)

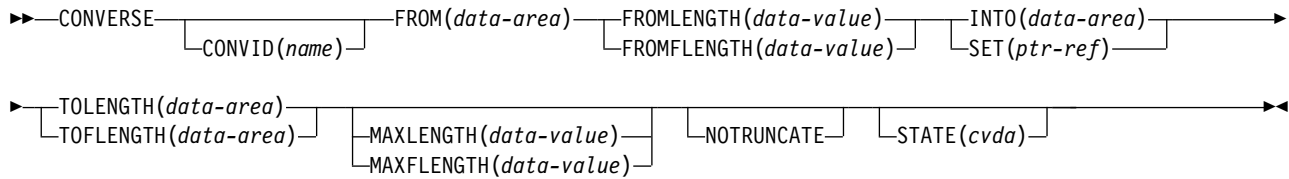

Conditions: EOC, INVREQ, LENGERR, NOTALLOC, SIGNAL, TERMERR


Description

CONVERSE sends, then receives, data on an APPC mapped conversation.

CONVERSE (LUTYPE2/LUTYPE3)

Communicate on a 3270-display logical unit (LUTYPE2) or 3270-printer logical unit (LUTYPE3).

CONVERSE (LUTYPE2/LUTYPE3)

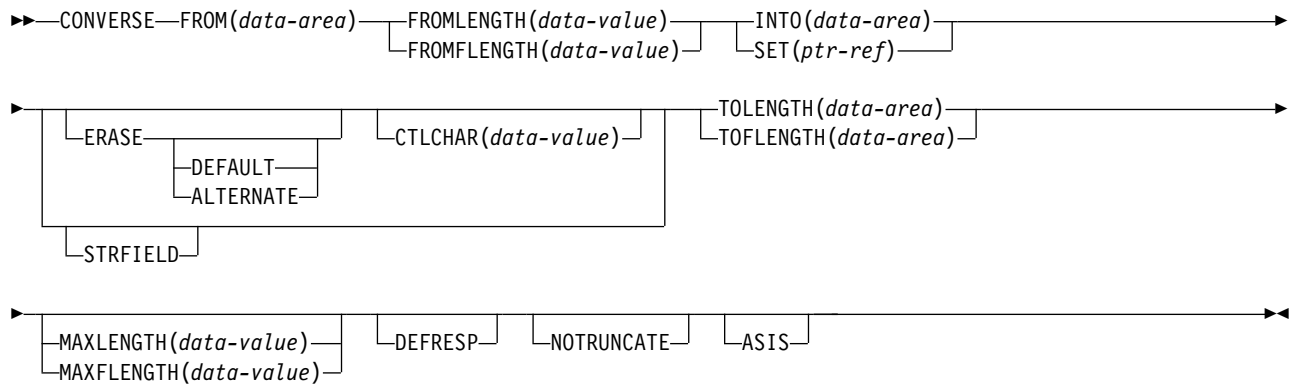

Conditions: EOC, LENGERR, TERMERR


Description

CONVERSE communicates on a 3270-display logical or 3270-printer logical unit.

CONVERSE (LUTYPE4)

Communicate on an LUTYPE4 logical unit.

CONVERSE (LUTYPE4)

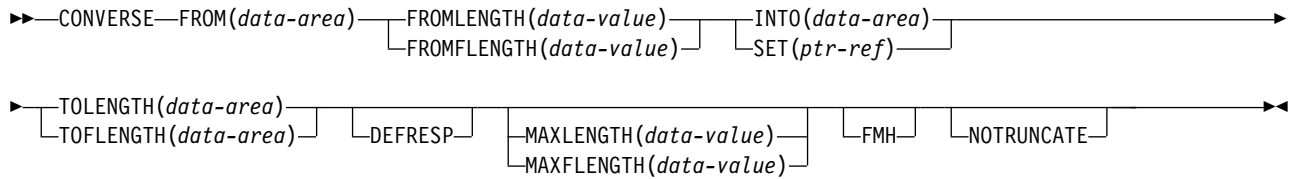

Conditions: EOC, EODS, IGRQCD, INBFMH, LENGERR, SIGNAL, TERMERR


Description

CONVERSE communicates on an LUTYPE4 logical unit.

CONVERSE (LUTYPE6.1)

Communicate on an LUTYPE6.1 logical unit.

CONVERSE (LUTYPE6.1)

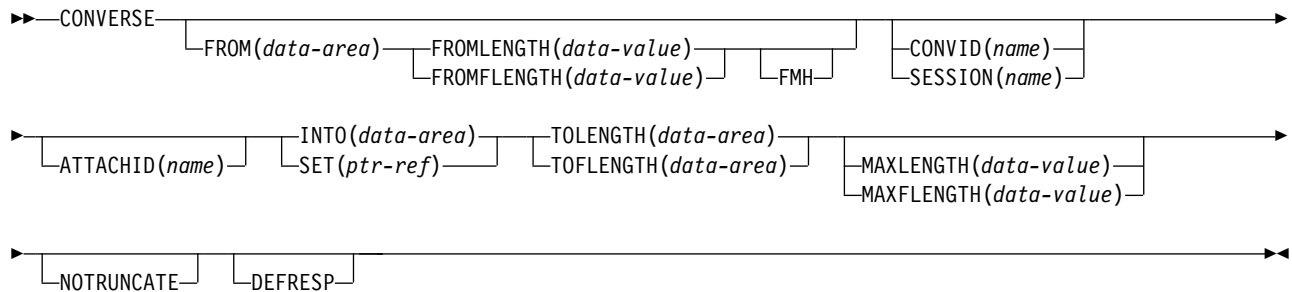

Conditions: CBIDERR, EOC, INBFMH, LENGERR, NOTALLOC, SIGNAL, TERMERR


Description

CONVERSE communicates on an LUTYPE6.1 logical unit.

CONVERSE (SCS)

Communicate on a 3270 SCS printer logical unit.

CONVERSE (SCS)

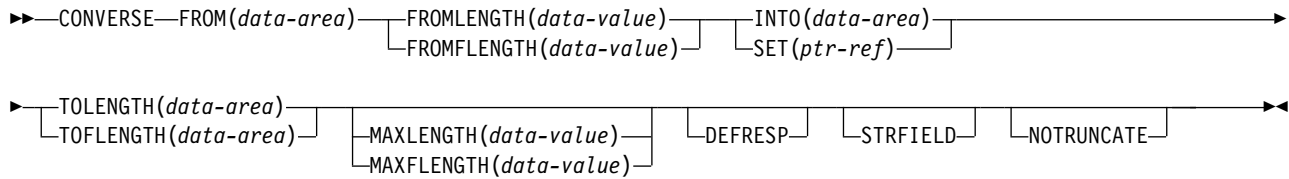

Conditions: LENGERR, TERMERR


Description

CONVERSE communicates on a 3270 SNA character string (SCS) printer logical unit. The SCS printer logical unit accepts a character string as defined by Systems Network Architecture (SNA). Some devices connected under SNA can send a signal that can be detected by the HANDLE CONDITION SIGNAL command, which in turn can invoke an appropriate handling routine. If necessary, a WAIT SIGNAL command can be used to make the application program wait for the signal. The PA keys on a 3287 can be used in this way, or with a RECEIVE command.

CONVERSE (3270 logical)

Communicate on a 3270 logical unit.

CONVERSE (3270 logical)

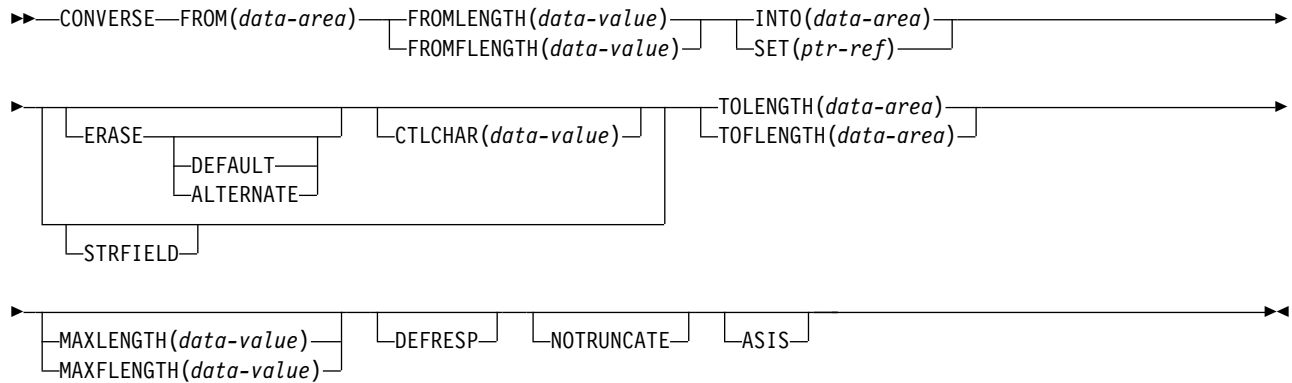

Conditions: INVREQ, LENGERR, TERMERR


Description

CONVERSE communicates on a 3270 logical unit.

CONVERSE (3600-3601)

Communicate on a 3600 (3601) logical unit.

CONVERSE (3600-3601)

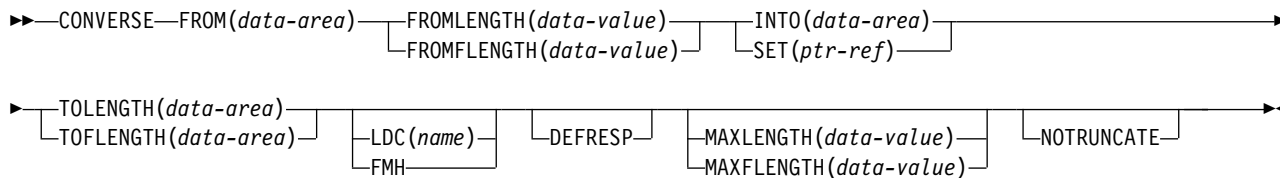

Conditions: EOC, EODS, INBFMH, LENGERR, SIGNAL, TERMERR

Description

CONVERSE communicates on a 3600 logical unit. This form of the CONVERSE command also applies to the 4700 and the 3630 plant communication system.

A logical device code (LDC) is a code that can be included in an outbound Function Management Header (FMH) to specify the disposition of the data (for example, to which subsystem terminal it should be sent). Each code can be represented by a unique LDC mnemonic.

The installation can specify up to 256 2-character mnemonics for each TCTTE, and two or more TCTTEs can share a list of these mnemonics. A numeric value (0 through 255) corresponds to each LDC mnemonic for each TCTTE.

A 3600 device and a logical page size are also associated with an LDC. LDC or *LDC value* is used in this information to refer to the code specified by the user; *LDC mnemonic* refers to the 2-character symbol that represents the LDC numeric value.


When the LDC option is specified in the CONVERSE command, the numeric value associated with the mnemonic for the particular TCTTE is inserted in the FMH. This value is chosen by the installation, and is interpreted by the 3601 application program.

On output, the FMH can be built by the application program or by CICS. If your program supplies the FMH, you place it at the front of your output data and specify the FMH option on your CONVERSE command. If you omit the FMH option, CICS will provide an FMH but you must reserve the first three bytes of the message for CICS to complete.

CONVERSE (3600-3614)

Communicate on a 3600 (3614) logical unit.

CONVERSE (3600-3614)

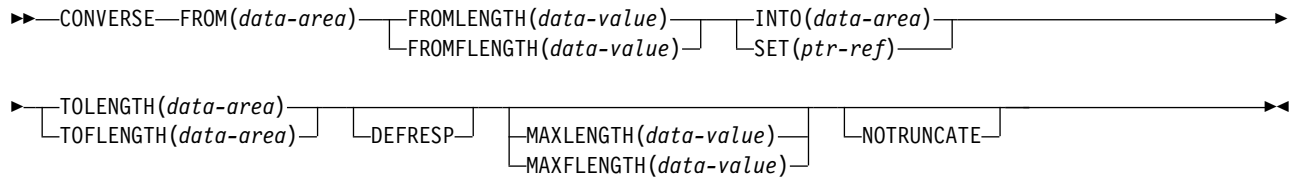

Conditions: LENGERR, TERMERR

Description

CONVERSE communicates on a 3600 logical unit.


The data stream and communication format used between a CICS application program and a 3614 is determined by the 3614. The application program is therefore device_dependent when handling 3614 communication.

For further information about designing 3614 application programs for CICS, refer to the *IBM 4700/3600/3630 Guide*.

CONVERSE (3650 interpreter)

Communicate on a 3650 interpreter logical unit.

CONVERSE (3650 interpreter)

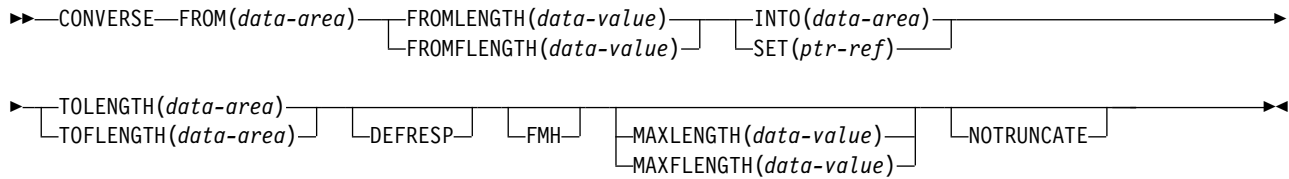

Conditions: EOC, EODS, INBFMH, LENGERR, TERMERR


Description

CONVERSE communicates on a 3650 interpreter logical unit.

CONVERSE (3650-3270)

Communicate on a 3650 host conversational (3270) logical unit.

CONVERSE (3650-3270)

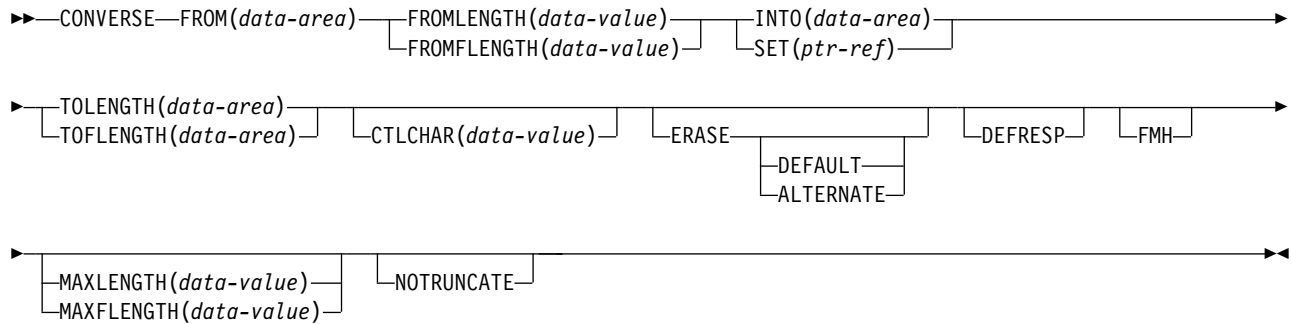

Conditions: LENGERR, TERMERR


Description

CONVERSE communicates on a 3650 host conversational logical unit.

CONVERSE (3650-3653)

Communicate on a 3650 host conversational (3653) logical unit.

CONVERSE (3650-3653)

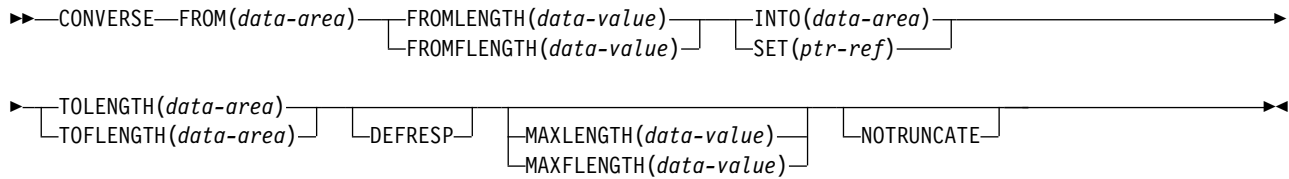

Conditions: EOC, LENGERR, TERMERR


Description

CONVERSE communicates on a 3650 host conversational logical unit.

CONVERSE (3650-3680)

Communicate on a 3650 host command processor (3680) logical unit.

CONVERSE (3650-3680)

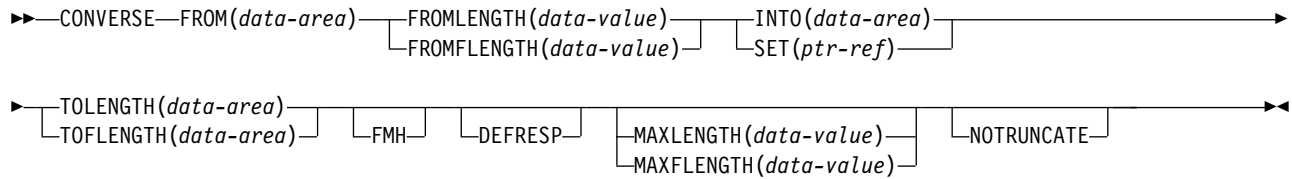

Conditions: LENGERR, TERMERR


Description

CONVERSE communicates on a 3650 host command processor logical unit.

CONVERSE (3767)

Communicate on a 3767 interactive logical unit.

CONVERSE (3767)

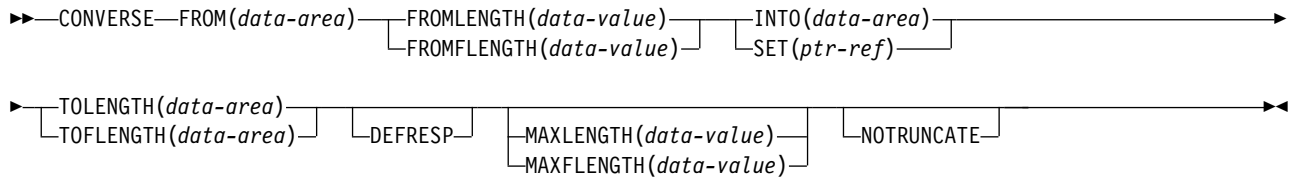

Conditions: EOC, LENGERR, SIGNAL, TERMERR


Description

CONVERSE communicates on a 3767 interactive logical unit. This command also applies to the 3770 interactive logical unit.

CONVERSE (3770)

Communicate on a 3770 batch logical unit.

CONVERSE (3770)

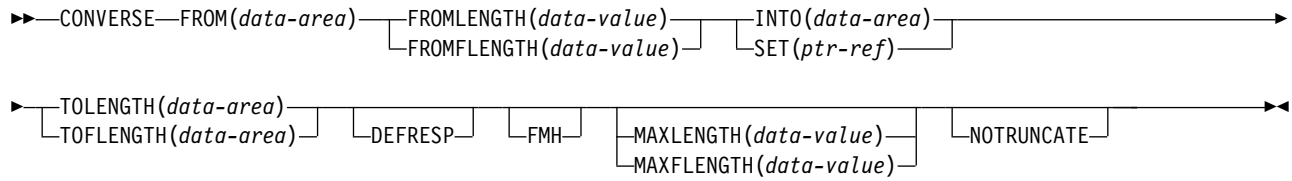

Conditions: EOC, EODS, INBFMH, LENGERR, SIGNAL, TERMERR


Description

CONVERSE communicates on a 3770 batch logical unit.

CONVERSE (3790 full-function or inquiry)

Communicate on a 3790 full-function or inquiry logical unit.

CONVERSE (3790 full-function or inquiry)

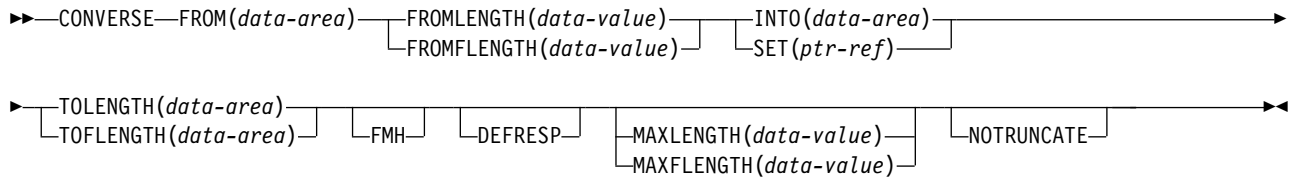

Conditions: EOC, EODS, INBFMH, LENGERR, SIGNAL, TERMERR


Description

CONVERSE communicates on a 3790 full-function or inquiry logical unit.

CONVERSE (3790 3270-display)

Communicate on a 3790 (3270-display) logical unit.

CONVERSE (3790 3270-display)

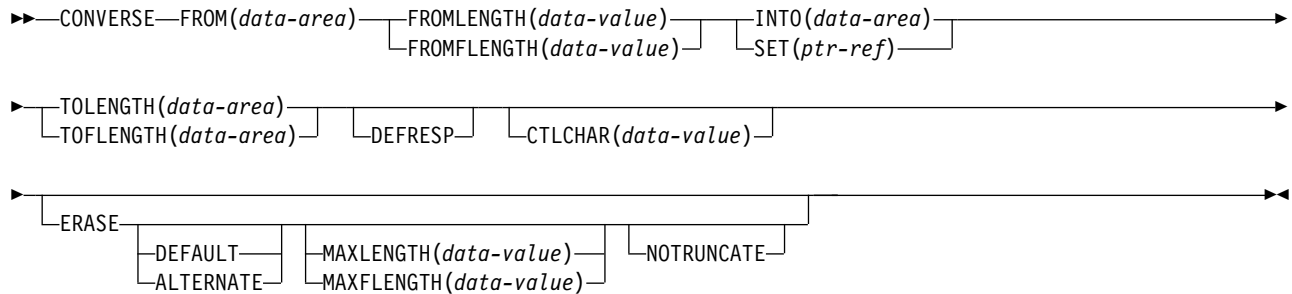

Conditions: LENGERR, TERMERR

Description

CONVERSE communicates on a 3790 logical unit.

CONVERSE: z/OS Communications Server options

Common options used on the CONVERSE command (z/OS Communications Server).

Options

ALTERNATE

sets the terminal to use the ALTERNATE screen size.

ASIS

indicates that output is to be sent in transparent mode (with no recognition of control characters and accepting any of the 256 possible combinations of eight bits as valid transmittable data).

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only. This note applies to any command that is used to receive katakana characters, not just to CONVERSE commands.

ATTACHID(*name*)

specifies that an attach header (created by a BUILD ATTACH command) is to precede, and be concatenated with, the user data supplied in the FROM option. "name" (1–8 characters) identifies the attach header control block to be used in the local task.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If the option is omitted, the principal facility for the task is used by default.

CTLCHAR(*data-value*)

specifies a 1-byte write control character (WCC) that controls the CONVERSE command. A COBOL user must specify a data area containing this character.

If the option is omitted, all modified data tags are reset to zero, and the keyboard is restored.

DEFAULT

sets the terminal to use the DEFAULT screen size.

DEFRESP

indicates that a definite response is required when the output operation has been completed.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For

transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

FMH

specifies that a function management header has been included in the data to be written. If the ATTACHID option is specified as well, the concatenated FMH flag is set in the attach FMH.

The use of FMH is optional and is not supported for all terminal types. If not supplied, CICS takes no action, except for 3600/4700 terminals, where an FMH is mandatory. In this case, if FMH is not specified, CICS supplies one and places it in the first 3 bytes of the message, which you must reserve for this purpose.

FROM(*data-area*)

specifies the data to be written to the terminal or logical unit, or sent to the partner transaction. This option may, when relevant, be omitted if ATTACHID is specified.

FROMLENGTH(*data-value*)

is a fullword alternative to FROMLENGTH.

FROMLENGTH(*data-value*)

specifies the length, as a halfword binary value, of the data. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

INTO(*data-area*)

specifies the receiving field for the data read from the terminal or logical unit, or the application target data area into which data is to be received from the application program connected to the other end of the current conversation.

LDC(*name*)

specifies the 2-character mnemonic used to determine the appropriate logical device code (LDC) numeric value. The mnemonic identifies an LDC entry defined by a DFHTCT TYPE=LDC macro.

MAXLENGTH(*data-value*)

is a fullword alternative to MAXLENGTH.

MAXLENGTH(*data-value*)

specifies the maximum amount (halfword binary value) of data that CICS is to recover in response to a CONVERSE (default) command. If INTO is specified, MAXLENGTH overrides the use of TOLENGTH as an input to CICS. If SET is specified, MAXLENGTH provides a way for the program to limit the amount of data it receives at one time.

If the value specified is less than zero, zero is assumed.

If the length of data exceeds the value specified and the NOTRUNCATE option is not present, the data is truncated to that value and the LENGERR condition occurs. The data area specified in the TOLENGTH option is set to the original length of data.

If the length of data exceeds the value specified and the NOTRUNCATE option is present, CICS retains the remaining data and uses it to satisfy subsequent RECEIVE commands. The data area specified in the TOLENGTH option is set to the length of data returned.

If no argument is coded for MAXLENGTH, CICS defaults to TOLENGTH.

NOTRUNCATE

specifies that, when the data available exceeds the length requested, the remaining data is not to be discarded but is to be retained for retrieval by subsequent RECEIVE commands.

SESSION(name)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If both this option and CONVID are omitted, the principal facility for the task is used.

SET(ptr-ref)

specifies the pointer reference to be set to the address of the data read from the terminal. pointer reference, unless changed by other commands or statements, is valid until the next CONVERSE (default) command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

STATE(cvda)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

STRFIELD

specifies that the data area specified in the FROM option contains structured fields. If this option is specified, the contents of all structured fields must be handled by the application program. The CONVERSE command must be used if the data area contains a read partition structured field. (Structured fields are described in the *CICS 3270 Data Stream Device Guide*.)

CTLCHAR and ERASE are mutually exclusive with STRFIELD, and their use with STRFIELD generates an error message.

TOFLENGTH(data-area)

is a fullword alternative to TOLENGTH.

TOLENGTH(data-area)

specifies the length (halfword binary value) of the data to be received. If you

specify INTO, but omit MAXLENGTH, “data-area” specifies the maximum length that the program accepts. If the value is less than zero, zero is assumed.

If the length of the data exceeds the value specified, but NOTRUNCATE is omitted, the data is truncated to that value, and the LENGERR condition occurs. When the data is received, the data area is set to the length of the data.

For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

Conditions

Some of the following conditions can occur in combination with others. CICS checks for these conditions in the following order:

1. EODS
2. INBFMH
3. EOC

If more than one occurs, only the first is passed to the application program. EIBRCODE, however, is set to indicate all the conditions that occurred.

62 CBIDERR

occurs if the requested attach header control block named in ATTACHID cannot be found.

Default action: terminate the task abnormally.

06 EOC

occurs when a request/response unit (RU) is received with the end-of-chain indicator set. Field EIBEOC also contains this indicator.

Default action: ignore the condition.

05 EODS

occurs when an end-of-data-set indicator is received.

Default action: terminate the task abnormally.

57 IGREQCD

occurs when an attempt is made to execute a CONVERSE command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

07 INBFMH

occurs if a request/response unit (RU) contains a function management header (FMH). Field EIBFMH contains this indicator and it should be used in preference to INBFMH. The IGNORE CONDITION command can be used to ignore the condition.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function shipping session (its principal facility)

also occurs (RESP2 not set) in any of the following situations:

- The command is used on a conversation that is in use by CPI Communications, or that is an APPC basic conversation. In the latter case, the application should have issued a GDS SEND INVITE followed by a GDS RECEIVE.

Default action: terminate the task abnormally.

22 LENGERR

occurs in any of the following situations:

- Data received is discarded by CICS because its length exceeds the maximum that the program accepts (see TOLENGTH and MAXLENGTH options), and the NOTRUNCATE option is not specified.
- An out-of-range value is supplied in one of the options, FROMLENGTH, FROMFLENGTH, MAXLENGTH, MAXFLENGTH, TOLENGTH, or TOFLENGTH.

Default action: terminate the task abnormally.

61 NOTALLO

occurs if the facility specified in the command is not owned by the application, or does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

24 SIGNAL

occurs when an inbound SIGNAL data-flow control command is received from a logical unit or session, or the partner transaction. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs for a terminal or session-related error. Any action on that conversation other than a FREE causes an ATCV abend.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

CONVERSE (non-z/OS Communications Server default)

Communicate on standard CICS terminal support.

CONVERSE (default)

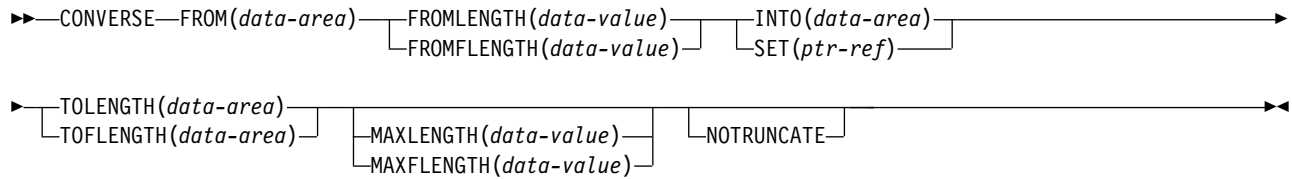

Conditions: LENGERR


Description

This form of the CONVERSE command is used by all CICS-supported terminals for which the other CONVERSE descriptions are not appropriate.

CONVERSE (MRO)

Communicate on an MRO session.

CONVERSE (MRO)

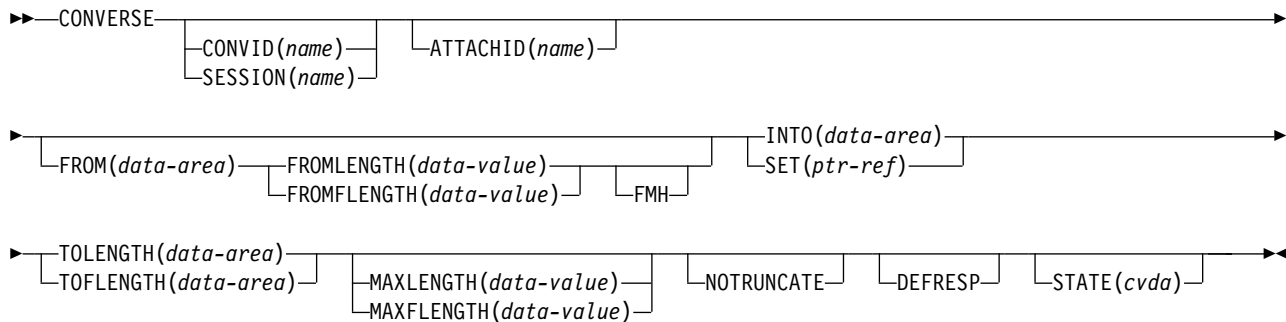

Conditions: CBIDERR, EOC, INBFMH, LENGERR, NOTALLOC, TERMERR


Description

CONVERSE communicates on an MRO session. For more information about MRO and IRC, see the Introduction to CICS intercommunication in the *CICS Intercommunication Guide*.

CONVERSE (2260)

Communicate on a 2260 or 2265 display station.

CONVERSE (2260)

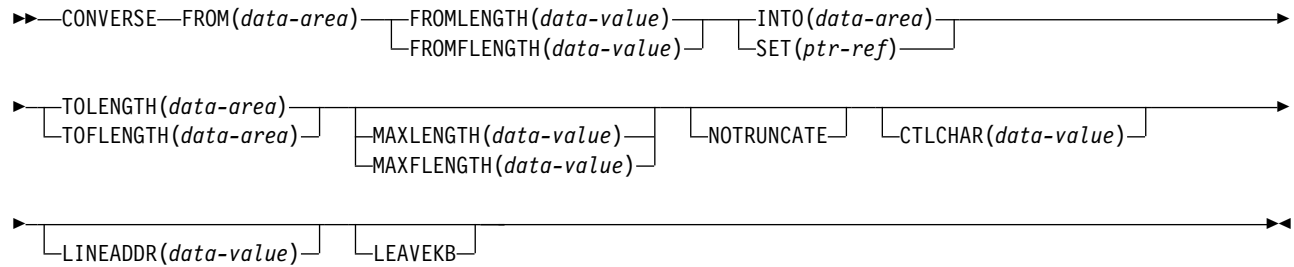

Condition: LENGERR

Description

CONVERSE communicates on a 2260 or 2265 display station.

CONVERSE: non-z/OS Communications Server options

Common options used on the CONVERSE command (non-z/OS Communications Server).

Options

ALTERNATE

set the terminal to use the ALTERNATE screen size.

ASIS

indicates that output is to be sent in transparent mode (with no recognition of control characters and accepting any of the 256 possible combinations of eight bits as valid transmittable data).

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only.

ATTACHID(*name*)

specifies that an attach header (created by a BUILD ATTACH command) is to precede, and be concatenated with, the user data supplied in the FROM option. "name" (1–8 characters) identifies the attach header control block to be used in the local task.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

CTLCHAR(*data-value*)

specifies a 1-byte write control character (WCC) that controls the CONVERSE command. (The WCC is documented in the *IBM 3270 Data Stream Programmer's Reference* manual.) A COBOL user must specify a data area containing this character. If the option is omitted, all modified data tags are reset to zero and the keyboard is restored.

DEFAULT

set the terminal to use the DEFAULT screen size.

DEFRESP

indicates that a definite response is required when the output operation has been completed.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

FMH

specifies that a function management header has been included in the data to be written. If the ATTACHID option is specified as well, the concatenated FMH flag is set in the attach FMH.

FROM(*data-area*)

specifies the data to be written to the terminal or logical unit, or sent to the partner transaction. This option may, when relevant, be omitted if ATTACHID is specified.

FROMLENGTH(*data-value*)

is a fullword alternative to FROMLENGTH.

FROMLENGTH(*data-value*)

specifies the length, as a halfword binary value, of the data to be written. If you use this option, you must also specify FROM. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

INTO(*data-area*)

specifies the receiving field for the data read from the logical unit or terminal.

LEAVEKB

specifies that the keyboard is to remain locked at the completion of the data transfer.

LINEADDR(*data-value*)

specifies that the writing is to begin on a specific line of a 2260/2265 screen. The data value is a halfword binary value in the range 1 through 12 for a 2260, or 1 through 15 for a 2265.

MAXLENGTH(*data-value*)

is a fullword alternative to MAXLENGTH.

MAXLENGTH(*data-value*)

specifies the maximum amount (halfword binary value) of data that CICS is to recover in response to a CONVERSE command. If INTO is specified, MAXLENGTH overrides the use of TOLENGTH as an input to CICS. If SET is specified, MAXLENGTH provides a way for the program to limit the amount of data it receives at one time.

If the value specified is less than zero, zero is assumed.

If the length of data exceeds the value specified and the NOTRUNCATE option is not present, the data is truncated to that value and the LENGERR condition occurs. The data area specified in the TOLENGTH option is set to the original length of data.

If the length of data exceeds the value specified and the NOTRUNCATE option is present, CICS retains the remaining data and uses it to satisfy subsequent RECEIVE commands. The data area specified in the TOLENGTH option is set to the length of data returned.

If no argument is coded for MAXLENGTH, CICS defaults to TOLENGTH.

NOTRUNCATE

specifies that, when the data available exceeds the length requested, the remaining data is not to be discarded but retained for retrieval by subsequent RECEIVE commands.

PSEUDOBIN

specifies that the data being read and written is to be translated from System/7 pseudobinary representation to hexadecimal.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If both this option and CONVID are omitted, the principal facility for the task is used.

SET(*ptr-ref*)

specifies a pointer reference to be set to the address of data received from the conversation partner in an MRO conversation. The pointer reference, unless changed by other commands or statements, is valid until the next CONVERSE (MRO) command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

STATE(*cvda*)

gets the state of the transaction program. The cvda values returned by CICS are:

- ALLOCATED
- FREE
- PENDFREE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

STRFIELD

specifies that the data area specified in the FROM option contains structured fields. If this option is specified, the contents of all structured fields must be handled by the application program. The CONVERSE command, rather than a SEND command, must be used if the data area contains a read partition structured field. (Structured fields are described in the *CICS 3270 Data Stream Device Guide*.)

CTLCHAR and ERASE are mutually exclusive with STRFIELD, and their use with STRFIELD generates an error message.

TOFLENGTH(*data-area*)

is a fullword alternative to TOLENGTH.

TOLENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data to be received. If you specify INTO, but omit MAXLENGTH, “data-area” specifies the maximum length that the program accepts. If the value is less than zero, zero is assumed.

If the length of the data exceeds the value specified, but NOTRUNCATE is omitted, the data is truncated to that value, and the LENGERR condition occurs. When the data is received, the data area is set to the length of the data.

For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

Conditions

Some of the following conditions can occur in combination with others. CICS checks for these conditions in the following order:

1. INBFMH
2. EOC

If more than one occurs, only the first is passed to the application program. EIBRCODE, however, is set to indicate all the conditions that occurred.

62 CBIDERR

occurs if the requested attach header control block named in ATTACHID cannot be found.

Default action: terminate the task abnormally.

06 EOC

occurs when a request/response unit (RU) is received with the end-of-chain indicator set. Field EIBEOC also contains this indicator.

Default action: ignore the condition.

04 EOF

occurs when an end-of-file indicator is received.

Default action: terminate the task abnormally.

07 INBFMH

occurs if a request/response unit (RU) contains a function management header (FMH). Field EIBFMH contains this indicator and it should be used in preference to INBFMH. The IGNORE CONDITION command can be used to ignore the condition.

Default action: terminate the task abnormally.

22 LENGERR

occurs in any of the following situations:

- Data is discarded by CICS because its length exceeds the maximum that the program accepts and the NOTRUNCATE option is not specified.
- An out-of-range value is supplied in the FROMLENGTH option.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

02 RDATT

occurs if the “receive” part of the conversation is terminated by the attention (ATTN) key rather than the return key.

Default action: ignore the condition.

81 TERMERR

occurs for a session-related error.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

03 WRBRK

occurs if the “send” part of the conversation is terminated by the attention (ATTN) key rather than the return key.

Default action: ignore the condition.

CONVERTTIME

Converts an architected date and time stamp string to the ASKTIME format.

CONVERTTIME

►►—CONVERTTIME—DATESTRING(*data-area*)—ASKTIME(*data-area*)—►►

Conditions: INVREQ

This command is threadsafe.

Description

CONVERTTIME analyzes four different date and time stamp formats that are commonly used on the Internet, and converts them to the ASKTIME (absolute date and time) format, in local time.

ASKTIME format gives the time, in packed decimal, since 00:00 on 1 January 1900. The time is given in milliseconds, and it is always truncated, never rounded up. The FORMATTIME command can be used to change this data into other formats.

Here are the architected date and time stamp string formats recognized by the CONVERTTIME command:

RFC 1123 format

The preferred standard format for date and time stamps for the HTTP protocol, as specified in RFC 1123. An example of a date and time stamp in this format is "Tue, 01 Apr 2003 10:01:02 +0000".

RFC 3339 format

The XML dateTime datatype, specified in RFC 3339, which is taken from the ISO 8601 standard. An example of a date and time stamp in this format is "2003-04-01T10:01:02.498Z". Date and time stamps in this format are in UTC (Coordinated Universal Time), with the time zone offset (-12:00 to +12:00) indicated at the end of the date and time stamp, or the letter Z for a zero offset (+00:00). The decimal fraction of a second that is shown in the example is optional.

RFC 850 format

An older date and time stamp format for the Internet, specified in RFC 850. An example of a date and time stamp in this format is "Tuesday, 01-Apr-03 10:01:02 GMT".

Important: Because the year has only two digits in this format, CICS uses the assumption that the years are in the range 1970 to 2069. In the example above, CICS assumes that the date of the document is 1 April 2003. Given the date and time stamp "Thursday, 13-Feb-98 15:30:00 GMT", CICS assumes that the date of the document is 13 February 1998. Be aware of this behavior when coding your application, if you think that you might receive date and time stamps in this format.

ASctime format

A date and time stamp format produced by the C ASctime function. An example of a date and time stamp in this format is "Tue Apr 1 10:01:02 2003".

Options

DATESTRING(*data-area*)

Specifies a 64-character data area to contain the architected date and time stamp string. You can supply a string in any of the formats recognized by the command. If the string is less than 64 characters long, pad it with blanks or nulls. You do not have to specify the format of the data in the DATESTRING option, because CICS automatically reads the data to determine whether it is a supported format. The date and time are converted to local time for the ASKTIME that is returned.

ASKTIME(*data-area*)

Specifies a data-area to receive the converted date and time stamp in ASKTIME format. If the date and time stamp is not in a recognized format, the ASKTIME is returned as zero.

Conditions

16 INVREQ


RESP2 values are:

- 1 The format of the date and time stamp string is not recognized as any of the formats supported by this command. This error can be caused by a date and time stamp string that is in a supported format but contains formatting errors, such as a year value that has more or less than the correct number of digits for the format, or an item that should be numeric but is not numeric.
- 2 Invalid time.
- 3 Invalid month.
- 4 Invalid year (includes years before 1900).
- 5 Invalid day name.
- 6 Invalid day number for month and year specified.
- 7 GMT was not stated (required for RFC 850 formats).
- 8 Invalid fraction of a second.
- 9 Invalid time zone offset value.

DEFINE ACTIVITY

Define a CICS business transaction services activity.

DEFINE ACTIVITY

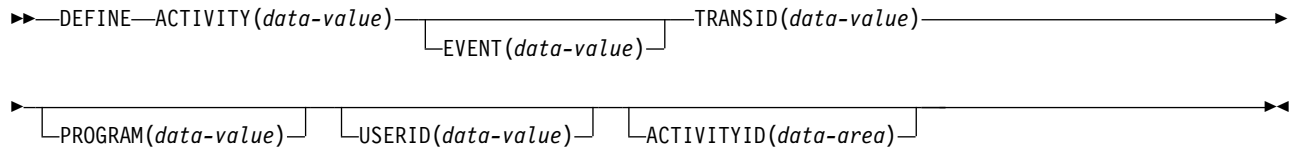

Conditions: ACTIVITYERR, EVENTERR, INVREQ, IOERR, NOTAUTH, TRANSIDERR

Description

DEFINE ACTIVITY defines an activity to CICS business transaction services. It is used to add a child activity to the current activity.

The name of the program used in the execution of the new activity is taken either from the PROGRAM option, or, if PROGRAM is not specified, from the transaction definition pointed to by the TRANSID option.

The transaction attributes specified on the TRANSID and USERID options take effect when the activity is activated by a RUN command, but *not* if it is activated by a LINK command—see “Context-switching” on page 563.

BTS does not commit the addition of the activity until the requesting transaction has taken a successful syncpoint.

Options

ACTIVITY(data-value)

specifies the name (1–16 characters) of the new activity. The name must not be the name of another child activity of the activity that issues the DEFINE command.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

ACTIVITYID(data-area)

returns the 52-character identifier assigned by CICS to the newly-defined activity. This identifier is unique across the sysplex.

EVENT(data-value)

specifies the name (1–16 characters) of the completion event for the activity. The completion event is sent to the activity's parent when the activity completes.

If EVENT is not specified, the completion event is given the same name as the activity itself.

The acceptable characters are A-Z a-z 0-9 \$ @ # . - and _. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

PROGRAM(data-value)

specifies the name (1–8 characters) of the program for the activity being defined. If no program is specified, the name is taken from the TRANSID definition.

TRANSID(data-value)

specifies the name (1–4 characters) of the transaction under which the activity is to run, when it is activated by a RUN command.

Note: If the activity is activated by a LINK command, it is run under the TRANSID of the transaction that issues the LINK.

The transaction must be defined in the CICS region in which the process is running.

USERID(data-value)

specifies the userid (1–8 characters) under whose authority the activity is to run, when it is activated by a RUN command.

Note: If the activity is activated by a LINK command, it is run under the userid of the transaction that issues the LINK.

The value of this field is known as the *defined userid*.

If you omit USERID, the defined userid defaults to the userid under which the transaction that issues the DEFINE command is running—we can call this the *command userid*.

If USERID is specified, CICS performs (at define time) a surrogate security check to verify that the command userid is authorized to use the defined userid. Thus, if you specify USERID, you must authorize the command userid as a surrogate user of the defined userid.

Conditions**109 ACTIVITYERR**

RESP2 values:

- 3 The name specified on the ACTIVITY option has already been used to name another child of the current activity.

111 EVENTERR

RESP2 values:

- 7 The completion event specified on the EVENT option has already been defined to the current activity's event pool.

16 INVREQ

RESP2 values:

- 4 The DEFINE ACTIVITY command was issued outside the scope of a currently-active activity.
- 17 The activity name specified on the ACTIVITY option, or the event name specified on the EVENT option, is invalid.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101** The user associated with the issuing task is not authorized to access the file associated with the BTS repository data set on which details of the activity are to be stored.
- 102** The user associated with the issuing task is not authorized as a surrogate of the defined userid specified on the USERID option.


28 TRANSIDERR

The transaction identifier specified on the TRANSID option is not defined to CICS.

DEFINE COMPOSITE EVENT

Define a BTS composite event.

DEFINE COMPOSITE EVENT

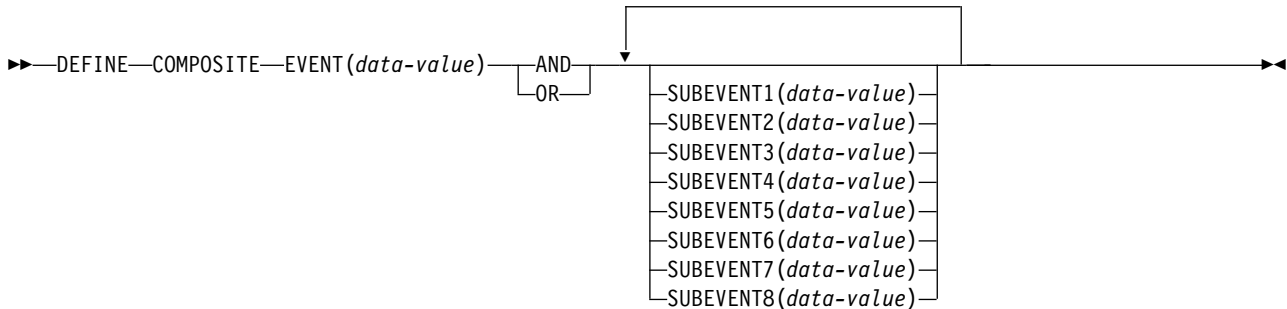

Conditions: EVENTERR, INVREQ

Description

DEFINE COMPOSITE EVENT defines a composite event to BTS. A composite event is formed from zero or more atomic events known as sub-events.

DEFINE COMPOSITE EVENT defines a *predicate*, which is a logical expression involving sub-events. At all times, the composite event's fire status (FIRED or NOTFIRED) reflects the value of the predicate. When the predicate becomes true, the composite event fires; when it becomes false, the composite's fire status reverts to NOTFIRED.

The logical operator that is applied to the sub-events in the composite event's predicate is one of the Boolean operators AND or OR. *AND and OR cannot both be used.*

You can specify up to 8 sub-events to be added to the composite event when the composite is created. If you do not specify any sub-events, the composite event is defined as "empty"—that is, as containing no sub-events.

To add sub-events to a composite event after the composite has been defined, use the ADD SUBEVENT command. There is no limit to the number of sub-events that you can add using ADD SUBEVENT.

Note: The following *cannot* be added as sub-events to a composite event:

- Composite events
- System events
- Sub-events of other composite events
- Input events, if the composite uses the AND operator.

To remove sub-events from a composite event, use the REMOVE SUBEVENT command.

Options

AND

specifies that the Boolean operator to be associated with this composite's predicate is AND. This means that the composite event will fire when *all* of its sub-events have fired.

Note: The fire status of an empty composite event that uses the AND operator is always FIRED (true).

EVENT(data-value)

specifies the name (1–16 characters) of the composite event being defined. The acceptable characters are A-Z a-z 0-9 \$ @ # . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

OR specifies that the Boolean operator to be associated with this composite's predicate is OR. This means that the composite event will fire when *any* of its sub-events fires.

Note: The fire status of an empty composite event that uses the OR operator is always NOTFIRED (false).

SUBEVENTn(data-value)

specifies the name (1–16 characters) of a sub-event to be added to the composite event when the composite is created. The acceptable characters are A-Z a-z 0-9 \$ @ # . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

You can specify this option up to 8 times; *n* must be in the range 1–8.

The sub-events that you specify must previously have been defined to the current activity by means of DEFINE INPUT EVENT, DEFINE ACTIVITY, or DEFINE TIMER commands. They must not be sub-events of existing composite events.

Conditions

111 EVENTERR

RESP2 values:

- 6 The event name specified on the EVENT option is invalid.
- 7 The event name specified on the EVENT option has already been defined to this activity.
- 21–28 One or more of the sub-events named on the SUBEVENTn option does not exist. The RESP2 value indicates the first sub-event that does not exist.

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of an activity.
- 31–38 One or more of the sub-events names specified on the SUBEVENTn option is invalid. The RESP2 value indicates the first invalid sub-event name.

DEFINE COUNTER and DEFINE DCOUNTER

Create a named counter in a named counter pool in the coupling facility. Use COUNTER to create counters that are handled as fullword signed counters and DCOUNTER to create counters that are handled as doubleword unsigned counters.

DEFINE COUNTER

```
►►—DEFINE—COUNTER(name)—┐
                             └─POOL(name)—┐
                                         └─VALUE(data-value)—┐
                                                         └─MINIMUM(data-value)—┐
                                                                                                     ┐
                                                                                                     └─►
┐
└─MAXIMUM(data-value)—┐
└─►
```

Conditions: INVREQ

This command is threadsafe.

DEFINE DCOUNTER

```
►►—DEFINE—DCOUNTER(name)—┐
                             └─POOL(name)—┐
                                         └─VALUE(data-value)—┐
                                                         └─MINIMUM(data-value)—┐
                                                                                                     ┐
                                                                                                     └─►
┐
└─MAXIMUM(data-area)—┐
└─►
```

Conditions: INVREQ

This command is threadsafe.

Description

These counter commands create a new named counter in a named counter pool in the coupling facility.

Although you can use the CICS API to operate with either fullword (signed) or doubleword (unsigned) binary values, the named counter server stores all values as doubleword unsigned values. Overflow conditions might occur if, for example, you define a counter with the DCOUNTER command and try to access it using the COUNTER command. Always access a named counter using commands from the same command set that you used to define the counter.

For information about specifying fullword and doubleword variables on these named counter commands, see “CICS command argument values” on page 4.

Options

COUNTER(*name*)

Specifies the 16-byte counter name field. The name should start with a letter and may contain letters, digits or underscore characters, padded to 16 bytes with trailing spaces. (Letters must be upper case. The national use symbols “£”, “#” and “@” are allowed wherever letters are allowed). It is

recommended that the name should start with a systematic prefix unique to the application. Any counters used by CICS itself will use the prefix "DFH".

DCOUNTER(*name*)

Specifies the 16-byte counter name field. The name should start with a letter and may contain letters, digits or underscore characters, padded to 16 bytes with trailing spaces. (Letters must be upper case. The national use symbols "£", "#" and "@" are allowed wherever letters are allowed). It is recommended that the name should start with a systematic prefix unique to the application. Any counters used by CICS itself will use the prefix "DFH".

MAXIMUM(*data-value*)

Specifies the maximum number for the named counter, using a fullword signed binary value for COUNTER and a doubleword unsigned value for DCOUNTER. This is the maximum number that can be assigned on a GET command, after which the counter must be reset by a REWIND command.

If you omit the MAXIMUM parameter, the named counter is defined with a default maximum of high values (X'7FFFFFFF' for the signed fullword case, or a doubleword filled with X'FF').

MINIMUM(*data-value*)

Specifies the minimum number for the named counter, using a fullword signed binary value for COUNTER and a doubleword unsigned value for DCOUNTER. This is the value to which a named counter is reset as a result of a REWIND command.

If you specify the MINIMUM parameter, you must also specify a VALUE parameter.

If you omit the MINIMUM parameter, the named counter is defined with a default minimum of low-values (a fullword or doubleword filled with X'00').

POOL(*name*)

Specifies an 8-character string to use as a pool selection parameter to select the pool in which the named counter is to be created. The string can be a logical pool name, or the actual pool name.

Valid characters for the pool selector string are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 8 characters, the name must be padded with trailing blanks.

This parameter is optional. If you omit the name of the pool, a pool selector value of 8 blanks is assumed.

If there is no matching entry in the DFHNCOPT options table, CICS uses the name specified on the NCPLDFT system initialization parameter, which specifies the default named counter pool.

For information about generating a named counter options table using the DFHNCO macro, see the *CICS Application Programming Guide*.

VALUE(*data-value*)

Specifies the initial number at which the new named counter is to start, using a fullword signed binary value for COUNTER and a doubleword unsigned value for DCOUNTER.

You can specify a number that is equal to, or greater than, the minimum value, up to the maximum value plus 1. If you specify an initial number that is equal to the maximum value plus 1, the counter is created with the counter-at-limit condition set and it cannot be used until it is rewound.

If you omit both the VALUE and MINIMUM parameters, the named counter is created with an initial value of zero. If you omit VALUE but specify a MINIMUM, the translator issues an error; the VALUE parameter is required if you specify the MINIMUM parameter.

Conditions

16 INVREQ

RESP2 values:

- 202 Duplicate counter name. A named counter of this name already exists.
- 301 The server has reported an error code that is not understood by the named counter interface. Generally, this is not possible unless the interface load module, DFHNCIF, is at a lower maintenance or release level than the server itself.
- 302 The server cannot create the new named counter because there is not enough space in the named counter pool.
- 303 An unexpected error, such as structure failure or loss of connectivity, has occurred on a macro used to access the coupling facility. Further information is in message DFHNC0441 in the application job log.
- 304 The pool selection parameter specified in the program cannot be resolved to a valid server name using the current options table.
- 305 The interface cannot establish a connection to the server for the selected named counter pool. Further information is in an AXM services message (AXMSCnnnn) in the application job log.
- 306 An abend occurred during server processing of a request. Further information is in a message in the application job log and the server job log.
- 308 The DFHNCOPT options table module, required to resolve a pool name, cannot be loaded.
- 309 During processing of the options table, the named counter interface encountered an unknown entry format. Either the options table is not correctly generated, or the DFHNCIF interface load module is not at the same release level as the options table.
- 310 An options table entry that matches the given pool name specified a user exit program, but the user exit program is not link-edited with the options table and cannot be loaded.
- 311 A response from the named counter server to the client region interface module, DFHNCIF, indicates that a system-managed rebuild is in progress but the EXEC CICS interface does not recognize the condition. This means that the CICS region is at CICS TS 2.1 or earlier.
- 403 The POOL parameter contains invalid characters or embedded spaces.
- 404 The COUNTER parameter contains invalid characters or embedded spaces.
- 406 The VALUE parameter is invalid. You cannot set the current value to less than the minimum value, or greater than the maximum value plus 1.
- 407 The MINIMUM or MAXIMUM parameter is invalid. Either the

MAXIMUM parameter specifies a value that is less than the minimum value, or (for COUNTER only) one of the parameters specifies a negative value.

Default action: terminate the task abnormally.

DEFINE INPUT EVENT

Define a BTS input event.

DEFINE EVENT

►►—DEFINE—INPUT—EVENT(*data-value*)—————►◄

Conditions: EVENTERR, INVREQ

Description

DEFINE INPUT EVENT defines an input event to BTS. Typically, an input event is passed to an activity by its parent, causing the activity to be activated. (Sometimes, however, the input event originates from outside the process.)

Most events fire on the completion of something, such as an activity or a specified time interval. An input event is different in that it fires after a RUN command that names it is issued.

An activity defines an input event in order to receive notification (via the INPUTEVENT option of the RUN or LINK ACTIVITY commands) of why it has been activated.

Note: System events such as DFHINITIAL are a special type of input event. They are recognized by all activities and do not need to be defined.

Options

EVENT(*data-value*)

specifies the name (1–16 characters) of the input event being defined. The acceptable characters are A-Z a-z 0-9 \$ @ # . - and _. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

Conditions

111 EVENTERR

RESP2 values:

- 6 The event name specified on the EVENT option is invalid.
- 7 The event name specified on the EVENT option has already been defined to this activity.

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of an activity.

DEFINE PROCESS

Define a CICS business transaction services process.

DEFINE PROCESS

```
►►—DEFINE—PROCESS(data-value)—PROCESSTYPE(data-value)—TRANSID(data-value)—————►
|
| PROGRAM(data-value) | USERID(data-value) | NOCHECK |
|-----|-----|-----|
```

Conditions: INVREQ, IOERR, NOTAUTH, PROCESSERR, TRANSIDERR

Description

DEFINE PROCESS defines a BTS process. It:

- Adds a new process (for example, a new instance of a business transaction) to the CICS business transaction services system
- Creates the process's root activity.

The name of the program used in the execution of the new process is taken either from the PROGRAM option, or, if PROGRAM is not specified, from the transaction definition pointed to by the TRANSID option.

The transaction attributes specified on the TRANSID and USERID options take effect when the process is activated by a RUN command, but *not* if it is activated by a LINK command—see “RUN” on page 563.

BTS does not commit the addition of the process until the requesting transaction has taken a successful syncpoint.

Options

NOCHECK

specifies that no record is to be written to the repository data set to reserve the name of the process.

Note that the process name must be unique in the repository—see the PROCESS and PROCESSTYPE options—and that BTS does not commit the addition of the process until the requesting transaction has taken a successful syncpoint.

You can use this option to improve BTS performance by removing the write to the repository and its associated logging. However, if you do so be aware that the error of specifying a non-unique process name no longer causes a PROCESSERR condition to be returned on the DEFINE PROCESS command. The error may not be discovered until much later—when syncpoint occurs—making it much harder to debug.

PROCESS(*data-value*)

specifies a name (1–36 characters) to identify the new process (business transaction instance). The name must be unique within the BTS repository data set on which details of the process are to be stored—see the PROCESSTYPE option. For example, it is valid to issue a DEFINE command on which the PROCESS option specifies a name that is currently in use by another process,

provided that the PROCESSTYPE option maps to a different underlying repository data set from that on which the first process is defined.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _ . Leading and embedded blank characters are also permitted.

If the name is specified as a literal string that is less than 36 characters long, it is padded with trailing blanks up to 36 characters. If the name is specified as a variable whose value is less than 36 characters long, no padding occurs.

PROCESSTYPE(data-value)

specifies the type (1–8 characters) of the new process.

Each process-type maps to a VSAM data set (the repository), on which information about processes of the named type is stored. That is, information about the state of a process (and of its constituent activities) is stored on the repository associated with the process-type to which it belongs. Records for multiple process-types can be stored on the same repository data set.

You can categorize your processes by assigning them to different process-types.

PROGRAM(data-value)

specifies the name (1–8 characters) of the program for the process being added. If no program is specified, the name is taken from the TRANSID definition.

TRANSID(data-value)

specifies the name (1–4 characters) of the transaction under which the process is to run when it is activated by a RUN command.

Note: If the process is activated by a LINK command, it is run under the TRANSID of the transaction that issues the LINK.

The transaction must be defined in the CICS region in which the DEFINE PROCESS command is executed.

USERID(data-value)

specifies the userid (1–8 characters) under whose authority the process is to run when it is activated by a RUN command.

Note: If the process is activated by a LINK command, it is run under the userid of the transaction that issues the LINK.

The value of this field is known as the *defined userid*.

If you omit USERID, the defined userid defaults to the userid under which the transaction that issues the DEFINE command is running—we can call this the *command userid*.

If USERID is specified, CICS performs (at define time) a surrogate security check to verify that the command userid is authorized to use the defined userid. Thus, if you specify USERID, you must authorize the command userid as a surrogate user of the defined userid.

Conditions

16 INVREQ

RESP2 values:

- 12** The installed PROCESSTYPE is not enabled.
- 22** The unit of work that issued the DEFINE PROCESS command has already acquired an activity.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to access the file associated with the BTS repository data set on which details of the process are to be stored.
- 102 The user associated with the issuing task is not authorized as a surrogate of the defined userid specified on the USERID option.

108 PROCESSERR

RESP2 values:

- 2 The process name specified on the PROCESS option is already in use on the BTS repository data set associated with the PROCESSTYPE option.
- 9 The process-type specified on the PROCESSTYPE option could not be found.
- 16 The process name specified on the PROCESS option contains an invalid character or characters.


28 TRANSIDERR

The transaction identifier specified on the TRANSID option is not defined to CICS.


DEFINE TIMER

Define a BTS timer.

DEFINE TIMER

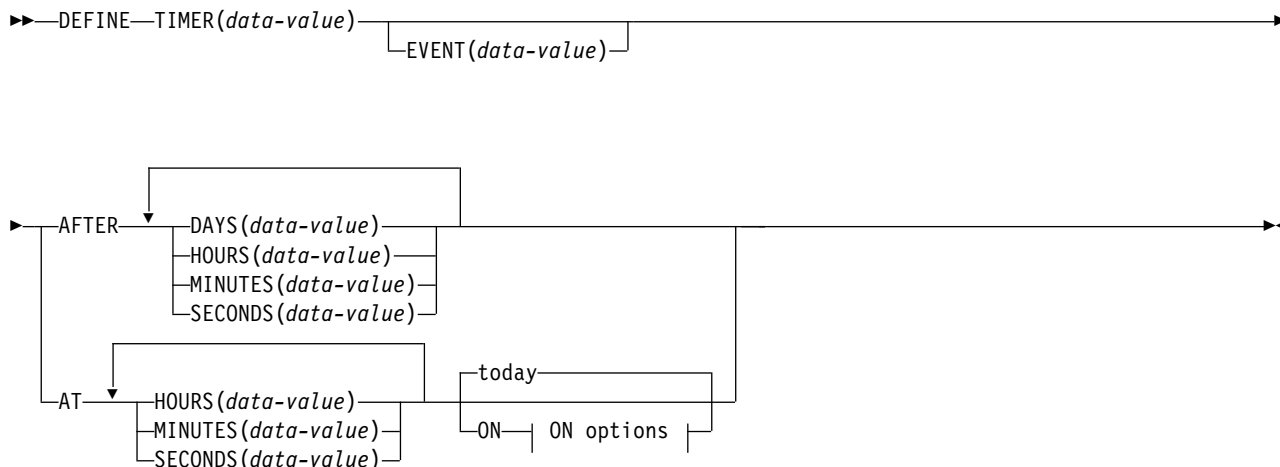

ON options:



Conditions: EVENTERR, INVREQ, TIMERERR

Description

DEFINE TIMER defines a BTS timer which will expire after a specified interval, or at a specified time and date. When a timer is defined, an associated event is also defined, in the event pool of the current activity. The name of the associated event defaults to the name of the timer. When the timer expires, its associated event fires.

Note:

1. All dates and times refer to local time.
2. A timer that specifies a time and date that has already passed expires immediately. Similarly, if the requested interval is zero, the timer expires immediately.

Options

AFTER

specifies the interval of time that is to elapse before the timer is to expire.

You must specify one or more of DAYS(0-999), HOURS(0-23), MINUTES(0-59), and SECONDS(0-59). For example, HOURS(1) SECONDS(3) means one hour and three seconds (the minutes default to zero).

AT specifies the time at which the timer is to expire.

You must specify one or more of HOURS(0-23), MINUTES(0-59), and SECONDS(0-59). For example:

- HOURS(1) means 1 a.m.
- HOURS(15) MINUTES(15) means 3:15 p.m.
- MINUTES(15) means 0:15 a.m.

DAYOFMONTH(*data-value*)

specifies, as a fullword binary value in the range 1–31, the day-of-the-month on which the timer is to expire.

DAYOFYEAR(*data-value*)

specifies, as a fullword binary value in the range 1–366, the day-of-the-year on which the timer is to expire. For example, DAYOFYEAR(1) specifies 1st January.

DAYS(*data-value*)

specifies a fullword binary value in the range 0–999. This is a suboption of the AFTER option. For its use and meaning, see AFTER.

The default value is zero.

EVENT(*data-value*)

specifies the name (1–16 characters) of the event to be associated with the timer. The acceptable characters are A-Z a-z 0-9 \$ @ # . - and _. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

The default event name is the name of the timer.

HOURS(*data-value*)

specifies a fullword binary value in the range 0–23. This is a suboption of the AFTER and AT options. For its use and meaning, see these options.

The default value is zero.

MINUTES(*data-value*)

specifies a fullword binary value in the range 0–59. This is a suboption of the AFTER and AT options. For its use and meaning, see these options.

The default value is zero.

MONTH(*data-value*)

specifies, as a fullword binary value in the range 1–12, the month in which the timer is to expire.

ON specifies the date at which the timer is to expire, as a combination of the YEAR, MONTH, DAYOFMONTH, and DAYOFYEAR options.

If the ON option is not specified, the default date is today.

SECONDS(*data-value*)

specifies a fullword binary value in the range 0–59. This is a suboption of the AFTER and AT options. For its use and meaning, see these options.

The default value is zero.

TIMER(*data-value*)

specifies the name (1–16 characters) of the timer. The acceptable characters are A-Z a-z 0-9 \$ @ # . - and _. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

YEAR(*data-value*)

specifies, as a fullword binary value in the range 0–2040, the year in which the timer is to expire.

Conditions

111 EVENTERR

RESP2 values:

- 6 The event name specified on the EVENT option is invalid.
- 7 The event name specified on the EVENT option (or the default event name taken from the timer name) has already been defined to this activity.

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of a currently-active activity.
- 11 An invalid interval was specified.
- 12 An invalid date or time was specified.

115 TIMERERR

RESP2 values:

- 14 The timer name specified on the TIMER option is invalid.
- 15 The timer name specified on the TIMER option has already been defined to this activity.

Examples

```
DEFINE TIMER() AT HOURS(15)
```

defines a timer that will expire at 3 p.m. today (or immediately if the local time is already later than 3 p.m.).

```
DEFINE TIMER() AT HOURS(15) ON YEAR(2001) MONTH(11) DAYOFMONTH(3)
```

defines a timer that will expire at 3 p.m. on 3rd November 2001.

```
DEFINE TIMER() AT HOURS(15) ON YEAR(2001) DAYOFYEAR(32)
```

defines a timer that will expire at 3 p.m. on 1st February 2001.


```
DEFINE TIMER() AT HOURS(8) ON YEAR(1997) MONTH(1) DAYOFMONTH(1)
```

defines a timer that expires immediately.

DELAY

Delay the processing of a task.

DELAY

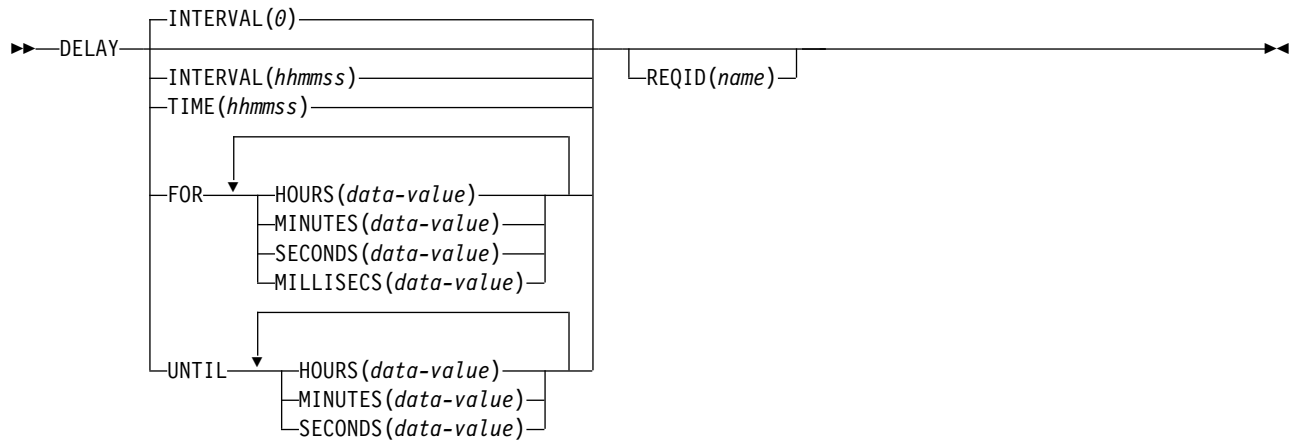

Conditions: EXPIRED, INVREQ

This command is threadsafe only when the interval is 0.

Note for dynamic transaction routing: Using DELAY with REQID if later CANCELED could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

DELAY suspends the processing of the issuing task for a specified interval of time or until a specified time of day. It supersedes any previously initiated POST command for the task.

It is possible to specify intervals in milliseconds (ms) however CICS checks for delay expiry every 250 ms so the actual interval might vary depending on where in the scan cycle your request is made.

The default is INTERVAL(0), but for C the default is FOR HOURS(0) MINUTES(0) SECONDS(0).

Options

FOR

specifies the duration of the delay.

HOURS(data-value)

a fullword binary value in the range 0–99.

INTERVAL(hhmmss)

specifies, in packed decimal format, the interval of time that is to elapse from the time when the DELAY command is issued. The **mm** and **ss** are in the range 0–59. The time specified is added to the current clock time by CICS when the command is executed to calculate the expiration time.

When using the C language, you are recommended to use the FOR/UNTIL HOURS, MINUTES, and SECONDS options as C does not provide a packed decimal data type. You may use INTERVAL, but if the value specified is **not** an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format.

MILLISECS(*data-value*)

specifies a fullword binary value in the range 0–999, when HOURS, MINUTES or SECONDS are also specified, or 0–359999999 when MILLISECS is the only option specified.

MINUTES(*data-value*)

specifies a fullword binary value in the range 0–59, when HOURS, SECONDS or MILLISECS are also specified, or 0–5999 when MINUTES is the only option specified.

REQID(*name*)

specifies a name (1–8 characters), which should be unique, to identify the DELAY request. Using this option to specify an application-defined name enables another transaction to cancel the DELAY request.

To enable other tasks to cancel unexpired DELAY requests, you must make the request identifier dynamically available. For example, storing it in a TS queue, whose name is known to other applications that may want to cancel the DELAY request, is one way you can pass a request identifier to other transactions.

SECONDS(*data-value*)

specifies a fullword binary value in the range 0–59, when HOURS, MINUTES or MILLISECS are also specified, or 0–359 999 when SECONDS is the only option specified.

TIME(*hhmmss*)

specifies, in packed decimal format, the time when the task should resume processing.

When using the C language, you are recommended to use the FOR/UNTIL HOURS, MINUTES, and SECONDS options as C does not provide a packed decimal data type. You may use TIME, but if the value specified is **not** an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format. See the section about expiration times in *CICS Application Programming Guide*.

UNTIL

specifies the time at the end of the delay and when the task should resume processing.

Conditions

31 EXPIRED

occurs if the time specified has already expired when the command is issued. If you specify very short intervals of less than 250 ms it is likely the time will have lapsed before the command is issued. You will need to use exception handling if short delay intervals are requested.

Default action: ignore the condition.

16 INVREQ

RESP2 values:

4 Hours are out of range.

- 5 Minutes are out of range.
- 6 Seconds are out of range.
- 22 Milliseconds are out of range.

also occurs (RESP2 not set) if the DELAY command is not valid for processing by CICS.

Default action: terminate the task abnormally.

Examples

The following example shows you how to suspend the processing of a task for five minutes:

```
EXEC CICS DELAY
      INTERVAL(500)
      REQID('GXLBZQMR')
```

```
EXEC CICS DELAY FOR MINUTES(5)
```

The following example shows you how, at 09:00, to suspend the processing of a task until 12:45:

```
EXEC CICS DELAY
      TIME(124500)
      REQID('UNIQUECODE')
```

There are two ways to enter the time under UNTIL.

- A combination of at least two of HOURS(0–99), MINUTES(0–59) and SECONDS(0–59). HOURS(1) SECONDS(3) would mean one hour and three seconds (the minutes default to zero).
- Any one of HOURS(0–99), MINUTES(0–5999), or SECONDS(0–359 999). HOURS(1) means one hour. MINUTES(62) means one hour and two minutes. SECONDS(3723) means one hour, two minutes, and three seconds.


Under FOR you can enter the time in both ways that apply to UNTIL and additionally you can specify a delay to include milliseconds or specify the delay completely in milliseconds. To specify fractions of a second on a delay, code the MILLISECS parameter in the range 0–999 in addition to other time units. To specify the delay purely in milliseconds, code the MILLISECS parameter in the range 0–359999999. The following example shows you how to suspend the processing of a task for 15000 milliseconds:

```
EXEC CICS DELAY
      FOR MILLISECS(15000)
      REQID('UNIQUECODE')
```

DELETE

Delete a record from a file - VSAM KSDS, VSAM RRDS, and data tables only.

DELETE

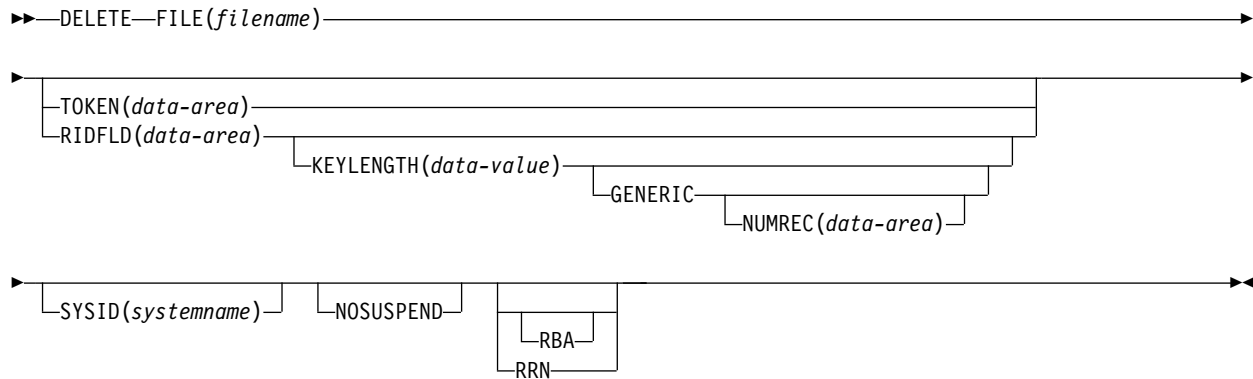

Conditions: CHANGED, DISABLED, DUPKEY, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, LOADING, LOCKED, NOTAUTH, NOTFND, NOTOPEN, RECORDBUSY, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

The **DELETE** command deletes a record from a file on a KSDS, a path over a KSDS, a CICS or user-maintained data table, or an RRDS. You cannot delete from a VSAM ESDS or a BDAM file. **All references to KSDS apply equally to CICS maintained data tables and, except where stated otherwise, to paths over a KSDS.** The file can be on a local or a remote system. You identify, in the RIDFLD option, the specific record to be deleted.

You can delete a group of records with a single invocation of this command, identifying the group by the GENERIC option (not available for RRDS). The **DELETE** command with GENERIC option should be used with caution. If the generic key specified will match a very large number of records, then the CICS unit of work will be holding a very large number of record locks until syncpoint. This could cause storage issues within the CICS region, or if the file is an RLS file, it could cause excessive use of coupling facility resources and affect other systems. Instead, consider using a series of generic deletes (by using generic keys that will match less records) and syncpoint after each range of records has been deleted.

You can also use this command to delete a single record that has previously been retrieved for update (by a READ UPDATE command). In this case, you must not specify the RIDFLD option.

When this command is used to delete records from a CICS-maintained data table, the update is made to both the source VSAM KSDS data set and the in-memory data table.

When this command is used to delete records from a user-maintained data table, the update is made only to the in-memory data table.

When this command is used to delete records from a coupling facility data table, the update is made only to the data table in the coupling facility.

Options

FILE(*filename*)

Specifies the name of the file to be accessed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

GENERIC (*VSAM KSDS only*)

Specifies that the search key is a generic key with a length specified in the KEYLENGTH option. The search for a record is satisfied when a record is found with a key that has the same starting characters (generic key) as those specified.

KEYLENGTH(*data-value*)

Specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case it is not valid. This option must be specified if GENERIC is specified, and it can be specified whenever a key is specified. However, if the length specified is different from the length defined for the data set and the operation is not generic, the INVREQ condition occurs.

The INVREQ condition also occurs if you specify GENERIC, and the KEYLENGTH is not less than the length specified in the VSAM definition.

Do not specify a zero value for KEYLENGTH because the results are unpredictable.

For remote files, you can specify the KEYLENGTH in the FILE definition. If KEYLENGTH is not defined there, and is not specified in the application program, and the key is longer than 4 characters, the default value is 4.

NOSUSPEND (*RLS only*)

Specifies that the request is not to wait if VSAM is holding an active lock against the record, including records locked as the result of a DEADLOCK.

Note: Requests that specify NOSUSPEND wait for at least 1 second before CICS returns the RECORDBUSY response.

NUMREC(*data-area*) (**VSAM KSDS only**)

Specifies a halfword binary data area that CICS sets to the number of deleted records.

RBA

(VSAM KSDS base data sets only, not paths) Specifies that the record

identification field specified in the RIDFLD option contains a relative byte address. Use this option only when deleting records using relative byte addresses instead of keys to identify the records.

You cannot use RBA for:

- User-maintained data tables
- Coupling facility data tables
- Any files opened in RLS access mode
- KSDS files that can hold more than 4 GB of data

RIDFLD(*data-area*)

Specifies the record identification field. The contents can be a key, a relative byte address (RBA), or a relative record number. For a relative byte address or a relative record number, the format of this field must be fullword binary. For a relative byte address, the RIDFLD can be greater than or equal to zero. For a relative record number, the RIDFLD can be greater than or equal to 1.

The contents must be a key for user-maintained data tables or coupling facility data tables.

You must specify this option if you have also specified GENERIC.

RRN (*VSAM RRDS only*)

Specifies that the record identification field specified in the RIDFLD option contains a relative record number. Use this option only with files referencing relative record data sets.

SYSID(*systemname*)

Specifies the name (1-4 characters) of the system the request is directed to.

If you specify SYSID, and omit both RBA and RRN, you must also specify KEYLENGTH; it cannot be found in the resource definition.

TOKEN(*data-area*)

Specifies, as a fullword binary value, a unique identifier for this DELETE request. Use this identifier to associate the delete request with a record returned on a previous READ UPDATE or BROWSE for UPDATE request. The value to use is the value returned in the TOKEN held by the earlier READ UPDATE or BROWSE for UPDATE request.

TOKEN can be function shipped. However, if a request specifying TOKEN is function shipped to a member of the CICS Family of products that does not recognize this option, the request fails.

Conditions

105 CHANGED

RESP2 values:

- 109** A **DELETE** command (without RIDFLD) is issued for a file that is a defined as a coupling facility data table using the contention update model and the record has been changed since the application program read it for update. To perform the **DELETE** successfully, repeat the read for update to get the latest version of the record, and try the **DELETE** command again.

Default action: terminate the task abnormally.

84 DISABLED

RESP2 values:

- 50** A file is disabled. A file can be disabled because:

- It was initially defined as disabled and has not since been enabled.
- It has been disabled by a **SET FILE** or a **CEMT SET FILE** command.

This condition cannot occur when the **DELETE** command follows any read with the **UPDATE** option.

Default action: terminate the task abnormally.

15 **DUPKEY**

RESP2 values:

- 140** A record is accessed by way of an alternate index with the **NONUNIQUEKEY** attribute, and another alternate index record with the same key follows.

Default action: terminate the task abnormally.

12 **FILENOTFOUND**

RESP2 values:

- 1** The file name referred to in the **FILE** option cannot be found in the file resource definition.

Default action: terminate the task abnormally.

21 **ILLOGIC**

RESP2 values:

- 110** A VSAM error occurs that is not in one of the other CICS response categories.

See **EIBRCODE** in the **EXEC** interface block; for details, see **EIB** fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 **INVREQ**

RESP2 values:

- 20** Delete operations are not allowed according to the resource definition.
- 21** A **DELETE** command is issued for a file referring to a VSAM ESDS.
- 22** A generic delete is issued for a file that is not a VSAM KSDS.
- 25** The **KEYLENGTH** and **GENERIC** options are specified, and the length specified in the **KEYLENGTH** option is greater than or equal to the length of a full key.
- 26** The **KEYLENGTH** option is specified (but the **GENERIC** option is not specified), and the specified length does not equal the length defined for the data set to which this file refers.
- 27** A **DELETE** command is issued for a file referring to a BDAM data set.
- 31** A **DELETE** command without the **RIDFLD** option is issued for a file for which no previous **READ UPDATE** command has been issued.
- 42** The **KEYLENGTH** and **GENERIC** options are specified, and the length specified in the **KEYLENGTH** option is less than zero.
- 44** The **DELETE** command does not conform to the correct format for a user-maintained or coupling facility data table; for example if **RBA** was specified.

- 47 A DELETE instruction includes a token whose value cannot be matched against any token in use for an existing read for UPDATE request.
- 51 A DELETE command specifying the RBA or XRBA keyword is issued against a KSDS file that is being accessed in RLS mode. RLS does not support relative byte address (RBA) access to KSDS files.
- 55 NOSUSPEND is specified for a non-RLS file.
- 56 An attempt to update a recoverable coupling facility data table has failed because the current unit of work has already updated 1024 recoverable coupling facility data tables. You cannot update more than 1024 recoverable coupling facility data tables within a unit of work
- 59 XRBA was specified, but the data set is not an extended ESDS.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120 There is an I/O error during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

54 ISCINVREQ

RESP2 values:

- 70 The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

94 LOADING

RESP2 values:

- 104 A delete request is issued for a user-maintained data table that is currently being loaded. A user-maintained data table cannot be modified during loading.

LOADING is also returned for a coupling facility data table if the delete request is for a key that is not yet loaded. A coupling facility data table can be modified during loading, but only if the requested key is within the range of those records already loaded.

The LOADING response can also be returned for a coupling facility data table that has failed during loading. For more information about what happens if the load for a coupling facility data table fails, see the description of the XD TLC global user exit in the Data tables management exits in the *CICS Customization Guide*.

If your application programs encounter the LOADING condition persistently or too frequently, check that this condition is not caused by conflicting file definitions that reference the same data set.

Default action: terminate the task abnormally.

100 LOCKED

RESP2 values:

- 106** An attempt is made to delete a record specifying the RIDFLD, but a *retained* lock exists against this key (see “Retained and active locks” on page 154). If the request specifies the GENERIC keyword, all possible records are deleted, but the locked records remain. The number of records deleted is returned by NUMREC.

The LOCKED condition can also occur for a DELETE request to a recoverable CFDT that uses the locking model, if the record being read is locked by a retained lock. See the Coupling facility data table retained locks in the *CICS Recovery and Restart Guide* for information about investigating retained locks on records in a coupling facility data table.

Default action: abend the task with code AEX8.

70 NOTAUTH

RESP2 values:

- 101** A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

- 80** An attempt to delete a record based on the search argument provided is unsuccessful.

For user-maintained data and coupling facility data tables, this condition occurs if an attempt to delete a record is unsuccessful because there is no entry with the specified key in the data table. This can occur on an attempt to delete a record using a DELETE without RIDFLD, if the delete is associated with a READ UPDATE request for a record that this transaction has deleted (using DELETE with RIDFLD) after it was read for update.

This does not mean that there is no such record in the source data set (if the table was created from one); it might be that such a record is present but was either rejected during initial loading by the user exit XDTRD, or was later deleted from the data table.

For coupling facility data tables, this condition can also occur when a DELETE command (without a RIDFLD) is issued to a coupling facility data table using the contention model, and the record has been deleted since it was read for update.

Default action: terminate the task abnormally.

19 NOTOPEN

RESP2 values:

- 60** NOTOPEN (RESP2 60) is returned for one of the following reasons:
- The requested file is CLOSED and UNENABLED. The CLOSED, UNENABLED state is reached after a CLOSE request has been received against an OPEN ENABLED file and the file is no longer in use. You can also make CLOSED, UNENABLED the initial state, by specifying STATUS(UNENABLED) and OPENTIME(FIRSTREF) on the FILE resource definition.

- The requested file is OPEN and in use by other transactions, but a CLOSE request against the file has been received.
- A DELETE command is issued against a data set that is quiesced, or is being quiesced, as a result of a SET DSNAME QUIESCED or IMMQUIESCED command.
- The requested file is CLOSED and ENABLED, so CICS has tried to open the file as part of executing the request. This file open has failed for some reason. Examine the console for messages that explain why the file open has been unsuccessful.

This condition does not occur if the request is made to a CLOSED, DISABLED file. In this case, the DISABLED condition occurs.

This condition also cannot occur when deleting a record just read for update.

Default action: terminate the task abnormally.

101 RECORDBUSY

RESP2 values:

- 107** The NOSUSPEND keyword is specified for the deletion of a record that is locked by a VSAM *active* lock (see “Retained and active locks”).

If the request specifies the GENERIC keyword, all possible records are deleted except for the locked records which remain. The number of records deleted is returned by NUMREC.

Default action: abend the task with code AEX9.

53 SYSIDERR

RESP2 values:

- 130** The SYSID option specifies a name that is not the local system or a remote system (made known to CICS by defining a CONNECTION). SYSIDERR also occurs when the link to the remote system is closed.
- 131** For a coupling facility data table, the connection to the coupling facility data table server has failed. This failure could occur because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132** The **DELETE** command is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails.

Default action: terminate the task abnormally.

Retained and active locks

RECORDBUSY refers to active locks and LOCKED refers to retained locks:

- DELETE requests for records that have retained locks are always rejected with a LOCKED response.
- DELETE requests for records that have active locks wait for the lock to be released, except when the NOSUSPEND keyword is specified, in which case CICS returns the RECORDBUSY response.

Examples

The following example shows you how to delete a group of records in a VSAM data set:


```
EXEC CICS DELETE  
      FILE('MASTVSAM')  
      RIDFLD(ACCTNO)  
      KEYLENGTH(1en)  
      GENERIC  
      NUMREC(NUMDEL)
```

DELETE ACTIVITY

Delete a BTS child activity.

DELETE

►►—DELETE—ACTIVITY(*data-value*)—————►►

Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED

Description

DELETE ACTIVITY removes a child activity from the BTS repository data set on which it is defined. The child activity's completion event is removed from the parent's event pool. Any descendants of the child activity are also deleted.

The activity to be deleted must be a child of the activity that issues the DELETE command. To be eligible for deletion, the child activity must be in one of the following processing states (modes):

- COMPLETE—completed normally, abnormally, or previously canceled.
- INITIAL—not yet run, or reset by means of a RESET ACTIVITY command.

For a description of all possible processing states, see Processing modes in the *CICS Business Transaction Services*.

Note: A child activity that is not deleted explicitly by means of a DELETE ACTIVITY command is deleted automatically by CICS when its parent completes.

Options

ACTIVITY(*data-value*)

specifies the name (1–16 characters) of the child activity to be deleted.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.
- 14 The child activity named on the ACTIVITY option is not in COMPLETE or INITIAL mode, and is therefore ineligible for deletion.

16 INVREQ

RESP2 values:

- 4 The DELETE ACTIVITY command was issued outside the scope of a currently-active activity.

17 IOERR

RESP2 values:

29 The repository file is unavailable.

30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

DELETE CHANNEL

Delete a named channel and all the containers that are in it.

DELETE CHANNEL

►►—DELETE CHANNEL(*data-value*)—►►

Conditions: CHANNELERR

This command is threadsafe.

Description

DELETE CHANNEL deletes the specified channel and all the containers that are in it. When you delete a channel and its containers:

- Any data that is in the containers is discarded.
- All storage that relates to the channel and to its containers is released.

The application program that issues the **DELETE CHANNEL** command must be the program that owns the channel. The program that owns the channel is the program that created the channel by naming it on one of the following commands:

- **LINK PROGRAM CHANNEL**
- **MOVE CONTAINER CHANNEL TOCHANNEL**
- **PUT CONTAINER CHANNEL**
- **PUT64 CONTAINER**
- **RETURN TRANSID CHANNEL**
- **START TRANSID CHANNEL**
- **XCTL PROGRAM CHANNEL**
- **WEB RECEIVE TOCHANNEL**
- **WEB CONVERSE TOCHANNEL**

An application program cannot delete the following channels:

- The current channel for the application program, that is, the channel with which the program was invoked.
- Any channel that the application program did not create.
- Any channel that is read-only.
- The transaction channel DFHTRANSACTION.

Options

CHANNEL(*data-value*)

Specifies the 1–16 character name of the channel that is to be deleted. Every container that is owned by the channel is deleted, and the channel itself is deleted.

Conditions

122 CHANNELERR

RESP2 values:


- 2 The channel specified on the CHANNEL option could not be found.

- | 3 The channel specified on the CHANNEL option is a read-only channel.
- | 4 The channel specified on the CHANNEL option is the current channel.
- | 5 The channel specified on the CHANNEL option is the transaction
| channel.
- | 6 The channel specified on the CHANNEL option is not owned by the
| calling program.
- |

DELETE CONTAINER (BTS)

Delete a named BTS data-container.

DELETE CONTAINER (BTS)

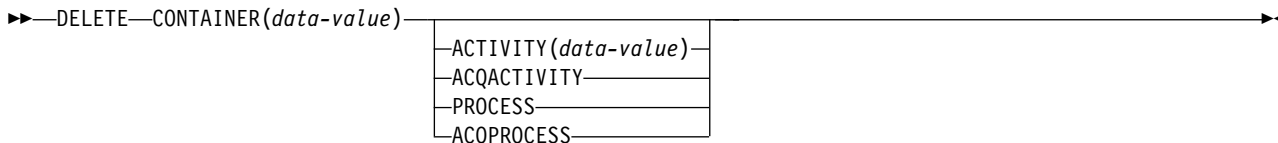

Conditions: ACTIVITYERR, CONTAINERERR, INVREQ, IOERR, LOCKED, PROCESSBUSY

Description

DELETE CONTAINER (BTS) deletes a BTS data-container and discards any data that it contains.

The container is identified by name and by the process or activity for which it is a container—the process or activity that “owns” it. The activity that owns the container can be identified:

- Explicitly, by specifying one of the PROCESS- or ACTIVITY-related options.
- Implicitly, by omitting the PROCESS- and ACTIVITY-related options. If these are omitted, the current activity is implied.

Note: Process containers can be deleted only by the root activity or by a program that has acquired the process.

Options

ACQACTIVITY

specifies either of the following:

- If the program that issues the command has acquired a process, that the container is owned by the root activity of that process.
- Otherwise, that the container is owned by the activity that the program has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the container is owned by the process that the program that issues the command has acquired in the current unit of work.

ACTIVITY(*data-value*)

specifies the name (1–16 characters) of the activity that owns the container. This must be a child of the current activity.

CONTAINER(*data-value*)

specifies the name (1–16 characters) of the container to be deleted.

PROCESS

specifies that the container to be deleted is owned by the current process—that is, the process that the program that issues the command is executing on behalf of.

Conditions

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.

110 CONTAINERERR

RESP2 values:

- 10 The container named on the CONTAINER option could not be found.
- 26 The process container named on the CONTAINER option is read-only. (Process containers can be deleted only by the root activity or by a program that has acquired the process.)

16 INVREQ

RESP2 values:

- 4 The command was issued outside the scope of a currently-active activity.
- 15 The ACQPROCESS option was used, but the unit of work that issued the request has not acquired a process.
- 24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.
- 25 The PROCESS option was used, but the command was issued outside the scope of a currently-active process.

17 IOERR

RESP2 values:

- 30 An input/output error has occurred on the repository file.
- 31 The record on the repository file is in use.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

106 PROCESSBUSY

RESP2 values:

- 13 The request could not be satisfied because the process record is locked by another task.

DELETE CONTAINER (CHANNEL)

Delete a named channel container.

DELETE CONTAINER (CHANNEL)

►►—DELETE—CONTAINER(*data-value*)—CHANNEL(*data-value*)—►►

Conditions: CHANNELERR, CONTAINERERR, INVREQ

This command is threadsafe.

Description

DELETE CONTAINER (CHANNEL) deletes a container from a channel and discards any data that it contains.

The container is identified by name and by the channel for which it is a container - the channel that “owns” it.

The channel that owns the container can be identified explicitly, by specifying the CHANNEL option, or implicitly, by omitting the CHANNEL option. When this option is omitted, the current channel is implied. If there is no current channel, the command is assumed to be an EXEC CICS DELETE CONTAINER (BTS) command. For more information, see “DELETE CONTAINER (BTS)” on page 160.

Options

CHANNEL(*data-value*)

Specifies the name (1–16 characters) of the channel that owns the container. You can specify the channel name DFHTRANSACTION to use the transaction channel.

CONTAINER(*data-value*)

Specifies the name (1–16 characters) of the container to be deleted.

Conditions

122 CHANNELERR

RESP2 values:

- 2 The channel specified on the CHANNEL option could not be found.
- 3 Either the current channel or the channel specified on the CHANNEL option is read-only.

110 CONTAINERERR

RESP2 values:

- 10 The container named on the CONTAINER option could not be found.

16 INVREQ

RESP2 values:

- 4 The command was issued outside the scope of a currently-active channel.
- 30 You cannot delete a CICS-defined read-only container.

DELETE COUNTER and DELETE DCOUNTER

Delete the named counter from the specified pool. Use COUNTER for fullword signed counters and DCOUNTER for doubleword unsigned counters.

DELETE COUNTER

►►—DELETE COUNTER(*name*)—┐
 └POOL(*name*)—┘

Conditions: INVREQ

This command is threadsafe.

DELETE DCOUNTER

►►—DELETE DCOUNTER(*name*)—┐
 └POOL(*name*)—┘

Conditions: INVREQ

This command is threadsafe.

Description

These commands delete the named counter from the specified pool.

Options

COUNTER(*name*)

Specifies the name of the fullword counter to delete. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

DCOUNTER(*name*)

Specifies the name of the doubleword counter to delete. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

POOL(*poolname*)

Specifies an 8-character string to use as a pool selection parameter to select the pool in which the named counter resides. The string can be a logical pool name, or the actual pool name.

Valid characters for the pool selector string are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 8 characters, the name must be padded with trailing blanks.

This parameter is optional. If you omit the name of the pool, a pool selector value of 8 blanks is assumed.

If there is no matching entry in the DFHNCOPT options table, CICS uses the name specified on the NCPLDFT system initialization parameter, which specifies the default named counter pool.

For information about generating a named counter options table using the DFHNCO macro, see the *CICS Application Programming Guide*.

Conditions

16 INVREQ

RESP2 values:

- 201 Named counter not found.
- 301 The server has reported an error code that is not understood by the named counter interface. Generally, this is not possible unless the interface load module, DFHNCIF, is at a lower maintenance or release level than the server itself.
- 303 An unexpected error, such as structure failure or loss of connectivity, has occurred on a macro used to access the coupling facility. Further information is in message DFHNC0441 in the application job log.
- 304 The pool selection parameter specified in the program cannot be resolved to a valid server name using the current options table.
- 305 The interface cannot establish a connection to the server for the selected named counter pool. Further information is in an AXM services message (AXMSCnnnn) in the application job log.
- 306 An abend occurred during server processing of a request. Further information is in a message in the application job log and the server job log.
- 308 The DFHNCOPT options table module, required to resolve a pool name, cannot be loaded.
- 309 During processing of the options table, the named counter interface encountered an unknown entry format. Either the options table is not correctly generated, or the DFHNCIF interface load module is not at the same release level as the options table.
- 310 An options table entry that matches the given pool name specified a user exit program, but the user exit program is not link-edited with the options table and cannot be loaded.
- 311 A response from the named counter server to the client region interface module, DFHNCIF, indicates that a system-managed rebuild is in progress but the EXEC CICS interface does not recognize the condition. This means that the CICS region is at CICS TS 2.1 or earlier.
- 403 The POOL parameter contains invalid characters or embedded spaces.

Default action: terminate the task abnormally.

DELETE EVENT

Delete a BTS event.

DELETE EVENT

►►—DELETE—EVENT(*data-value*)—◄◄

Conditions: EVENTERR, INVREQ

Description

DELETE EVENT deletes a BTS event that is no longer needed. The event is removed from the current activity's event pool. An event can be deleted whether it has fired or not.

DELETE EVENT can be used to delete only the following types of event:

- Input
- Composite.

DELETE EVENT *cannot* be used to delete:

- Activity completion events. These are implicitly deleted when a response from the completed activity is acknowledged by a CHECK ACTIVITY command issued by the activity's parent; or when a DELETE ACTIVITY command is issued.
- Timer events. These are implicitly deleted when the expiry of the associated timer is acknowledged by a CHECK TIMER command; or when a DELETE TIMER command is issued.
- System events.

Note:

1. If the event to be deleted is included in the predicate of a composite event, it is removed from the predicate's Boolean expression. The fire status of the composite event (FIRED or NOTFIRED) is re-evaluated.
2. Deleting a composite event has no effect on its sub-events.

Options

EVENT(*data-value*)

specifies the name (1–16 characters) of the event to be deleted.

Conditions

111 EVENTERR

RESP2 values:

- 4 The event specified on the EVENT option is not recognized by BTS.

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of an activity.
- 2 The event specified on the EVENT option cannot be deleted because it is a system, timer, or activity completion event.

DELETE TIMER

Delete a BTS timer.

DELETE TIMER

►►—DELETE—TIMER(*data-value*)—◄◄

Conditions: INVREQ, TIMERERR

Description

DELETE TIMER deletes a BTS timer. If an event is associated with the timer, the event is also deleted and removed from the current activity's event pool. (There will be no event associated with the timer if the timer has expired and a CHECK TIMER command has been issued.)

The only timers a program can delete are those owned by the current activity. A timer can be deleted whether it has expired or not.

Options

TIMER(*data-value*)

specifies the name (1–16 characters) of the timer to be deleted.

Conditions

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of a currently-active activity.

115 TIMERERR

RESP2 values:

- 13 The timer specified on the TIMER option does not exist.

DELETEQ TD

Delete all transient data.

DELETEQ TD

►►—DELETEQ TD—QUEUE(*name*)—
 └SYSID(*systemname*)┐ ►►

Conditions: DISABLED, INVREQ, ISCINVREQ, LOCKED, NOTAUTH, QIDERR, SYSIDERR

This command is threadsafe when it is used with a queue in a local CICS region, or function shipped to a remote CICS region over an IPIC connection. It is non-threadsafe when it is function shipped to a remote CICS region over another type of connection.

Description

DELETEQ TD deletes all the transient data associated with a particular intrapartition destination (queue). All storage associated with the destination is released (deallocated). Note that you cannot use this command to delete an *extrapartition* transient data queue. An attempt to do so results in an INVREQ condition.

Options

QUEUE(*name*)

Specifies the symbolic name (1 - 4 alphanumeric characters) of the queue to be deleted. The named queue must be defined to CICS.

If SYSID is specified, the queue is assumed to be on a remote system, irrespective of how it is defined. Otherwise the resource definition is used to find out whether the queue is on a local or a remote system.

SYSID(*systemname*)

(remote systems only) Specifies the name (1 - 4 characters) of the system the request is directed.

Conditions

84 DISABLED

Occurs when the queue has been disabled.

Default action: terminate the task abnormally.

16 INVREQ

Occurs if DELETEQ names an extrapartition queue.

Default action: terminate the task abnormally.

54 ISCINVREQ

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

100 LOCKED

Occurs when the request cannot be performed because use of the queue has been restricted owing to a unit of work failing indoubt. This can happen on

any request for a logically-recoverable queue defined with WAIT(YES) and WAITACTION(REJECT) in the TDQUEUE resource definition.

Specify WAIT(YES) and WAITACTION(Queue) in the TDQUEUE resource definition if you want the transaction to wait.

Default action: terminate the task abnormally.

70 NOTAUTH

Occurs when a resource security check has failed on Queue(*name*).

Default action: terminate the task abnormally.

44 QIDERR

Occurs if the symbolic destination to be used with DELETEQ TD cannot be found.

Default action: terminate the task abnormally.

53 SYSIDERR


Occurs when the SYSID option specifies a name that is neither the local system nor a remote system (made known to CICS by defining a CONNECTION or an IPCONN). SYSIDERR also occurs when the link to the remote system is closed.

Default action: terminate the task abnormally.

DELETEQ TS

Delete a temporary storage queue.

DELETEQ TS



Conditions: INVREQ, ISCINVREQ, LOCKED, NOTAUTH, QIDERR, SYSIDERR

| This command is threadsafe when it is used with a queue in main storage or auxiliary storage, either in a local CICS region, or function shipped to a remote CICS region over an IPIC connection. The command is non-threadsafe when
| it is function shipped to a remote CICS region over another type of connection, or when it is used with a queue in a
| shared temporary storage pool in a z/OS coupling facility that is managed by a temporary storage data sharing
| server (TS server).

Note for dynamic transaction routing: Using this command might create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see *Affinity in Developing applications*.

Description

DELETEQ TS deletes all the temporary data associated with a temporary storage queue. All storage associated with the queue is freed.

You should delete temporary data as soon as possible to avoid using excessive amounts of storage.

When a recoverable temporary storage queue is deleted, you must issue a sync point before issuing a subsequent **WRITEQ TS** command for the same queue.

Options

QNAME (*name*)

An alternative to **QUEUE**, **QNAME** specifies the symbolic name (1 - 16 characters) of the queue to be deleted. The name must not consist solely of binary zeros and must be unique in the CICS system. If the name has less than 16 characters, you must still use a 16-character field, padded with blanks if necessary.

QUEUE (*name*)

Specifies the symbolic name (1 - 8 characters) of the queue to be deleted. The name cannot consist solely of binary zeros and must be unique within the CICS system. If the name has less than 8 characters, you must still use an 8-character field, padded with blanks if necessary.

SYSID (*systemname*)

(Remote and shared queues only) Specifies the system name (1 - 4 characters) identifying the remote system or shared queue pool to which the request is directed. Note that TSMODEL resource definitions do not support specifying a **SYSID** for a queue that resides in a temporary storage data sharing pool. Use the **QUEUE** or **QNAME** option instead. Using an explicit **SYSID** for a shared queue pool requires the support of a temporary storage table (TST).

Conditions

16 INVREQ

Occurs in either of the following situations:

- The queue was created by CICS internal code.
- The queue name specified consists solely of binary zeroes.

Default action: terminate the task abnormally.

54 ISCINVREQ

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

100 LOCKED

Occurs when the request cannot be performed because use of the queue has been restricted owing to a unit of work failing indoubt.

Default action: terminate the task abnormally.

70 NOTAUTH

Occurs when a resource security check has failed on QUEUE(*name*).

Default action: terminate the task abnormally.

44 QIDERR

Occurs when the specified queue cannot be found in either main or auxiliary storage.

Default action: terminate the task abnormally.

53 SYSIDERR

Occurs in any of the following situations:

- The SYSID option specifies a name that is not the local system or a remote system (made known to CICS by defining a CONNECTION or an IPCONN).
- When IPIC connectivity is used, the local system, the remote system, or both, are not CICS TS 4.2 or later regions.
- The link to the remote system is closed.
- The CICS region in which the temporary storage command is executed fails to connect to the TS server managing the TS pool that supports the referenced temporary storage queue. For example, this situation can occur if the CICS region is not authorized to access the temporary storage server.


This condition can also occur if the temporary storage server is not started, or because the server has failed (or been stopped) while CICS continues to run.

Default action: terminate the task abnormally.

DEQ

Schedule use of a resource by a task (dequeue).

DEQ



Conditions: INVREQ, LENGERR

This command is threadsafe if it is defined as LOCAL. It is non-threadsafe if it is defined as GLOBAL.

Note for dynamic transaction routing: Using this command could create inter-transaction affinities that adversely affect the use of dynamic transaction routing, unless the name specified in RESOURCE matches the name specified in an installed ENQMODEL resource definition, that has sysplex-wide scope. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

DEQ causes a resource currently enqueued on by the task to be released for use by other tasks.

If a task enqueues on, but does not dequeue from, a resource, CICS automatically releases the resource during syncpoint processing or when the task is terminated. A resource in the context of this command is any string of 1–255 bytes, established by in-house standards, to protect against conflicting actions between tasks, or to cause single-threading within a program.

When issuing the DEQ command, the resource to be dequeued from must be identified by the method used when enqueueing on the resource. If no enqueue has been issued for the resource, the dequeue is ignored.

If more than one ENQ command is issued for a resource by a task, that resource remains owned by the task until the task issues a matching number of DEQ commands.

When an EXEC CICS DEQ (or ENQ) command is issued for a resource whose name matches that of an installed ENQMODEL resource definition, CICS checks the value of the ENQSCOPE attribute to determine whether the scope is local or sysplex-wide. If the ENQSCOPE is non-blank, CICS treats the ENQ or DEQ as sysplex-wide, and passes a queue name and the resource name to z/OS global resource serialization to manage the enqueue. If the ENQSCOPE attribute is left blank (the default value), CICS treats the DEQ as local to the issuing CICS region. If no ENQMODEL matches the resource name, the scope of the DEQ command is local. For more information on ENQMODEL resources, see ENQMODEL resources in Reference -> System definition.

Options

LENGTH(*data-value*)

specifies that the resource to be dequeued from has a length given by the data value. The data value is a halfword binary value in the range 1 through 255. If the value you specify is outside this range, a LENGERR condition occurs. If the LENGTH option is specified in an ENQ command, it must also be specified in the DEQ command for that resource, and the values of these options must be the same.

MAXLIFETIME(*cvda*)

specifies the duration of the ENQ being released. CVDA values are:

UOW The enqueue was acquired with a duration of a unit of work. This is the default value.

Note: For compatibility with previous releases of CICS, a CVDA value of LUW is also supported.

TASK

ENQ was acquired with a duration of a task.

RESOURCE(*data-area*)

specifies either an area whose address represents the resource to be dequeued from, or a variable that contains the resource (an employee name, for example). In the latter case, you must use the LENGTH option.

Conditions

16 INVREQ

RESP2 values:

2 The MAXLIFETIME option is set with an incorrect CVDA.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

1 The value you specified for the LENGTH option is outside the range 1 through 255.

Default action: terminate the task abnormally.

Examples

The following examples show how to dequeue from a resource:


```
EXEC CICS DEQ  
      RESOURCE(RESNAME)
```

```
EXEC CICS DEQ  
      RESOURCE(SOCSECNO)  
      LENGTH(9)
```

DOCUMENT CREATE

Create a document.

DOCUMENT CREATE

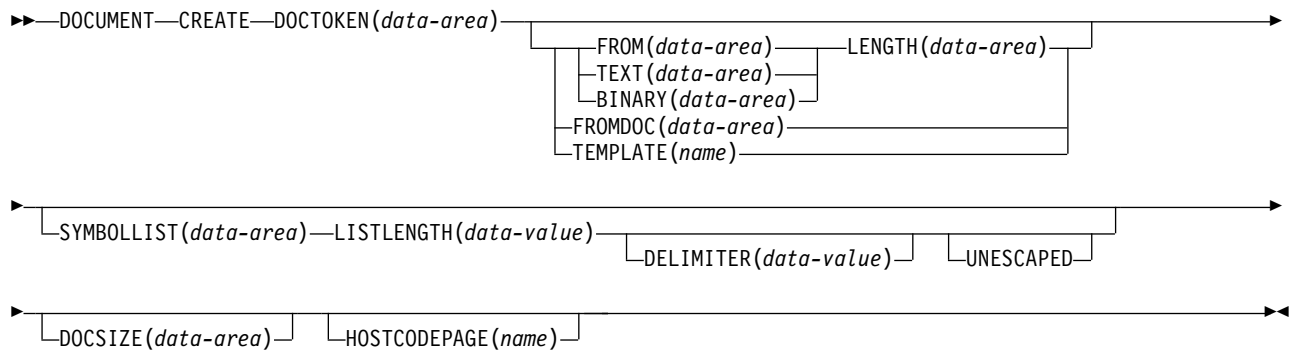

Conditions: INVREQ, LENGERR, NOTAUTH, NOTFND, SYMBOLERR, TEMPLATERR

This command is threadsafe.

Description

DOCUMENT CREATE signals the start of the document creation process. The document being created can be an empty document, or it can be based on an existing document, a template, or data contained in an application buffer.

Options

BINARY(data-area)

specifies a buffer of data which is to be used as the contents of the new document being created. The data is copied unchanged to the document content and no attempt is made to parse the data for symbol substitution. The purpose of the BINARY option is to allow the application to insert blocks of data that must not undergo conversion to a client code page when the data is sent. Use the LENGTH option to specify the length of this buffer.

DELIMITER(data-value)

specifies an optional 1-byte value used to delimit symbol name-value pairs in the SYMBOLLIST buffer. If this option is not specified, the value defaults to an ampersand. Certain delimiter values (such as the space character) are disallowed, and all of these cause an INVREQ condition on the command if used. The rules are listed in the *CICS Application Programming Guide*.

If this option is used, the application must ensure that the DELIMITER does not appear in any symbol value in the SYMBOLLIST buffer. For this reason, the application should not use alphanumeric and other printable characters as the DELIMITER value.

DOCSIZE(data-area)

specifies a binary fullword area that will be updated with the current size of the document in bytes. This is the maximum size of the buffer needed to contain a copy of the document when a RETRIEVE command is issued.

DOCTOKEN(data-area)

specifies a data area to contain the binary token of the document. The area

must be 16 bytes in length and will be set to a CICS-generated name by which the document can be referred to in later commands.

FROM(data-area)

specifies that data supplied by the application is to be used to create the contents of the new document. The data content could be a template or a document which was created and retrieved. If the data is a template, symbol substitution will take place where the symbols exist in the symbol table. If the data is a previously retrieved document, the conversion and bookmark tags which were inserted during retrieval will be removed from the content and stored in the internal format required by the API commands. Note that symbol substitution will not be attempted on any unresolved symbols contained in a retrieved document. Use the LENGTH option to specify the length of this buffer.

FROMDOC(data-area)

specifies the binary token (see the **DOCTOKEN** option) of a document whose contents are to be copied to the new document being created. All bookmark and conversion tags are copied to the new document. The symbol table will be not be copied.

HOSTCODEPAGE(name)

specifies the name of the host code page that the data being added is encoded in. This option applies to the TEXT, SYMBOL and TEMPLATE options only. The name must be eight characters long; if it is shorter than eight characters it must be padded on the right with blanks.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS now also accepts any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

Note that the HOSTCODEPAGE parameter must specify an EBCDIC-based code page if any symbol processing will be required, as the delimiters used for symbol and symbol list processing are assumed to be in EBCDIC.

LENGTH(data-value)

specifies the length, as a fullword binary value, of the buffer containing the TEXT, BINARY or FROM data.

LISTLENGTH(data-value)

specifies the length, as a fullword binary value, of the symbol list.

SYMBOLLIST(data-area)

specifies a buffer which contains a symbol list. Use the LISTLENGTH option to specify the length of this buffer. A symbol list is a character string consisting of one or more symbol definitions separated by ampersands. Each symbol definition consists of a name, an equals sign, and a value. Here is an example of a symbol list:

```
applid=IYCQ&jobname=test
```

By default, symbols in the symbol list are separated by the & character, but you can override this by using the DELIMITER keyword to specify a different symbol separator. The *CICS Application Programming Guide* lists the rules which apply when setting symbols using a SYMBOLLIST.

TEMPLATE(name)

specifies the 48-byte name of a template. The template must be defined to CICS using RDO. If the name is shorter than 48 bytes, it must be padded on the right with blanks.

Note: If you insert a template before the symbols contained in it are set, the symbols will never be substituted. This can occur if you create a document from a template without specifying a symbol list.

TEXT(data-area)

specifies a buffer of data which is to be used as the contents of the new document being created. The data is copied unchanged to the document content and no attempt is made to parse the data for symbol substitution. The data will be marked as requiring conversion to the client code page when the document is sent. Use the LENGTH option to specify the length of this buffer.

UNESCAPED

prevents CICS from unescaping symbol values contained in the SYBOLLIST buffer. If this option is used, plus signs are not converted to spaces, and sequences such %2B are not converted to single byte values.

The UNESCAPED option does not allow you to include the character that you have used as the symbol separator within a symbol value in a symbol list. If you want to use the UNESCAPED option, choose a symbol separator that will never be used within a symbol value.

Conditions**INVREQ**

RESP2 value:

- 1 The retrieved document specified on the FROM option is not in a valid RETRIEVE format.

LENGERR

RESP2 value:

- 1 The value specified for LENGTH is invalid. The value is negative.
- 9 The value specified for LISTLENGTH is invalid. Value must be between 1 and (16M - 1).

70 NOTAUTH

The command has failed a resource security check. (If the NOTAUTH condition is not handled, applications that receive it may abend with code AEY7.)

Note that the **EXEC CICS DOCUMENT** commands reference document templates using the 48-character name of the template (as specified in the TEMPLATENAME attribute of the DOCTEMPLATE resource). However, security checking for the commands uses the name of the DOCTEMPLATE resource definition that corresponds to the TEMPLATENAME attribute. If resource security checking is in place, the user ID for the transaction must have READ access to this DOCTEMPLATE resource definition.

RESP2 value:

- 101 The user ID for the transaction does not have READ access to the DOCTEMPLATE resource definition for the document template named by the TEMPLATE option.

13 NOTFND

RESP2 values:

- 2 The document specified on the FROMDOC option could not be found or was named incorrectly.
- 3 The template specified on the TEMPLATE option could not be found or was named incorrectly.
- 7 The host code page specified on the HOSTCODEPAGE option could not be found or was named incorrectly.
- 8 The value specified for DELIMITER is not valid.

116 SYMBOLERR

A symbol specified in the symbol list does not conform to the naming rules for symbols. RESP2 contains the offset of the symbol in the list.

117 TEMPLATERR

The template specified on the DOCTEMPLATE resource does not exist or an invalid #set, #include or #echo command was encountered while processing the supplied template data. RESP2 contains the offset of the invalid command.

DOCUMENT DELETE

Delete a document.

DOCUMENT DELETE

►►—DOCUMENT—DELETE—DOCTOKEN(*data-area*)—————►◄

Conditions: NOTFND

This command is threadsafe.

Description

The **DOCUMENT DELETE** command enables you to delete documents that are no longer required during a transaction. The command allows the application to request deletion of a document and all storage related to the document. On execution of this command, the storage allocated to the document is released immediately. If the **DOCUMENT DELETE** command is not invoked, the document exists until the application ends.

Options

DOCTOKEN(*data-area*)

specifies the 16-byte binary token of the document to be deleted.

Conditions

13 NOTFND


RESP2 values:

- 1 The document has not been created, or the name is incorrectly specified.

DOCUMENT INSERT

Insert document objects.

DOCUMENT INSERT

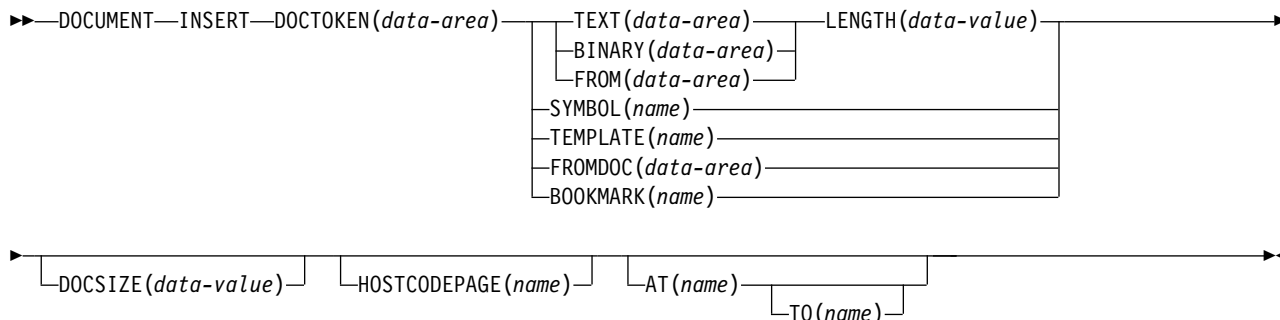

Conditions: DUPREC, INVREQ, LENGERR, NOTAUTH, NOTFND, TEMPLATERR

This command is threadsafe.

Description

DOCUMENT INSERT allows the application to insert document objects at insertion points in the document. The insertion points (bookmarks) define relative positions in the document. Bookmarks must be defined before being referenced. Data is always inserted after the position identified by the bookmark.

Options

AT(*name*)

specifies the 16-byte symbolic name of a bookmark which identifies the position of the insertion point in the document. Data is inserted after the bookmark, and any data following the bookmark is shifted down. The application can use a combination of the AT and TO options to perform an overlay operation. If the AT operand is not specified, the data is inserted at the end of the document. A pre-defined bookmark of TOP is provided to allow the application to insert data at the beginning of the document.

BINARY(*data-area*)

specifies a buffer of data to be inserted into the document. The data is copied unchanged to the insertion point in the document, and no attempt is made to parse the data for symbol substitution. The BINARY option allows the application to insert blocks of data that must not undergo conversion to a client code page when the data is sent. Use the LENGTH option to specify the length of this buffer.

BOOKMARK(*name*)

specifies a bookmark to be inserted into the document. A bookmark is a symbolic name which identifies an insertion point in the document. The name can be up to 16 characters in length, and must not contain any imbedded spaces.

DOCSIZE(*data-value*)

specifies a binary fullword area to be updated with the current size of the document in bytes. This is the maximum size of the buffer needed to contain a copy of the document when a RETRIEVE command is issued.

DOCTOKEN(*data-area*)

specifies the 16-byte binary token of the document into which data is to be inserted.

FROM(*data-area*)

specifies that a buffer of data supplied by the application is to be inserted into the document. The data content can be a template or a document that was previously created and retrieved. If the data is a template, symbol substitution takes place where the symbols exist in the symbol table. If the data is a previously retrieved document, the conversion and bookmark tags which were inserted during the retrieval will be removed from the content and stored in the internal form required by the API commands. Note that symbol substitution will not be attempted on any unresolved symbols contained in a retrieved document. Use the LENGTH option to specify the length of this buffer.

FROMDOC(*data-area*)

specifies the binary token of a document (see the DOCTOKEN option) whose contents are copied to the insertion point of the target document. All bookmarks and conversion tags are copied to the target document. The symbol table is not copied.

HOSTCODEPAGE(*name*)

specifies the symbolic name (see the DOCTOKEN option) of the host code page that the data being added is encoded in. This option applies to the TEXT, SYMBOL and TEMPLATE options only. The name must be eight characters long; if it is shorter than eight characters, it must be padded on the right with blanks.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS now also accepts any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

Note that the HOSTCODEPAGE parameter must specify an EBCDIC-based code page if any symbol processing will be required, as the delimiters used for symbol and symbol list processing are assumed to be in EBCDIC.

LENGTH(*data-value*)

specifies the length, as a fullword binary value, of the buffer containing the TEXT, BINARY or FROM data.

When the DOCUMENT INSERT command follows a DOCUMENT RETRIEVE command, without the use of the DATAONLY option, and the retrieved document is being inserted using the FROM option, the LENGTH specified must be equal to the length of the retrieved document.

SYMBOL(*name*)

specifies the 32-byte name of a symbol in the symbol table. The data associated with the symbol in the symbol table is inserted, but not the symbol itself. Note that when data associated with a symbol has been inserted into a document, you cannot change that data in the document that is being composed. If you set a different value for the symbol, the new value will be used the next time

that symbol is inserted into a document. Your change will not affect the value that has already been inserted into the document.

TEMPLATE(*name*)

specifies the 48-byte name of a template. The template must be defined to CICS using RDO. If the name is less than 48 bytes, it must be padded on the right with blanks. The current values of any symbols are substituted into the template.

Note: When a template containing symbols has been inserted into a document, you cannot change the substituted values of those symbols in the document that is being composed. If you set different values for the symbols, the new values will be used the next time that the template is inserted into a document. Your changes will not affect the values that have already been inserted into the document.

TEXT(*data-area*)

specifies a buffer of data to be inserted into the document. The data is copied unchanged to the insertion point in the document, and no attempt is made to parse the data for symbol substitution. When the document is sent, it is marked as requiring conversion to the client code page. Use the LENGTH option to specify the length of this buffer.

TO(*name*)

specifies the symbolic name of a bookmark identifying the end position of an overlay operation. Data between the bookmarks identified by the AT and TO operands is deleted, and new data is inserted in its place. It is possible to delete data between two bookmarks by specifying a null string on the TEXT or BINARY option with a LENGTH of zero.

Conditions

14 DUPREC

The bookmark has already been defined.

16 INVREQ

RESP2 values are:

- 0 The bookmark specified on the TO option appears before the bookmark specified on the AT bookmark.
- 1 The retrieved document specified on the FROM option is not in a valid RETRIEVE format.
- 2 The bookmark name on the BOOKMARK option is invalid.

LENGERR

RESP2 value:

- 1 The value specified for LENGTH is invalid. The value is negative.

70 NOTAUTH

The command has failed a resource security check. (If the NOTAUTH condition is not handled, applications that receive it may abend with code AEY7.)

Note that the EXEC CICS DOCUMENT commands reference document templates using the 48-character name of the template (as specified in the TEMPLATENAME attribute of the DOCTEMPLATE resource definition). However, security checking for the commands uses the name of the DOCTEMPLATE resource definition that corresponds to the TEMPLATENAME

attribute. If resource security checking is in place, the user ID for the transaction must have READ access to this DOCTEMPLATE resource definition.

RESP2 value:

- 101** The user ID for the transaction does not have READ access to the DOCTEMPLATE resource definition for the document template named by the TEMPLATE option.

13 NOTFND

One of the following documents or templates could not be found, or its name was incorrect.

RESP2 values:

- 1** The document specified on the DOCUMENT option.
- 2** The document specified on the FROMDOC option.
- 3** The template specified on the TEMPLATE option.
- 4** The document specified on the SYMBOL option.
- 5** The document specified on the AT option.
- 6** The document specified on the TO option.
- 7** The document specified on the HOSTCODEPAGE option.

117 TEMPLATERR

An invalid #set, #include or #echo command has been encountered while processing the supplied template data, or the CICS region does not have the correct level of authority to access the zFS file of this template. RESP2 contains either a zero (if the maximum of 32 levels of embedded templates is exceeded), or the offset of the invalid command.

DOCUMENT RETRIEVE

Copy a document into the application's own buffer.

DOCUMENT RETRIEVE

►►—DOCUMENT—RETRIEVE—DOCTOKEN(*data-area*)—INTO(*data-area*)—LENGTH(*data-value*)—►
└─┬─┐ └─┬─┐ └─┬─┐
└─MAXLENGTH(*data-value*)─┘ └─CHARACTERSET(*name*)─┘ └─DATAONLY─┘

Conditions: INVREQ, LENGERR, NOTFND

This command is threadsafe.

Description

DOCUMENT RETRIEVE allows the application to obtain a copy of the document in its own buffer, which it can then manipulate directly. The document is managed by CICS, and the application does not have direct access to the buffer containing the contents of the document. The document exists only for the duration of the current transaction, so the application must retrieve the document and store it if the document is to exist over transaction boundaries. The retrieved document can be used as a basis for a new document by using the FROM option of the **DOCUMENT CREATE** command.

When the document is retrieved, CICS inserts tags into the document contents to identify the bookmarks and to delimit the blocks that do not require code page conversion. To request a copy without tags, specify DATAONLY. The extracted document can also be converted into a single client code page by using the CHARACTERSET option.

The **DOCUMENT CREATE** and **DOCUMENT INSERT** commands return a DOCSIZE value. This value is the maximum size of the buffer needed to contain a copy of the document in its original code page (including control information), when the RETRIEVE command is issued. However, when the CHARACTERSET option specifies an encoding that requires more bytes than the original EBCDIC data (for example, UTF-8), the maximum size might not be large enough to store the converted document. If the DOCSIZE value is used for the buffer size in this case, the program should be prepared to handle a LENGERR condition and acquire a new buffer using the size returned in the LENGTH parameter. Alternatively, you can determine the actual document length before allocating the buffer by issuing a **DOCUMENT RETRIEVE** with a dummy buffer and a MAXLENGTH of zero, then handling the LENGERR condition and using the returned LENGTH value.

Options

CHARACTERSET(*name*)

specifies the name of the client character set to which the data should be converted. The name can be up to 40 characters in length (if it is shorter than 40 characters, it must be padded on the right with blanks).

This parameter replaces the CLNTCODEPAGE parameter, which is supported for upgrade purposes only.

CLNTCODEPAGE(*name*)

This option is supported for upgrade purposes only. CHARACTERSET replaces it. The action taken by CICS is the same for both keywords.

DATAONLY

specifies that the data should be retrieved without any imbedded tags.

DOCTOKEN(*data-area*)

specifies the 16-byte binary token of the document to be retrieved.

INTO(*data-area*)

specifies the buffer that is to contain the copy of the document content.

LENGTH(*data-value*)

specifies the length, as a fullword binary value, of the amount of data being returned to the application. If the document is truncated, this is the exact length required to return the whole document.

MAXLENGTH(*data-value*)

specifies the length, as a fullword binary value, of the maximum amount of data the buffer can receive.

Conditions**16 INVREQ**

RESP2 values:

- 11 An invalid or unsupported combination of code pages was specified.
- 12 An error occurred during CCSID conversion and the conversion could not be completed. For example, a piece of text or a symbol value ended part of the way through a multi-byte character.

22 LENGERR

RESP2 values:

- 1 MAXLENGTH is less than zero. The document size is not returned in the LENGTH field.
- 2 The length of the receiving buffer is zero, or is too short to contain the document contents. The document is truncated and the exact length required is returned in the LENGTH field.

13 NOTFND


RESP2 values:

- 1 The document has not been created, or the name is incorrectly specified.
- 7 The specified character set cannot be found.

DOCUMENT SET

Add symbols and values to symbol table.

DOCUMENT SET

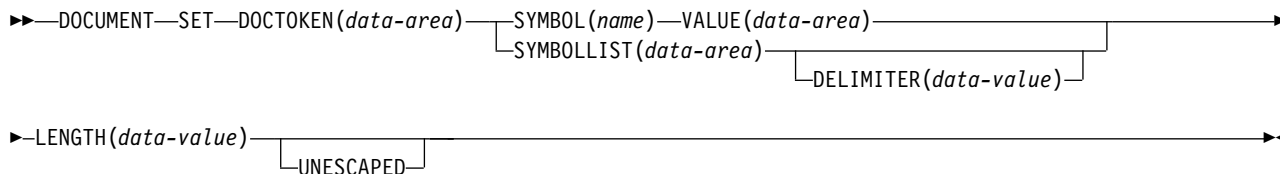

Conditions: INVREQ, LENGERR, NOTFND, SYMBOLERR

This command is threadsafe.

Description

DOCUMENT SET allows the application to add symbols and their associated values to the symbol table. If the symbol being added already exists in the table, it is replaced by the new definition.

Note:

1. When a template containing symbols has been inserted into a document, you cannot change the substituted values of those symbols in the document that is being composed. If you set different values for the symbols, the new values will be used the next time that the template is inserted into a document. Your changes will not affect the values that have already been inserted into the document.
2. If you insert a template before the symbols contained in it are set, the symbols will never be substituted. This can occur if you create a document from a template without specifying a symbol list.

Options

DELIMITER(data-value)

specifies an optional 1-byte value used to delimit symbol name-value pairs in the SYMBOLLIST buffer. If this option is not specified, the value defaults to an ampersand. Certain delimiter values (such as the space character) are disallowed, and all of these cause an INVREQ condition on the command if used. They are listed in the *CICS Application Programming Guide*.

If this option is used, the application must ensure that the DELIMITER does not appear in any symbol value in the SYMBOLLIST buffer. For this reason, the application should not use alphanumeric and other printable characters as the DELIMITER value.

DOCTOKEN(data-area)

specifies the 16-byte binary token of the document that owns the symbol table.

LENGTH(data-value)

specifies the length, as a fullword binary value, of the buffer containing the data value associated with the symbol, or the length of the buffer containing the symbol list when the SYMBOLLIST option is used.

SYMBOL(*name*)

specifies the name of the symbol that is to be added to the table. The name can be 1 to 32 characters in length with no embedded spaces. The *CICS Application Programming Guide* lists the rules which apply when specifying the name of a symbol. If you want to define more than one symbol in the same command, use the SYBOLLIST option instead.

SYBOLLIST(*data-area*)

specifies a buffer which contains a symbol list. Use the LENGTH option to specify the length of this buffer. A symbol list is a character string consisting of one or more symbol definitions separated by ampersands. Each symbol definition consists of a name, an equals sign, and a value. Here is an example of a symbol list:

```
applid=IYCQ&jobname=test
```

By default, symbols in the symbol list are separated by the & character, but you can override this by using the DELIMITER keyword to specify a different symbol separator. The *CICS Application Programming Guide* lists the rules which apply when setting symbols using a SYBOLLIST.

UNESCAPED

prevents CICS from unescaping symbol values contained in the SYBOLLIST buffer. If this option is used, plus signs are not converted to spaces, and sequences such as %2B are not converted to single byte values.

The UNESCAPED option does not allow you to include the character that you have used as the symbol separator within a symbol value in a symbol list. If you want to use the UNESCAPED option, choose a symbol separator that will never be used within a symbol value. Alternatively, you can use the SYMBOL and VALUE options to specify symbol values that contain the character you have used as the symbol separator, because the symbol separator has no special meaning when used in the VALUE option.

VALUE(*data-area*)

specifies an area containing the value to be associated with the SYMBOL. The *CICS Application Programming Guide* lists the rules which apply when specifying the value of a symbol.

Conditions**16 INVREQ**

RESP2 values:

- 8 The value specified for DELIMITER is not valid.

LENGERR

RESP2 value:

- 9 The value specified for symbol list LENGTH is invalid. Value must be between 1 and (16M - 1).
- 10 The value specified for symbol value LENGTH is invalid. Value must be between 1 and (16M - 1).

13 NOTFND

RESP2 values:

- 1 The document has not been created or the name is incorrectly specified.

116 SYMBOLERR

a symbol name is invalid. RESP2 values:


0 SYMBOLLIST was not used.

offset RESP2 contains the offset of the invalid symbol in the list.

DUMP TRANSACTION

Request a transaction dump.

DUMP TRANSACTION

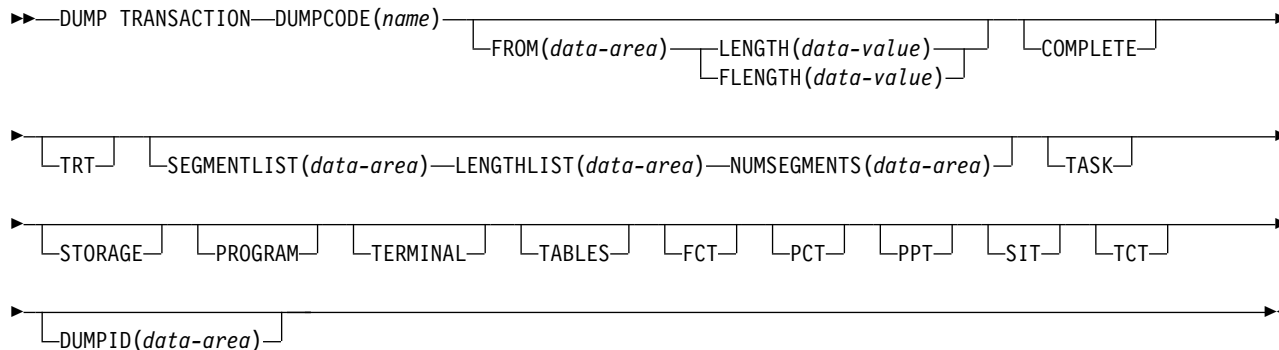

Conditions: INVREQ, IOERR, NOSPACE, NOSTG, NOTOPEN, OPENERR, SUPPRESSED

Description

DUMP TRANSACTION dumps all, a series, or any single main storage area related to a task, any or all of the CICS tables, or all of these together.

Note that if you issue a DUMP TRANSACTION for a DUMPCODE that is defined in the transaction dump table with SYSDUMP, you also get a system dump.

If there is no entry in the system dump table for the specified DUMPCODE, a temporary entry is made. This entry is lost on the next CICS start. The system dump table is described in the *CICS Problem Determination Guide*.

Options

COMPLETE

dumps all main storage areas related to a task, all the CICS tables, and the DL/I control blocks.

DUMPCODE(name)

specifies a name (1–4 characters) that identifies the dump. If the name contains any leading or imbedded blanks, the dump is produced but INVREQ is raised. No entry is added to the system dump table.

If you omit all the options except DUMPCODE, you get the same dump as if you specified TASK, but without the DL/I control blocks.

DUMPID(data-area)

returns a 6- to 9-character dump identifier generated for this particular dump. The format of the identifier is xxxx/yyyy, where xxxx represents the **dump run number**, yyyy is the **dump count**, and the slash (/) symbol is a separator character. The dump identifier is generated as follows:

Dump run number

A number in the range 1 to 9999. (Leading zeros are not used for this number, which is why the dump id can vary from 6 to 9 characters.) The dump run number begins at 1 when you first start CICS with a

newly-initialized local catalog, and is incremented by 1 each time you restart CICS. The dump run number is saved in the local catalog when you perform a normal shutdown, but is reset if you start CICS with a START=INITIAL or START=COLD system initialization parameter.

Dump count

A number in the range 0001 through 9999. (Leading zeros are required in the dump id.) This is the number assigned to the dump in this run of CICS, starting at 0001 for the first dump, and incremented by 1 with each dump taken.

FCT

dumps the file control table, which contains FILE resource definitions.

FLENGTH(*data-value*)

specifies the length (fullword binary value) of the storage area (specified in the FROM option) that is to be dumped. The maximum length that you can specify is 16 777 215 bytes.

FLENGTH and LENGTH are mutually exclusive.

FROM(*data-area*)

dumps the specified data area, which must be a valid area; that is, storage allocated by the operating system within the CICS region. In addition, the following areas are dumped:

- Task control area (TCA) and, if applicable, the transaction work area (TWA).
- Common system area (CSA), including the user's portion of the CSA (CWA).
- If TRAN is specified for the TRTRANTY SIT parameter, only the trace entries associated with the current task are formatted. If TRTRANTY=ALL is specified, the entire internal trace table is formatted. This applies only when the CICS trace facility is active.
- Either the terminal control table terminal entry (TCTTE) or the transient data queue definition associated with the requesting task.

Whenever the TCTTE is dumped, the terminal control table user area (if any) and the message control blocks (if any) associated with the TCTTE are dumped. The latter are used by basic mapping support.

LENGTH(*data-value*)

specifies the length (halfword binary) of the data area specified in the FROM option. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

LENGTH and FLENGTH are mutually exclusive.

LENGTHLIST(*data-area*)

specifies a list of 32-bit binary values showing the lengths of the storage areas to be dumped. This corresponds to the list of segments specified in the SEGMENTLIST option. You must use both the SEGMENTLIST and NUMSEGMENTS options when you use the LENGTHLIST option.

NUMSEGMENTS(*data-area*)

specifies the number (fullword binary) of areas to be dumped. You must use both the SEGMENTLIST and LENGTHLIST options when you use the NUMSEGMENTS option.

PCT

formats a summary of each installed transaction resource definition.

PPT

formats a summary of each installed program resource definition.

PROGRAM

specifies that program storage areas associated with this task are to be dumped, as follows:

- Task control area (TCA) and, if applicable, the transaction work area (TWA)
- Common system area (CSA), including the user's portion of the CSA (CWA)
- Trace entries relating to the task written to the internal trace table (only when the CICS trace facility is active)
- All program storage areas containing user-written application programs active on behalf of the requesting task
- Register save areas (RSAs) indicated by the RSA chain off the TCA
- Either the terminal control table terminal entry (TCTTE) or the transient data queue definition associated with the requesting task.

Whenever the TCTTE is dumped, the terminal control table user area (if any) and the message control blocks (if any) associated with the TCTTE are dumped.

SEGMENTLIST (*data-area*)

specifies a list of addresses, which are the starting points of the segments to be dumped. Each segment is a task-related storage area. You must use both the NUMSEGMENTS and LENGTHLIST options when you use the SEGMENTLIST option.

SIT

.dumps the system initialization table.

STORAGE

specifies that storage areas associated with this task are to be dumped, as follows:

- Task control area (TCA) and, if applicable, the transaction work area (TWA)
- Common system area (CSA), including the user's portion of the CSA (CWA)
- Trace entries relating to the task written to the internal trace table (only when the CICS trace facility is active)
- All transaction storage areas
- Either the terminal control table terminal entry (TCTTE) or the transient data queue definition associated with the requesting task

Whenever the TCTTE is dumped, the terminal control table user area (if any) and the message control blocks (if any) associated with the TCTTE are dumped.

TABLES

dumps the FCT (file control table, containing FILE resource definitions), PCT (program control table, containing TRANSACTION resource definitions), PPT (processing program table, containing PROGRAM resource definitions), SIT (system initialization table, containing CICS system initialization parameters), and the TCT (terminal control table, containing TERMINAL resource definitions).

TASK

specifies that storage areas associated with this task are to be dumped, as follows:

- A summary of the transaction environment associated with this task
- Common system area (CSA), including the user's portion of the CSA (CWA)
- Trace entries relating to the task written to the internal trace table (only when the CICS trace facility is active)

- All program storage areas containing user-written application programs active on behalf of the requesting task
- All transaction storage areas
- Either the terminal control table terminal entry (TCTTE) or the transient data queue definition associated with the requesting task
- Register save areas (RSAs) indicated by the RSA chain off the TCA
- All terminal input/output areas (TIOAs) chained off the terminal control table terminal entry (TCTTE) for the terminal associated with the requesting task
- DL/I control blocks

Whenever the TCTTE is dumped, the terminal control table user area (if any) and the message control blocks (if any) associated with the TCTTE are dumped.

TCT

dumps the terminal control table.

TERMINAL

specifies that storage areas associated with the terminal are to be dumped, as follows:

- Task control area (TCA) and, if applicable, the transaction work area (TWA)
- Common system area (CSA), including the user's portion of the CSA (CWA)
- Trace entries relating to the task written to the internal trace table (only when the CICS trace facility is active)
- All terminal input/output areas (TIOAs) chained off the terminal control table terminal entry (TCTTE) for the terminal associated with the requesting task as long as the request is not a write, or storage freezing is on for the task or the terminal
- Either the terminal control table terminal entry (TCTTE) or the transient data queue definition associated with the requesting task.

Whenever the TCTTE is dumped, the terminal control table user area (if any) and the message control blocks (if any) associated with the TCTTE are dumped. The latter are used by basic mapping support.

TRT

dumps the trace entries relating to the task written to the internal trace table.

Conditions

16 INVREQ

RESP2 values:

- 13** An incorrect DUMPCODE is specified. DUMPCODE contains unprintable characters, or leading or imbedded blanks.
- The dump is produced but no entry is added to the system dump table.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 9** The SDUMP process is not authorized.
- 10** An error occurred during system dumping.

13 The CICS routine issuing the SDUMP is unable to establish a recovery routine (FESTAE).

Default action: terminate the task abnormally.

18 NOSPACE

RESP2 values:

4 The transaction dump is incomplete due to lack of space.

Default action: terminate the task abnormally.

42 NOSTG

RESP2 values:

5 CICS has run out of working storage.

Default action: terminate the task abnormally.

19 NOTOPEN

RESP2 values:

6 The current CICS dump data set is not open.

Default action: terminate the task abnormally.

87 OPENERR

RESP2 values:

7 There is an error on opening, closing, or writing to the current CICS dump routine.

Default action: terminate the task abnormally.

72 SUPPRESSED

RESP2 values:

1 The transaction dump is suppressed by MAXIMUM in table.

2 The transaction dump is suppressed by NOTRANDUMP in table.

3 The transaction dump is suppressed by a user exit program.

Default action: terminate the task abnormally.

Examples

The following example shows how to request a dump of all the task-related storage areas, the terminal control table, and a specified data area:

```
EXEC CICS DUMP TRANSACTION
      DUMPCODE('name')
      FROM(data-area)
      LENGTH(data-value)
```

This second example (written in PL/I) shows you a case in which five task-related storage areas are dumped:

```

DCL storage_address(5)    POINTER,
    storage_length(5)     FIXED BIN(31),
    nsegs                 FIXED BIN(31);
storage_address(1) = ADDR(areal);
storage_length(1)  = CSTG(areal);
:
:
nsegs = 5;
EXEC CICS DUMP TRANSACTION
    DUMPCODE('name')
    SEGMENTLIST(storage_address)
    LENGTHLIST(storage_length)
    NUMSEGMENTS(nsegs);

```

ENDBR

End the browse of a file.

ENDBR

►—ENDBR—FILE(*filename*)—
 └─REQID(*data-value*)─┐ └─SYSID(*systemname*)─┐

Conditions: FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, NOTAUTH, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

ENDBR ends a browse on a file or data table on a local or a remote CICS region.

The UPDATE option is available within browse so we recommend that you use this because otherwise you would need to issue an ENDBR command before using READ UPDATE to avoid self deadlock abends. We recommend issuing an ENDBR before syncpoint for similar reasons.

If STARTBR was not successful, you do not need to issue ENDBR.

Options

FILE(*filename*)

Specifies the name of the file being browsed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition for the file is used to find out whether the data set is on a local or a remote system.

REQID(*data-value*)

Specifies a unique (halfword binary value) request identifier for a browse, used to control multiple browse operations on a data set. If this option is not specified, a default value of zero is assumed.

SYSID(*systemname*)

Specifies the name (1–4 characters) of the system the request is directed to.

Conditions**12 FILENOTFOUND**

RESP2 values:

- 1 The name referred to in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

21 ILLOGIC (VSAM)

RESP2 values:

- 110 A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 35 The REQID, SYSID, or file name does not match that of any successful STARTBR command.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120 There is an I/O error during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

54 ISCINVREQ

RESP2 values:

- 70 The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 101 A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

53 SYSIDERR

RESP2 values:

- 130 The SYSID option specifies a name that is neither the local system nor

a remote system that is defined by a CONNECTION or IPCONN definition. SYSIDERR also occurs when the link to the remote system is known but unavailable. In the case of an IPCONN, SYSIDERR occurs if the link is known but either the local or remote systems do not support file control commands that are function shipped using IP interconnectivity.

Default action: terminate the task abnormally.

ENDBROWSE ACTIVITY

End a browse of the child activities of a BTS activity, or of the descendant activities of a BTS process.

ENDBROWSE ACTIVITY

►►—ENDBROWSE—ACTIVITY—BROWSETOKEN(*data-value*)—————►◄

Conditions: ILLOGIC, TOKENERR

Description

ENDBROWSE ACTIVITY ends a browse of the child activities of a BTS activity (or of the descendant activities of a BTS process), and invalidates the browse token.

Options

BROWSETOKEN(*data-value*)

specifies, as a fullword binary value, the browse token to be deleted.

Conditions

21 ILLOGIC

RESP2 values:

- 1 The value specified in the BROWSETOKEN option matches a current browse token, but not one that is being used for an activity browse.

112 TOKENERR

RESP2 values:

- 3 The browse token is not valid.

ENDBROWSE CONTAINER

End a browse of the containers associated with a channel, or with a BTS activity or process.

ENDBROWSE CONTAINER

►►—ENDBROWSE—CONTAINER—BROWSETOKEN(*data-value*)—————►◄

Conditions: ILLOGIC, TOKENERR

Description

ENDBROWSE CONTAINER ends a browse of the containers associated with a channel, or with a BTS activity or process, and invalidates the browse token.

Options

BROWSETOKEN(*data-value*)

specifies, as a fullword binary value, the browse token to be deleted.

Conditions

21 ILLOGIC

RESP2 values:

- 1 The value specified in the BROWSETOKEN option matches a current browse token, but not one that is being used for a browse of containers.

112 TOKENERR

RESP2 values:

- 3 The browse token is not valid.

ENDBROWSE EVENT

End a browse of the events known to a BTS activity.

ENDBROWSE EVENT

►►—ENDBROWSE—EVENT—BROWSETOKEN(*data-value*)—————►◄

Conditions: TOKENERR

Description

ENDBROWSE EVENT ends a browse of the events that are within the scope of a BTS activity, and invalidates the browse token.

Options

BROWSETOKEN(*data-value*)

specifies, as a fullword binary value, the browse token to be deleted.

Conditions

112 TOKENERR

RESP2 values:

3 The browse token is not valid.

ENDBROWSE PROCESS

End a browse of processes of a specified type within the CICS business transaction services system.

ENDBROWSE PROCESS

►►—ENDBROWSE—PROCESS—BROWSETOKEN(*data-value*)—————►◄

Conditions: ILLOGIC, TOKENERR

Description

ENDBROWSE PROCESS ends a browse of the processes of a specified type within the CICS business transaction services system, and invalidates the browse token.

Options

BROWSETOKEN(*data-value*)

specifies, as a fullword binary value, the browse token to be deleted.

Conditions

21 ILLOGIC

RESP2 values:

- 1 The value specified in the BROWSETOKEN option matches a current browse token, but not one that is being used for a process browse.

112 TOKENERR


RESP2 values:

- 3 The browse token is not valid.

ENQ

Schedule use of a resource by a task (enqueue).

ENQ



Conditions: ENQBUSY, INVREQ, LENGERR

This command is threadsafe if it is defined as LOCAL. It is non-threadsafe if it is defined as GLOBAL.

Description

ENQ causes further execution of the task issuing the ENQ command to be synchronized with the availability of the specified resource; control is returned to the task when the resource is available.

A resource in the context of this command is any string of 1–255 bytes, established by in-house standards, to protect against conflicting actions between tasks, or to cause single threading within a program.

If a task enqueues on a resource but does not dequeue from it, CICS automatically releases the resource during syncpoint processing (including DL/I, PCB, and TERM calls), or when the task is terminated. Option UOW forces the dequeue at the end of a unit of work (UOW). Option TASK forces the dequeue at the end of a task. If there are several units of work in a task, the enqueue carries over the UOWs.

If more than one ENQ command is issued for the same resource by a given task, the resource remains owned by that task until the task issues a matching number of DEQ commands.

The resource to be enqueued on must be identified by one of the following methods:

- Specifying a data area that is the resource. It is the location (address) of the data area in storage that matters, not its contents.
- Specifying a data area that contains a unique argument (for example, an employee name) that represents the resource. It is the contents of the data value that matters, not its location. LENGTH is required; the presence of the LENGTH option tells CICS to enqueue on the contents of the data value.

When an EXEC CICS ENQ (or DEQ) command is issued for a resource whose name matches that of an installed ENQMODEL resource definition, CICS checks the value of the ENQSCOPE attribute to determine whether the scope is local or sysplex-wide. If the ENQSCOPE is non-blank, CICS treats the ENQ or DEQ as sysplex-wide, and passes a queue name and the resource name to z/OS global resource serialization to manage the enqueue. If the ENQSCOPE attribute is left blank (the default value), CICS treats the ENQ as local to the issuing CICS region. If no ENQMODEL matches the resource name, the scope of the ENQ command is

local. For more information on ENQMODEL resources, see ENQMODEL resources in Reference -> System definition.

Resource unavailability

If a resource is not available when ENQ is issued, the application program is suspended until it becomes available. However, if the NOSUSPEND option has been specified and the resource is unavailable, the ENQBUSY condition is raised, as it is also raised if you have an active HANDLE condition. This allows the application program to handle the case of resource unavailability (by HANDLE CONDITION ENQBUSY) without waiting for the resource to become available.

Options

LENGTH(*data-value*)

specifies as a halfword binary value the length of the resource to be enqueued on. The value must be in the range 1 through 255; otherwise, the LENGERR condition occurs. If the LENGTH option is specified in an ENQ command, it must also be specified in the DEQ command for that resource, and the values of these options must be the same. You must specify LENGTH when using the method that specifies a data value containing a unique argument, but not for the method that specifies a data area as the resource. It is the presence or absence of LENGTH that tells CICS which method you are using.

MAXLIFETIME(*cvda*)

specifies the duration of the ENQ to be automatically released by CICS. CVDA values are:

UOW The duration of the ENQ is a unit of work. Examples are a syncpoint rollback or syncpoint, if the application does not issue a DEQ before the unit of work ends. This is the default value.

Note: For compatibility, a CVDA value of LUW is also supported.

TASK

The duration of the ENQ is a task. The enqueue carries over the units of work within the task. Use MAXLIFETIME(TASK) with great care because other tasks issuing ENQ commands on the same resource could be suspended until the end of this task.

There are two ways to code this option.

- You can assign a CVDA value with the translator routine DFHVALUE. This allows you to change a CVDA value in the program. For example:

```
MOVE DFHVALUE(UOW) TO AREA-A
EXEC CICS ENQ RESOURCE(RESNAME)
      MAXLIFETIME(AREA-A)
```

- If the required action is always the same, you can declare the value directly. For example:

```
or
EXEC CICS ENQ RESOURCE(RESNAME) UOW
```

```
EXEC CICS ENQ RESOURCE(RESNAME) TASK
```

NOSUSPEND

specifies that the application program is not to be suspended if the resource on the ENQ command is unavailable, but the ENQBUSY condition occurs.

Note, however, that if a HANDLE CONDITION for ENQBUSY is active when the command is executed, action, control is passed to the user label supplied in the HANDLE CONDITION. This takes precedence over the NOSUSPEND option but is, of course, negated by either NOHANDLE or RESP.

RESOURCE (*data-area*)

identifies the resource to be enqueued on by:

- Specifying an area whose address represents the resource.
- Specifying a variable that contains the resource (an employee name, for example). In this case, you must use the LENGTH option.

Conditions

55 ENQBUSY

occurs when an ENQ command specifies a resource that is unavailable and the NOSUSPEND option is specified, or there is an active HANDLE CONDITION ENQBUSY.

If the NOSUSPEND option is not specified, and the ENQ command specifies a resource that is unavailable, the application program is suspended and the ENQBUSY condition is not raised.

Default action: ignore the condition.

16 INVREQ

RESP2 values: CVDA values are:

- 2 The MAXLIFETIME option is set with an incorrect CVDA.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 1 The value specified for the LENGTH option is outside the range 1 through 255.

Default action: terminate the task abnormally.

Examples

Two tasks, enqueueing on the same resource and specifying a data area that is the resource, must refer to the same location in storage. They could both, for example, refer to the same location in the CWA.

```
EXEC CICS ENQ  
      RESOURCE(RESNAME)
```

Two tasks, enqueueing on the same resource and specifying a data area that contains a unique argument, can refer to the same location or to different locations, but the contents of the locations must be the same. The length must be supplied in the LENGTH option.


```
EXEC CICS ENQ  
      RESOURCE(SOCSECNO)  
      LENGTH(9)
```

The two methods cannot be combined. If one task uses the LENGTH option, and the other task does not, CICS regards the enqueues with and without the LENGTH option as different types of enqueues, and the tasks are not serialized.

ENTER TRACENUM

Write a trace entry.

ENTER TRACENUM

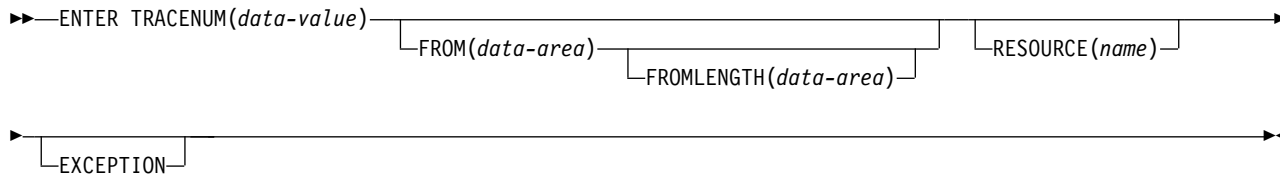

Conditions: INVREQ, LENGERR

This command is threadsafe.

Description

The ENTER TRACENUM command makes a trace entry in the currently active trace destinations. CICS writes the trace entry only if the master and user trace flags are on, unless you specify the EXCEPTION option, in which case a user trace entry is always written, even if the master and user trace flags are off. Exception trace entries are always written to the internal trace table (even if internal tracing is set off), but they are written to other destinations only if they are active.

You can use the exception trace option in an application program to write a trace entry when the program detects an exception or abnormal condition. To do this, include an ENTER TRACENUM(data-value) EXCEPTION command in your program's exception or abnormal condition error-handling routine.

To write an exception trace entry in an error situation when an application program has given up control, you can issue an ENTER TRACENUM(data-value) EXCEPTION command from a user-written program error program (PEP). See the Writing a program error program in the *CICS Customization Guide* for programming information about modifying the DFHPEP program.

Note ENTER TRACENUM replaces the earlier ENTER TRACEID command, which is still supported for compatibility with releases of CICS earlier than Version 3. You should use ENTER TRACENUM for all new programs, and whenever you apply maintenance to old programs.

For information about the trace entry format, see Using traces in problem determination in the *CICS Problem Determination Guide*.

Options

EXCEPTION

specifies that CICS is to write a user exception trace entry. The EXCEPTION option overrides the master user trace flag, and CICS writes the trace entry even if the user trace flag is off. Exception trace entries are identified by the characters *EXCU when the trace entries are formatted by the trace utility

program. See the CICS exception tracing in the *CICS Problem Determination Guide* for more information about user exception trace entries.

FROM(*data-area*)

specifies a data area whose contents are to be entered into the data field of the trace table entry. If you omit the FROM option, two fullwords of binary zeros are passed.

FROMLENGTH(*data-area*)

specifies a halfword binary data area containing the length of the trace data, in the range 0–4000 bytes. If FROMLENGTH is not specified, a length of 8 bytes is assumed.

RESOURCE(*name*)

specifies an 8-character name to be entered into the resource field of the trace table entry.

TRACENUM(*data-value*)

specifies the trace identifier for a user trace table entry as a halfword binary value in the range 0 through 199.

Conditions

16 INVREQ

RESP2 values:

- 1 TRACENUM is outside the range 0 through 199.
- 2 There is no valid trace destination.
- 3 The user trace flag is set OFF and EXCEPTION has not been specified.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 4 FROMLENGTH is outside the range 0 through 4000.

Default action: terminate the task abnormally.

Examples


The following COBOL example shows how to write a user trace entry with a trace identifier of 123, with trace data from a data area called USER-TRACE-ENTRY:

```
EXEC CICS ENTER TRACENUM(123)
      FROM(USER-TRACE-ENTRY)
END-EXEC.
```

EXTRACT ATTACH (LUTYPE6.1)

Retrieve values from an LUTYPE6.1 attach header.

EXTRACT ATTACH (LUTYPE6.1)

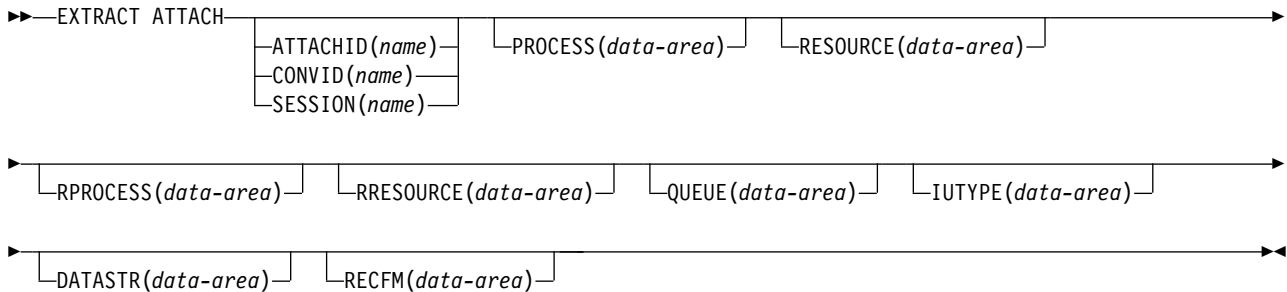

Conditions: CBIDERR, INVREQ, NOTALLOC

Description

EXTRACT ATTACH retrieves a set of values that are held in an attach header control block, or that have been built previously. For the command to retrieve information from a received attach Function Management Header (FMH), EIBATT must have been set during a RECEIVE or CONVERSE command.

Options

ATTACHID(*name*)

specifies that values are to be retrieved from an attach header control block. The name (1–8 characters) identifies this control block to the local task.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

DATASTR(*data-area*)

corresponds to the data stream profile field, ATTDSP, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is given by CICS to the data stream profile field in an attach FMH. For most CICS applications, the option can be omitted.

The value returned in the data area is a halfword binary value. Only the low-order byte is used; the SNA-defined meanings of the bits are as follows:

0-7 reserved - must be set to zero
 8-11 0000 - user-defined
 1111 - SCS data stream
 1110 - 3270 data stream
 1101 - structured field
 1100 - logical record management
 12-15 defined by the user if bits 8-11
 are set to 0000; otherwise reserved
 (must be set to zero)

IUTYPE(*data-area*)

corresponds to the interchange unit field, ATTIU, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the interchange unit field in an attach FMH. For most CICS applications the option can be omitted.

The value returned in the data area is a halfword binary value. Only the low-order 7 bits are used; the SNA-defined meanings of the bits are as follows:

0-10 reserved - must be set to zero
 11 0 - not end of multichain interchange unit
 1 - end of multichain interchange unit
 12,13 reserved - must be set to zero
 14,15 00 - multichain interchange unit
 01 - single-chain interchange unit
 10 - reserved
 11 - reserved

PROCESS(*data-area*)

corresponds to the process name, ATTDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, a transaction running in one system can acquire a session to the second system and can identify the transaction to be attached; in the second system the identification is carried in the first chain of data sent across the session.

In general, the first four bytes of data identify the transaction to be attached. However an attach FMH, identifying the transaction to be attached, can be built and sent. The receiving CICS system uses just the first four bytes of the process name as a transaction name.

No significance is attached by CICS to process names in attach FMHs sent in chains of data other than the first.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the process name field in an attach FMH.

QUEUE(*data-area*)

corresponds to the queue name, ATTDQN, in an attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the queue name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the queue name field in an attach FMH.

RECFM(*data-area*)

corresponds to the deblocking algorithm field, ATTDDBA, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the deblocking algorithm field in an attach FMH. For most CICS applications, the option can be omitted.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the interchange unit field in an attach FMH.

The value returned in the data area is a halfword binary value. Only the low-order byte is used; the SNA-defined meanings of the bits are as follows:

0-7 reserved - must be set to zero
8-15 X'00' - reserved
X'01' - variable-length
variable-blocked
X'02' - reserved
X'03' - reserved
X'04' - chain of RUs
X'05' through X'FF' - reserved

RESOURCE(*data-area*)

corresponds to the resource name, ATTPRN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the resource name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the resource name field in an attach FMH.

RPROCESS(*data-area*)

corresponds to the return process name, ATTRDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the return process name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return process name field in an attach FMH.

RRESOURCE(*data-area*)

corresponds to the return resource name, ATTRPRN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the return resource name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return resource name field in an attach FMH.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

Conditions

62 CBIDERR

occurs if the requested attach header control block cannot be found.

Default action: terminate the task abnormally.

16 INVREQ

occurs if incorrect data is found.

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

EXTRACT ATTACH (MRO)

Retrieve values from an MRO attach header.

EXTRACT ATTACH (MRO)

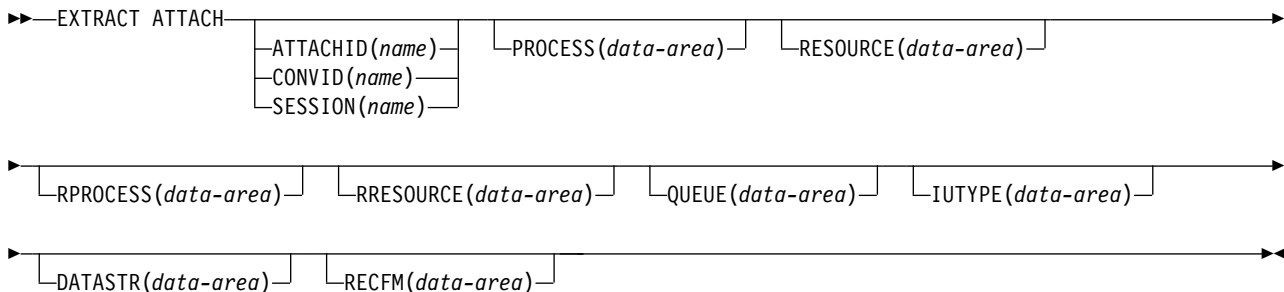

Conditions: CBIDERR, INVREQ, NOTALLOC

Description

EXTRACT ATTACH retrieves a set of values that are held in an attach header control block, or that have been built previously. For the command to retrieve information from a received attach Function Management Header (FMH), EIBATT must have been set during a RECEIVE or CONVERSE command.

For more information about MRO and IRC, see Introduction to CICS intercommunication in the *CICS Intercommunication Guide*.

Options

ATTACHID(name)

specifies that values are to be retrieved from an attach header control block. The name (1–8 characters) identifies this control block to the local task.

CONVID(name)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

DATASTR(data-area)

corresponds to the data stream profile field, ATTDSP, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is given by CICS to the data stream profile field in an attach FMH. For most CICS applications, the option can be omitted.

The value returned in the data area is a halfword binary value. Only the low-order byte is used; the SNA-defined meanings of the bits are as follows:

0-7 reserved - must be set to zero
 8-11 0000 - user-defined
 1111 - SCS data stream
 1110 - 3270 data stream
 1101 - structured field
 1100 - logical record management
 12-15 defined by the user if bits 8-11
 are set to 0000; otherwise reserved
 (must be set to zero)

IUTYPE(*data-area*)

corresponds to the interchange unit field, ATTIU, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the interchange unit field in an attach FMH. For most CICS applications the option can be omitted. The value returned in the data area is a halfword binary value. Only the low-order 7 bits are used; the SNA-defined meanings of the bits are as follows:

0-10 reserved - must be set to zero
 11 0 - not end of multichain interchange unit
 1 - end of multichain interchange unit
 12,13 reserved - must be set to zero
 14,15 00 - multichain interchange unit
 01 - single chain interchange unit
 10 - reserved
 11 - reserved

PROCESS(*data-area*)

corresponds to the process name, ATTDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, a transaction running in one system can acquire a session to the second system and can identify the transaction to be attached; in the second system the identification is carried in the first chain of data sent across the session.

In general, the first four bytes of data identify the transaction to be attached. However an attach FMH, identifying the transaction to be attached, can be built and sent. The receiving CICS system uses just the first four bytes of the process name as a transaction name. No significance is attached by CICS to process names in attach FMHs sent in chains of data other than the first.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the process name field in an attach FMH.

QUEUE(*data-area*)

corresponds to the queue name, ATTDQN, in an attach FMH. For communication between two CICS systems, no significance is attached by CICS to the queue name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the queue name field in an attach FMH.

RECFM(*data-area*)

corresponds to the deblocking algorithm field, ATTDDBA, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no particular significance is attached by CICS to the deblocking algorithm field in an attach FMH. For most CICS applications, the option can be omitted.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the interchange unit field in an attach FMH.

The value returned in the data area is a halfword binary value. Only the low-order byte is used; the SNA-defined meanings of the bits are as follows:

0-7 reserved - must be set to zero
8-15 X'00' - reserved
X'01' - variable-length
variable-blocked
X'02' - reserved
X'03' - reserved
X'04' - chain of RUs
X'05' through X'FF' - reserved

RESOURCE(*data-area*)

corresponds to the resource name, ATTPRN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the resource name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the resource name field in an attach FMH.

RPROCESS(*data-area*)

corresponds to the return process name, ATTRDPN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the return process name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return process name field in an attach FMH.

RRESOURCE(*data-area*)

corresponds to the return resource name, ATTRPRN, in an LUTYPE6.1 attach FMH.

For communication between two CICS systems, no significance is attached by CICS to the return resource name in an attach FMH.

For communication between a CICS system and another subsystem, refer to documentation supplied by the subsystem about how to use the return resource name field in an attach FMH.

SESSION(*name*)

specifies the symbolic identifier (1-4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

Conditions

62 CBIDERR

occurs if the requested attach header control block cannot be found.

Default action: terminate the task abnormally.

16 INVREQ

occurs if incorrect data is found.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

EXTRACT ATTRIBUTES (APPC)

Obtain the state of the APPC conversation.

EXTRACT ATTRIBUTES (APPC)

►►—EXTRACT ATTRIBUTES—┐—STATE(*cvda*)—►►
└CONVID(*name*)┘

Conditions: INVREQ, NOTALLOC

Description

EXTRACT ATTRIBUTES extracts conversation state information for APPC mapped conversations.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

By default, the principal facility is assumed.

STATE(*cvda*)

gets the state of the transaction program. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application explicitly, or implicitly by default, specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- The command is issued against a CPI-Communications conversation.
- The command is issued against an APPC basic conversation. (A GDS EXTRACT ATTRIBUTES should have been used instead.)

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the specified CONVID value does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

EXTRACT ATTRIBUTES (MRO)

Extract attributes from an MRO conversation.

EXTRACT ATTRIBUTES (MRO)



Conditions: INVREQ, NOTALLOC

Description

EXTRACT ATTRIBUTES (MRO) extracts conversation state information for MRO conversations.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

If both this option and CONVID are omitted, the principal facility for the task is used.

STATE(*cvda*)

gets the state of the transaction program. The cvda values returned by CICS are:

- ALLOCATED
- FREE
- PENDFREE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

- 200 A distributed program link server application explicitly, or implicitly by default, specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- An incorrect command has been issued for the terminal or LU in use.

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

EXTRACT CERTIFICATE

Obtain information from the client certificate received over a TCP/IP service that specified client authentication.

EXTRACT CERTIFICATE

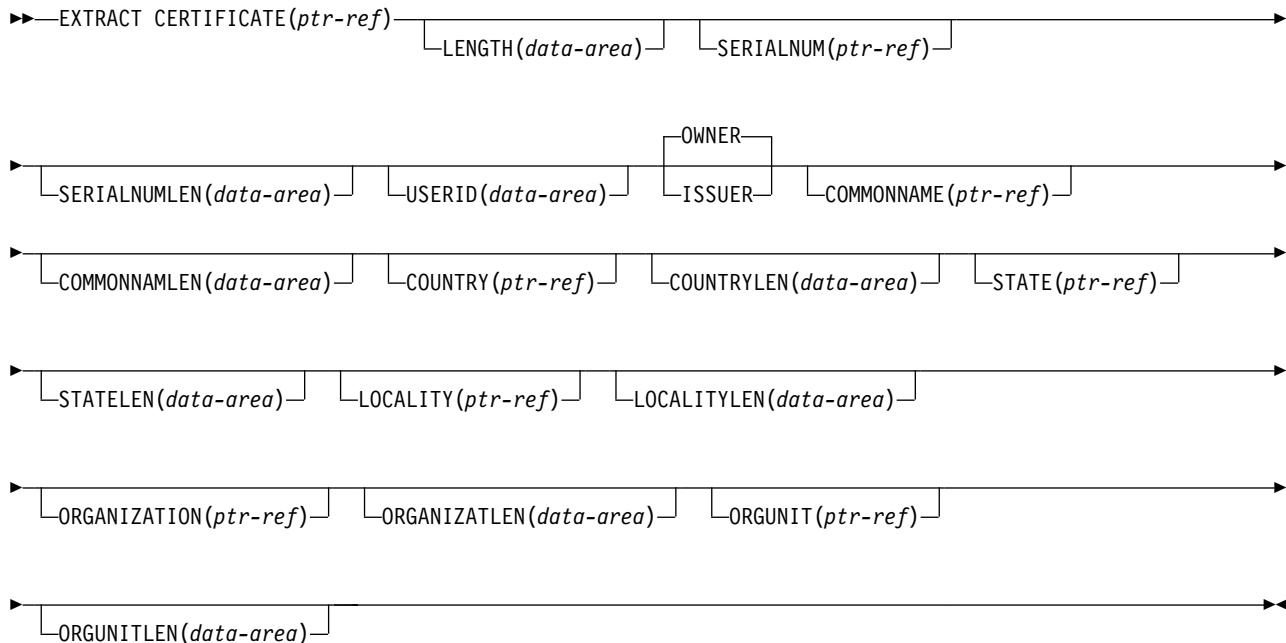

Conditions: INVREQ, LENGERR

This command is threadsafe.

Description

EXTRACT CERTIFICATE allows the application to obtain information from the X.509 certificate that was received from a client during a Secure Sockets Layer (SSL) handshake over a TCPIPService that specified SSL(CLIENTAUTH). The certificate contains fields that identify the owner (or subject) of the certificate, and fields that identify the certificate authority that issued the certificate. You can select the fields that you require by specifying the OWNER or ISSUER option. You cannot retrieve both OWNER and ISSUER fields with one command.

If you attempt to extract a certificate and there is no certificate to extract, low or zero values are returned for the pointers.

Options

CERTIFICATE(ptr-ref)

Specifies a pointer reference to be set to the address of the full binary certificate received from the client. The pointer reference is valid until the next CICS command or the end of task.

COMMONNAME(ptr-ref)

Specifies a pointer reference to be set to the common name from the client certificate. The pointer reference is valid until the next CICS command or the end of task.

COMMONNAMLEN(data-area)

Specifies a fullword binary data area to be set to the length of the common name from the client certificate.

COUNTRY(ptr-ref)

Specifies a pointer reference to be set to the address of the country from the client certificate. The pointer reference is valid until the next CICS command or the end of task.

COUNTRYLEN(data-area)

Specifies a fullword binary data area to be set to the length of the country from the client certificate.

ISSUER

Indicates that the values returned by this command refer to the certificate authority that issued this certificate.

LENGTH(data-area)

Specifies a fullword binary data area to be set to the length of the body of the client certificate.

LOCALITY(ptr-ref)

Specifies a pointer reference to be set to the address of the locality from the client certificate. The pointer reference is valid until the next CICS command or the end of task.

LOCALITYLEN(data-area)

Specifies a fullword binary data area to be set to the length of the locality from the client certificate.

ORGANIZATION(ptr-ref)

Specifies a pointer reference to be set to the address of the organization from the client certificate. The pointer reference is valid until the next CICS command or the end of task.

ORGANIZATLEN(data-area)

Specifies a fullword binary data area to be set to the length of the organization from the client certificate.

ORGUNIT(ptr-ref)

Specifies a pointer reference to be set to the address of the organization unit from the client certificate. The pointer reference is valid until the next CICS command or the end of task.

ORGUNITLEN(data-area)

Specifies a fullword binary data area to be set to the length of the organization unit from the client certificate.

OWNER

Indicates that the values returned by this command refer to the owner of the certificate.

SERIALNUM(ptr-ref)

Specifies a pointer reference to be set to the address of the serial number of the certificate assigned by the certificate issuer. The pointer reference is valid until the next CICS command or the end of task.

SERIALNUMLEN(data-area)

Specifies a fullword binary data area to be set to the length of the serial number.

STATE(ptr-ref)

Specifies a pointer reference to be set to the address of the state or province from the client certificate. The pointer reference is valid until the next CICS command or the end of task.

STATELEN(data-area)

Specifies a fullword binary data area to be set to the length of the state or province from the client certificate.

USERID(data-area)

Specifies an 8-byte field to be set to the user ID connected with the client certificate.

Conditions**16 INVREQ**

occurs for the following conditions:

- The command is being issued in a non-CICS Web Interface application.
- The command is being issued for a non-HTTP request.
- If an error occurs retrieving the certificate data from CICS intermediate storage.

22 LENGERR

The string being extracted is longer than the length specified for one of the options.

EXTRACT LOGONMSG

Access z/OS Communications Server logon data.

EXTRACT LOGONMSG

►►—EXTRACT LOGONMSG—┐INTO(*data-area*)—┐LENGTH(*data-area*)—►►
 └SET(*ptr-ref*)—┘

Condition: NOTALLOC

Description

EXTRACT LOGONMSG accesses z/OS Communications Server logon data. This data may have been specified by the terminal operator at logon or in the ISSUE PASS command, for example. This data is only available if the system initialization parameter LGNMSG=YES is specified. The data can only be extracted once. It is possible to force the first transaction that runs on the terminal to be that which issues EXTRACT LOGONMSG by using the system initialization parameter GMTRAN.

All the logon data is extracted and its length placed in the field specified by the LENGTH option. Because the LENGTH option cannot be used to limit the amount of data extracted, it is recommended that a field of 256 bytes is always used for this option.

If you use the SET option, the z/OS Communications Server logon data is not freed until the session terminates (CLSDST). If you use the INTO option, the z/OS Communications Server logon data is copied into user storage and then freed.

Options

INTO(*data-area*)

specifies the receiving field for the data extracted.

LENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data extracted. If no data is available, LENGTH is set to zero.

SET(*ptr-ref*)

specifies the pointer reference that is to be set to the address of the data extracted. The pointer reference, unless changed by other commands or statements, is valid until the next EXTRACT LOGONMSG command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

Conditions

61 NOTALLOC


occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

EXTRACT PROCESS

Retrieve values from APPC conversation attach header.

EXTRACT PROCESS (APPC)

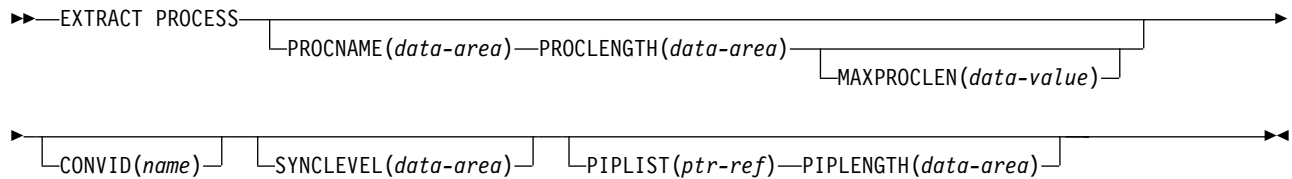

Conditions: INVREQ, LENGERR, NOTALLOC

Description

EXTRACT PROCESS lets an application program access conversation-related data, specified to CICS when the program is attached. The attach receiver does not have to execute an EXTRACT PROCESS command unless it requires this information.

The EXTRACT PROCESS command is valid only on an APPC conversation that is the principal facility for the task.

Options

CONVID(*name*)

Identifies the conversation to which the command relates. The 4-character name identifies the token representing the principal session (EIBTRMID).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If CONVID and SESSION are both omitted, the principal facility for the task is used by default.

MAXPROCLen(*data-value*)

Specifies the buffer length of PROCNAME. If MAXPROCLen is not specified, the buffer is assumed to have 32 bytes.

PIPLength(*data-area*)

Specifies a halfword binary data area in which the total length of the process initialization parameter (PIP) list is returned.

PIPLIST(*ptr-ref*)

Specifies a pointer reference that is set to the address of a CICS-provided data area containing a PIP list. This list contains variable-length records in the same format as the list in the CONNECT PROCESS command. A returned value of zero means that no PIP data has been received by CICS.

PROCLength(*data-area*)

Specifies a halfword data area that is set by CICS to the length of the process name. If PROCNAME is specified, this option must be specified.

PROCNAME(*data-area*)

Specifies the data area to receive the process name specified by the remote

system that caused the task to start. The data area can be 1–64 bytes long. The process name is padded on the right with blanks if it is too short. The PROCNAME data area should not be shorter than the MAXPROCLen value.

SYNCLEVEL (*data-area*)

Specifies a halfword data area that is set by CICS to the SYNCLEVEL value. For further information about synchronization levels, see Synchronization.

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Also occurs (RESP2 not set) in any of the following situations:

- EXTRACT PROCESS has been used on a conversation other than APPC mapped (for example, LUTYPE6.1, APPC basic, or CPI Communications).
- EXTRACT PROCESS has been used on a conversation that was not started by input from the network, and whose session is not a principal facility.
- The command is issued against a CPI-Communications conversation.

Default action: terminate the task abnormally.

22 LENGERR

Occurs if the actual length of PROCNAME is greater than MAXPROCLen, or greater than 32 bytes if MAXPROCLen is not specified.

Default action: terminate the task abnormally.

61 NOTALLOC


Occurs if the specified CONVID value specified does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

EXTRACT TCPIP

Obtain information about TCP/IP characteristics of the current transaction.

EXTRACT TCPIP

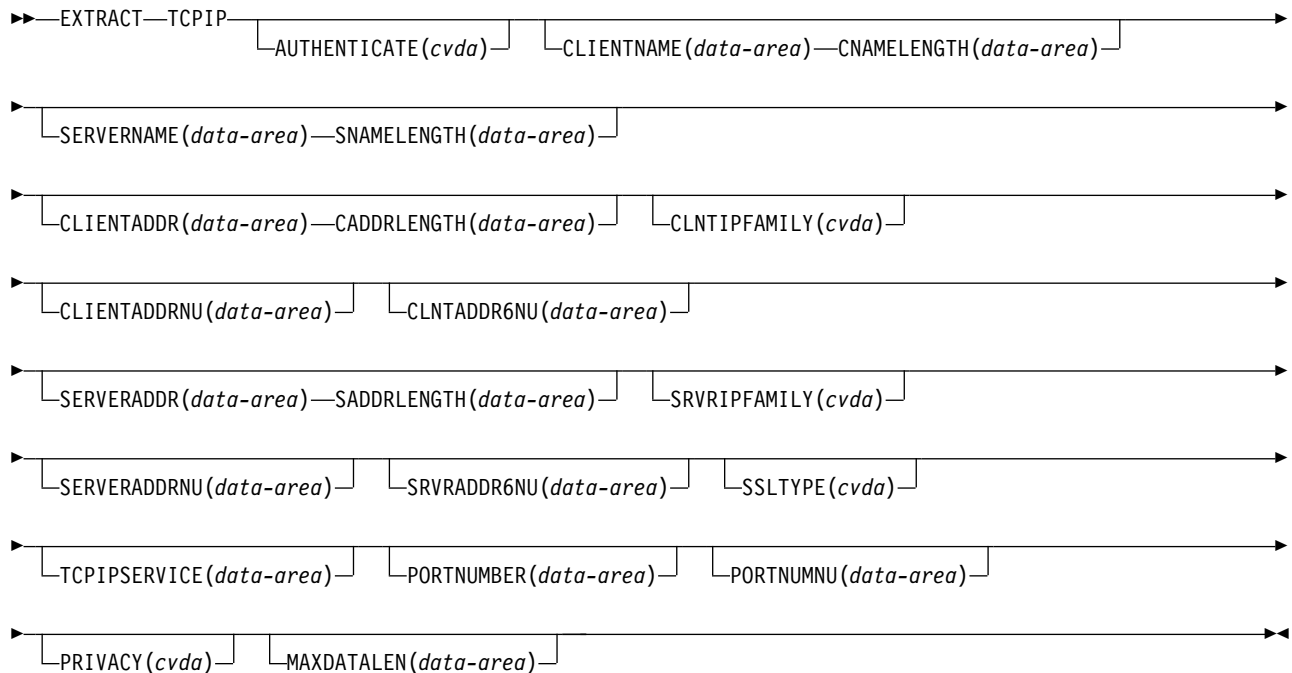

Conditions: INVREQ, LENGERR

This command is threadsafe.

Description

EXTRACT TCPIP provides information about the TCP/IP connection, and about security options specified in the TCPIPSERVICE definition.

Options

AUTHENTICATE(*cvda*)

Returns a CVDA indicating the authentication requested for the client using this transaction. Here are the values:

ASSERTED

AUTOAUTH

AUTOREGISTER

BASICAUTH

CERTIFICAUTH

NOAUTHENTIC

CADDRLENGTH(*data-area*)

Returns the length of the buffer supplied on the CLIENTADDR option, and is set to the length of the data returned to the application. If the CLIENTADDR is an IPv6 address, you must set the buffer length of CADDRLENGTH to at least 39 characters. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

CLIENTADDR(*data-area*)

Returns a buffer containing the IP address of the client. The IP address can be in IPv4 or IPv6 format. IPv4 addresses are returned as native IPv4 dotted decimal addresses; for example, 1.2.3.4 IPv6 addresses are returned as native IPv6 colon hexadecimal addresses; for example, ::a:b:c:d

For information about IP addresses, see IP addresses in Product overview.

CLIENTADDRNU(*data-area*)

Returns a fullword binary field containing the IPv4 address of the client in binary form. If the address is in IPv6 format, it is returned in the CLNTADDR6NU option and 0 is returned in CLIENTADDRNU.

CLIENTNAME(*data-area*)

Specifies a buffer to contain the name of the client as known by the Domain Name Server.

CLNTADDR6NU(*data-area*)

Returns a 16-byte field containing the IPv6 address of the client in binary form. This option is returned only if the option CLNTIPFAMILY has a value of IPV6. If the address is in IPv4 format, the address is returned in the CLNTADDRNU option and zeros are returned to CLNTADDR6NU.

CLNTIPFAMILY(*cvda*)

Returns the format of the IP address of the client. CVDA values are as follows:

- IPV4** CLIENTADDR returns a dotted decimal IPv4 address and CLIENTADDRNU returns the IPv4 address in binary form.
- IPV6** CLIENTADDR returns a colon hexadecimal IPv6 address and CLIENTADDR6NU returns the IPv6 address in binary form.

NOTAPPLIC

The source of the input has not been determined. 0.0.0.0 is returned.

CNAMELENGTH(*data-area*)

Specifies the length of the buffer supplied on the CLIENTNAME option, and is set to the actual length of the data returned to the application, or zero if the name of the client is not known to the domain name server. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

MAXDATALEN(*data-area*)

Specifies a fullword binary field to contain the setting for the maximum length of data that can be received by CICS as an HTTP server.

PRIVACY(*cvda*)

Returns a CVDA indicating the level of SSL encryption used between the transaction and its client for an inbound request. CVDA values are as follows:

NOTSUPPORTED**REQUIRED****SUPPORTED**

PORTNUMBER(*data-area*)

Specifies a 5-character field to contain the port number associated with this transaction in character form. This port received the incoming data that initiated this transaction.

PORTNUMNU(*data-area*)

Fullword field to contain the port number associated with this transaction in binary form. This port received the incoming data that initiated this transaction.

SADDRLENGTH(*data-area*)

Returns the length of the buffer supplied on the SERVERADDR option, and is set to the length of the data returned to the application. If SERVERADDR is an IPv6 address, you must set the buffer length of SADDRLENGTH to at least 39 characters. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

SERVERADDR(*data-area*)

Returns a buffer containing the IP address of the server. The IP address can be in IPv4 or IPv6 format. IPv4 addresses are returned as native IPv4 dotted decimal addresses, for example; 1.2.3.4. IPv6 addresses are returned as native IPv6 colon hexadecimal addresses; for example, ::a:b:c:d. If an error occurs, 0.0.0.0 is returned and the data is truncated.

SERVERADDRNU(*data-area*)

Returns a fullword binary field containing the IPv4 address of the server in binary form. If the address is IPv6 format, it is returned in the SRVRADDR6NU option and 0 is returned to SERVERADDRNU.

SERVERNAME(*data-area*)

Specifies a buffer to contain the name of the server as known by the Domain Name Server.

SNAMELENGTH(*data-area*)

Specifies the length of the buffer supplied on the SERVERNAME option, and is set to the length of the data returned to the application. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

SRVRADDR6NU(*data-area*)

Returns a 16-byte field containing the IPv6 address of the server in binary form. This option is returned only if the option SRVIPFAMILY has a value of IPV6. If the address is in IPv4 format, the address is returned in the SERVERADDRNU option and zeros are returned in SRVRADDR6NU.

SRVIPFAMILY(*cvda*)

Returns the format of the IP address of the server. CVDA values are as follows:

IPV4 SERVERADDR returns a dotted decimal IPv4 address and SERVERADDRNU returns the IPv4 address in binary form.

IPV6 SERVERADDR returns a colon hexadecimal IPv6 address and SERVERADDR6NU returns the IPv6 address in binary form.

NOTAPPLIC

The source of the input has not been determined. 0.0.0.0 is returned.

SSLTYPE(*cvda*)

Returns a CVDA indicating whether the Secure Sockets Layer (SSL) is being used to secure communications for this transaction. Here are the values:

SSL

NOSSL

CLIENTAUTH

ATTLSAWARE

TCPIPSERVICE (*data-area*)

An 8-byte field to contain the name of the TCPIPSERVICE associated with this transaction.

Conditions

16 INVREQ

RESP2 values:

- 2 An incorrect socket response was received.
- 5 The command was issued from a non-TCPIP application.

22 LENGERR


RESP2 values:

- 1 CLIENTADDR, SERVERADDR, CLIENTNAME, or SERVERNAME is specified, but the relevant length field is either not specified, or it is less than or equal to zero.
- 3 CLIENTADDR is too small to contain the string extracted.
- 4 SERVERADDR is too small to contain the string extracted.
- 6 CLIENTNAME is too small to contain the string extracted.
- 7 SERVERNAME is too small to contain the string extracted.

EXTRACT TCT

Convert an 8-character name to a 4-character name on an LUTYPE6.1 logical unit.

EXTRACT TCT



Condition: INVREQ, NOTALLOC

Description

EXTRACT TCT converts the 8-character SNA network name for a logical unit into the corresponding 4-character name it is known by in the local CICS system.

Options

NETNAME(*name*)

specifies the 8-character name of the logical unit in the SNA network.

SYSID(*systemname*)

specifies the variable to be set to the equivalent local name of the system.

TERMID(*data-area*)

specifies the variable to be set to the equivalent local name of the terminal.

Conditions

16 INVREQ

occurs if NETNAME is not valid.

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

EXTRACT WEB

Obtain information about an HTTP request that has been made to CICS as an HTTP server or about a connection between an Internet server and CICS as an HTTP client. This command is a synonym of WEB EXTRACT.


EXTRACT WEB (CICS as an HTTP server)

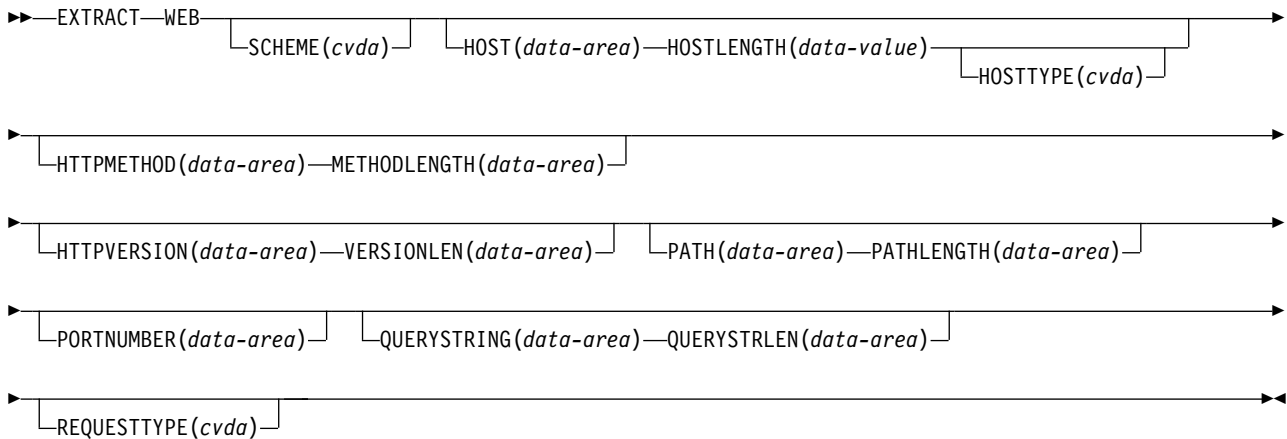

Conditions: INVREQ, LENGERR, NOTOPEN

This command is threadsafe.

EXTRACT WEB (CICS as an HTTP client)

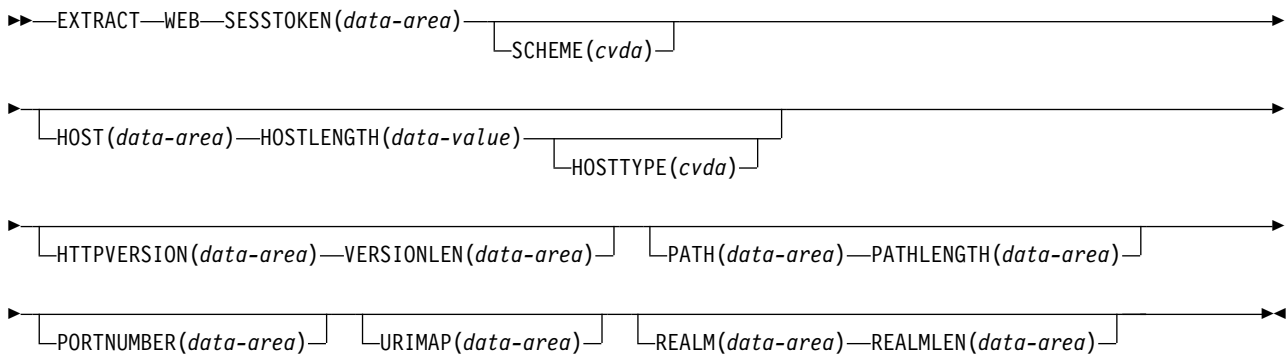

Conditions: INVREQ, IOERR, LENGERR, NOTFND, NOTOPEN, TIMEDOUT

This command is threadsafe.

Description

For CICS as an HTTP server, WEB EXTRACT enables an application to obtain information about the most recent HTTP request that has been made to CICS by a Web client and assigned to the application for handling.

For CICS as an HTTP client, when the SESSTOKEN option is specified, the command enables an application to obtain information about a connection that it has opened with a server. The information returned to the application comprises global information about the connection, such as the host name of the server and its HTTP version. Information about specific requests made by the application, and responses made by the server, is not available using this command. The WEB RECEIVE command is used to receive information from a server response.

Options

HOST(*data-area*)

For CICS as an HTTP server, HOST specifies a buffer to contain the host component of the URL, as specified either in the Host header field for the request or in the request line (if an absolute URI was used for the request). The port number is presented separately using the PORTNUMBER option.

For CICS as an HTTP client, with the SESSTOKEN option, HOST specifies a buffer to contain the host name of the server in the connection identified by the SESSTOKEN option. The port number is presented separately using the PORTNUMBER option.

An IPv4 or IPv6 address can represent the host name. IPv4 addresses are returned as native IPv4 dotted decimal addresses; for example, 1.2.3.4. IPv6 addresses are returned as native IPv6 colon hexadecimal addresses; for example, ::a:b:c:d

For information on IP addresses, see IP addresses in Product overview.

HOSTLENGTH(*data-area*)

Specifies the length of the buffer supplied on the HOST option, as a fullword binary variable, and is set to the length of the data returned to the application. 116 characters is an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

HOSTTYPE(*cvda*)

Returns the address format of the HOST option. CVDA values are as follows:

HOSTNAME

The HOST option contains a character host name. The IP address that corresponds to the host name is looked up in the domain name server.

IPV4 The address is a dotted decimal IPv4 address.

IPV6 The address is a colon hexadecimal IPv6 address.

NOTAPPLIC

An incorrect host address was returned (HOST=0.0.0.0).

HTTPMETHOD(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the HTTP method string on the request line of the message.

This option is not relevant for CICS as an HTTP client.

HTTPVERSION(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the HTTP version for the Web client, as stated on its request.

For CICS as an HTTP client (with the SESSTOKEN option), this option specifies a buffer to contain the HTTP version of the server in the connection

identified by the SESSTOKEN option. If CICS does not already know the HTTP version of the server, CICS makes a request to the server with the OPTIONS method to find out this information.

1.1 indicates HTTP/1.1, and 1.0 indicates HTTP/1.0 or lower.

METHODLENGTH(*data-area*)

Specifies the length of the buffer supplied on the HTTPMETHOD option, as a fullword binary variable, and is set to the actual length of the data returned to the application. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

PATH(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the path specified in the request line of the message.

For CICS as an HTTP client (with the SESSTOKEN option), this option specifies a buffer to contain the default path that applies to requests made using the connection. If a URIMAP definition was specified on the WEB OPEN command for the connection, the default path is the path specified in the URIMAP definition. Otherwise, the default path is a single forward slash.

PATHLENGTH(*data-area*)

Specifies the length of the buffer supplied on the PATH option, as a fullword binary variable, and is set to the length of the data returned to the application. 256 characters is an appropriate size to specify for this data-area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

PORTNUMBER(*data-area*)

For CICS as an HTTP server, this option returns a data area containing the port number specified in the request line of the message.

For CICS as an HTTP client (with the SESSTOKEN option), this option returns a data containing the port number used to access the server in the connection specified by the SESSTOKEN option.

The value returned in the data area is a fullword binary value.

Well-known port numbers for a service are normally omitted from the URL. If the port number is not present in the URL, the command identifies and returns it based on the scheme. For HTTP, the well-known port number is 80, and, for HTTPS, the well-known port number is 443. If a port number is returned that is not the default for the scheme, you must specify the port number explicitly to gain access to the URL; for example, if you are using this information in a WEB OPEN command.

QUERYSTRING(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the query string on the request line of the message. The query string is the value or values encoded after the question mark (?) delimiting the end of the path. The query string is returned in its escaped form.

This option is not relevant for CICS as an HTTP client.

QUERYSTLEN(*data-area*)

Specifies the length of the buffer supplied on the QUERY option, as a fullword binary variable, and is set to the length of the data returned to the application (the query string). 256 characters is an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

REALM(*data-area*)

Specifies, for CICS as an HTTP client, the realm or security environment that contains the data that you are requesting. If you are issuing a command in response to an HTTP 401 message, REALM is the realm value in the most recently received WWW-Authenticate header.

REALMLEN(*data-area*)

Specifies, for CICS as an HTTP client, the buffer length supplied for the REALM option, as a fullword binary variable. If you are issuing a command in response to an HTTP 401 message, REALMLEN is the length of the realm name in the most recently received WWW-Authenticate header.

REQUESTTYPE(*cvda*)

For CICS as an HTTP server, this option specifies the type of request received. This option is not relevant for CICS as an HTTP client. CVDA values are as follows:

HTTPYES

Indicates an HTTP request.

HTTPNO

Indicates a non-HTTP request.

SCHEME(*cvda*)

For both CICS as an HTTP server, and CICS as an HTTP client (with the SESSTOKEN option), this option returns the scheme used for the connection between CICS and the Web client or server. CVDA values are as follows:

HTTP Is the HTTP protocol, without SSL.

HTTPS

Is the HTTPS protocol, which is HTTP with SSL.

SESSTOKEN(*data-value*)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token. For the command, information is returned about the specified connection.

This option is not relevant for CICS as an HTTP server.

URIMAP(*data-area*)

For CICS as an HTTP client (with the SESSTOKEN option), this option returns the 8-character name (in mixed case) of any URIMAP definition that was specified on the WEB OPEN command to open the connection specified by the SESSTOKEN option. The INQUIRE URIMAP command can be used to find information about the attributes of this URIMAP definition.

This option is not relevant for CICS as an HTTP server.

VERSIONLEN(*data-area*)

Specifies the length of the buffer supplied on the HTTPVERSION option, as a fullword binary variable, and is set to the length of the data returned to the application.

Conditions**16 INVREQ**

RESP2 values:

- 1 The command is being issued in a non-CICS Web support application.

- 3 The command is being issued for a non-HTTP request. This command is set only if one or more of HTTPMETHOD, HTTPVERSION, or PATH is specified and the request is a non-HTTP request).
- 41 The connection has closed. This is a WEB EXTRACT (Client) error only. The server may have timed out due to inactivity on this connection.
- 67 The content of the response does not conform to HTTP format. The error is generated because there is a syntax problem. This error is for WEB EXTRACT (Client) only.
- 71 A chunked transfer-coding error has occurred. This error is for WEB EXTRACT (Client) only.
- 144 One or more of the Web command parameters is invalid. This error is for WEB EXTRACT (Client) only.
- 17 IOERR**
RESP2 values:
 - 42 Socket error.
- 22 LENGERR**
RESP2 values:
 - 4 The method exceeds the length specified (METHODLENGTH option).
 - 5 The PATHLENGTH option value was not greater than zero.
 - 6 The HTTP version exceeds the length specified (VERSIONLEN option).
 - 7 The VERSIONLEN option value was not greater than zero.
 - 8 The query string exceeds the length specified (QUERYSTRLEN option).
 - 21 The HOSTLENGTH option value was not greater than zero.
 - 29 The host name exceeds the length specified (HOSTLENGTH option).
 - 30 The path exceeds the length specified (PATHLENGTH option).
 - 141 REALMLLEN is not positive, or is not large enough to contain the realm value returned in the HTTP 401 response.
- 13 NOTFND**
RESP2 values:
 - 155 Request line information not found.
- 19 NOTOPEN**
RESP2 values:
 - 27 Session token not valid.
- 124 TIMEDOUT**
RESP2 values:
 - 62 Timeout on socket receive.

FORCE TIMER

Force the early expiry of a BTS timer.

FORCE TIMER



Conditions: INVREQ, TIMERERR

Description

FORCE TIMER forces a BTS timer that has not yet expired to expire immediately. This causes the event associated with the timer to fire.

If the timer has already expired, the command has no effect.

The activity that owns the timer can be identified:

- Explicitly, by specifying either the ACQPROCESS or ACQACTIVITY option.
- Implicitly, by omitting the ACQPROCESS and ACQACTIVITY options. If these are omitted, the current activity is implied.

Options

ACQACTIVITY

specifies either of the following:

- If the program that issues the command has acquired a process, that the timer is owned by the root activity of that process.
- Otherwise, that the timer is owned by the activity that the program has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the timer is owned by the process that the program that issues the command has acquired in the current unit of work.

TIMER(*data-value*)

specifies the name (1–16 characters) of the timer to be forced.

Conditions

16 INVREQ

RESP2 values:

- | | |
|----|--------------------------------------------------------------------------|
| 1 | The command was issued outside the scope of a currently-active activity. |
| 16 | The ACQPROCESS option was specified, but there is no acquired process. |
| 17 | The ACQACTIVITY option was specified, but there is no acquired activity. |

115 TIMERERR


RESP2 values:

- | | |
|----|-----------------------------------------------------|
| 13 | The timer named on the TIMER option does not exist. |
|----|-----------------------------------------------------|

FORMATTIME

Transform absolute date and time into a specified format.

FORMATTIME

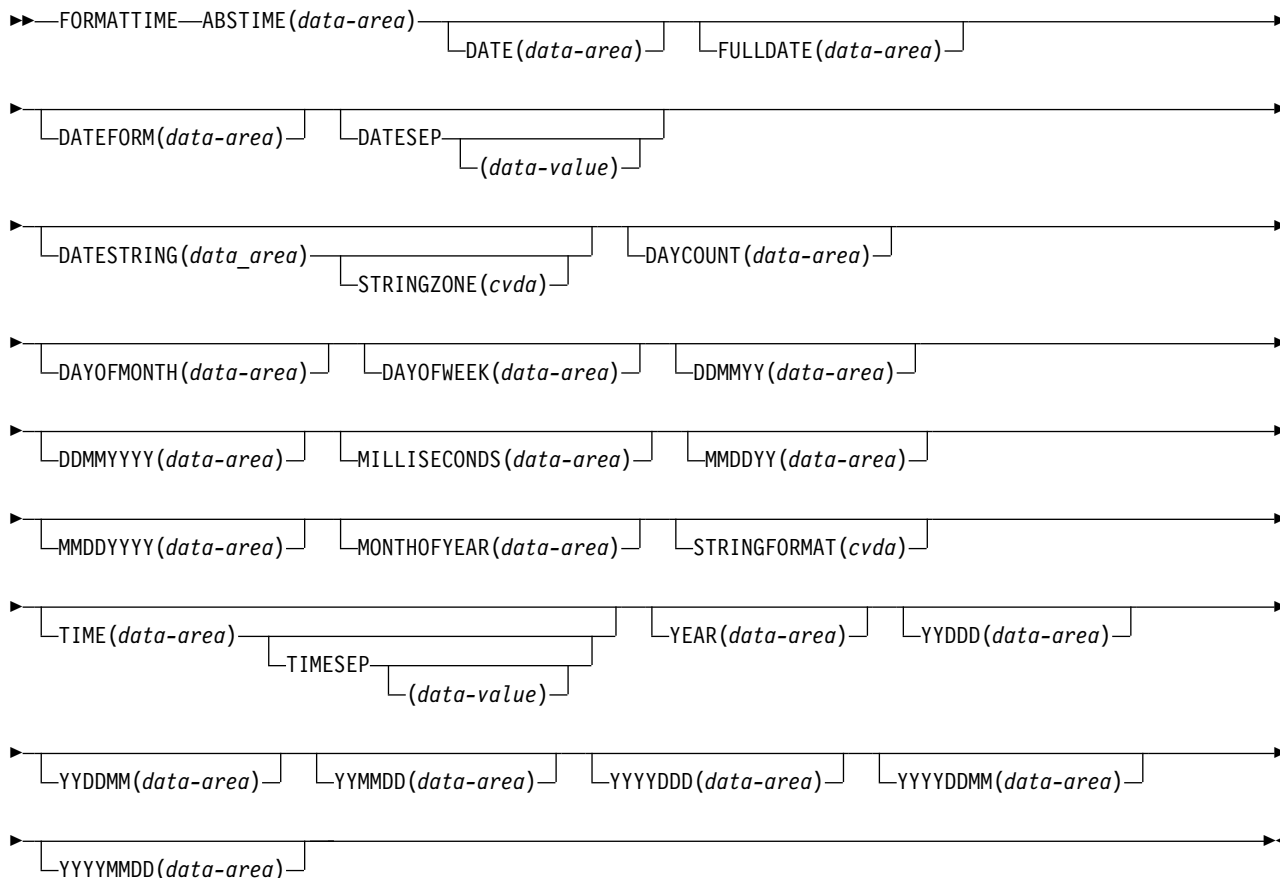

Condition: INVREQ

This command is threadsafe.

Description

FORMATTIME transforms the absolute date and time into any of a variety of formats. Normally, the ABSTIME argument is the value returned by an ASKTIME ABSTIME command.

To obtain an elapsed time in a particular format, the ABSTIME data value can be the difference between two values returned by ASKTIME, and options such as DAYCOUNT(d) and TIME(t) can be specified.

When you use the DATESTRING option to request an architected date and time stamp string that requires the clock time to be at UTC, CICS calculates the required timezone offset from your supplied ABSTIME value, which is in local time, and

produces the date and time stamp string in UTC. All other values returned by the FORMATTIME command, such as the TIME value, are returned in local time. It is therefore normal for the FORMATTIME command to produce an architected date and time stamp string showing one date and time, and return other values showing another date and time, for the same supplied ABSTIME value.

Options

ABSTIME(*data-area*)

Specifies the data area for the number of milliseconds since 00:00 on 1 January 1900, which is known as absolute time. The time is taken from the system time-of-day clock, adjusted for leap seconds and to apply the local timezone offset (including daylight saving time), truncated to the millisecond, and returned as a packed decimal of length 8 bytes. You can use FORMATTIME to change the data into other familiar formats.

The format of the parameter is:

```
COBOL: PIC S9(15) COMP-3
C:      char data_ref[8];
PL/I:   FIXED DEC(15);
ASM:    PL8
```

DATE(*data-area*)

Specifies the variable that is to receive the date in the format specified in the DATFORM system initialization parameter. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 8-character user field. You normally use this option only when a date is needed for output purposes. Where a date is needed for analysis, request the date in explicit form; for example, using the MMDDYY option.

DATEFORM(*data-area*)

Specifies the format of the installation-defined date. CICS returns YYMMDD, DDMMYY, or MMDDYY (six characters) according to the DATFORM system initialization parameter.

DATESEP(*data-value*)

Specifies the character to be inserted as the separator between the year and the month and between the day and the month; or between the year and the day, if form YYDDD is specified.

If you omit this option, no separator is supplied. If you omit *data-value*, a slash (/) is assumed as the separator.

DATESTRING(*data-area*)

Specifies the 64-character user field where CICS returns the architected date and time stamp string in the format specified by the STRINGFORMAT option. If STRINGFORMAT is not specified, the default format provided is the RFC 1123 format (RFC1123). If you are using the DATESTRING option, first run the ASKTIME ABSTIME command to obtain a value for the ABSTIME option. If the value for the ABSTIME option is from any other source, the architected date and time stamp string that is returned by the FORMATTIME command might be incorrect.

DAYCOUNT(*data-area*)

Returns the number of days since 1 January 1900 (day 1), as a fullword binary

number. This function is useful if you need to compare the current date with a previous date that has, for example, been stored in a data set.

DAYOFMONTH(*data-area*)

Returns the number of the day in the month as a fullword binary number.

DAYOFWEEK(*data-area*)

Returns the relative day number of the week as a fullword binary number: Sunday=0, Saturday=6. This number can be converted to a textual form of day in any language.

DDMMYY(*data-area*)

Specifies the 8-character user field where CICS returns the date, in day/month/year format; for example, 21/10/98. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 8-character user field.

DDMMYYYY(*data-area*)

Specifies the 10-character user field where CICS returns the date, in day/month/year format; for example 17/06/1995. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 10-character user field.

FULLDATE(*data-area*)

Specifies the 10-character user field where CICS returns the date, in the format specified in the DATFORM system initialization parameter, with the year expanded to four digits. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 10-character user field. You normally use this option only when a date is needed for output purposes. Where a date is needed for analysis, request the date in explicit form, for example, using the MMDDYYYY option.

MILLISECONDS(*data-area*)

Returns the number of milliseconds in the current second specified by ABSTIME, as a binary integer in the range 0 - 999.

MMDDYY(*data-area*)

Specifies the 8-character user field in which CICS returns the date, in month/day/year format; for example, 10/21/95. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 8-character user field.

MMDDYYYY(*data-area*)

Specifies the 10-character user field where CICS returns the date, in month/day/year format; for example 11/21/1995. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 10-character user field.

MONTHOFYEAR(*data-area*)

data-area is set to the relative month number of the year as a fullword binary number (January=1, December=12). You can convert this number, in your application program, to the name of the month in any language.

STRINGFORMAT(*cvda*)

Specifies the format for the architected date and time stamp string returned in DATESTRING. The CVDA values are:

RFC1123

Specifies the RFC 1123 format, which is suitable for use in HTTP messages. This date and time stamp string contains the day, date, and

24-hour clock time, for example "Tue, 01 Apr 2003 10:01:02 +0000". This format does not include milliseconds, and the number of seconds is truncated.

RFC3339

Specifies the RFC 3339 format, also known as the XML dateTime data type. This format is an implementation of a subset of the ISO 8601 standard. An example of a date and time stamp in this format is 2003-04-24T10:01:02+00:00. Date and time stamps in this format are in UTC (Coordinated Universal Time). This date and time stamp string contains the date and the 24-hour clock time. The time zone offset (-12:00 to +12:00) is indicated at the end of the date and time stamp.

The RFC 3339 specification allows the letter Z to be used for a zero offset (+00:00). A decimal fraction of a second in the 24-hour clock time is optional in the specification, and the FORMATTIME command does not include it. An example of a timestamp showing the decimal fraction of a second and the letter Z for a zero offset is 2003-04-01T10:01:02.498Z. If you want to add the decimal fraction of a second using your application, you can use the MILLISECONDS option to return the number of milliseconds that have also elapsed.

STRINGZONE(*cvda*)

Specifies the timezone in which the time stamp returned in DATESTRING is to be returned. The CVDA values are:

UTC DATESTRING is to be returned in UTC. This is the default setting.

LOCAL

DATESTRING is to be returned in LOCAL timezone.

TIME(*data-area*)

data-area is set as an 8-character field to the current 24-hour clock time in the form hh:mm:ss, where the separator is specified by the TIMESEP option. The number of seconds is truncated. Use the MILLISECONDS option to return the number of milliseconds that have also elapsed.

TIMESEP(*data-value*)

Specifies the character to be used as the separator in the returned time. If you omit this option, no separator is assumed and 6 bytes are returned in an 8-character field. If you omit *data-value*, a colon (:) is used as a separator.

YEAR(*data-area*)

Specifies the full 4-figure number of the year as a fullword binary number; for example, 1995, 2001.

YYDDD(*data-area*)

Specifies the 6-character user field where CICS returns the date, in year/day format; for example, 95/301. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 6-character user field.

YYDDMM(*data-area*)

Specifies the 8-character user field where CICS returns the date, in year/day/month format; for example, 95/30/10. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 8-character user field.

YYMMDD(*data-area*)

Specifies the 8-character user field where CICS returns the date, in year/month/day format; for example, 95/10/21. A separator is present if

requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 8-character user field.

YYYYDDD(*data-area*)

Specifies the 8-character user field where CICS returns the date, in year/day format; for example 1995/200. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 8-character user field.

YYYYDDMM(*data-area*)

Specifies the 10-character user field where CICS returns the date, in year/day/month format; for example 1995/21/06. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 10-character user field.

YYYYMMDD(*data-area*)

Specifies the 10-character user field where CICS returns the date, in year/month/day format; for example 1995/06/21. A separator is present if requested by the DATESEP option. If no separator is requested, the returned value is left-justified in the 10-character user field.

Conditions

16 INVREQ

RESP2 values:

- 1 The ABSTIME value is less than zero or not in packed-decimal format.
- 2 Invalid CVDA value for the STRINGFORMAT option.

Default action: terminate the task abnormally.

Examples

The following example shows the effect of some of the options of the command. Let *utime* contain the value 003578979940458 in milliseconds.

```
EXEC CICS ASKTIME ABSTIME(utime)
EXEC CICS FORMATTIME ABSTIME(utime)
         DATESEP('-') DDMMYY(date)
         TIME(time) TIMESEP(':')
```

This gives the values 05-31-13 for *date* and 08:05:40 for *time*.

FREE

Return a terminal or logical unit.

FREE

►►—FREE—◄◄

Condition: NOTALLOC

Description

FREE returns a terminal or logical unit when the transaction owning it no longer requires it. The principal facility is freed.

If you are running EDF, and the transaction frees the principal facility, EDF is terminated.

Conditions

61 NOTALLOC

occurs if the task is not associated with the terminal.

Default action: terminate the task abnormally.

FREE (APPC)

Return an APPC mapped session to CICS.

FREE (APPC)



Conditions: INVREQ, NOTALLOC

Description

FREE returns an APPC session to CICS when a transaction owning it no longer requires it. The session can then be allocated for use by other transactions.

If you omit CONVID, the principal facility is freed. Facilities not freed explicitly are freed by CICS when the task terminates.

If you are running EDF, and the transaction frees the principal facility, EDF is terminated.

Options

CONVID(*name*)

identifies the APPC mapped session to be freed. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

If this option is omitted, the principal facility is assumed.

STATE(*cvda*)

gets the state of the current conversation. The STATE option on a FREE command returns a cvda code of 00 if there is no longer an active conversation. The other output cvda values are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- The CONVID value specified in the command relates to a basic (unmapped) APPC conversation.
- The CONVID value specified in the command relates to a CPI-Communications conversation.

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the specified CONVID value does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

FREE (LUTYPE6.1)

Return LUTYPE6.1 sessions to CICS.

FREE (LUTYPE6.1)



Conditions: INVREQ, NOTALLOC

Description

FREE returns an LUTYPE6.1 session to CICS when a transaction that owns it no longer requires it. The session can then be allocated for use by other transactions.

If you omit both CONVID and SESSION, the principal facility is freed. Facilities not freed explicitly are freed by CICS when the task terminates.

If you are running EDF, and the transaction frees the principal facility, EDF is terminated.

Options

CONVID(name)

Identifies the LUTYPE6.1 session to be freed. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

SESSION(name)

Specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

Conditions

16 INVREQ

Occurs if the session specified in the command was allocated for a basic (unmapped) APPC conversation.

See also EIBRCODE in EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

61 NOTALLOC

Occurs if the session specified in the command is not owned by the application.

Default action: terminate the task abnormally.

FREE (MRO)

Return MRO sessions to CICS.

FREE (MRO)



Conditions: INVREQ, NOTALLOC

Description

FREE returns an MRO session to CICS when a transaction that owns it no longer requires it. The session can then be allocated for use by other transactions.

If you omit both CONVID and SESSION, the principal facility is freed. Facilities not freed explicitly are freed by CICS when the task terminates.

If you are running EDF, and the transaction frees the principal facility, EDF is terminated.

Options

CONVID(name)

Identifies the MRO session to be freed. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

SESSION(name)

Specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

STATE(cvda)

Gets the state of the current conversation. The STATE on a FREE command returns a cvda code of 00 if there is no longer an active conversation. The other output cvda values are:

- ALLOCATED
- FREE
- PENDFREE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

Occurs in any one of the following situations:

- The session specified in the command was allocated for a basic (unmapped) APPC conversation
- The session is in the wrong state to be freed.

See also EIBRCODE in EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.


61 NOTALLOC

occurs if the session specified in the command is not owned by the application.

Default action: terminate the task abnormally.

FREEMAIN

Release main storage that was acquired by using a GETMAIN request.

FREEMAIN

Condition: INVREQ

This command is threadsafe.

Description

FREEMAIN releases the following storage:

- Main storage that was acquired by a GETMAIN command issued by the application.
- Main storage that was acquired by a LOAD command for a program, map, or table that is defined with RELOAD=YES.

If the task that acquired the storage or loaded the program does not release it, CICS releases the storage at task end, except for in the following situations:

- The GETMAIN command is specified the SHARED option. The storage remains allocated until another task issues a FREEMAIN or FREEMAIN64 request to release it.
- The program is defined with RELOAD=YES. The storage remains allocated until another task issues a FREEMAIN or FREEMAIN64 request to release it.
- The program is defined with RELOAD=NO but was loaded with the HOLD option. The program remains available until it is released by another task.

Note: In the first two situations listed, using FREEMAIN might create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see *Affinity in Developing applications*.

You can release CICS-key storage from a program only if it is being executed in CICS key. If the previously-acquired storage was obtained from CICS-key storage, and the program that issues the FREEMAIN request is in user-key, an INVREQ condition occurs with a RESP2 value of 2.

To release main storage that was acquired by using a GETMAIN64 request, use the FREEMAIN64 command. See FREEMAIN64 in Reference -> Application development.

Options

DATA(*data-area*)

Specifies the data area of main storage to be released.

In assembler language, *data-area* must be a relocatable expression that is a data reference; in COBOL or C, it must be a data name; and in PL/I, it must be a data reference.

The length of storage released is the length that was obtained by the GETMAIN request and not necessarily the length of the data area.

DATAPOINTER(*ptr-value*)

Specifies the address of the main storage to be released, as a pointer reference. This option is an alternative to the DATA option, and specifies the pointer reference that was returned by a GETMAIN command using the SET option.

The length of storage released is the length obtained by the GETMAIN request.

Conditions

16 INVREQ

RESP2 values:

- 1 The storage specified by the DATA or DATAPOINTER parameter is not storage acquired by a GETMAIN command.
- 2 The storage area specified by the DATA or DATAPOINTER parameter is in CICS-key storage, and the program issuing the FREEMAIN command is in user-key.

Default action: terminate the task abnormally.

Example: COBOL

```
DATA DIVISION.
WORKING-STORAGE SECTION.
77 AREA-POINTER    USAGE IS POINTER.
LINKAGE SECTION.
  01 WORKAREA      PIC X(100).
PROCEDURE DIVISION.
  EXEC CICS GETMAIN SET(AREA-POINTER)
  LENGTH(100)
  END-EXEC.
  .
  SET ADDRESS OF WORKAREA TO AREA-POINTER.
  .
  .
  EXEC CICS FREEMAIN DATA(WORKAREA)
  END-EXEC.
  EXEC CICS RETURN
  END-EXEC.
```

Alternatively, the previous COBOL example could free the storage by using the following command:

```
EXEC CICS FREEMAIN DATAPOINTER(AREA-POINTER)
END-EXEC.
```

Example: C

```

#pragma XOPTS(CICS);
#define MAINSIZE 100;
main()
{
    char            *buffer;
    struct eib_record dfheiptr;
    EXEC CICS ADDRESS EIB(dfheiptr);
    EXEC CICS GETMAIN SET(buffer)
                                LENGTH(MAINSIZE);
    buffer[2] = 'a';
    .
    .
    EXEC CICS FREEMAIN DATA(buffer);
    EXEC CICS RETURN;
}

```

Example: PL/I

```

DCL AREA_PTR      POINTER,
    WORKAREA      CHAR(100) BASED(AREA_PTR);
.
.
EXEC CICS GETMAIN SET(AREA_PTR) LENGTH(100);
.
EXEC CICS FREEMAIN DATA(WORKAREA);

```

Example: Assembler

```

WORKAREA  DS    CL100
.
.
        EXEC CICS GETMAIN SET(9) LENGTH(100)
        USING  WORKAREA,9
        EXEC CICS FREEMAIN DATA(WORKAREA)

```




Alternatively, you can free storage using the DATAPOINTER option as shown in the following example:

```

WORKAREA  DS    CL100
.
        EXEC CICS GETMAIN SET(9) LENGTH(100)
        USING  WORKAREA,9
.
        DROP    9
.
        EXEC CICS FREEMAIN DATAPOINTER(9)

```

Related reference

-  FREEMAIN64 in Reference -> Application development
-  GETMAIN in Reference -> Application development
-  GETMAIN64 in Reference -> Application development

FREEMAIN64

Release storage that was acquired by using a GETMAIN or GETMAIN64 request. This command is for use only in non-Language Environment (LE) AMODE(64) assembler language application programs.

See Assembler language programming restrictions and requirements in Developing applications.

FREEMAIN64

►►—FREEMAIN64—┐ DATA(*data-area64*)
└ DATAPOINTER(*ptr-value64*)—┘

Condition: INVREQ

This command is threadsafe.

Description

FREEMAIN64 releases the following storage:

- Main storage that was acquired by a GETMAIN or GETMAIN64 command issued by the application.
- Main storage that was acquired by a LOAD command for a program, map, or table that is defined with RELOAD=YES.

If the task that acquired the storage or loaded the program does not release it, CICS releases the storage at task end, except for in the following situations:

- The GETMAIN or GETMAIN64 command is specified the SHARED option. The storage remains allocated until another task issues a FREEMAIN or FREEMAIN64 request to release it.
- The program is defined with RELOAD=YES. The storage remains allocated until another task issues a FREEMAIN or FREEMAIN64 request to release it.
- The program is defined with RELOAD=NO but was loaded with the HOLD option. The program remains available until it is released by another task.

Note: In the first two situations listed, using FREEMAIN64 might create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see Affinity in Developing applications.

You can release CICS-key storage from a program only if it is being executed in CICS key. If the storage was obtained from CICS-key storage, and the program that issues the FREEMAIN64 request is in user-key, an INVREQ condition occurs with a RESP2 value of 2.

Options

DATA(*data-area64*)

Specifies the data area of main storage to be released.

In assembler language, *data-area64* must be a relocatable expression that is a data reference.

The length of storage released is the length that was obtained by the original request and not necessarily the length of the data area.

DATAPOINTER(*ptr-value64*)

Specifies the address of the main storage to be released, as a 64-bit pointer reference. This storage can be storage that was acquired by a previous GETMAIN or GETMAIN64 request. For example, a 64-bit pointer reference to an area of 31-bit storage can be specified.

The length of storage released is the length that was obtained by the original request.

Conditions

16 INVREQ

RESP2 values:

- 1 The storage specified by the DATA or DATAPOINTER parameter is not storage acquired by a GETMAIN or GETMAIN64 command.
- 2 The storage area specified by the DATA or DATAPOINTER parameter is in CICS-key storage, and the program issuing the FREEMAIN64 command is in user-key.

Examples: Assembler




The following example releases storage by using the DATA option.

```
WORKAREA DS CL100
.
.
EXEC CICS GETMAIN64 SET(9) FLENGTH(1048576)
      USING WORKAREA,9
EXEC CICS FREEMAIN64 DATA(WORKAREA)
```

The following example releases storage by using the DATAPOINTER option.

```
WORKAREA DS CL100
.
EXEC CICS GETMAIN SET(9) LENGTH(100)
      USING WORKAREA,9
.
.
DROP 9
.
EXEC CICS FREEMAIN64 DATAPOINTER(9)
```


Related reference

-  FREEMAIN in Reference -> Application development
-  GETMAIN in Reference -> Application development
-  GETMAIN64 in Reference -> Application development

GDS ALLOCATE

Acquire a session to a remote system for use by APPC basic conversation (assembler-language and C programs only).

GDS ALLOCATE (APPC basic)

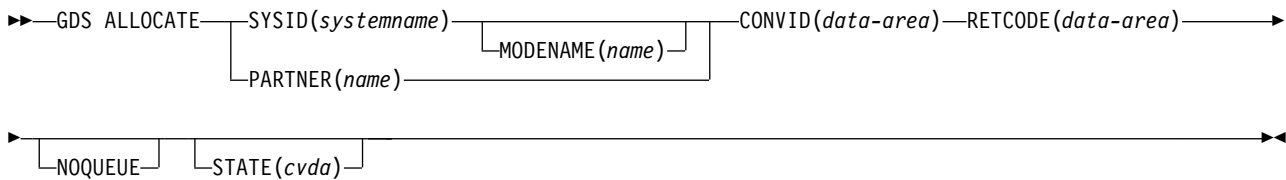

Description

GDS ALLOCATE acquires a session to a remote system.

The return code is given in RETCODE (see Table 2 on page 251). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVID(*data-area*)

specifies the 4-character application data area that is to contain the token returned by an ALLOCATE command to identify the allocated conversation. This token is required in subsequent GDS commands issued on the conversation.

MODENAME (*name*)

specifies the name of the mode group from which the session is to be acquired. If you specify SYSID and omit MODENAME, CICS selects a modename from those defined for the system.

NOQUEUE

specifies that the request to allocate a session is not to be queued when a suitable APPC session cannot be acquired immediately. A session is acquired immediately only if it is a bound contention winner that is not already allocated to another conversation.

The return code in RETCODE indicates whether or not a session has been acquired.

If the NOQUEUE option is not used, a delay may occur before control is passed back to the application program. A delay can occur for any of the following reasons:

- All sessions for the specified SYSID and MODENAME are in use.
- The CICS allocation algorithm has selected a session that is not currently bound (in which case, CICS has to bind).

- The CICS allocation algorithm has selected a contention loser (in which case, CICS has to bid).

If there is a delay, the program waits until the session has been acquired.

PARTNER(*name*)

specifies the name (eight characters) of a set of definitions that include the names of a remote LU (NETNAME) and a communication profile to be used on the allocated session. For APPC basic conversations, the only relevant attribute set by the profile is MODENAME.

If you use this option as an alternative to SYSID and MODENAME, CICS uses the NETNAME and MODENAME from the PARTNER definition.

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 2) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

SYSID(*systemname*)

specifies the remote system to which an APPC session is to be allocated. The name, which is 1–4 characters, identifies an entry (defined as an APPC connection) in the CICS terminal control table.

Table 2. GDS ALLOCATE return codes

| RETCODE (hexadecimal) | Description |
|--------------------------|----------------------------------------------------------------------------------------|
| 01 0C 00 | SYSID is unrecognized. |
| 01 0C 04 | SYSID is not an LUTYPE6.2 connection name. |
| 01 04 04 | NOQUEUE is specified but no bound connection-winner sessions are available. |
| 01 04 08 | MODENAME is not known. |
| 01 04 0C | The MODENAME value is SNASVCMG which is restricted to use by CICS. |
| 01 04 0C | z/OS Communications Server has no class of service (COS) table for the MODENAME value. |
| 01 04 10 | The task was canceled during queuing of the command. |

Table 2. GDS ALLOCATE return codes (continued)

| RETCODE (hexadecimal) | Description |
|--------------------------|----------------------------------------------------------------------------------|
| 01 04 14 | All modegroups are closed. |
| 01 04 14 | The requested modegroup is closed. |
| 01 04 18 | The requested modegroup is draining (closing down). |
| 01 08 00 | All sessions in the requested modegroup are unusable. |
| 01 08 00 | The connection is in quiesce state. |
| 01 08 00 | The connection is out of service. |
| 01 08 00 | The connection is not acquired. |
| 01 08 00 | The requested modegroup's local max (maximum permitted number of sessions) is 0. |
| 01 08 00 | The VTAM ACB is closed. |
| 01 0C 14 | The NETNAME specified in the PARTNER definition is not known. |
| 02 0C 00 | PARTNER is not known. |
| 06 00 00 | The PROFILE specified in the PARTNER definition is not known. |

Note: VTAM is now the z/OS Communications Server.

GDS ASSIGN

Get the identifier of the principal facility in use by APPC basic conversation (assembler-language and C programs only).

GDS ASSIGN (APPC basic)

►►—GDS ASSIGN—┐PRINCONVID(*data-area*)┐┐PRINSYSID(*data-area*)┐—RETCODE(*data-area*)—►►

Description

GDS ASSIGN gets the identifier of the principal facility.

The return code is given in RETCODE (see Table 3). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

PRINCONVID(*data-area*)

specifies a 4-byte data area in which the conversation token (CONVID) of the principal facility is to be returned.

PRINSYSID(*data-area*)

specifies a 4-byte data area in which the SYSID of the principal facility is to be returned.

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 3) is to be moved.


Table 3. GDS ASSIGN return codes

| RETCODE (hexadecimal) | Description |
|--------------------------|----------------------------------------|
| 03 00 | Principal facility is not APPC. |
| 03 04 | Principal facility is not basic. |
| 04 | No terminal principal facility exists. |

GDS CONNECT PROCESS

Initiate[®] an APPC basic conversation (assembler-language and C programs only).

GDS CONNECT PROCESS (APPC basic)

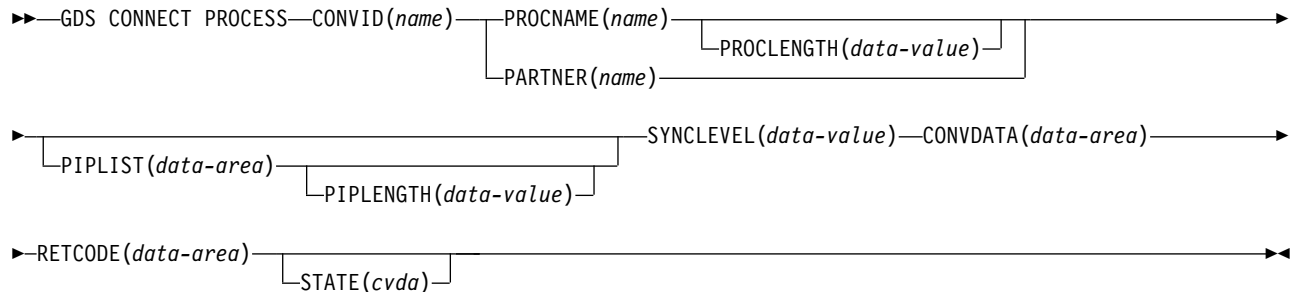

Description

EXEC CICS conditions are never raised on GDS commands.

The return code is given in RETCODE (see Table 4 on page 255). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

GDS CONNECT PROCESS allows the application program to specify a partner application that is to run in the remote system.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(data-area)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(name)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

PARTNER(name)

specifies the name (8 characters) of a set of definitions that includes the name (or extended name) of a remote partner transaction (TPNAME or XTPNAME). You can use this option as an alternative to PROCNAME and PROCLENGTH.

PIPLENGTH(data-value)

specifies the total length of the process initialization parameter (PIP) list specified on a CONNECT PROCESS command.

PIPLIST(*data-area*)

specifies the PIP data that is to be sent to the remote process.

PROCLENGTH(*data-value*)

specifies the length (as a halfword binary value in the range 1–64) of the target process name.

PROCNAME(*name*)

specifies the name of the remote application. The APPC architecture allows names of lengths (1–64 bytes), but leaves each product free to set its own maximum. If the remote system is CICS, you can use the standard 4-character transaction ID. You can also use the TPNAME value in the transaction definition.

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 4) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

SYNCLEVEL(*data-value*)

specifies the synchronization level (halfword binary value) intended for the current conversation. The possible values are:

- 0 None
- 1 Confirm
- 2 Syncpoint

Table 4. GDS CONNECT PROCESS return codes

| RETCODE (hexadecimal) | Description |
|--------------------------|-----------------------------------------------------------------------|
| 02 0C 00 | PARTNER is not known. |
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 0C | The SYNCLEVEL option specifies a value other than 0, 1, or 2. |
| 03 0C | The SYNCLEVEL option requested either 1 or 2, but it was unavailable. |

Table 4. GDS CONNECT PROCESS return codes (continued)

| RETCODE (hexadecimal) | Description |
|--------------------------|-------------------------------------------------------------------------------------|
| 03 08 | A state check occurred. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |
| 05 00 00 00 00 20 | PROCLENGTH is outside the range 1–64. |
| 05 00 00 00 7F FF | The PIPELENGTH value is outside the range 4–763. |
| 05 00 00 00 7F FF | The 2-byte length field (LL) for one of the PIPs is less than 4. |
| 05 00 00 00 7F FF | The total of the LLs in PIP data is greater than the PIPELENGTH value. |

GDS EXTRACT ATTRIBUTES

Access state information on an APPC basic conversation (assembler-language and C programs only).

GDS EXTRACT ATTRIBUTES (APPC basic)

►►—GDS EXTRACT ATTRIBUTES—CONVID(*name*)—STATE(*cvda*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—►►

Description

GDS EXTRACT ATTRIBUTES accesses state information about an APPC basic conversation.

The return code is given in RETCODE (see Table 5 on page 258). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 5 on page 258) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE

- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND


Table 5. GDS EXTRACT ATTRIBUTES return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|-------------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 01 | INVREQ for a DPL server program. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |

GDS EXTRACT PROCESS

Retrieve values from an APPC basic conversation (assembler-language and C programs only).

GDS EXTRACT PROCESS (APPC basic)

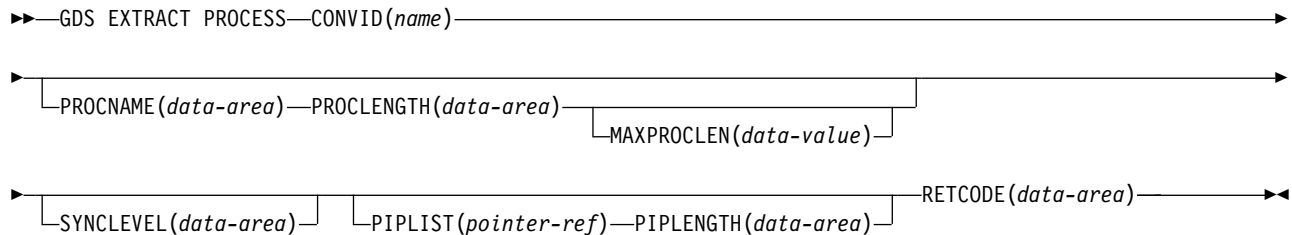

Description

GDS EXTRACT PROCESS retrieves values from an APPC basic conversation. The data retrieved is valid only when the command is issued against an APPC basic principal facility.

The return code is given in RETCODE (see Table 6 on page 260). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVID(*name*)

identifies the conversation the command relates to. The 4-character name identifies the token representing the principal session (returned by a previously executed GDS ASSIGN command).

MAXPROCLen(*data-value*)

specifies the length (1–64 characters) of the PROCNAME data area. If MAXPROCLen is not specified, the buffer is assumed to have 32 bytes.

PIPLENGTH(*data-area*)

specifies a halfword binary data area that is to receive the length of the PIPLIST received by a GDS EXTRACT PROCESS command.

PIPLIST(*pointer-ref*)

specifies the pointer reference that is to be set to the address of the PIPLIST received by a GDS EXTRACT PROCESS command. A zero setting indicates that no PIPLIST was received.

PROCLength(*data-area*)

specifies a halfword binary data area that is set to the actual length of the process name.

PROCNAME(*data-area*)

specifies the application target data area (1–64 bytes) into which the process

name, specified in the APPC attach function management header, is to be moved. The area is padded with blanks, if necessary.

RETCODE (*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 6) is to be moved.

SYNCLEVEL (*data-area*)

specifies a halfword binary data area that is set to indicate the synchronization level in effect for the current conversation. The possible values are:

- 0 None
- 1 Confirm
- 2 Syncpoint

Table 6. GDS EXTRACT PROCESS return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|-------------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 00 | CONVID is for a session that is not the principal facility. |
| 03 00 | Principal facility was not started by terminal data. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |
| 05 00 00 00 00 20 | PROCLENGTH value returned is greater than MAXPROCLEN value. |

GDS FREE

Return an APPC session to CICS (assembler-language and C programs only).

GDS FREE (APPC basic)

►►—GDS FREE—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—►►

Description

GDS FREE returns the session to CICS. The issue of this command is valid only when the conversation is finished, that is, the conversation state is FREE.

The return code is given in RETCODE (see Table 7 on page 262). For a list of return code values, see the CICS mapping to the APPC architecture in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to be freed. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 7 on page 262) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The STATE on a FREE command returns a cvda code of 00 if there is no longer an active conversation. The other output cvda values are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE

- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Table 7. GDS FREE return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|-------------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |

GDS ISSUE ABEND

Terminate APPC basic conversation abnormally (assembler-language and C programs only).

GDS ISSUE ABEND (APPC basic)

►►—GDS ISSUE ABEND—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—►►

Description

GDS ISSUE ABEND causes an APPC basic conversation to end immediately, regardless of the conversation state. The partner transaction is informed.

The return code is given in RETCODE (see Table 8 on page 264). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 8 on page 264) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK

- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Table 8. GDS ISSUE ABEND return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|-------------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |

GDS ISSUE CONFIRMATION

Issue a synchronization request on an APPC basic conversation (assembler-language and C programs only).

GDS ISSUE CONFIRMATION (APPC basic)

►►—GDS ISSUE CONFIRMATION—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—►►

Description

GDS ISSUE CONFIRMATION issues a synchronization request in response to a GDS SEND CONFIRM issued by a partner transaction.

The return code is given in RETCODE (see Table 9 on page 266). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 9 on page 266) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE

- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Table 9. GDS ISSUE CONFIRMATION return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|-------------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 03 14 | The command was issued for a sync level 0 conversation. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |

GDS ISSUE ERROR

Inform an APPC basic conversation partner of an error (assembler-language and C programs only).

GDS ISSUE ERROR (APPC basic)

►►—GDS ISSUE ERROR—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—◄◄

Description

GDS ISSUE ERROR informs the conversation partner that there is an error.

The return code is given in RETCODE, see below. For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 10 on page 268) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK

- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Table 10. GDS ISSUE ERROR return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|---------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 04 | CONVID is for a session that is not allocated to task, or that is a relay link. |

GDS ISSUE PREPARE

Issue the first flow of a syncpoint request on an APPC basic conversation (assembler-language and C programs only).

GDS ISSUE PREPARE (APPC basic)

►►—GDS ISSUE PREPARE—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—►►

Description

GDS ISSUE PREPARE issues the first flow of a syncpoint request.

The return code is given in RETCODE (see Table 11 on page 270). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 11 on page 270) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK

- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Table 11. GDS ISSUE PREPARE return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|---------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 0C | The command was issued on a conversation that is not sync-level 2. |
| 03 24 | A state error occurred. |
| 04 | CONVID is for a session that is not allocated to task, or that is a relay link. |

GDS ISSUE SIGNAL

Request a change of direction from the sending transaction APPC basic conversation (assembler-language and C programs only).

GDS ISSUE SIGNAL (APPC basic)

►►—GDS ISSUE SIGNAL—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—►►

Description

GDS ISSUE SIGNAL requests a change of direction.

The return code is given in RETCODE (see Table 12 on page 272). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 12 on page 272) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK

- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND


Table 12. GDS ISSUE SIGNAL return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|---------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 04 | CONVID is for a session that is not allocated to task, or that is a relay link. |

GDS RECEIVE

Receive data on an APPC basic conversation (assembler-language and C programs only).

GDS RECEIVE (APPC basic)

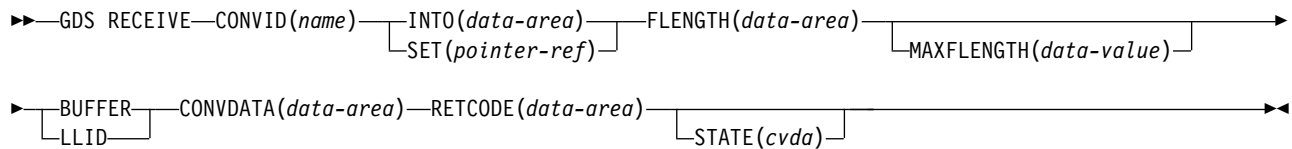

Description

GDS RECEIVE receives data and indicators from a partner transaction.

The return code is given in RETCODE (see Table 13 on page 275). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

BUFFER

specifies that the length of the data passed to the application program in response to the RECEIVE command is to be restricted only by the length specified in the MAXFLENGTH option, and is not to be affected by GDS structured field boundaries. Control is returned to the application program when this length has been received, or when a synchronization request, change-direction, or end-bracket is received.

CONVDATA(data-area)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(name)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

FLENGTH(data-area)

specifies a fullword binary data area that is set to the length of the data made available to the application program.

INTO(data-area)

specifies the application target data area into which data is to be received from

the application program connected to the other end of the current conversation. The length of this area must not be less than the value specified in the MAXFLENGTH option.

LLID

specifies that the delimiter to be used by CICS to terminate the passing of data to the application program is the end of a GDS structured field, if this occurs before the MAXFLENGTH limit is reached.

MAXFLENGTH(*data-value*)

specifies, as a fullword binary value, either the length of the target data area specified in the INTO option, or the maximum length of data to be addressed by the pointer reference specified in the SET option. The length must not exceed 32 767 bytes. CICS does not receive more data than the MAXFLENGTH value allows.

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 13 on page 275) is to be moved.

SET(*pointer-ref*)

specifies the pointer reference to be set to the address of data received from the application program connected to the other end of the current conversation. The pointer reference, unless changed by other commands or statements, is valid until the next RECEIVE (GDS or APPC) command, or the end of the task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND


Table 13. GDS RECEIVE return codes

| RETCODE (hexadecimal) | Description |
|--------------------------|-------------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check occurred. |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |
| 05 00 00 00 7F FF | MAXFLENGTH is outside the range 0 through 32 767. |

GDS SEND

Send data on an APPC basic conversation (assembler-language and C programs only).

GDS SEND (APPC basic)

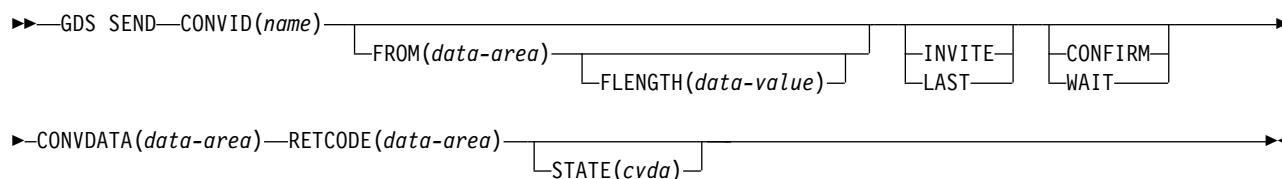

Description

GDS SEND sends data.

The return code is given in RETCODE (see Table 14 on page 277). For a list of return code values, see the Return codes for APPC basic conversations in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONFIRM

allows an application working at synchronization level 1 or 2 to synchronize its processing with that of a process in a remote system. The actions taken to synchronize processing are defined by the application programs involved. The CONFIRM option causes RQD2 to be added to the data already sent, and forces a WAIT. On receipt of the indicator, the remote process takes the agreed actions and then sends a response. When the WAIT completes, CDBERR is set to X'00' if the appropriate response has been received.

CONVDATA(data-area)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(name)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

FLENGTH(data-value)

specifies the length (as a fullword binary value in the range 1–32 767) of the data specified in the FROM option.

FROM(data-area)

specifies the data that is to be sent.

INVITE

allows an application program to add a change-direction indicator to data already sent to a process in a connected APPC system. Control data is not transmitted by CICS until the subsequent execution of a WAIT or a SYNCPOINT command, unless CONFIRM or WAIT is also coded on the GDS SEND INVITE command.

LAST

allows an application program to add CEB to data already sent to a process in a connected APPC system. CEB is not transmitted by CICS until the subsequent execution of a WAIT or a SYNCPOINT command, unless CONFIRM or WAIT is also coded on the GDS SEND LAST command. Note that if one of these commands fails because of a conversation-related error, the conversation remains in bracket. In such a case, the application program should execute a GDS RECEIVE command. However, GDS SEND LAST WAIT (with no data) always causes the conversation to be deallocated.

RETCODE (*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 14) is to be moved.

STATE (*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

WAIT

ensures that all data and indicators so far sent on a conversation are erased from the partner transaction.

If the WAIT option is not used, data from successive SEND commands is accumulated by CICS, together with any indicators, in an internal buffer. If the buffer becomes full, most of the accumulated data is transmitted to the remote system, but the accumulated indicators are not. Transmission of the accumulated data plus the indicators is forced by the WAIT or CONFIRM options of the GDS SEND command, or by a GDS WAIT command.

Table 14. GDS SEND return codes

| RETCODE (hexadecimal) | Description |
|--------------------------|---------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |

Table 14. GDS SEND return codes (continued)

| RETCODE (hexadecimal) | Description |
|--------------------------|-------------------------------------------------------------------------------------|
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 03 14 | The CONFIRM option has been used on a sync level 0 conversation. |
| 03 10 | LL error (incorrect or incomplete). |
| 04 | CONVID is for a session that is not allocated to the task, or that is a relay link. |
| 05 00 00 00 7F FF | The FLENGTH value is outside the range 0 through 32 767. |

GDS WAIT

Ensure accumulated data transmitted on an APPC conversation (assembler-language and C programs only).

GDS WAIT (APPC basic)

►►—GDS WAIT—CONVID(*name*)—CONVDATA(*data-area*)—RETCODE(*data-area*)—STATE(*cvda*)—►►

Description

GDS WAIT ensures that the accumulated data has been sent.

The return code is given in RETCODE (see Table 15 on page 280). For a list of return code values, see the CICS mapping to the APPC architecture in the *CICS Distributed Transaction Programming Guide*. EXEC CICS conditions are never raised on GDS commands.

Options

In general, the arguments can be replaced by absolute or relocatable assembler-language expressions.

CONVDATA(*data-area*)

specifies the 24-byte application data area into which conversation-related information is to be moved. A description of the format of the data area is given in the discussion of CONVDATA fields in the Testing indicators in the *CICS Distributed Transaction Programming Guide*.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed GDS ALLOCATE command, or the token representing the principal session (returned by a previously executed GDS ASSIGN command).

RETCODE(*data-area*)

specifies the 6-byte application data area into which return code information (shown in Table 15 on page 280) is to be moved.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK

- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND


Table 15. GDS WAIT return codes

| RETCODE (hexadecimal) | Description |
|----------------------------------|---------------------------------------------------------------------------------|
| 03 00 | CONVID is for a session that is not APPC. |
| 03 00 | CONVID is for a session that is in use by CPI Communications. |
| 03 04 | CONVID is for a conversation that is not basic. |
| 03 08 | A state check has occurred. |
| 04 | CONVID is for a session that is not allocated to task, or that is a relay link. |

GET CONTAINER (BTS)

Retrieve data from a named BTS data-container.

GET CONTAINER

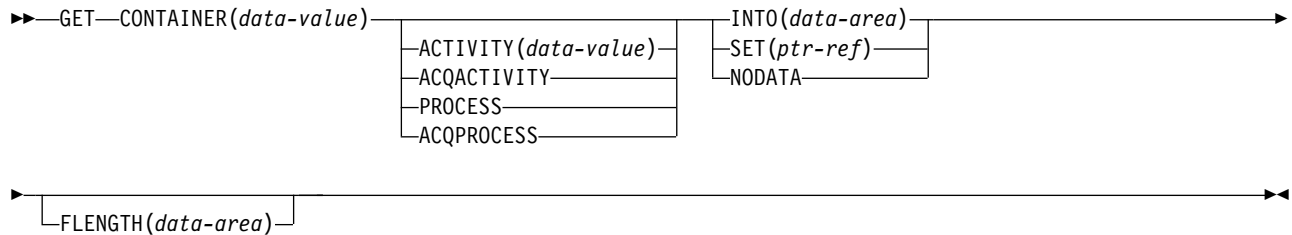

Conditions: ACTIVITYERR, CONTAINERERR, INVREQ, IOERR, LENGERR, LOCKED, PROCESSBUSY

Description

GET CONTAINER reads the data associated with a specified BTS activity or process into working storage.

The container which holds the data is identified by name and by the process or activity for which it is a container—the process or activity that “owns” it. The activity that owns the container can be identified:

- Explicitly, by specifying one of the PROCESS- or ACTIVITY-related options.
- Implicitly, by omitting the PROCESS- and ACTIVITY-related options. If these are omitted, the current activity is implied.

See also “PUT CONTAINER (BTS)” on page 425 and “MOVE CONTAINER (BTS)” on page 411.

Options

ACQACTIVITY

specifies either of the following:

- If the program that issues the command has acquired a process, that the container is owned by the root activity of that process.
- Otherwise, that the container is owned by the activity that the program has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the container is owned by the process that the program that issues the command has acquired in the current unit of work.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the activity that owns the container. This must be a child of the current activity.

CONTAINER(data-value)

specifies the name (1–16 characters) of the container that holds the data to be retrieved.

FLENGTH(data-area)

As an input field, FLENGTH specifies, as a fullword binary value, the length of the data to be read. As an output field, FLENGTH returns the length of the

data in the container. Whether FLENGTH is an input or an output field depends on which of the INTO, SET, or NODATA options you specify.

INTO option specified

FLENGTH is both an input and an output field.

On input, FLENGTH specifies the maximum length of the data that the program accepts. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs. If the length of the data is less than the value specified, the data is copied with no padding and the LENGERR condition occurs.

FLENGTH need not be specified if the length can be generated by the compiler from the INTO variable. If you specify both INTO and FLENGTH, FLENGTH specifies the maximum length of the data that the program accepts.

On output (that is, on completion of the retrieval operation) CICS sets the data area, if specified, to the actual length of the data in the container.

SET or NODATA option specified

FLENGTH is an output-only field. It must be specified and specified as a data-area.

On completion of the retrieval operation, the data area is set to the actual length of the data in the container.

INTO(data-area)

specifies an area of working storage into which the retrieved data is to be placed.

NODATA

specifies that no data is to be retrieved. Use this option to discover the length of the data in the container (returned in FLENGTH).

PROCESS

specifies that the container to be retrieved is owned by the current process—that is, the process that the program that issues the command is executing on behalf of.

SET(ptr-ref)

specifies a data area in which the address of the retrieved data is returned. The data area is maintained by CICS until a subsequent GET CONTAINER command with the SET option is issued by the task, or until the task ends.

If your application needs to keep the data it should move it into its own storage.

Conditions

109 ACTIVITYERR

RESP2 values:

8 The activity named on the ACTIVITY option could not be found.

110 CONTAINERERR

RESP2 values:

10 The container named on the CONTAINER option could not be found.

16 INVREQ

RESP2 values:

- 2 The INTOCCSID option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) INTOCCSID is valid only on GET CONTAINER commands that specify (explicitly or implicitly) a channel. It is not valid on GET CONTAINER (BTS) commands.
- 4 The command was issued outside the scope of a currently-active activity.
- 15 The ACQPROCESS option was used, but the unit of work that issued the request has not acquired a process.
- 24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.
- 25 The PROCESS option was used, but the command was issued outside the scope of a currently-active process.

17 IOERR

RESP2 values:

- 30 An input/output error has occurred on the repository file.
- 31 The record on the repository file is in use.

22 LENGERR

RESP2 values:

- 11 The length of the program area is not the same as the length of the data in the container. If the area is smaller, the data is truncated to fit into it. If the area is larger, the data is copied to the program area but no padding is added.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

106 PROCESSBUSY


RESP2 values:

- 13 The request could not be satisfied because the process record is locked by another task.

GET CONTAINER (CHANNEL)

Retrieve data from a named channel container.

GET CONTAINER (CHANNEL)

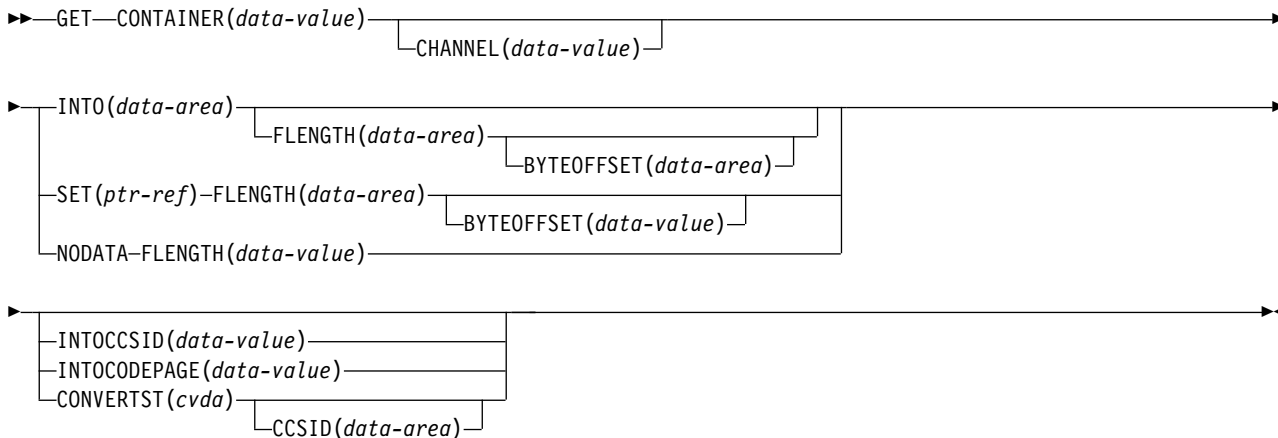

Conditions: CCSIDERR, CHANNELERR, CODEPAGEERR, CONTAINERERR, INVREQ, LENGERR

This command is threadsafe.

Description

GET CONTAINER (CHANNEL) reads the data associated with a specified channel container.

The container that holds the data is identified by name and by the channel for which it is a container; the channel that “owns” it.

The channel that owns the container can be identified explicitly, by specifying the CHANNEL option, or implicitly, by omitting the CHANNEL option. When this option is omitted, the current channel is implied. If there is no current channel, the command is assumed to be an EXEC CICS GET CONTAINER (BTS) command. For more information, see “GET CONTAINER (BTS)” on page 281.

Options

BYTEOFFSET(*data-value*)

Specifies the offset in bytes where the data returned starts. For CHAR containers, the BYTEOFFSET value is used as an offset into the data in the requested code page. If you use a code page with multibyte characters, depending on the BYTEOFFSET value you specify, the data returned might have partial characters at the beginning, end, or both. In this situation, your application program must be able to handle and interpret the data returned. If the value specified is less than zero, zero is assumed.

CCSID(*data-area*)

Returns a fullword that contains the Coded Character Set Identifier (CCSID) of the data returned by the CONVERTST(NOCONVERT) option. You can use this option to retrieve containers with a DATATYPE of CHAR, without converting the data. If a DATATYPE of BIT is specified for the container, this value is zero.

CHANNEL(*data-value*)

Specifies the name (1 - 16 characters) of the channel that owns the container. You can specify the channel name DFHTRANSACTION to use the transaction channel.

CONTAINER(*data-value*)

Specifies the name (1 - 16 characters) of the container that holds the data to be retrieved.

CONVERTST(*cvda*)

Specifies the required data conversion status.

NOCONVERT

The container data is retrieved without being converted. If you used the WEB RECEIVE to store the HTTP body in a container, and you need to retrieve the body unconverted from that container, you must use the NOCONVERT option.

FLENGTH(*data-area*)

As an input field, FLENGTH specifies, as a fullword binary value, the length of the data to be read. As an output field, FLENGTH returns the length of the data in the container. FLENGTH is an input or an output field depending on which of the BYTEOFFSET, INTO, SET, or NODATA options you specify.

BYTEOFFSET option specified

FLENGTH is both an input and an output field.

On **input**, FLENGTH specifies the maximum length of the data that the program accepts. The data returned begins at the offset specified by the BYTEOFFSET value. If the value specified is less than zero, zero is assumed.

On **output** (that is, on completion of the retrieval operation) CICS sets the data area to the length of the data returned. The maximum length returned is equal to the length of the data in the container minus the BYTEOFFSET value.

INTO option specified

FLENGTH is both an input and an output field.

On **input**, FLENGTH specifies the maximum length of the data that the program accepts. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs. If the length of the data is less than the specified value, the data is copied but no padding is performed.

You do not need to specify FLENGTH if the length can be generated by the compiler from the INTO variable. If you specify both INTO and FLENGTH, FLENGTH specifies the maximum length of the data that the program accepts.

On **output** (that is, on completion of the retrieval operation) CICS sets the data area, if specified, to the actual length of the data in the container. If the container holds character data that has been converted from one CCSID to another, this is the length of the data after conversion.

SET or NODATA option specified

FLENGTH is an output-only field. It must be present and must be specified as a data-area.

On completion of the retrieval operation, the data area is set to the actual length of the data in the container. If the container holds character data that has been converted from one CCSID to another, this is the length of the data after conversion.

INTO(*data-area*)

Specifies the data area into which the retrieved data is placed.

INTOCCSID(*data-value*)

Specifies the Coded Character Set Identifier (CCSID) into which the character data in the container is converted, as a fullword binary number. If you prefer to specify an IANA name for the code page, or if you prefer to specify the CCSID as alphanumeric characters, use the INTOCODEPAGE option instead.

For CICS Transaction Server for z/OS applications, the CCSID is typically an EBCDIC CCSID. However, it is possible to specify an ASCII CCSID if, for example, you want to retrieve ASCII data without it being automatically converted to EBCDIC.

If INTOCCSID and INTOCODEPAGE are not specified, the value for conversion defaults to the CCSID of the region. The default CCSID of the region is specified on the **LOCALCCSID** system initialization parameter.

Only character data can be converted, and only then if a DATATYPE of CHAR was specified on the **PUT CONTAINER** or **PUT64 CONTAINER** command used to place the data in the container. A DATATYPE of CHAR is implied if FROMCCSID or FROMCODEPAGE is specified on the **PUT CONTAINER** or **PUT64 CONTAINER** command.

For more information about data conversion with channels, see Data conversion with channels in Developing applications.

For an explanation of CCSIDs, see Preparing for code page conversion with channels in Developing applications.

INTOCODEPAGE(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the code page into which the character data in the container is to be converted, using up to 40 alphanumeric characters, including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

Where an IANA name exists for a code page and CICS supports its use, the name is listed with the CCSID. For more information, see Preparing for code page conversion with channels in Developing applications.

NODATA

Specifies that no data is retrieved. Use this option to discover the length of the data in the container (returned in FLENGTH).

The length of character data may change if data conversion takes place. Therefore, if character data is to be converted into any CCSID *other than that of this region*, when you specify NODATA you should also specify INTOCCSID. This ensures that the correct length of the converted data is returned in FLENGTH.

SET(*ptr-ref*)

Specifies a data area in which the address of the retrieved data is returned.

If the application program that issues the **GET CONTAINER** command is defined with **DATALOCATION(ANY)**, the address of the data can be above or below the 16 MB line. If the application program is defined with **DATALOCATION(BELOW)**, the address of the data is below the 16 MB line. If **TASKDATAKEY(USER)** is specified for the executing transaction, the data returned is in user key; otherwise it is in CICS key.

CICS maintains the data area until any of the following occurs:

- A subsequent **GET CONTAINER** or **GET64 CONTAINER** command with the **SET** option, for the same container in the same channel, is issued by any program that can access this storage.
- The container is deleted by a **DELETE CONTAINER** command.
- The container is moved by a **MOVE CONTAINER** command.
- The channel goes out of program scope.
- The channel, and the containers that are in it, are deleted by a **DELETE CHANNEL** command.

Beware of linking to other programs that might issue one of these commands.

Do not issue a **FREEMAIN** command to release this storage.

If your application needs to keep the data, it should move it into its own storage.

Conditions

123 CCSIDERR

RESP2 values:

- 1 The CCSID specified on the **INTOCCSID** option is outside the range of valid CCSID values.
- 2 The CCSID specified on the **INTOCCSID** option and the CCSID of the container are an unsupported combination. (The CCSID of the container is the value that was specified using either **FROMCODEPAGE** or **FROMCCSID**, or defaulted, when the container was built.)
- 3 The data was created with a data type of **BIT**. Code page conversion is not possible. The data was returned without any code page conversion.
- 4 One or more characters could not be converted. The character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container.

122 CHANNELERR

RESP2 values:

- 2 The channel specified on the **CHANNEL** option could not be found.

125 CODEPAGEERR

RESP2 values:

- 1 The code page specified on the **INTOCODEPAGE** option is not supported.
- 2 The code page specified on the **INTOCODEPAGE** option and the code page of the channel are an unsupported combination.
- 3 The data was created with a data type of **BIT**. Code page conversion is not possible. The data was returned without any code page conversion.

- 4 One or more characters could not be converted. The character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container.

110 CONTAINERERR

RESP2 values:

- 10 The container named on the CONTAINER option could not be found.

16 INVREQ

RESP2 values:

- 2 The INTOCCSID option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) INTOCCSID is valid only on GET CONTAINER commands that specify (explicitly or implicitly) a channel.
- 4 The CHANNEL option was not specified, there is no current channel (because the program that issued the command was not passed one), and the command was issued outside the scope of a currently-active BTS activity.
- 5 The CONVERTST cvda value is invalid.

22 LENGERR


RESP2 values:

- 11 The length of the program area is shorter than the length of the data in the container. When the area is smaller, the data is truncated to fit into it.
- 12 The offset is greater than, or equal to, the length of the container.

GET COUNTER and GET DCOUNTER

Get the next number from the named counter in the specified pool. Use COUNTER for fullword signed counters and DCOUNTER for doubleword unsigned counters.


GET COUNTER

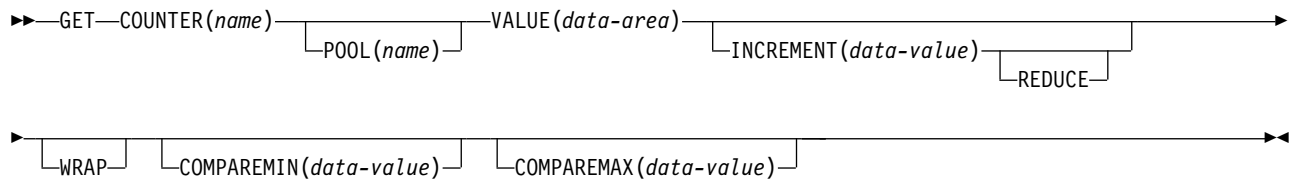

Conditions: INVREQ, LENGERR, SUPPRESSED

This command is threadsafe.

GET DCOUNTER

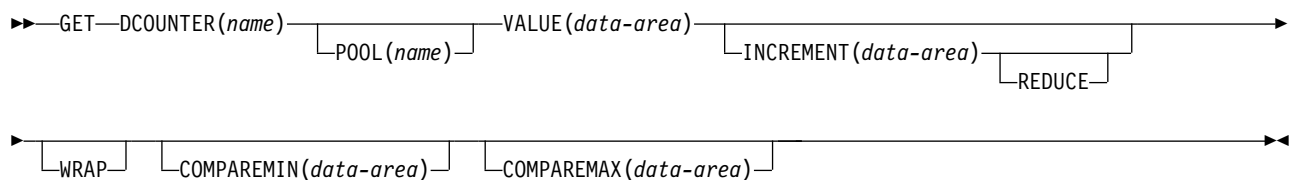

Conditions: INVREQ, LENGERR, SUPPRESSED

This command is threadsafe.

Description

These counter commands obtain, from the named counter server, the current number from the named counter in the specified pool, and updates the current number by the default, or by a specified, increment. The default increment is 1.

You can use the COMPAREMAX and COMPAREMIN options to obtain a number only if it falls within a specified range, or is above or below a specified value.

For information about specifying fullword and doubleword variables on these named counter commands, see “CICS command argument values” on page 4.

Options

COMPAREMAX(*data-value*)

Specifies, as a fullword signed binary value (or doubleword unsigned binary value for DCOUNTER), a value to compare with the current value of the named counter, and makes the result of the GET command conditional on the comparison:

- If the current value to assign is less than, or equal to, the value specified on the COMPAREMAX parameter, the current value is returned, and the response is normal.

- If the current value is greater than the specified value, CICS returns an exception condition.

Normally, the COMPAREMAX value is greater than the COMPAREMIN value and the current value must satisfy both comparisons (that is, it must be between the two values or equal to one of them).

You can specify a COMPAREMAX value that is less than the COMPAREMIN value. In this situation, the current value is considered to be in range if it satisfies either the COMPAREMIN or the COMPAREMAX comparison.

COMPAREMIN(*data-value*)

Specifies, as a fullword signed binary value (or doubleword unsigned binary value for DCOUNTER), a value to compare with the current value of the named counter, and makes the result of the GET command conditional on the comparison:

- If the current value to assign is equal to, or greater than, the value specified on the COMPAREMIN parameter, the current value is returned, and the response is normal.
- If the current value is less than the specified value, CICS returns an exception condition.

Note: You can specify a COMPAREMIN value that is greater than the COMPAREMAX value. See the COMPAREMAX parameter for the effect of this.

COUNTER(*name*)

Specifies the name of the fullword counter from which the current number is to be assigned to the application program. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

DCOUNTER(*name*)

Specifies the name of the doubleword counter from which the current number is to be assigned to the application program. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

INCREMENT(*data-value*)

Specifies, as a fullword signed binary value (or doubleword unsigned binary value for DCOUNTER), an increment by which the named counter is to be updated, instead of the default value of 1. The counter is incremented after the current number has been assigned.

Specifying an increment to override the default increment of 1 enables the application program to obtain exclusive use of more than one number for each call. For example, to obtain exclusive use of a block of 20 numbers, specify INCREMENT(20).

See the description of the REDUCE and WRAP options for the effect of specifying an increment when the counter is at, or near, the maximum value.

POOL(*poolname*)

Specifies an 8-character string to use as a pool selection parameter to select the pool in which the named counter resides. The string can be a logical pool name, or the actual pool name.

Valid characters for the pool selector string are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 8 characters, the name must be padded with trailing blanks.

This parameter is optional. If you omit the name of the pool, a pool selector value of 8 blanks is assumed.

If there is no matching entry in the DFHNCOPT options table, CICS uses the name specified on the NCPLDFT system initialization parameter, which specifies the default named counter pool.

For information about generating a named counter options table using the DFHNCO macro, see the *CICS Application Programming Guide*.

REDUCE

Specifies that you want the named counter server to reduce the specified increment if the range of numbers remaining to be assigned is too small.

The range of numbers is too small if the difference between the current value and the maximum value plus 1 is less than the specified increment, in which case:

- If you specify REDUCE, the INCREMENT parameter value is reduced and the GET request succeeds. In this case, the GET command has reserved a range of numbers less than that specified by the INCREMENT parameter, and the current value is updated to the maximum value plus 1.
- If you do not specify the REDUCE option, the result depends on whether you specify the WRAP option. If the REDUCE and WRAP options are both omitted, the request fails with the counter-at-limit error (SUPPRESSED, RESP2=101), but the current number is not changed. For example, if a request specifies an INCREMENT parameter value of 15 when the current number is 199 990 and the counter maximum number is defined as 199 999, the GET command fails because updating the counter by the specified increment would cause the current number to exceed 200 000.

VALUE (data-area)

Specifies the data area (fullword signed data-area for COUNTER, and doubleword unsigned data-area for DCOUNTER) into which CICS returns the current number, obtained from the named counter server for the specified pool.

WRAP

Specifies that you want the named counter server to rewind the named counter automatically if it is in a counter-at-limit condition, thus avoiding the error condition that would otherwise result.

If the named counter is in the counter-at-limit condition, or the increment specified without the REDUCE option would cause the counter-at-limit condition, the counter server acts as follows:

- It resets the current value of the named counter equal to the minimum value defined for the counter.
- It returns the new current value to the application program, with DFHRESP(NORMAL).
- It updates the current value by the required increment ready for the next request.

If you omit the WRAP option, and the counter-at-limit condition is reached, CICS returns SUPPRESSED, RESP2=101.

Conditions

16 INVREQ

RESP2 values:

201 Named counter not found.

- 301 The server has reported an error code that is not understood by the named counter interface. Generally, this is not possible unless the interface load module, DFHNCIF, is at a lower maintenance or release level than the server itself.
- 303 An unexpected error, such as structure failure or loss of connectivity, has occurred on a macro used to access the coupling facility. Further information is in message DFHNC0441 in the application job log.
- 304 The pool selection parameter specified in the program cannot be resolved to a valid server name using the current options table.
- 305 The interface cannot establish a connection to the server for the selected named counter pool. Further information is in an AXM services message (AXMSCnnnn) in the application job log.
- 306 An abend occurred during server processing of a request. Further information is in a message in the application job log and the server job log.
- 308 The DFHNCOPT options table module, required to resolve a pool name, cannot be loaded.
- 309 During processing of the options table, the named counter interface encountered an unknown entry format. Either the options table is not correctly generated, or the DFHNCIF interface load module is not at the same release level as the options table.
- 310 An options table entry that matches the given pool name specified a user exit program, but the user exit program is not link-edited with the options table and cannot be loaded.
- 311 A response from the named counter server to the client region interface module, DFHNCIF, indicates that a system-managed rebuild is in progress but the EXEC CICS interface does not recognize the condition. This means that the CICS region is at CICS TS 2.1 or earlier.
- 403 The POOL parameter contains invalid characters or embedded spaces.
- 404 The COUNTER parameter contains invalid characters or embedded spaces.
- 406 The INCREMENT value is invalid. The value specified cannot be greater than the total range of the counter ((maximum value - minimum value) + 1).

Default action: terminate the task abnormally.

22 LENGERR

LENGERR occurs for COUNTER commands only and does not apply to DCOUNTER requests. It occurs when a counter that was defined by a DCOUNTER command or by the CALL interface has a value that is too large to be correctly represented as a fullword signed binary value (that is, the counter uses more than 31 bits).

In each of the three cases of overflow, the named counter server completes the operation, and returns a warning response to CICS, which CICS returns to your application program as the RESP2 value. The data area contains the low-order 32 bits returned from the named counter server, which could be a negative number.

RESP2 values:

- 001 The current value that the server has attempted to return in the VALUE data area has overflowed into the high-order (sign) bit (that is, the value returned is negative).
- 002 The current value is too large for a fullword data area by only 1 bit. In this case, the overflow value is exactly 1.
- 003 The current value is too large for a fullword data area by a value greater than 1.

Default action: terminate the task abnormally.

72 SUPPRESSED

RESP2 values:


- 101 The maximum value for the named counter has already been assigned and the counter is in the 'counter-at-limit' condition. No more counter numbers can be assigned until the named counter has been reset, either by a REWIND command, or by specifying the WRAP option on the GET command.
- 103 One of the following:
- The current value of the named counter is not within the range specified by the **COMPAREMAX** and **COMPAREMIN** parameters, when both are specified
 - The current value of the named counter is greater than the **COMPAREMAX** parameter or less than the **COMPAREMIN** parameter, when only one option is specified.

Default action: terminate the task abnormally.

GETMAIN

Get main 24-bit or 31-bit storage.

GETMAIN

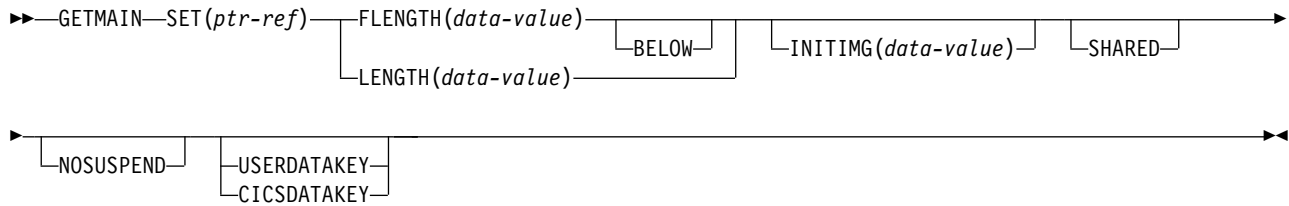

Conditions: LENGERR, NOSTG

This command is threadsafe.

Description

GETMAIN gets a main storage area of the size indicated by the FLENGTH option. The address of the area is returned in the pointer reference supplied in the SET option.

This command includes the LENGTH option for compatibility purposes only; for programs that run with current versions of CICS, use FLENGTH.

CICS always allocates on 16-byte boundaries and rounds the requested length up to the nearest 16-byte multiple. There is no default initialization, so if you require the storage to be initialized to a specific bit configuration, you must use the INITIMG option.

CICS allocates storage from one of the following dynamic storage areas (DSAs):

- DSAs in 24-bit storage:
 - The CICS dynamic storage area (CDSA), below 16 MB (below the line)
 - The user dynamic storage area (UDSA), below 16 MB
 - The shared dynamic storage area (SDSA), below 16 MB
- DSAs in 31-bit storage; the extended dynamic storage area (EDSA):
 - The extended CICS dynamic storage area (ECDSA), above 16 MB but below 2 GB (above the line)
 - The extended user dynamic storage area (EUDSA), above 16 MB but below 2 GB
 - The extended shared dynamic storage area (ESDSA), above 16 MB but below 2 GB

For more information about these DSAs, see CICS dynamic storage areas in *Improving performance*.

Note: You cannot use GETMAIN to get storage from the following DSAs:

- The read-only DSA (RDSA).
- The extended read-only DSA (ERDSA).
- The extended trusted DSA (ETDSA).

- DSAs in the above-the-bar dynamic storage area (GDSA). To obtain storage from these DSAs, use the GETMAIN64 in Reference -> Application development command.

CICS allocates storage from 24-bit or 31-bit storage, depending on the following options:

- The FLENGTH option with BELOW also specified. CICS obtains the storage from a DSA in 24-bit storage.
- The FLENGTH option, BELOW not specified. The AMODE of the requesting program determines the location of the obtained storage. For example, for an AMODE(31) program, CICS obtains the storage from the EDSA.
- The LENGTH option. CICS obtains the storage from a DSA in 24-bit storage.

CICS allocates storage from a CICS-key, user-key, or shared DSA, depending on the following options:

- USERDATAKEY
- CICSDATAKEY
- SHARED
- If no data-key option is specified on the GETMAIN command, the TASKDATAKEY option on the RDO TRANSACTION resource definition under which the requesting program is running. See TRANSACTION attributes in Reference -> System definition.

The effect of the data-key options is summarized in the following table:

Table 16. Data-key options on GETMAIN command

| No data-key option | USERDATAKEY specified | CICSDATAKEY specified |
|--------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| Storage key is determined by TASKDATAKEY on transaction definition | User-key storage. Storage is obtained from the UDSA or EUDSA if the SHARED option is not specified, or from the SDSA or ESDSA if the SHARED option is specified. | CICS-key storage. Storage is obtained from the CDSA or ECDSA. |

The data-key option on the GETMAIN command overrides the TASKDATAKEY option on the RDO TRANSACTION resource definition. For example, you can specify CICSDATAKEY to ensure that the requesting program obtains CICS-key storage from a CICS DSA, even if TASKDATAKEY(USER) is specified on the RDO TRANSACTION resource definition.

The storage that a task gets is available until it is released with a FREEMAIN or FREEMAIN64 command. For an area that is obtained without the SHARED option, only the task that acquired the storage can release it, and at task end CICS automatically releases such storage not already released.

Any storage acquired with the SHARED option is accessible by all tasks, including those that are running with transaction isolation. However, a SHARED area is not released at task end and remains until explicitly freed; any task can issue the FREEMAIN or FREEMAIN64 request. This means that you can use SHARED storage in task-to-task communication.

Note: Using the GETMAIN command with the SHARED option could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see Affinity in Developing applications.

Options

BELOW

Specifies that 24-bit (below 16 MB) storage is obtained; that is, from the CDSA, UDSA, or SDSA.

CICSDATAKEY

Specifies that CICS allocates storage from a CICS-key DSA (CDSA or ECDSA), overriding the TASKDATAKEY option specified on the transaction resource definition. If you do not specify a data-key option, the storage key (CICS-key or user-key) depends on the TASKDATAKEY option on the transaction resource definition.

Note: If the program is running under a task defined with TASKDATAKEY(USER) on the transaction resource definition, do not explicitly use FREEMAIN or FREEMAIN64, but allow the storage to be freed as part of the task termination.

FLENGTH(*data-value*)

Specifies the number of bytes of storage required, in fullword binary format.

The maximum length that you can specify is the value of the limit for the corresponding DSA; that is, DSALIMIT or EDSALIMIT. These are the system initialization parameters that define the overall storage limit within which CICS can allocate and manage the individual DSAs in 24-bit and 31-bit storage, respectively.

If the length requested is greater than the corresponding DSALIMIT or EDSALIMIT value, the LENGERR condition occurs. If the length requested is less than the corresponding limit, but is greater than the available storage, a NOSTG condition occurs.

INITIMG(*data-value*)

Specifies an optional 1-byte initialization value. If you specify INITIMG, CICS sets every byte of the acquired storage to the bit string you provide. Otherwise, CICS does not initialize the storage. In COBOL programs only, you must use a data area rather than a data value to define the initialization bit string.

LENGTH(*data-value*)

This option is supported only for compatibility with programs that are written to run under earlier releases of CICS. It is advisable to use FLENGTH.

LENGTH specifies the number of bytes (unsigned halfword binary value) of storage required. This option implies storage from below the 16 MB line and has an upper limit of 65520 bytes. For a larger area or storage above 16 MB, use FLENGTH.

If the value of LENGTH is zero, a LENGERR condition occurs. If the length requested is greater than the available storage, a NOSTG condition occurs.

NOSUSPEND

Specifies that if no storage is available, CICS does not suspend the task, but issues the NOSTG condition.

If a HANDLE CONDITION for NOSTG is active when the command is executed, control is passed to the user label supplied in the HANDLE CONDITION. This takes precedence over the NOSUSPEND option, but is deactivated by NOHANDLE or RESP.

SET(*ptr-ref*)

Sets the pointer reference to the address of the acquired main storage. The pointer is set to the first byte of the storage area.

SHARED

Prevents the automatic release of storage obtained by a GETMAIN command at the end of the task that requested it. This enables task-to-task communication. An area obtained with SHARED is not released until a corresponding FREEMAIN is issued, whether by the requesting task or some other task.

Be aware that if a task abends, any shared storage acquired is not automatically released.

USERDATAKEY

Specifies that CICS allocates storage from a user-key DSA (the UDSA, SDSA, EUDSA, or ESDSA), overriding the TASKDATAKEY option specified on the transaction resource definition. If you do not specify a data-key option, the storage key (CICS-key or user-key) depends on the TASKDATAKEY option on the transaction resource definition.

Conditions

22 LENGERR

RESP2 values:

- 1 The FLENGTH value is less than 1 or greater than the length of the target dynamic storage area from which the request is to be satisfied. See the discussion about DSAs in CICS dynamic storage areas in Improving performance.

Also occurs if the LENGTH value is zero.

Default action: terminate the task abnormally.

42 NOSTG

RESP2 values:

- 2 The storage requested is more than is currently available in the target DSA. See the discussion about DSAs in CICS dynamic storage areas in Improving performance.

Default action: ignore the condition. An active HANDLE CONDITION NOSTG also raises this condition.

Examples

The following example shows how to get a 1024-byte area from user-key storage below 16 MB (assuming that TASKDATAKEY(USER) is specified on the RDO TRANSACTION resource definition), and initialize it to spaces:




```
EXEC CICS GETMAIN SET(PTR)
        FLENGTH(1024)
        BELOW
        INITIMG(BLANK)
```

You must define BLANK in your program as the character representing a space.

The following example shows how to get a 2048-byte area from CICS-key storage above 16 MB but below 2 GB (regardless of the TASKDATAKEY option specified on the transaction resource definition), and initialize it to spaces:

```
EXEC CICS GETMAIN SET(PTR)
      FLENGTH(2048)
      INITMG(BLANK)
      CICSDATAKEY
```

Related reference


-  FREEMAIN in Reference -> Application development
-  FREEMAIN64 in Reference -> Application development
-  GETMAIN64 in Reference -> Application development

GETMAIN64

Get 24-bit, 31-bit, or 64-bit storage. This command is for use only in non-Language Environment (LE) AMODE(64) assembler language application programs.

See Assembler language programming restrictions and requirements in Developing applications.

GETMAIN64

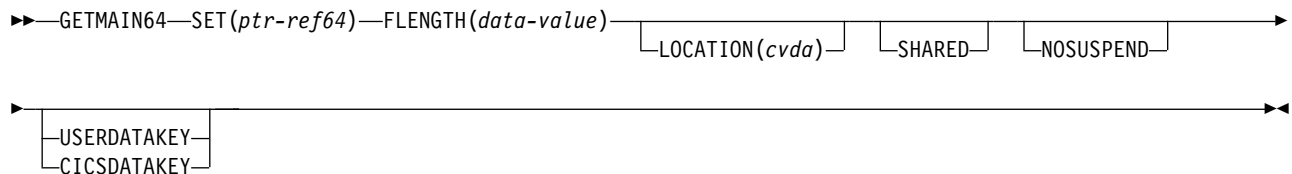

Conditions: INVREQ, LENGERR, NOSTG

This command is threadsafe.

Description

GETMAIN64 gets a main storage area of the size indicated by the FLENGTH option. The address of the area is returned in the 64-bit pointer reference supplied in the SET option. By default, the addressing mode (AMODE) of the requesting program determines the location of the obtained storage. Therefore, for an AMODE(64) program, GETMAIN64 obtains 64-bit storage.

You can also use the LOCATION parameter to specify that 24-bit or 31-bit storage is obtained, regardless of the AMODE of the calling program. For example, if you specify LOCATION(LOC31), a 64-bit address for an area of 31-bit storage is returned.

CICS always allocates on 16-byte boundaries and rounds the requested length up to the nearest 16-byte multiple.

CICS allocates storage from one of the following dynamic storage areas (DSAs):

- DSAs in 24-bit storage:
 - The CICS dynamic storage area (CDSA), below 16 MB (below the line)
 - The user dynamic storage area (UDSA), below 16 MB
 - The shared dynamic storage area (SDSA), below 16 MB
- DSAs in 31-bit storage; the extended dynamic storage area (EDSA):
 - The extended CICS dynamic storage area (ECDSA), above 16 MB but below 2 GB (above the line)
 - The extended user dynamic storage area (EUDSA), above 16 MB but below 2 GB
 - The extended shared dynamic storage area (ESDSA), above 16 MB but below 2 GB
- DSAs in 64-bit storage: the above-the-bar dynamic storage area (GDSA):
 - The above-the-bar CICS DSA (GCDSA)
 - The above-the-bar user DSA (GUDSA)

- The above-the-bar shared DSA (GSDSA)

For more information about these DSAs, see CICS dynamic storage areas in Improving performance.

Note: You cannot use GETMAIN64 to obtain storage from the following DSAs:

- The read-only DSA (RDSA)
- The extended read-only DSA (ERDSA)
- The extended trusted DSA (ETDSA)

CICS allocates storage from a CICS-key, user-key, or shared DSA, depending on the following options:

- USERDATAKEY
- CICSDATAKEY
- SHARED
- If no data-key option is specified on the GETMAIN64 command, the TASKDATAKEY option on the RDO TRANSACTION resource definition under which the requesting program is running. See TRANSACTION attributes in Reference -> System definition.

The following table summarizes the effect of the data-key options.

Table 17. Data-key options on GETMAIN64 command

| No data-key option | USERDATAKEY specified | CICSDATAKEY specified |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Storage key is determined by TASKDATAKEY on the transaction definition | User-key storage. If the SHARED option is not specified, storage is obtained from the UDSA, EUDSA, or GUDSA. If the SHARED option is specified, storage is obtained from the SDSA, ESDSA, or GSDSA. | CICS-key storage. Storage is obtained from the CDSA, ECDSA, or GCDSA. |

The data-key option on the GETMAIN64 command overrides the TASKDATAKEY option on the RDO TRANSACTION resource definition. For example, you can specify CICSDATAKEY to ensure that the requesting program obtains CICS-key storage from a CICS DSA, even if TASKDATAKEY(USER) is specified on the RDO TRANSACTION resource definition.

The storage that a task obtains is available until it is released with a FREEMAIN or FREEMAIN64 command. For storage that is obtained without the SHARED option, only the task that acquired the storage can release it. At task end, CICS automatically releases such storage not already released.

Any storage obtained with the SHARED option is accessible by all tasks, including those that are running with transaction isolation. However, a shared area is not released at task end and remains until explicitly freed; any task can issue the FREEMAIN or FREEMAIN64 request. This means that you can use shared storage in task-to-task communication.

Note: Using the GETMAIN64 command with the SHARED option could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see Affinity in Developing applications.

Options

CICSDATAKEY

Specifies that CICS allocates storage from a CICS-key DSA (CDSA, ECDSA, or GCDSA), overriding the TASKDATAKEY option specified on the transaction resource definition. If you do not specify a data-key option, the storage key (CICS-key or user-key) depends on the TASKDATAKEY option on the transaction resource definition.

Note: If the program is running under a task defined with TASKDATAKEY(USER) on the transaction resource definition, do not explicitly use a FREEMAIN or FREEMAIN64 request, but allow the storage to be freed as part of the task termination.

FLENGTH(*data-value*)

Specifies the number of bytes of storage required, in fullword binary format.

For 64-bit storage, the maximum length that you can specify is 2146435056 (2 GB - (1 MB + 16 bytes)). If the length requested is greater than the available storage, a NOSTG condition occurs.

For 24-bit or 31-bit storage, the maximum length that you can specify is the value of the limit for the corresponding DSA, that is, DSALIMIT or EDSALIMIT. DSALIMIT and EDSALIMIT are system initialization parameters that define the overall storage limits within which CICS can allocate and manage the individual DSAs in 24-bit and 31-bit storage, respectively. If the length requested is bigger than the corresponding DSALIMIT or EDSALIMIT value, the LENGERR condition occurs. If the length requested is less than the corresponding limit, but is greater than the available storage, a NOSTG condition occurs.

LOCATION(*cvda*)

Specifies that CICS allocates storage from 24-bit or 31-bit storage, regardless of the AMODE of the calling program. CVDA values are as follows:

LOC24

24-bit storage (below 16 MB) is obtained; that is, from the CDSA, UDSA, or SDSA.

LOC31

31-bit storage (above 16 MB but below 2 GB) is obtained; that is, from the ECDSA, EUDSA, or ESDSA.

NOSUSPEND

Specifies that if no storage is available, CICS does not suspend the task, but issues the NOSTG condition.

SET(*ptr-ref64*)

Sets the 64-bit pointer reference to the address of the acquired main storage. The pointer is set to the first byte of the storage area.

The pointer reference returns a 64-bit address for an area of 64-bit, 31-bit, or 24-bit storage. The location of the obtained storage depends on the AMODE of the caller, unless a LOCATION option is specified.

SHARED

Prevents the automatic release of storage obtained by a GETMAIN64 command at the end of the task that requested it. This enables task-to-task communication. An area obtained with SHARED is not released until a corresponding FREEMAN or FREEMAIN64 request is issued, whether by the requesting task or another task.

Be aware that if a task abends, any shared storage acquired is not automatically released.

USERDATAKEY

Specifies that CICS allocates storage from a user-key DSA (UDSA, SDSA, EUDSA, ESDSA, GUDSA, or GSDSA), overriding the TASKDATAKEY option specified on the transaction resource definition. If you do not specify a data-key option, the storage key (CICS-key or user-key) depends on the TASKDATAKEY option on the transaction resource definition.

Conditions

16 INVREQ

RESP2 values:

- 3 The LOCATION option is not valid.

22 LENGERR

RESP2 values:

- 1 The FLENGTH value is less than 1, or greater than the length of the target dynamic storage area from which the request is to be satisfied. See the discussion about DSAs in CICS dynamic storage areas in *Improving performance*.

42 NOSTG

RESP2 values:


- 2 The storage requested is more than is currently available in the target DSA. See the discussion about DSAs in CICS dynamic storage areas in *Improving performance*.


Example


The following example shows how to get a 1048576 byte area from CICS-key storage above the bar (regardless of the TASKDATAKEY option specified on the transaction resource definition):

```
EXEC CICS GETMAIN64 SET(5)
        FLENGTH(1048576)
        CICSDATAKEY
```

Related reference

 GETMAIN in Reference -> Application development


 FREEMAIN in Reference -> Application development

 FREEMAIN64 in Reference -> Application development

GETNEXT ACTIVITY

Browse the child activities of a BTS activity, or the descendant activities of a BTS process.

GETNEXT ACTIVITY

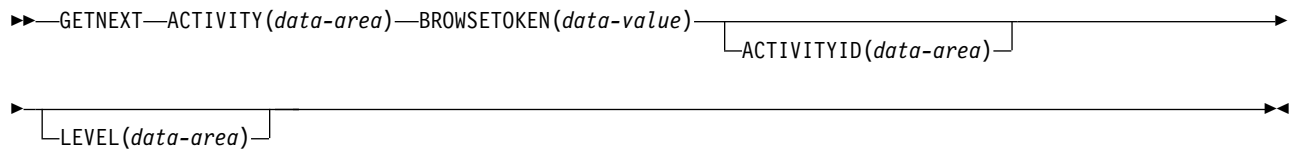

Conditions: ACTIVITYERR, END, ILLOGIC, IOERR, TOKENERR

Description

GETNEXT ACTIVITY returns either:

- The name and identifier of the next child activity of a BTS activity (if the PROCESS and PROCESSTYPE options were omitted from the STARTBROWSE ACTIVITY command)
- The name and identifier of the next descendant activity of a BTS process (if the PROCESS and PROCESSTYPE options were specified on the STARTBROWSE ACTIVITY command).

You can use the `INQUIRE ACTIVITYID` command to query the identified activity.

Options

ACTIVITYID(data-area)

returns the 52-character identifier of the next activity.

ACTIVITY (data-area)

returns the 16-character name of the next activity.

BROWSETOKEN(data-value)

specifies, as a fullword binary value, a browse token returned on a previous STARTBROWSE ACTIVITY command.

LEVEL(data-area)

returns a fullword value indicating the depth in the activity-tree at which the next activity lies.

On a browse of the descendant activities of a process, a value of '0' indicates the root activity, '1' a child of the root activity, '2' a grandchild of the root activity, and so on.

On a browse of the child activities of an activity, the value returned is always 0.

Conditions

109 ACTIVITYERR

RESP2 values:

- 19** The request timed out. It may be that another task using this activity-record has been prevented from ending.

83 END

RESP2 values:

- 2 There are no more resource definitions of this type.

21 ILLOGIC

RESP2 values:

- 1 The value specified in the BROWSETOKEN option matches a current browse token, but not one that is being used for an activity browse.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

112 TOKENERR

RESP2 values:

- 3 The browse token is not valid.

GETNEXT CONTAINER

Browse the containers associated with a channel, or with a BTS activity or process.

GETNEXT CONTAINER

►►—GETNEXT—CONTAINER(*data-area*)—BROWSETOKEN(*data-value*)—►►

Conditions: END, ILLOGIC, TOKENERR

Description

GETNEXT CONTAINER returns the name of the next container associated with a channel, or with a BTS activity or process. You can use the INQUIRE CONTAINER command to query the returned container.

Note:

1. You can use successive GETNEXT CONTAINER commands to retrieve the names of all the channel's or activity's containers that existed at the time the STARTBROWSE CONTAINER command was executed. However, the names of any containers that are deleted after the STARTBROWSE and before they have been returned by a GETNEXT are not returned.
2. The names of any containers that are created on (or moved to) this channel or activity after the STARTBROWSE command is executed may or may not be returned.
3. The order in which containers are returned is undefined.

Options

BROWSETOKEN(*data-value*)

specifies, as a fullword binary value, a browse token returned on a previous STARTBROWSE CONTAINER command.

CONTAINER(*data-area*)

returns the 16-character name of the next data-container.

Conditions

83 END

RESP2 values:

- 2 There are no more resource definitions of this type.

21 ILLOGIC

RESP2 values:

- 1 The value specified in the BROWSETOKEN option matches a current browse token, but not one that is being used for a browse of containers.

112 TOKENERR


RESP2 values:

- 3 The browse token is not valid.

GETNEXT EVENT

Browse the events known to a BTS activity.

GETNEXT EVENT

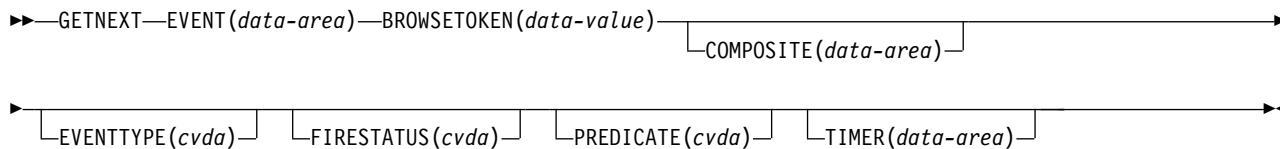

Conditions: END, TOKENERR

Description

GETNEXT EVENT returns the attributes of the next event, or sub-event, that is within the scope of a BTS activity.

Options

BROWSETOKEN(data-value)

specifies, as a fullword binary value, a browse token returned on a previous STARTBROWSE EVENT command.

COMPOSITE(data-area)

returns, if the named event is a sub-event, the 16-character name of the composite event that it is part of.

EVENT(data-area)

returns the 16-character name of the next event. This may be:

- An atomic event. An atomic event returned on this command may or may not be a sub-event.
- A composite event.
- A system event.

EVENTTYPE(cvda)

indicates the type of the named event. CVDA values are:

ACTIVITY

Activity completion

COMPOSITE

Composite

INPUT

Input

SYSTEM

System

TIMER

Timer.

FIRESTATUS(cvda)

indicates the state of the named event. CVDA values are:

FIRED

The event has fired normally.

NOTFIRED

The event has not fired.

PREDICATE(cvda)

indicates, if the named event is composite, the Boolean operator applied to its predicate. CVDA values are:

AND The Boolean operator applied to the predicate is AND.

OR The Boolean operator applied to the predicate is OR.

TIMER(data-area)

returns, if the named event is a timer event, the 16-character name of its associated timer.

Conditions**83 END**

RESP2 values:

2 There are no more resource definitions of this type.

112 TOKENERR


RESP2 values:

3 The browse token is not valid.

GETNEXT PROCESS

Browse all processes of a specified type within the CICS business transaction services system.

GETNEXT PROCESS



Conditions: END, ILLOGIC, IOERR, PROCESSERR, TOKENERR

Description

GETNEXT PROCESS returns the name of the next process of a specified type within the CICS business transaction services system.

Options

ACTIVITYID(*data-area*)

returns the 52-character identifier of the next process's root activity.

BROWSETOKEN(*data-value*)

specifies, as a fullword binary value, a browse token returned on a previous STARTBROWSE PROCESS command.

PROCESS(*data-area*)

returns the 36-character name of the next process.

Conditions

83 END

RESP2 values:

2 There are no more resource definitions of this type.

21 ILLOGIC

RESP2 values:

1 The value specified in the BROWSETOKEN option matches a current browse token, but not one that is being used for a process browse.

17 IOERR

RESP2 values:

30 An input/output error has occurred on the repository file.

108 PROCESSERR

RESP2 values:

13 The request timed out. It may be that another task using this process-record has been prevented from ending.

112 TOKENERR

RESP2 values:


3 The browse token is not valid.

GET64 CONTAINER

Retrieve data from a named channel container into 64-bit storage. This command is for use only in non-Language Environment (LE) AMODE(64) assembler language application programs. CICS business transaction services (BTS) containers are not supported.

See Assembler language programming restrictions and requirements in Developing applications.

GET64 CONTAINER

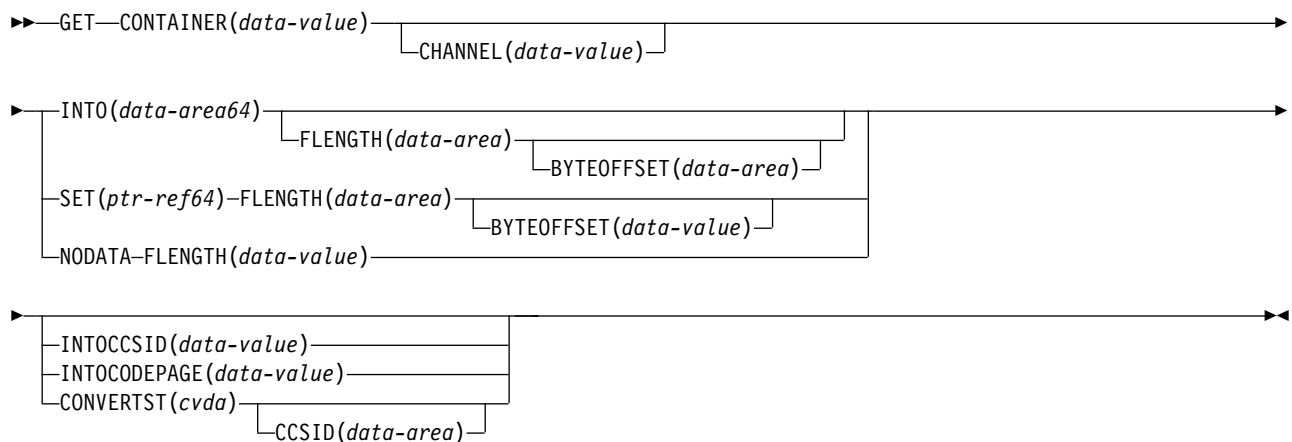

Conditions: CCSIDERR, CHANNELERR, CODEPAGEERR, CONTAINERERR, INVREQ, LENGERR

This command is threadsafe.

Description

GET64 CONTAINER reads the data associated with a specified channel container into 64-bit storage.

The container that holds the data is identified by name and by the channel for which it is a container: the channel that “owns” it. The channel that owns the container can be identified explicitly, by specifying the CHANNEL option, or implicitly, by omitting the CHANNEL option. When this option is omitted, the current channel is implied.

Options

BYTEOFFSET(*data-value*)

Specifies the offset in bytes where the data returned starts. For CHAR containers, the BYTEOFFSET value is used as an offset into the data in the requested code page. If you use a code page with multibyte characters, depending on the BYTEOFFSET value you specify, the data returned might have partial characters at the beginning, end, or both. In this situation, your application program must be able to handle and interpret the data returned. If the value specified is less than zero, zero is assumed.

CCSID(*data-area*)

Returns a fullword that contains the Coded Character Set Identifier (CCSID) of

the data returned by the CONVERTST(NOCONVERT) option. You can use this option to retrieve containers with a DATATYPE of CHAR, without converting the data. If a DATATYPE of BIT is specified for the container, this value is zero.

CHANNEL(*data-value*)

Specifies the name (1 - 16 characters) of the channel that owns the container. You can specify the channel name DFHTRANSACTION to use the transaction channel.

CONTAINER(*data-value*)

Specifies the name (1 - 16 characters) of the container that holds the data to retrieve.

CONVERTST(*cvda*)

Specifies the required data conversion status.

NOCONVERT

The container data is retrieved without being converted. If you used the **WEB RECEIVE** command to store the HTTP body in a container, and you need to retrieve the body unconverted from that container, you must use the NOCONVERT option.

FLENGTH(*data-area*)

As an input field, FLENGTH specifies, as a fullword binary value, the length of the data to be read. As an output field, FLENGTH returns the length of the data in the container. FLENGTH is an input or an output field depending on which of the BYTEOFFSET, INTO, SET, or NODATA options you specify.

BYTEOFFSET option specified

FLENGTH is both an input and an output field.

On **input**, FLENGTH specifies the maximum length of the data that the program accepts. The data returned begins at the offset specified by the BYTEOFFSET value. If the value specified is less than zero, zero is assumed.

On **output** (that is, on completion of the retrieval operation) CICS sets the data area to the length of the data returned. The maximum length returned is equal to the length of the data in the container minus the BYTEOFFSET value.

INTO option specified

FLENGTH is both an input and an output field.

On **input**, FLENGTH specifies the maximum length of the data that the program accepts. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs. If the length of the data is less than the specified value, the data is copied but no padding is performed.

You do not need to specify FLENGTH if the length can be generated by the compiler from the INTO variable. If you specify both INTO and FLENGTH, FLENGTH specifies the maximum length of the data that the program accepts.

On **output** (that is, on completion of the retrieval operation) CICS sets the data area, if specified, to the actual length of the data in the container. If the container holds character data that has been converted from one CCSID to another, this is the length of the data after conversion.

SET or NODATA option specified

FLENGTH is an output field only. It must be present and must be specified as a data-area.

On completion of the retrieval operation, the data area is set to the actual length of the data in the container. If the container holds character data that has been converted from one CCSID to another, this is the length of the data after conversion.

INTO(*data-area64*)

Specifies the 64-bit data area into which the retrieved data is placed. *data-area64* refers to an area that is referenced by a 64-bit pointer and that can be in 64-bit (above-the-bar) storage.

INTOCCSID(*data-value*)

Specifies the Coded Character Set Identifier (CCSID) into which the character data in the container is converted, as a fullword binary number. If you prefer to specify an IANA name for the code page, or if you prefer to specify the CCSID as alphanumeric characters, use the INTOCODEPAGE option instead.

For CICS Transaction Server for z/OS applications, the CCSID is typically an EBCDIC CCSID. However, it is possible to specify an ASCII CCSID if, for example, you want to retrieve ASCII data without it being automatically converted to EBCDIC.

If INTOCCSID and INTOCODEPAGE are not specified, the value for conversion defaults to the CCSID of the region. The default CCSID of the region is specified on the **LOCALCCSID** system initialization parameter.

Only character data can be converted, and only then if a DATATYPE of CHAR was specified on the **PUT CONTAINER** or **PUT64 CONTAINER** command used to place the data in the container. A DATATYPE of CHAR is implied if FROMCCSID or FROMCODEPAGE is specified on the **PUT CONTAINER** or **PUT64 CONTAINER** command.

For more information about data conversion with channels, see Data conversion with channels in Developing applications.

For an explanation of CCSIDs, see Preparing for code page conversion with channels in Developing applications.

INTOCODEPAGE(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the code page into which the character data in the container is converted, using up to 40 alphanumeric characters, including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

Where an IANA name exists for a code page and CICS supports its use, the name is listed with the CCSID. For more information, see Preparing for code page conversion with channels in Developing applications.

NODATA

Specifies that no data is retrieved. Use this option to discover the length of the data in the container (returned in FLENGTH).

The length of character data might change if data conversion takes place. Therefore, if character data is to be converted into any CCSID *other than that of*

this region, when you specify NODATA you should also specify INTOCCSID. This ensures that the correct length of the converted data is returned in FLENGTH.

SET(ptr-ref64)

Specifies a 64-bit pointer reference in which the 64-bit address of the retrieved data is returned. This pointer reference is always to 64-bit (above-the-bar) storage.

CICS maintains the data area until any of the following occurs:

- A subsequent **GET CONTAINER** or **GET64 CONTAINER** command with the SET option, for the same container in the same channel, is issued by any program that can access this storage.
- The container is deleted by a **DELETE CONTAINER** command.
- The container is moved by a **MOVE CONTAINER** command.
- The channel goes out of program scope.
- The channel, and the containers that are in it, are deleted by a **DELETE CHANNEL** command.

Beware of linking to other programs that might issue one of these commands.

Do not issue a **FREEMAIN64** command to release this storage.

If your application needs to keep the data, it should move it into its own storage.

Conditions

123 CCSIDERR

RESP2 values:

- 1 The CCSID specified on the INTOCCSID option is outside the range of valid CCSID values.
- 2 The CCSID specified on the INTOCCSID option and the CCSID of the container are an unsupported combination. (The CCSID of the container is the value that was specified using either FROMCODEPAGE or FROMCCSID, or defaulted, when the container was built.)
- 3 The data was created with a data type of BIT. Code page conversion is not possible. The data was returned without any code page conversion.
- 4 One or more characters could not be converted. The character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container.

122 CHANNELERR

RESP2 values:

- 2 The channel specified on the CHANNEL option could not be found.

125 CODEPAGEERR

RESP2 values:

- 1 The code page specified on the INTOCODEPAGE option is not supported.
- 2 The code page specified on the INTOCODEPAGE option and the code page of the channel are an unsupported combination.

- 3 The data was created with a data-type of BIT. Code page conversion is not possible. The data was returned without any code page conversion.
- 4 One or more characters could not be converted. The character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container.

110 CONTAINERERR

RESP2 values:

- 10 The container named on the CONTAINER option could not be found.

16 INVREQ

RESP2 values:

- 2 The INTOCCSID option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) INTOCCSID is valid only on GET64 CONTAINER commands that specify (explicitly or implicitly) a channel.
- 4 The CHANNEL option was not specified and there is no current channel (because the program that issued the command was not passed one).
- 5 The CONVERTST cvda value is invalid.

22 LENGERR

RESP2 values:

- 11 The length of the program area is shorter than the length of the data in the container. When the area is smaller, the data is truncated to fit into it.
- 12 The offset is greater than, or equal to, the length of the container.

HANDLE ABEND

Handle an abnormal termination exit.

HANDLE ABEND



Conditions: NOTAUTH, PGMIDERR (PROGRAM only)

This command is threadsafe.

Description

Use the **HANDLE ABEND** command to activate, cancel, or reactivate an exit for abnormal termination processing. You can suspend the command by using the **PUSH HANDLE** and **POP HANDLE** commands. See the *CICS Application Programming Guide*.

When a task terminates abnormally, CICS searches for an active abend exit, starting at the logical level of the application program in which the abend occurred, and proceeding to successively higher levels. The first active abend exit found, if any, is given control.

The **HANDLE ABEND** command cannot intercept abends that are issued with the **CANCEL** option. Some internal abends generated by CICS are issued with the **CANCEL** option, for example the ASPx or APSJ abend codes.

When the label specified in a **HANDLE ABEND LABEL** command receives control, the registers are set as follows:

COBOL

Control returns to the **HANDLE ABEND** command with the registers restored. COBOL GO TO statement is then executed.

Assembler

R15: Abend label. R0-14: Contents at the point when the last EXEC CICS command was issued.

If **LABEL** is specified, the addressing mode and execution key used are those of the program that issued the **HANDLE ABEND** command.

If **PROGRAM** is specified, the addressing mode is defined by the way the program is link-edited and the execution key is specified by the **EXECKEY** option on the resource definition of the program.

If a **COMMAREA** has been established, it will be passed to the specified **PROGRAM**. Where more than one application program was involved in the task, the **COMMAREA** that is passed to the abend exit is the **COMMAREA** of the program that issued the **HANDLE ABEND** command. This might not be the **COMMAREA** of the program in which the abend occurred.

If a current channel exists, it will be accessible from the specified PROGRAM.

Options

CANCEL

Specifies that a previously established exit at the logical level of the application program in control is canceled. This option is the default.

LABEL(*label*)

Specifies the program label to which control branches if abnormal termination occurs.

You cannot use this option for AMODE(64) assembler language, C, C++, or PL/I application programs.

PROGRAM(*name*)

Specifies the name of the program that control is passed to if the task is terminated abnormally. If the abend condition is raised and the specified program is not already defined, this program is autoinstalled.

The program named in this option should always terminate with an abend, except when handling abends generated as a result of application program logic.

RESET

Specifies that an exit canceled by a HANDLE ABEND CANCEL command, or by CICS, is reactivated.

This option is usually issued by an abnormal termination exit routine.

Conditions

70 NOTAUTH

Occurs when a resource security check has failed on PROGRAM(name).

Default action: terminate the task abnormally.

27 PGMIDERR

RESP2 values:

- 1 The program has no installed resource definition and autoinstall for programs is not active.
- 2 The program is disabled.
- 9 The installed program resource definition is for a remote program.

Default action: terminate the task abnormally.

Examples


The following example shows how to establish a program as an exit:

```
EXEC CICS HANDLE ABEND  
      PROGRAM('EXITPGM')
```

HANDLE AID

Handle attention identifiers (AIDs).

HANDLE AID

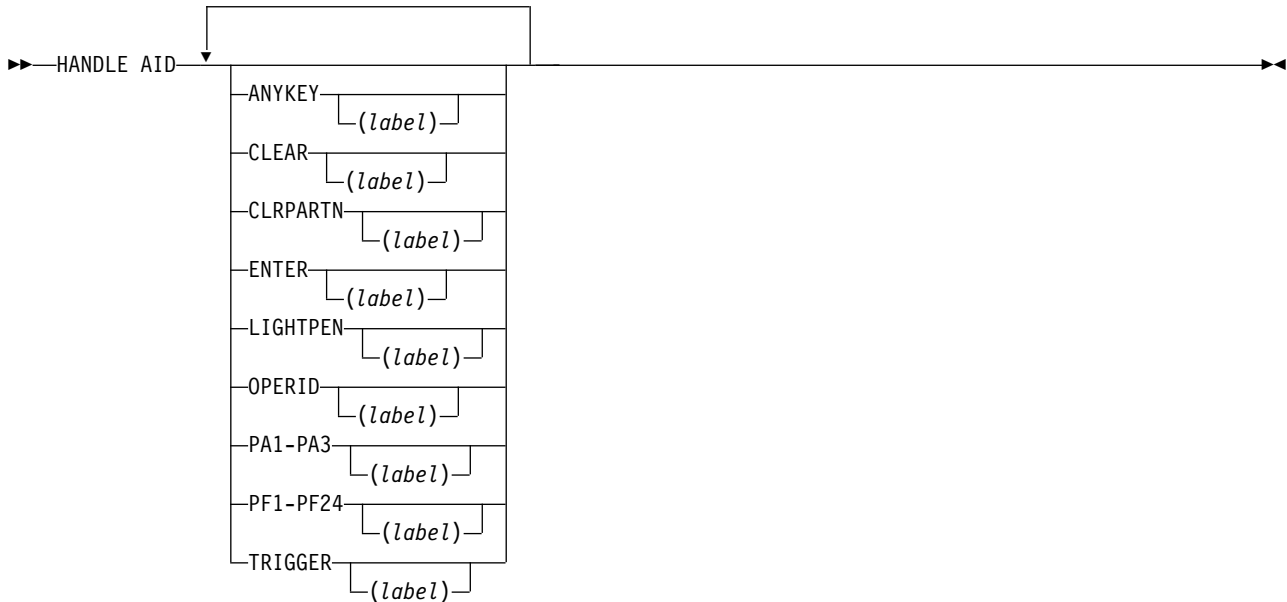

Condition: INVREQ

This command is threadsafe.

Description

You can use the HANDLE AID command to specify the label to which control is to be passed when an AID is received from a display device. Control is passed after the input command is completed; that is, after any data received in addition to the AID has been passed to the application program.

Restriction: This command is supported only in COBOL, PL/I, and assembler language applications (but not AMODE(64) assembler language applications). It is not supported in all other supported high level languages.

To ignore an AID, issue a HANDLE AID command that specifies the associated option **without** a label. This deactivates the effect of that option in any previously-issued HANDLE AID command.

If no HANDLE AID commands are in effect, that is, none have been issued or all have been canceled, control returns to the application program at the instruction immediately following the input command. Look in EIBAID to determine which key was pressed.

You can specify the following options:

- ANYKEY (any PA key, any PF key, or the CLEAR key, but not ENTER)
- CLEAR (for the key of that name)

- CLRPARTN (for the key of that name)
- ENTER (for the key of that name)
- LIGHTPEN (for a light-pen attention)
- OPERID (for the operator identification card reader, the magnetic slot reader (MSR), or the extended MSR (MSRE))
- PA1, PA2, or PA3 (any of the program access keys)
- PF1 through PF24 (any of the function keys)
- TRIGGER (for a trigger field attention)

You cannot include more than 16 options in the same command.

If a task is initiated from a terminal by means of an AID, the first RECEIVE command in the task does not read from the terminal but copies only the input buffer (even if the length of the data is zero) so that control can be passed by means of a HANDLE AID command for that AID.

For the standard attention identifier list (DFHAID), and the standard attribute and printer control character list (DFHBMSCA), see Appendix H, “BMS-related constants,” on page 925.

The label receives control in the same execution key as the execution key that the program was running in when the HANDLE AID command was issued.

A print key specified by the system PRINT initialization parameter takes precedence over a HANDLE AID command.

Conditions

16 INVREQ

RESP2 values:

- 200 The command was issued by a distributed program link server application.

Default action: terminate the task abnormally.

Example


The following example shows a HANDLE AID command that specifies one label for the PA1 key, and a second label for CLEAR, PA2, PA3, and all the function keys except PF10. If a PF10 AID is received, or ENTER is pressed, control returns to the application program at the instruction immediately following the input command.

```
EXEC CICS HANDLE AID PA1(LAB1)
      ANYKEY(LAB2) PF10
```

HANDLE CONDITION

Handle conditions.

HANDLE CONDITION



This command is threadsafe.

Description

Use the **HANDLE CONDITION** command to specify the label to which control is to be passed if a condition occurs. You must include the name of the condition and, optionally, a label to which control is to be passed if the condition occurs.

Restriction: This command is supported only in COBOL, PL/I, and assembler language applications (but not AMODE(64) assembler language applications). It is not supported in all other supported high level languages.

If you omit the label parameter, any **HANDLE CONDITION** command for the condition is deactivated, and the default action is taken if the condition occurs. This is independent of the setting of the generalized ERROR condition.

You must ensure that the **HANDLE CONDITION** command is executed before the command that might result in the associated condition.

You cannot include more than 16 conditions in the same command. The conditions must be separated by at least one space. You must specify any additional conditions in further **HANDLE CONDITION** commands.

If a condition occurs that is not specified in a **HANDLE CONDITION** or **IGNORE CONDITION** command, the default action is taken. However, if the default action for such a condition terminates the task abnormally, and the condition ERROR has been specified, the action for ERROR is taken.

The label receives control in the same execution key as the execution key that the program was running in when the **HANDLE CONDITION** command was issued.

Scope

The **HANDLE CONDITION** command for a given condition applies only to the program in which it is specified. The **HANDLE CONDITION** command remains active while the program is being executed, or until one of the following situations occurs:

- An **IGNORE CONDITION** command for the same condition is encountered. The **HANDLE CONDITION** command is overridden.
- Another **HANDLE CONDITION** command for the same condition is encountered. The new command overrides the previous one.
- A **LINK** command is executed to call another CICS program. The **HANDLE CONDITION** options are not inherited by the linked-to program.

The **HANDLE CONDITION** command is temporarily deactivated by the **NOHANDLE** or **RESP** option on a command.

Language considerations

In an assembler language application program, when a branch to a label is caused by a condition, the registers in the application program are restored to their values in the program at the point where the command that caused the condition is issued.

In a PL/I application program, a branch to a label in an inactive procedure or in an inactive begin block, caused by a condition, produces unpredictable results.

Options

condition(*label*)

Specifies the name of the condition. *label* specifies the location in the program to be branched to if the condition occurs.

For more information about the conditions, see EIB fields in Reference -> Application development.

Examples


The following example shows how to handle conditions such as **DUPREC** and **LENGERR** that can occur when you use a **WRITE** command to add a record to a data set. **DUPREC** is handled as a special case. Default action is taken for **LENGERR** (that is, the task is terminated abnormally). All other conditions are handled by the error routine **ERRHANDL**.

```
EXEC CICS HANDLE CONDITION  
      ERROR(ERRHANDL)  
      DUPREC(DUPRTN) LENGERR
```

IGNORE CONDITION

Ignore conditions.

IGNORE CONDITION



This command is threadsafe.

Description

Use the **IGNORE CONDITION** command to specify that no action is taken if a condition occurs (that is, control returns to the instruction following the command that failed to execute, and the EIB is set). Execution of a command might result in several conditions being raised. CICS checks these conditions in a predetermined order. Only the first one that is not ignored (by your **IGNORE CONDITION** command) is passed to your application program.

Restriction: This command is supported only in COBOL, PL/I, and assembler language applications (but not AMODE(64) assembler language applications). It is not supported in all other supported high level languages.

For information about the conditions, see EIB fields in Reference -> Application development.

The **IGNORE CONDITION** command for a given condition applies only to the program in which it is specified, and it remains active while the program is being executed, or until a **HANDLE CONDITION** command for the same condition is encountered, in which case the **IGNORE CONDITION** command is overridden.

You cannot include more than sixteen conditions in the same command. The conditions must be separated by at least one space. You can specify additional conditions in further **IGNORE CONDITION** commands.

Options


condition

Specifies the name of the condition to be ignored.

INQUIRE ACTIVITYID

Retrieve the attributes of a BTS activity.

INQUIRE ACTIVITYID

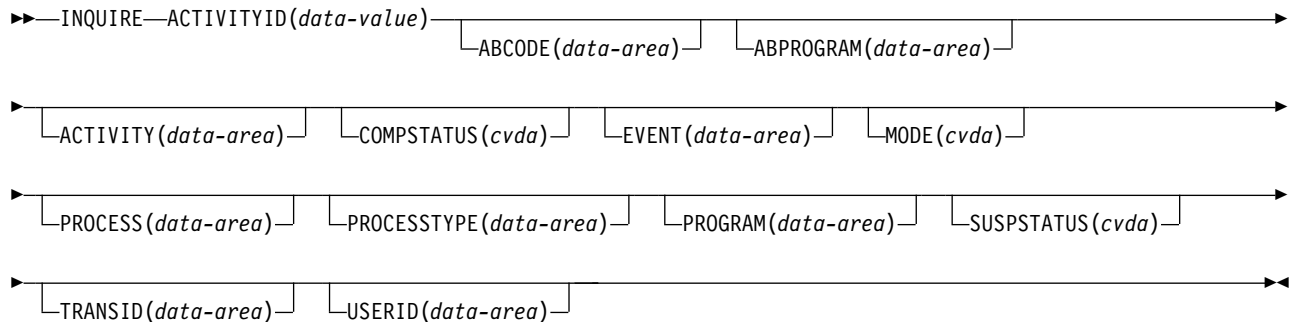

Conditions: ACTIVITYERR, NOTAUTH

Description

INQUIRE ACTIVITYID returns the attributes of a specified BTS activity.

You can use this command to get details of an activity whose identifier has been retrieved during a browse operation.

Options

ABCODE(data-area)

returns, if the activity terminated abnormally, the 4-character abend code.

ABPROGRAM(data-area)

returns, if the activity terminated abnormally, the 8-character name of the program that was in control at the time of the abend.

ACTIVITY(data-area)

returns the 16-character name of the activity being queried.

ACTIVITYID(data-value)

specifies the identifier (1–52 characters) of the activity to be queried. (Typically, the activity identifier will have been retrieved by a GETNEXT ACTIVITY command, during an activity browse.)

COMPSTATUS(cvda)

indicates the completion status of the activity. CVDA values are:

ABEND

The program that implements the activity abended. Any children of the activity have been canceled.

FORCED

The activity was forced to complete—for example, it was canceled with a CANCEL ACTIVITY command.

INCOMPLETE

The named activity is incomplete. This could mean:

- That it has not yet been run

- That it has returned from one or more activations but needs to be reattached in order to complete all its processing steps
- That it is currently active.

NORMAL

The named activity completed successfully.

EVENT(data-area)

returns the 16-character name of the completion event that is sent to the requestor of this activity when the activity completes asynchronously with the requestor.

MODE(cvda)

indicates the current state (mode) of the activity. CVDA values are:

ACTIVE

An activation of the activity is running.

CANCELLING

CICS is waiting to cancel the activity. A CANCEL ACTIVITY command has been issued, but CICS cannot cancel the activity immediately because one or more of the activity's children are inaccessible.

No further operations on the activity are permitted until it has been canceled.

COMPLETE

The activity has completed, either successfully or unsuccessfully. The value returned on the COMPSTATUS option tells you how it completed.

DORMANT

The activity is waiting for an event to fire its next activation.

INITIAL

No RUN or LINK command has yet been issued against the activity; or the activity has been reset by means of a RESET ACTIVITY command.

PROCESS(data-area)

returns the 36-character name of the process to which this activity belongs.

PROCESSTYPE(data-area)

returns the 8-character name of the process-type to which the process that contains this activity belongs.

PROGRAM(data-area)

returns the 8-character name of the program that executes when this activity is run.

SUSPSTATUS(cvda)

indicates whether the activity is currently suspended. CVDA values are:

SUSPENDED

The activity is currently suspended. If a reattachment event occurs, it will not be reactivated.

NOTSUSPENDED

The activity is not currently suspended. If a reattachment event occurs, it will be reactivated.

TRANSID(data-area)

returns the 4-character transaction identifier under which this activity runs.

USERID(data-area)

returns the 8-character identifier of the user under whose authority this activity runs.

Conditions**109 ACTIVITYERR**

RESP2 values:

- 1** The activity identifier specified on the ACTIVITYID option does not relate to any activity that is within the scope of this task.
- 19** The request timed out. It may be that another task using this activity-record has been prevented from ending.
- 29** The repository file is unavailable.
- 30** An input/output error has occurred on the repository file.

70 NOTAUTH


RESP2 values:

- 101** The user associated with the issuing task is not authorized to access this resource in the way requested.

INQUIRE CONTAINER

Retrieve the attributes of a BTS data-container.

INQUIRE CONTAINER

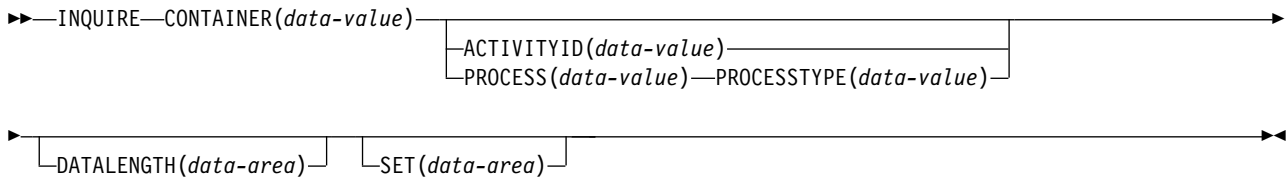

Conditions: ACTIVITYERR, CONTAINERERR, IOERR, NOTAUTH, PROCESSERR

Description

INQUIRE CONTAINER returns a pointer to the contents of a named BTS data-container, plus the length of the data.

To inquire upon a container associated with the current activity, omit the ACTIVITYID and PROCESS options.

To inquire upon a container associated with another activity, specify the ACTIVITYID option. (The activity identifier specified on the ACTIVITYID option may, for example, have been returned on a GETNEXT ACTIVITY command during a browse operation.)

To inquire upon a process container (including one associated with the *current* process), specify the PROCESS and PROCESSTYPE options.

Note:

1. Inquiring on a container of the current activity returns details of the in-storage version, rather than the committed version on the repository. This means that it's possible to see:
 - Containers that are not yet on the repository
 - Container contents that differ from those on the repository.
2. Inquiring on a container not owned by the current activity returns details of the committed version on the repository. However, the read of the repository record is “dirty”—the record is not locked. So, if the record is being updated by another task, it's possible for the returned data to be unreliable.

Options

ACTIVITYID(data-value)

specifies the identifier (1–52 characters) of the activity which the data-container is associated with.

If both this and the process options are omitted, the current activity is assumed.

CONTAINER(data-value)

specifies the name (1–16 characters) of the data-container being inquired upon.

DATALENGTH(data-area)

returns the fullword length of the data contained in the named data-container.

PROCESS(data-value)

specifies the name (1–36 characters) of the process which the data-container is associated with.

If both this and the ACTIVITYID option are omitted, the current activity is assumed.

PROCESSTYPE(data-value)

specifies the process-type (1–8 characters) of the process named in the PROCESS option.

SET(data-area)

returns a pointer to the contents of the data-container.

Conditions**109 ACTIVITYERR**

RESP2 values:

- 2 The activity indicated by the ACTIVITYID option could not be found.
- 3 Because neither the ACTIVITYID nor the PROCESS options were specified, an inquiry on the current activity was implied—but there is no current activity associated with the request.
- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

110 CONTAINERERR

RESP2 values:

- 1 The container specified on the CONTAINER option could not be found.

17 IOERR

RESP2 values:

- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to access this resource in the way requested.

108 PROCESSERR


RESP2 values:

- 2 The process-type specified on the PROCESSTYPE option could not be found.
- 4 The process specified on the PROCESS option could not be found.
- 13 The request timed out. It may be that another task using this process-record has been prevented from ending.
- 33 The process specified on the PROCESS option has not yet been committed.

INQUIRE EVENT

Retrieve the attributes of a BTS event.

INQUIRE EVENT

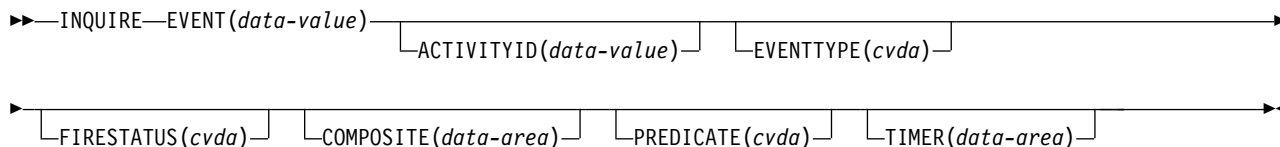

Conditions: ACTIVITYERR, EVENTERR, INVREQ, IOERR, NOTAUTH

Description

INQUIRE EVENT returns the attributes of a named BTS event.

To inquire upon an event associated with the current activity, omit the ACTIVITYID option. To inquire upon an event associated with another activity, specify the ACTIVITYID option. (The activity identifier specified on the ACTIVITYID option may, for example, have been returned on a GETNEXT ACTIVITY command during a browse operation.)

Options

ACTIVITYID(data-value)

specifies the identifier (1–52 characters) of the activity which the event is associated with.

If this option is omitted, the current activity is assumed.

COMPOSITE(data-area)

returns, if the named event is a sub-event, the 16-character name of the composite event that it is part of.

EVENT(data-value)

specifies the name (1–16 characters) of the event being inquired upon.

EVENTTYPE(cvda)

indicates the type of the named event. CVDA values are:

ACTIVITY

Activity completion

COMPOSITE

Composite

INPUT

Input

SYSTEM

System

TIMER

Timer.

FIRESTATUS(cvda)

indicates the state of the named event. CVDA values are:

FIRED

The event has fired normally.

NOTFIRED

The event has not fired.

PREDICATE(cvda)

indicates, if the named event is composite, the Boolean operator applied to its predicate. CVDA values are:

AND The Boolean operator applied to the predicate is AND.

OR The Boolean operator applied to the predicate is OR.

TIMER(data-area)

returns, if the named event is a timer event, the 16-character name of the timer.

Conditions**109 ACTIVITYERR**

RESP2 values:

3 The activity indicated by the ACTIVITYID option could not be found.

29 The repository file is unavailable.

30 An input/output error has occurred on the repository file.

111 EVENTERR

RESP2 values:

1 The event specified on the EVENT option could not be found.

16 INVREQ

RESP2 values:

1 There is no current activity within the scope of this task.

17 IOERR

RESP2 values:

30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

101 The user associated with the issuing task is not authorized to access this resource in the way requested.

INQUIRE PROCESS

Retrieve the attributes of a BTS process.

INQUIRE PROCESS

►►—INQUIRE—PROCESS(*data-value*)—PROCESSTYPE(*data-value*)—ACTIVITYID(*data-area*)—►►

Conditions: ILLOGIC, NOTAUTH, PROCESSERR

Description

INQUIRE PROCESS returns the attributes of a named BTS process. It can be used, for example, to obtain the identifier of the root activity of a process, in order to start a browse of the root activity's child activities, containers, or events.

Options

ACTIVITYID(*data-area*)

returns the 52-character identifier of the root activity of the process that is being queried.

PROCESS(*data-value*)

specifies the name (1–36 characters) of the process to be queried.

PROCESSTYPE(*data-value*)

specifies the process-type (1–8 characters) of the process to be queried.

Conditions

21 ILLOGIC

RESP2 values:

1 A browse of this resource type is already in progress.

70 NOTAUTH

RESP2 values:

101 The user associated with the issuing task is not authorized to access this resource in the way requested.

108 PROCESSERR

RESP2 values:


1 The process specified on the PROCESS option could not be found.

4 The process-type specified on the PROCESSTYPE option could not be found.

INQUIRE TIMER

Retrieve the attributes of a BTS timer.

INQUIRE TIMER

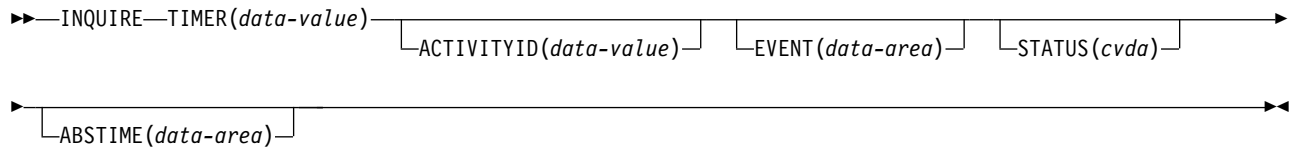

Conditions: ACTIVITYERR, INVREQ, IOERR, NOTAUTH, TIMERERR

Description

INQUIRE TIMER returns the attributes of a named BTS timer.

To inquire upon a timer associated with the current activity, omit the ACTIVITYID option. To inquire upon a timer associated with another activity, specify the ACTIVITYID option. (The activity identifier specified on the ACTIVITYID option may, for example, have been returned on a GETNEXT ACTIVITY command during a browse operation.)

Options

ABSTIME(data-area)

returns, in packed decimal format, the time at which the timer will expire, expressed in milliseconds since 00:00 on 1 January 1900 (rounded to the nearest hundredth of a second).

You can use FORMATTIME to change the data into other familiar formats.

ACTIVITYID(data-value)

specifies the identifier (1–52 characters) of the activity which the timer is associated with.

If this option is omitted, the current activity is assumed.

EVENT(data-area)

returns the 16-character name of the event (if any) associated with the timer.

STATUS(cvda)

indicates the state of the timer. CVDA values are:

EXPIRED

The timer expired normally.

FORCED

Expiry of the timer was forced by means of a FORCE TIMER command.

UNEXPIRED

The timer has not yet expired.

TIMER(data-value)

specifies the name (1–16 characters) of the timer.

Conditions

109 ACTIVITYERR

RESP2 values:

- 3 The activity indicated by the ACTIVITYID option could not be found.
- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of a currently—active activity.

17 IOERR

RESP2 values:

- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to access this resource in the way requested.

115 TIMERERR

RESP2 values:


- 1 The timer specified on the TIMER option could not be found.

INVOKE APPLICATION

Invoke an application entry point program. **EXEC CICS INVOKE APPLICATION** allows invocation of an application by naming an operation that corresponds to one of its program entry points, without having to know the name of the application entry point program and regardless of whether the program is public or private.

The application must be in an AVAILABLE state. If multiple versions of the application are in an AVAILABLE state, the entry point programs of the highest version of the application are the ones that are public, and so can be linked to by using an **EXEC CICS LINK** command. The **INVOKE APPLICATION** command allows lower versions of the application to be invoked, by specifying a version as well as an operation, and this corresponds to a private entry point program.

INVOKE APPLICATION

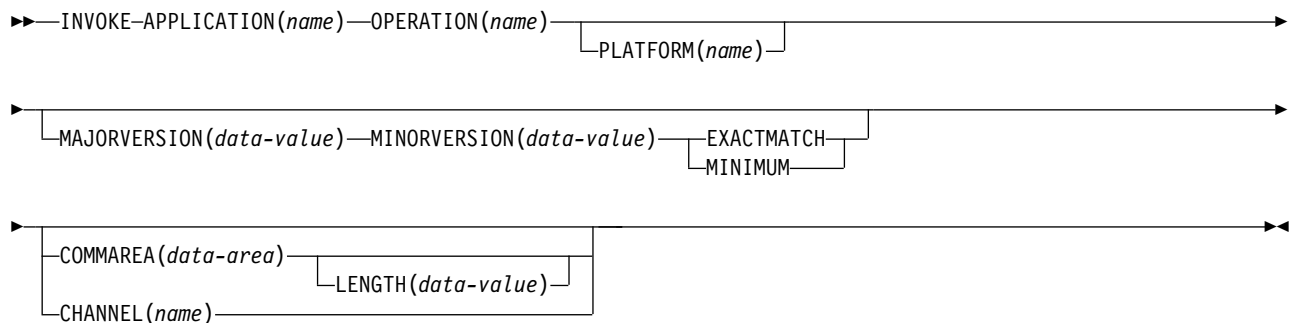

Conditions: APPNOTFOUND, CHANNELERR, INVREQ, LENGERR, NOTAUTH, PGMIDERR

This command is threadsafe.

Description

The **INVOKE APPLICATION** command links to a local program, which is the entry point to the specified application for the specified operation. It passes control from an application program at one logical level to an application program at the next lower logical level.

This command operates in the current platform context. If the command does not specify a platform name, the current platform name is used. If there is no current platform, then the command fails with a response of APPNOTFOUND.

For more information, and examples of how you can use the **EXEC CICS INVOKE APPLICATION** command, see Invoking a multi-versioned application in Administering.

Options

APPLICATION *(name)*

Specifies the name (1 - 64 characters) of the application. The acceptable characters are: a-z A-Z 0-9 . _ # @ -

CHANNEL *(name)*

Specifies the name (1 - 16 characters) of a channel that is to be made available to the called program. The acceptable characters are: A-Z a-z 0-9 \$ @ # / % & ?

! : | " = ~ , ; < > . - _ . Leading and embedded blank characters are not permitted. If the name supplied is fewer than 16 characters, it is padded with trailing blanks up to 16 characters. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see *The scope of a channel in Developing applications*.

Channel names are always in EBCDIC. The set of allowed characters for channel names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if channels are to be transferred between regions, it is advisable to restrict the characters that are used to name them to A-Z a-z 0-9 & : = , ; < > . - and _.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see *Channels and containers in Developing applications*.

The program that issues the INVOKE command can do one of the following:

- Have already created the channel by using one or more **PUT CONTAINER CHANNEL** or **PUT64 CONTAINER** commands.
- Specify its current channel, by name.
- Name a channel that does not currently exist. A new empty channel is created.

COMMAREA(*data-area*)

Specifies a communication area that is to be made available to the called program. In this option, the data area is passed, and you must give it the name DFHCOMMAREA in the receiving program. See *Passing data to other programs in Developing applications*.

EXACTMATCH

Specifies that an exact match on the application major version number and minor version number is required. If not found then an APPNOTFOUND condition is returned.

Note: There is no match criteria for micro version. The highest micro version is always used.

LENGTH(*data-value*)

Specifies a halfword binary value that is the length in bytes of the COMMAREA (communication area). This value must not exceed 24 KB if the COMMAREA is to be passed between any two CICS servers (for any combination of product, version, and release). This limit allows for the COMMAREA and space for headers.

Ensure that the value you specify matches the length of the data that is being passed in the COMMAREA. Do not specify 0 (zero) for LENGTH because the resulting behavior is unpredictable and the **EXEC CICS LINK** command might fail.

When you use a COMMAREA to pass data, the program that is linked to must verify that the EIBCALEN field in the EIB of the task matches what the program expects. Discrepancies might result in storage violations or system failures. For more information, see *COMMAREA in Developing applications*.

MAJORVERSION(*data-value*)

Specifies the major version number of the application as a fullword binary value.

If MAJORVERSION is specified, then MINORVERSION must also be specified. If no version is specified, then the highest major and minor version of the application is invoked.

MINIMUM

Specifies that the specified minor version number is the minimum that is required, but use a higher version if it is available. If multiple higher minor versions are available the highest is used. This applies to minor version numbers only. The major version number cannot be exceeded and must match exactly. If no higher minor version exists nor the minimum required minor version, then an APPNOTFOUND condition is returned.

Note: There is no match criteria for micro version. The highest micro version is always used.

MINORVERSION(*data-value*)

Specifies the minor version number of the application as a fullword binary value.

If MINORVERSION is specified, then MAJORVERSION must also be specified. If no version is specified, then the highest major and minor version of the application is invoked.

The EXACTMATCH or MINIMUM keywords specify the matching criteria for the major and minor versions.

OPERATION(*name*)

Specifies the name (1 - 64 characters) of the application operation which the application entry point program implements. The acceptable characters are: a-z A-Z 0-9 . _ # @ -

PLATFORM(*name*)

Specifies the name (1 - 64 characters) of the platform on which the application is installed. The acceptable characters are: a-z A-Z 0-9 . _ # @ -

If no platform name is specified, the current platform name is used. If there is no current platform, then the command fails with a response of APPNOTFOUND.

Conditions

127 APPNOTFOUND

RESP2 values:

- 1 The EXACTMATCH keyword is specified and the required version of the application cannot be found.
- 2 The MINIMUM keyword is specified and no minimum level or higher microversion of the application can be found.
- 3 No version was specified. No application can be found.

Default action: end the task abnormally.

An application might not be found for a number of reasons:

- The application is not in an AVAILABLE state.
- The named operation does not correspond to an entry point program for the application.
- The application is not installed on this platform.
- The CICS region is not part of the platform name specified.

122 CHANNELERR

RESP2 values:

- 1 The name that is specified on the CHANNEL option contains an invalid character or combination of characters.

Default action: end the task abnormally.

16 INVREQ

RESP2 values:

- 1 No Platform name is specified and there is no current platform.
- 2 The application entry point program is a Java program but the user class cannot be found.
- 3 The application entry point program is a Java program but the JVMSERVER cannot be found.
- 4 The application entry point program is a Java program but the JVMSERVER resource is not enabled.

Default action: end the task abnormally.

22 LENGERR

RESP 2 values:

- 11 The COMMAREA length is less than 0 or greater than the permitted length.
- 26 The COMMAREA address is zero, but the COMMAREA length is nonzero.

Default action: end the task abnormally.

70 NOTAUTH

RESP2 values:

- 101 A resource security check has failed on the name of the application entry point program that implements the operation for the specified application.

Default action: end the task abnormally.

27 PGMIDERR

RESP2 values:


- 1 The application entry point program is disabled.
- 2 The application entry point program could not be loaded

Default action: end the task abnormally.

INVOKE SERVICE

Call a service from a CICS application. The command specifies the name of a service or the CICS resource, such as a WEBSERVICE resource, that contains information about the service to be called.

INVOKE SERVICE

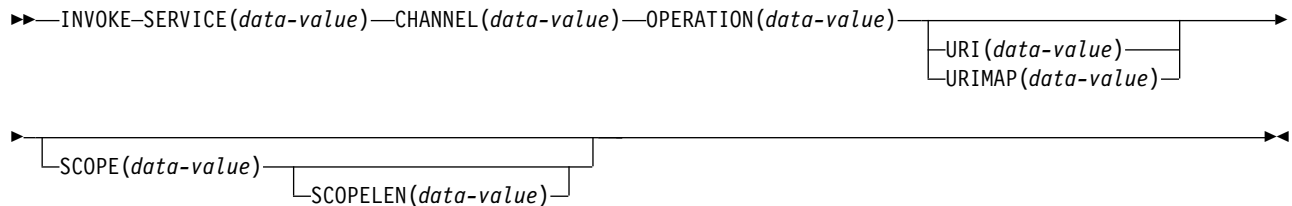

Conditions: INVREQ, LENGERR, NOTFND, TIMEDOUT

This command is threadsafe.

Description

Use the **INVOKE SERVICE** command in CICS applications to call a service; for example, the application can act as a web service requester and call an XML-based service, or the application can call another CICS application that is acting as a channel-based service. For more information about these two types of services, see the *CICS Application Programming Guide*.

Use this command for all new web service applications, rather than the **INVOKE WEBSERVICE** command, which is a synonym. If you use this command for web services, you must supply specific containers to CICS as input. For more information on writing a web service application, see the *CICS Web Services Guide*.

When you invoke the service, you can specify a URIMAP resource that contains the information about the URI of the service. You can specify this information directly on the INVOKE SERVICE command instead of using a URIMAP resource. However, using a URIMAP resource has the following advantages:

- System administrators can manage any changes to the endpoint of the connection, so you do not need to recompile your applications if the URI of a service provider changes.
- You can choose to make CICS keep the connections that were opened with the URIMAP resource open after use, and place them in a pool for reuse by the application for subsequent requests, or by another application that calls the same service. Connection pooling is only available when you specify a URIMAP resource that has the SOCKETCLOSE attribute set. For more information about the performance benefits of connection pooling, see Connection pooling for HTTP client performance in Improving performance.

The **INVOKE SERVICE** command drives the XWBOPEN user exit, which can make the connection to the server go through a proxy server, if required.

Options

CHANNEL(data-value)

Specifies the name of the channel used to pass the containers that hold the

data mapped by the application data structure. On return, the same channel holds the response from the web service, again mapped by the application data structure. The name of the channel can be up to 16 characters. If *name* is a variable, and it contains a name that is less than 16 characters, then the variable must be padded with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

OPERATION(*data-value*)

Specifies a data area containing the name of the operation that is to be invoked. The name of the operation is contained in the WSDL for the target web service. The data area must be 255 characters long; if the operation name is less than 255 characters, then the data area must be padded with trailing blanks.

SERVICE(*data-value*)

Specifies the name of the service:

- If you want to invoke a web service, specify the name of the WEBSERVICE resource that defines the web service. The WEBSERVICE resource specifies the location of the web service description and the web service binding file that CICS uses when it communicates with the web service. The name of the WEBSERVICE resource can be up to 32 characters. The value must be padded with trailing blanks if there are less than 32 characters.
- If you want to invoke a channel-based service, specify the name of the service. The format of the service is a URI. The name can be up to 32 characters. The value must be padded with trailing blanks if there are less than 32 characters.

SCOPE(*data-value*)

Specifies a scope prefix for the service name. Use SCOPE if you require a service name longer than the 32 character limit imposed by the SERVICE option.

Note: SCOPE only applies to channel-based services.

If you are writing a COBOL program that is translated with the COBOL3 translator option, the length of the data value cannot exceed 160 bytes. If you are using the COBOL2 translator option, you must use a data area instead of a data value.

SCOPELEN(*data-value*)

A fullword binary value that specifies the length of the scope that prefixes the service name.

URI(*data-value*)

Specifies a data area containing the URI of the service to be invoked. If specified, this option supersedes any URI specified in the WEBSERVICE resource definition. If you omit both this option and the URIMAP option, the WEBSERVICE binding file associated with the resource definition must include either a provider URI or a provider application name. The data area must be 255 characters long; if the URI is less than 255 characters, the data area must be padded with trailing blanks. For information about the format of URIs, see the topic "The components of a URL" in the *CICS Internet Guide*.

Do not specify this option for web services that use WS-Addressing.

Do not specify this option if you use connection pooling; use the URIMAP option instead to specify an appropriate URIMAP resource to enable connection pooling.

URIMAP(*data-value*)

Specifies the name of a URIMAP resource that CICS uses to derive the URI

value. Use a URIMAP resource if you want to enable connection pooling, where CICS keeps the client HTTP connection open for this application or another application to reuse. If specified, this option supersedes any URI specified in the WEBSERVICE resource definition. If you omit both this option and the URI option, the WEBSERVICE binding file associated with the resource definition must include either a provider URI or a provider application name.

You must create the URIMAP resource for an HTTP client request with the attribute USAGE(CLIENT). For connection pooling, you must also set the SOCKETCLOSE attribute. The CICS web services assistant does not create the URIMAP resource, so you must define it yourself. For information about creating a URIMAP resource for a client request, see the topic "Creating a URIMAP definition for an HTTP request by CICS as an HTTP client" in the *CICS Internet Guide*.

Do not specify this option for web services that use WS-Addressing.

Conditions

16 INVREQ

RESP2 values:

- 1 The name specified for the CHANNEL option contains an illegal character or combination of characters.
- 2 The name specified for the OPERATION option contains an illegal character or combination of characters.
- 3 The web service binding file associated with the WEBSERVICE is invalid.
- 4 The value specified for the URI contained an illegal character or combination of characters, or the specified host name could not be resolved.
- 5 The PIPELINE used by the WEBSERVICE is defined as a service requester pipeline but is invoked in a service provider or *vice versa*.
- 6 The invoked WEBSERVICE returned a SOAP fault. The description of the fault is available in its XML format in the container DFHWS-BODY.

Note: This condition is not raised for XML-ONLY web service invocations.

- 7 The URI option was not specified on the command, and the WEBSERVICE definition does not specify a URI or a program name.
- 8 The WEBSERVICE is not in service
- 9 A container does not have the correct DATATYPE. This may be the **DFHWS-DATA** container, or another container referenced in the application data. The **DFHWS-DATA** container and most other application data containers must be populated in BIT mode. Any containers that hold XML markup must be populated in CHAR mode.
- 10 The PIPELINE used by the WEBSERVICE is not enabled.
- 11 CICS could not link to the program specified in the WEBSERVICE definition.
- 12 The containers that the command expects were not on the correct channel.
- 13 An input error was detected either generating a SOAP request message

or processing a SOAP response message. A DFHPIxxxx message is written to MSGUSR to document the problem in more detail. It is likely that the application data structure contains invalid data that cannot be converted to a SOAP request message. For more information, see the error message in the DFH-XML-ERRORMSG container.

- 14 A conversion error occurred when CICS attempted to convert between the application data structure and the SOAP message. Either the application data structure contains invalid data that cannot be converted to a SOAP request, or data in the SOAP response message cannot be converted into the application's data structure. Some possible causes of this condition are:

- A value in the SOAP response message is larger than the corresponding field in the application's data structure.
- When building the SOAP request, the web services binding file indicates that a data field contains packed decimal or zoned decimal data, and the contents of the field are invalid for this data type.

A DFHPIxxxx message is written to MSGUSR to document the problem in more detail. For more information, see the error message in the DFH-XML-ERRORMSG container.

- 15 An unhandled error has occurred in the pipeline. Information about the error is in container DFHERROR.
- 16 A locally optimized web service has abended. The underlying unit of work has been backed out.
- 17 A remote web service request did not return a response message.
- 18 The container **DFHWS-BODY** has not been populated by an application for an XML-ONLY WEBSERVICE.
- 19 A URI or a URIMAP has been specified, but this option is not allowed when the WEBSERVICE resource has a default WS-Addressing endpoint reference or the WS-Addressing context has been built using the **WSACONTEXT BUILD** API command.
- 20 The specified URIMAP does not have a valid scheme.
- 21 The specified URIMAP is not client mode.
- 22 The specified URIMAP is not enabled.
- 23 An unspecified transport or link failure occurred when attempting to use the pipeline. CICS issues a message to document the specific problem.
- 24 z/OS Connect pipeline was used.
- 41 The connection has been closed.
- 101 The container **DFHWS-BODY** does not have the correct DATATYPE. For this container, a DATATYPE of CHAR must be specified.
- 103 The container **DFHWS-BODY** contains no data.
- 104 Either the container **DFHREQUEST** or the container **DFHWS-BODY** is missing.
- 105 A fault was built within the service requester PIPELINE used by the WEBSERVICE, either while the request was being sent, or while the response was being processed. This condition could indicate that a header processing program has issued a fault.

- 106 Either the generated SOAP request message was not well formed, or the SOAP response message was not well formed. This condition could indicate that the XML parser returned a fatal error code.
- 107 Either the generated SOAP request message was not a valid SOAP message, or the SOAP response message was not a valid SOAP message.
- 109 109 HTTP redirect (301, 302, 303, or 307) response was returned. The Location header is available in the **DFHWS-LOCATION** container.

22 LENGERR

RESP 2 values:

- 1 Either the SCOPELEN option was not specified or it was not a valid value.

13 NOTFND

RESP2 values:

- 1 The web service binding file associated with the WEBSERVICE specifies the name of a SOAP message parsing program supplied by another product, but the parsing program could not be found.
- 2 The specified CHANNEL could not be located.
- 3 The specified OPERATION was not in the web service binding file.
- 4 The specified WEBSERVICE could not be located.
- 5 A CONTAINER specified in the web service binding file could not be located.
- 6 The specified URIMAP could not be located.

124 TIMEDOUT

RESP2 values:

- 1 An expected timeout has occurred. When the message exchange pattern specifies an optional error response, and an error response is not returned from the remote web service, the timeout is acceptable.
- 2 An unexpected timeout has occurred. A response was expected from the remote web service, but none was received.
- 62 An unexpected timeout has occurred on socket receive.

INVOKE WEBSERVICE

Call a service from a CICS application. This command is a synonym of the **INVOKE SERVICE** command and is provided for compatibility with existing web service requester applications. Use **INVOKE SERVICE** for any new web service applications.

Description

For details of the **INVOKE SERVICE** command, see “INVOKE SERVICE” on page 335.

ISSUE ABEND

Abend the mapped conversation with an APPC partner.

ISSUE ABEND (APPC)

►►—ISSUE ABEND—┐┐CONVID(*name*)┐┐STATE(*cvda*)┐┐—►►

Conditions: INVREQ, NOTALLOC, TERMERR

Description

ISSUE ABEND abnormally ends the conversation. The partner transaction sees the TERMERR condition.

Options

CONVID(*name*)

identifies the conversation to be abended. The 4-character name identifies either the symbolic identifier returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the symbolic identifier representing the principal facility (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If both CONVID and SESSION are omitted, the principal facility is assumed.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- ISSUE ABEND is used on any conversation other than an EXEC CICS APPC mapped conversation.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the specified CONVID value relates to a conversation that is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE command causes an ATCV abend.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE ABORT

End processing of a data set abnormally.

ISSUE ABORT

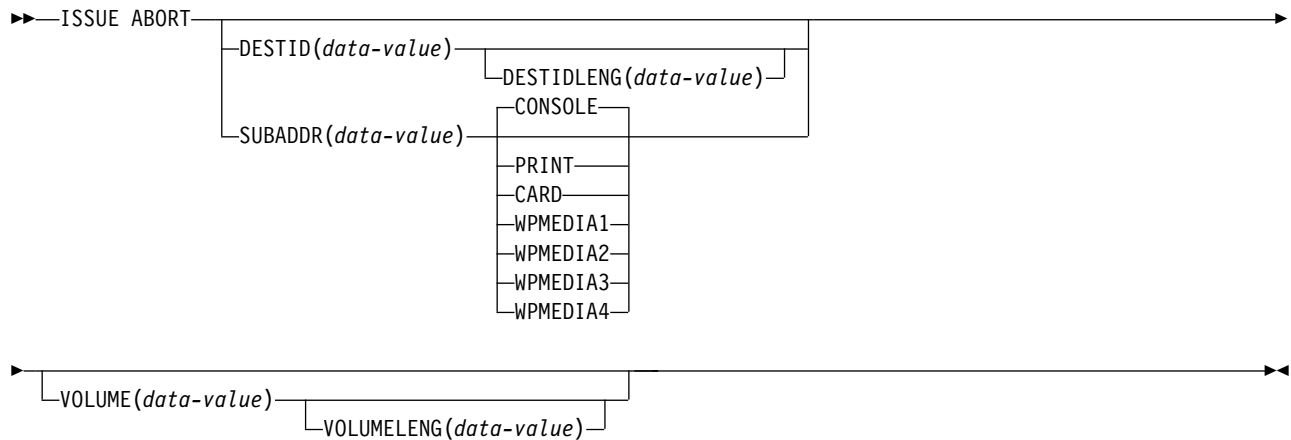

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE ABORT ends communication with a data set in an outboard controller, or the selected medium, abnormally. The data set specified in the DESTID option is deselected abnormally. The options CONSOLE, PRINT, CARD, and WPMEDIA1–4 are alternatives to DESTID and DESTIDLENG.

Options

CARD

specifies that the output medium is a card reader or card punch device. This option is not valid with DESTID and DESTIDLENG.

CONSOLE

specifies that the output medium is that provided for messages to the operator. This option is not valid with DESTID and DESTIDLENG. This refers to a programmable subsystem such as the IBM 3790 data communication system. It does not refer to a CICS or system console.

DESTID(*data-value*)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the DESTID option.

PRINT

specifies that the output medium is a printer.

SUBADDR(*data-value*)

specifies the medium subaddress as a halfword binary value (in the range 0

through 15) which allows media of the same type, for example, “printer 1” or “printer 2”, to be defined. Value 15 means a medium of any type. The default is zero.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

WPMEDIA1 through WPMEDIA4

specifies that, for each specific LUTYPE4 device, a word-processing medium is defined to relate to a specific input/output device.

Conditions

48 FUNCERR

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE ADD

Add a record to a data set.

ISSUE ADD

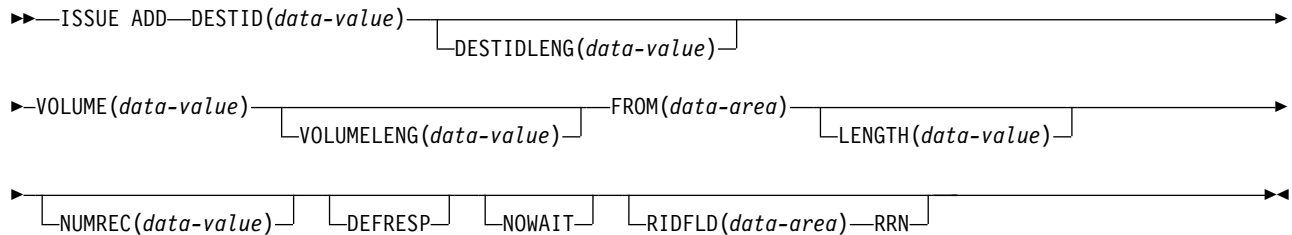

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE ADD adds records to a sequential or keyed direct data set in an outboard controller. The FROM option is used to specify the data to be written, and the LENGTH option specifies its length.

The RIDFLD option is only needed with this command when it applies to a DPCX/DXAM data set. In this case, it specifies the relative record number of the record to be added. When RIDFLD is used, NUMREC must be 1 (the default).

Options

DEFRESP

specifies that all terminal control commands issued as a result of the ISSUE ADD command are to request a definite response from the outboard batch program, irrespective of the specification of message integrity for the CICS task (by the system programmer).

DESTID(*data-value*)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the DESTID option.

FROM(*data-area*)

specifies the data to be written to the data set.

LENGTH(*data-value*)

specifies the length (halfword binary value) of the data to be written. For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

NOWAIT

specifies that the CICS task continues processing without waiting for the ISSUE ADD command to complete. If this option is not specified, the task activity is suspended until the command is completed.

NUMREC(*data-value*)

for a relative record data set, specifies as a halfword binary value the number of logical records to be added. Records are replaced sequentially starting with the one identified by the RIDFLD option.

For an indexed data set, NUMREC cannot be specified because only one record can be added.

RIDFLD(*data-area*)

specifies, for a relative record data set, a 4-character field as the relative record number (starting from zero) of the record. The RRN option is also required.

For a keyed direct data set, RIDFLD should specify a key.

RRN

specifies that the record identification field specified in the RIDFLD option contains a relative record number. This option is required for a relative record data set.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

Conditions**48 FUNCERR**

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE CONFIRMATION

Issue a positive response to a SEND CONFIRM on an APPC mapped conversation.

ISSUE CONFIRMATION (APPC)



Conditions: INVREQ, NOTALLOC, SIGNAL, TERMERR

Description

ISSUE CONFIRMATION allows an application program to respond positively when the CONFIRM option has been specified on a SEND command executed by a partner transaction.

Options

CONVID(*name*)

identifies the conversation in which to send the response. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal facility (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If both CONVID and SESSION are omitted, the principal facility is assumed.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- ISSUE CONFIRMATION is used on a conversation that is either of the following:
 - Sync level 0
 - Not APPC mapped

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the specified CONVID value relates to a conversation that is not owned by the application.

Default action: terminate the task abnormally.

24 SIGNAL

occurs when an inbound SIGNAL data-flow control command is received from a partner transaction. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE causes an ATCV abend.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE COPY (3270 logical)

Copy data from 3270 logical unit.

ISSUE COPY (3270 logical)

►►—ISSUE COPY—TERMINID(*name*)—CTLCHAR(*data-value*)—WAIT—►►

Conditions: LENGERR, NOTALLOC, TERMERR

Description

ISSUE COPY copies the format and data contained in the buffer of a specified terminal into the buffer of the terminal that started the transaction. Both terminals must be attached to the same remote control unit.

Options

CTLCHAR(*data-value*)

specifies a 1-byte copy control character (CCC) that defines the copy function. A COBOL user must specify a data area containing this character. If the option is omitted, the contents of the entire buffer (including nulls) are copied.

TERMINID(*name*)

specifies the name (1–4 characters) of the terminal whose buffer is to be copied. The terminal must have been defined in the TCT.

WAIT

specifies that processing of the command must be completed before any subsequent processing is attempted.

If the WAIT option is not specified, control is returned to the application program once processing of the command has started. A subsequent input or output request (terminal control, BMS, or batch data interchange) to the terminal associated with the task causes the application program to wait until the previous request has been completed.

Conditions

22 LENGERR

occurs if an out-of-range value is supplied.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a terminal-related error.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE DISCONNECT (default)

Terminate a session between CICS and a logical unit or terminal.

ISSUE DISCONNECT (default)

►►—ISSUE DISCONNECT—◄◄

Conditions: SIGNAL, TERMERR

Description

ISSUE DISCONNECT terminates sessions between CICS and the following terminals or logical units:

- 3270-display logical unit (LUTYPE2)
- 3270-printer logical unit (LUTYPE3)
- LUTYPE4 logical unit
- 3270 SCS printer logical unit
- 2260 or 2265 display station
- 3270 logical unit
- 3600 pipeline logical unit
- 3600(3601) logical unit
- 3600(3614) logical unit
- 3630 plant communication system
- 3650 interpreter logical unit
- 3650 host conversational (3270) logical unit
- 3650 host conversational (3653) logical unit
- 3650(3680) host command processor logical unit
- 3767/3770 interactive logical unit
- 3770 batch logical unit
- 3790 logical units

Conditions

For most terminal and logical unit types, ISSUE DISCONNECT raises no conditions. Exceptions are:

24 SIGNAL

occurs only for an ISSUE DISCONNECT for LUTYPE4, 3600(3601), 3767 interactive, 3770 batch, and 3790 full-function logical units.

It occurs when an inbound SIGNAL data-flow control command is received from a logical unit or session. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs only for an ISSUE DISCONNECT for LUTYPE4 logical units.

It occurs for a terminal-related error, such as a session failure. This condition applies to SNA-connected LUs only. Because of the asynchronous nature of this condition, the application program should check, using SEND CONFIRM or SYNCPOINT, to make sure any errors still outstanding have been resolved before it relinquishes control. If you want to handle this condition, you must first issue a FREE command to free the session. If you do not do this, an INVREQ condition occurs, plus an ATCV abend if you do not handle this condition.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE DISCONNECT (LUTYPE6.1)

Disconnect an LUTYPE6.1 logical unit.

ISSUE DISCONNECT (LUTYPE6.1)



Conditions: NOTALLOC, TERMERR

Description

ISSUE DISCONNECT disconnects the unit, if DISCREQ=YES is set in the TYPETERM resource definition.

Options

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be disconnected. If this option is omitted, the principal facility for the task is disconnected.

Conditions

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a terminal-related error, such as a session failure.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally withabend code ATNI.

ISSUE END

End processing of a data set.

ISSUE END

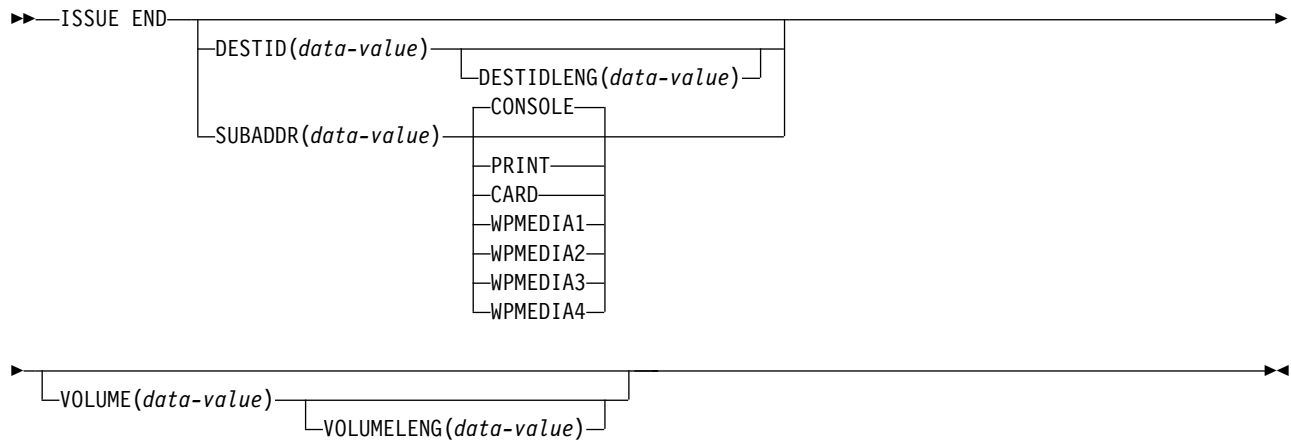

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE END ends communication with a data set in an outboard controller or with the selected medium. The data set specified in the DESTID option, or the selected medium, is deselected normally. The options CONSOLE, PRINT, CARD, and WPMEDIA1–4 are alternatives to DESTID and DESTIDLENG.

Options

CARD

specifies that the output medium is a card reader or card punch device. This option is not valid with DESTID and DESTIDLENG.

CONSOLE

specifies that the output medium is that provided for messages to the operator. This option is not valid with DESTID and DESTIDLENG. This refers to a programmable subsystem such as the IBM 3790 data communication system. It does not refer to a CICS or system console.

DESTID(data-value)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(data-value)

specifies the length (halfword binary value) of the name specified in the DESTID option.

PRINT

specifies that the output medium is a printer.

SUBADDR(data-value)

specifies the medium subaddress as a halfword binary value (in the range

0–15) that allows media of the same type, for example, “printer 1” or “printer 2”, to be defined. Value 15 means a medium of any type. The default is zero.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

WPMEDIA1 through WPMEDIA4

specifies that, for each specific LUTYPE4 device, a word-processing medium is defined to relate to a specific input/output device.

Conditions

48 FUNCERR

occurs if there is an error during the execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE ENDFILE

Indicate the end-of-file condition to the 3740 data entry system.

ISSUE ENDFILE



Condition: INVREQ, NOTALLOC

Description

ISSUE ENDFILE indicates the end-of-file condition to the 3740.

Options

83 ENDOUTPUT

indicates the end-of-output condition as well as end of file.

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application attempted to send on its function shipping session, its principal facility.

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

ISSUE ENDOUTPUT

Indicate the end-of-output condition to the 3740 data entry system.

ISSUE ENDOUTPUT



Condition: INVREQ, NOTALLOC

Description

ISSUE ENDOUTPUT indicates the end-of-output condition to the 3740.

Options

20 ENDFILE

indicates the end-of-file condition as well as end of output.

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application attempted to send on its function shipping session, its principal facility.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

ISSUE EODS

Send end-of-data-set function management header to the 3650 interpreter logical unit.

ISSUE EODS

►►—ISSUE EODS—◄◄

Conditions: INVREQ, NOTALLOC, TERMERR

Description

ISSUE EODS issues the end-of-data-set management header.

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application attempted to send on its function shipping session, its principal facility.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a terminal-related error, such as a session failure.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE ERASE

Delete a record from a data set.

ISSUE ERASE

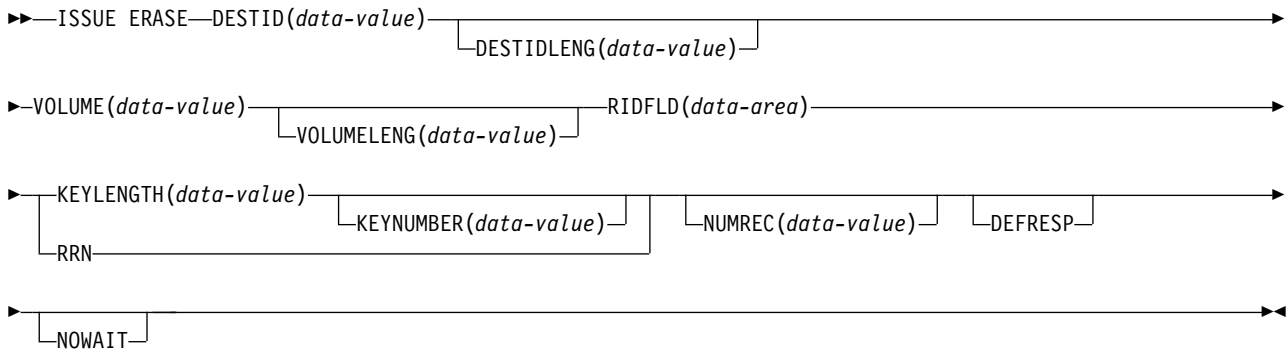

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE ERASE deletes a record from a keyed direct data set in an outboard controller, or erases a record from a DPCX or DXAM relative record data set.

Options

DEFRESP

specifies that all terminal control commands issued as a result of the ISSUE ERASE command are to request a definite response from the outboard batch program, irrespective of the specification of message integrity for the CICS task (by the system programmer).

DESTID(*data-value*)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the DESTID option.

KEYLENGTH(*data-value*)

specifies the length of the key specified in the RIDFLD option, as a halfword binary value.

KEYNUMBER(*data-value*)

specifies the number, as a halfword binary value, of the index to be used to locate the record. There can be eight indexes (1–8). The default is 1. This option applies only to DPCX or DXAM and is mutually exclusive with RRN.

NOWAIT

specifies that the CICS task continues processing without waiting for the ISSUE ERASE command to complete. If this option is not specified, the task activity is suspended until the command is completed.

NUMREC(*data-value*)

for a relative record data set, specifies as a halfword binary value the number of logical records to be deleted. Records are replaced sequentially starting with the one identified by the RIDFLD option.

For an indexed data set, NUMREC cannot be specified, because only one record is deleted.

RIDFLD(*data-area*)

specifies the record identification field.

For a relative record data set, the RIDFLD option specifies a fullword binary integer (the relative record number of the record starting from zero); and the RRN option is used.

For an indexed data set, the RIDFLD option specifies the key that is embedded in the data. The KEYLENGTH option is also required.

RRN

specifies that the record identification field specified in the RIDFLD option contains a relative record number. If the option is not specified, RIDFLD is assumed to specify a key.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

Conditions**48 FUNCERR**

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE ERASEAUP

Erase all unprotected fields of a 3270 buffer.

ISSUE ERASEAUP



Conditions: INVREQ, NOTALLOC, TERMERR

Description

ISSUE ERASEAUP erases unprotected fields by:

1. Clearing all unprotected fields to nulls (X'00')
2. Resetting modified data tags in each unprotected field to zero
3. Positioning the cursor to the first unprotected field
4. Restoring the keyboard

You can use the ISSUE ERASEAUP command for the following types of 3270 logical units:

- 3270-display logical unit (LUTYPE2)
- 3270-printer logical unit (LUTYPE3)
- 3270 logical unit
- 3650 host conversational (3270) logical unit
- 3790 (3270-display) logical unit
- 3790 (3270-printer) logical unit

Options

WAIT

ensures that the erase is completed before control returns to the application program. If you omit WAIT, control returns to the application program as soon as ISSUE ERASEAUP starts processing.

Conditions

16 INVREQ

RESP2 values:

- 200** A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs if there is a terminal-related error.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE ERROR

Inform APPC mapped conversation partner of error.

ISSUE ERROR (APPC)



Conditions: INVREQ, NOTALLOC, SIGNAL, TERMERR

Description

ISSUE ERROR allows an application program to inform a process in a connected APPC system that some program-detected error has occurred. For example, a remote CICS application is notified by having EIBERR set, with EIBERRCD=X'0889'. The actions required to recover from the error are the responsibility of logic contained in both application programs. The application program can use this command to respond negatively when the CONFIRM option has been specified on a SEND command executed by a process in a connected APPC system.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal facility (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If both CONVID and SESSION are omitted, the principal facility is assumed.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- The command is not valid for the APPC conversation type in use.
- The command is issued against a CPI-Communications conversation.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the specified CONVID value does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

24 SIGNAL

occurs when an inbound SIGNAL data-flow control command is received from a partner transaction. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE command causes an ATCV abend.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE LOAD

Specify the name of a program on 3650 interpreter logical unit.

ISSUE LOAD

►►—ISSUE LOAD—PROGRAM(*name*)—┐
 └CONVERSE┘ ►►

Conditions: NONVAL, NOTALLOC, NOSTART, TERMERR

Description

ISSUE LOAD specifies the name of the 3650 application program that is to be loaded.

Options

CONVERSE

specifies that the 3650 application program is able to communicate with the host processor. If this option is not specified, the 3650 application program cannot communicate with the host processor.

PROGRAM(*name*)

specifies the name (1–8 characters) of the 3650 application program that is to be loaded.

Conditions

09 NONVAL

occurs if the 3650 application program name is not valid.

Default action: terminate the task abnormally.

10 NOSTART

occurs if the 3651 is unable to initiate the requested 3650 application program.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a terminal-related error.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE NOTE

Request next record number.

ISSUE NOTE

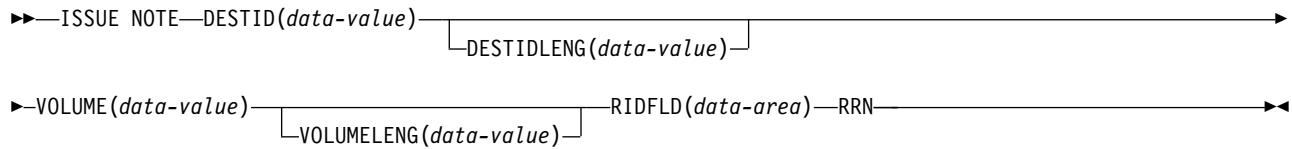

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE NOTE requests the number of the next record. It finds the relative record number of the next record in an addressed direct data set. The number is returned in the data area specified in the RIDFLD option. The RRN option must be specified, because a relative record number is involved.

Options

DESTID(data-value)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(data-value)

specifies the length (halfword binary value) of the name specified in the DESTID option.

RIDFLD(data-area)

specifies as a 4-character field a data area the relative record number of the next record is returned in.

RRN

specifies that the record identification field specified in the RIDFLD option contains a relative record number.

VOLUME(data-value)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(data-value)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

Conditions

48 FUNCERR

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE PASS

z/OS Communications Server application routing.

ISSUE PASS

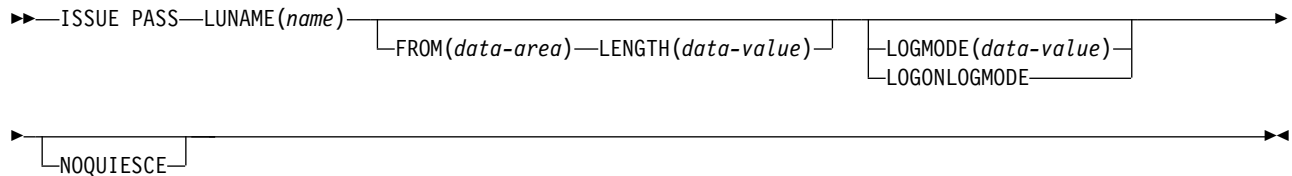

Conditions: INVREQ, LENGERR, NOTALLOC

Description

ISSUE PASS disconnects the terminal from CICS after the task has terminated, and transfers it to the z/OS Communications Server application defined in the LUNAME option.

This command requires that AUTH=PASS is coded on the z/OS Communications Server APPL macro for the CICS terminal-owning system that issues it, with DISCREQ=YES or RELREQ=YES in the RDO TYPETERM resource definition for any terminal where this function might be used.

If the LUNAME specified is the name of another CICS system, you can use the EXTRACT LOGONMSG command to access the data referred to by this command.

Because of a z/OS Communications Server limitation, the maximum length of the user data is restricted to 255 bytes.

Note: The system initialization parameter CLSDSTP=NOTIFY|NONOTIFY allows you to have the node error program (NEP) and the console notified of whether the PASS was successful or not. The NEP can be coded to reestablish a session ended by an unsuccessful PASS. For programming information about how to do this, see the section about NEP in the Writing a node error program in the *CICS Customization Guide*.

Options

FROM(data-area)

specifies the data area containing the logon user data that is to be passed to the application named in the LUNAME option. This option may be omitted if ATTACHID is specified on an LUTYPE6.1 command.

LENGTH(data-value)

specifies the length, as a halfword binary value, of the data issued.

LOGMODE(data-value)

specifies the name (1–8 characters) of the z/OS Communications Server logon mode table entry used by z/OS Communications Server to establish the new session.

LOGONLOGMODE

specifies that the new session is to be established with the z/OS Communications Server logon mode table entry in use when the session logged on.

Note: The logmode name saved is taken from the X'0D' control vector in the z/OS Communications Server CINIT. This is the logmode name known in this system.

If persistent sessions (PSDINT=nnn in the SIT) is in use, then the TYPETERM definition for any terminal to be ISSUE PASSEd should use RECOPTION(NONE), because the logon LOGMODE name is not recovered across a persistent sessions restart.

If neither LOGMODE nor LOGONLOGMODE is supplied, the new session will be established with the default LOGMODE.

LUNAME(*name*)

specifies the name (1–8 characters) of the z/OS Communications Server application to which the terminal is to be passed.

NOQUIESCE

specifies that the user can choose to recover from certain pass failures.

Conditions**16 INVREQ**

occurs if the command is not valid for the logical unit in use.

Default action: terminate the task abnormally.

22 LENGERR

occurs if an out-of-range value is supplied in the LENGTH option.

Default action: terminate the task abnormally.

61 NOTALLOC


occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

ISSUE PREPARE

Issue the first flow of a syncpoint request on an APPC mapped conversation.

ISSUE PREPARE (APPC)



Conditions: INVREQ, NOTALLOC, TERMERR

Description

ISSUE PREPARE applies only to distributed transaction processing over APPC links. It enables a syncpoint initiator to prepare a syncpoint slave for syncpointing by sending only the first flow (prepare-to-commit) of the syncpoint exchange. Depending on the reply from the syncpoint slave, the initiator can proceed with the syncpoint by issuing a SYNCPOINT command, or initiate back-out by issuing a SYNCPOINT ROLLBACK command.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBSRCE in the EIB, or the token representing the principal facility (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If both CONVID and SESSION are omitted, the principal facility is assumed.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- The conversation is not an APPC mapped conversation.
- The conversation state is not valid for the request.
- The sync level of the conversation is not 2.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the CONVID value in the command does not relate to a conversation that is owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE causes an ATCV abend.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE PRINT

Print displayed data on first available printer.

ISSUE PRINT

►►—ISSUE PRINT—◄◄

Conditions: INVREQ, NOTALLOC, TERMERR

Description

ISSUE PRINT prints displayed data on the first available printer that can respond to a print request.

ISSUE PRINT can be used on a number of logical units, using the printers defined below:

- For a 3270 logical unit or a 3650 host conversational (3270) logical unit, the printer must be defined by the PRINTER or ALTPRINTER options on the RDO TERMINAL resource definition, or by a printer supplied by the autoinstall user program.
- For a 3270-display logical unit with the PTRADAPT feature, used with a 3274 or 3276, the printer is allocated by the printer authorization matrix. The PTRADAPT feature is enabled by specifying DEVICE=LUTYPE2 and PRINTADAPTER=YES on the RDO TYPETERM resource definition.
- For a 3790 (3270-display) logical unit, the printer is allocated by the 3790. The printer must be in service, not currently attached to a task, and owned by the same CICS system that owns the terminal running the transaction.

Conditions

16 INVREQ

RESP2 values:

- 200** A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a terminal-related error.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE QUERY

Interrogate a data set.

ISSUE QUERY

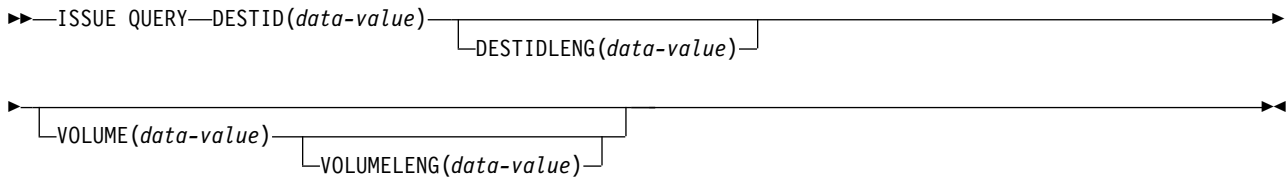

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE QUERY interrogates a data set. It is used to request that a sequential data set in an outboard controller be transmitted to the host system. The application program should either follow this command with ISSUE RECEIVE commands to get the resulting inbound data, or terminate the transaction to allow CICS to start a new transaction to process the data.

Options

DESTID(data-value)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(data-value)

specifies the length (halfword binary value) of the name specified in the DESTID option.

VOLUME(data-value)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(data-value)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

Conditions

48 FUNCERR

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE RECEIVE

Read a record from a data set.

ISSUE RECEIVE



Conditions: DSSTAT, EOC, EODS, INVREQ, LENGERR, UNEXPIN

Description

ISSUE RECEIVE reads a sequential data set in an outboard controller.

The INTO option specifies the area into which the data is to be placed. The LENGTH option must specify a data area that contains the maximum length of record that the program accepts. If the record length exceeds the specified maximum length, the record is truncated and the LENGERR condition occurs. After the retrieval operation, the data area specified in the LENGTH option is set to the record length (before any truncation occurred).

Alternatively, a pointer reference can be specified in the SET option. CICS then acquires an area of sufficient size to hold the record, and sets the pointer reference to the address of that area. After the retrieval operation, the data area specified in the LENGTH option is set to the record length.

The outboard controller might not send the data from the data set specified in the ISSUE QUERY command. The ASSIGN command must be used to get the value of DESTID (which identifies the data set that has been transmitted) and the value of DESTIDLENG (which is the length of the identifier in DESTID).

Options

INTO(*data-area*)

specifies the receiving field for the data read from the data set.

If you specify the ISSUE RECEIVE command with the INTO option, the parameter must be a data area that specifies the maximum length of data that the program is prepared to handle. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs. On completion of the retrieval operation, the data area is set to the original length of the data.

LENGTH(*data-area*)

specifies the length (halfword binary value) of the data received.

If you have specified SET, you must also specify LENGTH.

SET(*ptr-ref*)

specifies the pointer reference that is to be set to the address location of the data read from the data set.

If you specify the SET option, the parameter must be a data area. On completion of the retrieval operation, the data area is set to the length of the data.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

If you have specified SET, you must also specify LENGTH.

Conditions

46 DSSTAT

occurs when the destination status changes in one of the following ways:

- The data stream is abended.
- The data stream is suspended.

Default action: terminate the task abnormally.

06 EOC

occurs if the request/response unit (RU) is received with the end-of-chain (EOC) indicator set. Field EIBEOC also contains this indicator.

Default action: ignore the condition.

05 EODS

occurs when the end of the data set is encountered.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

22 LENGERR

occurs if the length of the retrieved data is greater than the value specified by the LENGTH option.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE REPLACE

Update a record in a data set.

ISSUE REPLACE

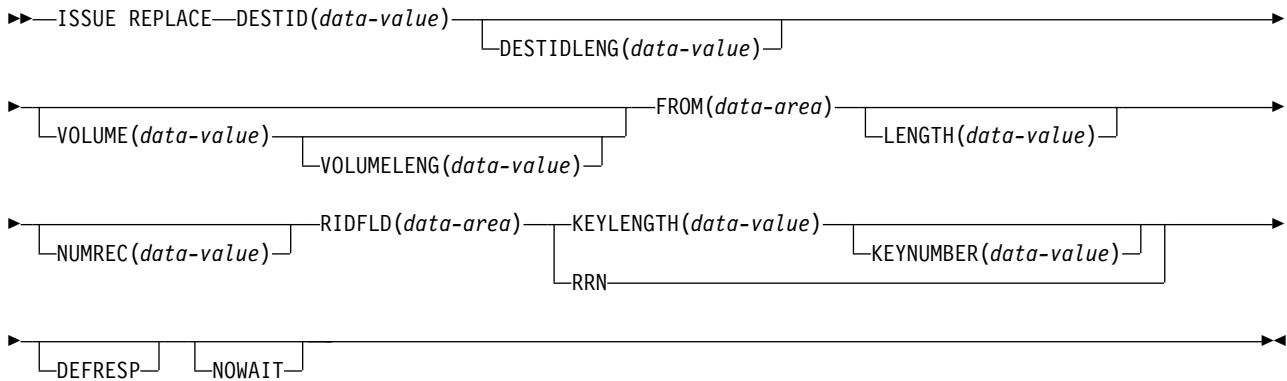

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE REPLACE updates (replaces) a record in either a relative (addressed direct) or an indexed (keyed direct) data set in an outboard controller.

Options

DEFRESP

specifies that all terminal control commands issued as a result of the ISSUE REPLACE command request a definite response from the outboard batch program, irrespective of the specification of message integrity for the CICS task (by the system programmer).

DESTID(data-value)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(data-value)

specifies the length (halfword binary value) of the name specified in the DESTID option.

FROM(data-area)

specifies the data that is to be written to the data set.

KEYLENGTH(data-value)

specifies the length (halfword binary value) of the key specified in the RIDFLD option.

KEYNUMBER(data-value)

specifies the number, as a halfword binary value, of the index to be used to locate the record. There can be eight indexes (1 through 8). The default is 1. This option applies only to DPCX/DXAM and is mutually exclusive with RRN.

LENGTH(*data-value*)

specifies the length (halfword binary value) of the data to be written.

NOWAIT

specifies that the CICS task continues processing without waiting for the ISSUE REPLACE command to complete. If this option is not specified, the task activity is suspended until the command is completed.

NUMREC(*data-value*)

for a relative data set, specifies as a halfword binary value the number of logical records to be replaced. Records are replaced sequentially starting with the one identified by the RIDFLD option.

For an indexed data set, NUMREC cannot be specified because only one record is replaced.

RIDFLD(*data-area*)

specifies the record identification field.

For a relative record data set, the RIDFLD option specifies a fullword binary integer (the relative record number of the record starting from zero); and the RRN option is used.

For an indexed data set, the RIDFLD option specifies the key that is embedded in the data specified by the FROM option. The KEYLENGTH option is also required.

RRN

specifies that the record identification field specified in the RIDFLD option contains a relative record number. This option is required for a relative record data set.

If the option is not specified, RIDFLD is assumed to specify a key.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the VOLUME option.

Conditions**48 FUNCERR**

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN

occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE RESET


Relinquish use of a telecommunication line.

This command is supported for compatibility with earlier releases of CICS. It is superseded by the `ISSUE DISCONNECT` command, which you are recommended to use instead.

ISSUE SEND

Send data to a named data set or to a selected medium.

ISSUE SEND

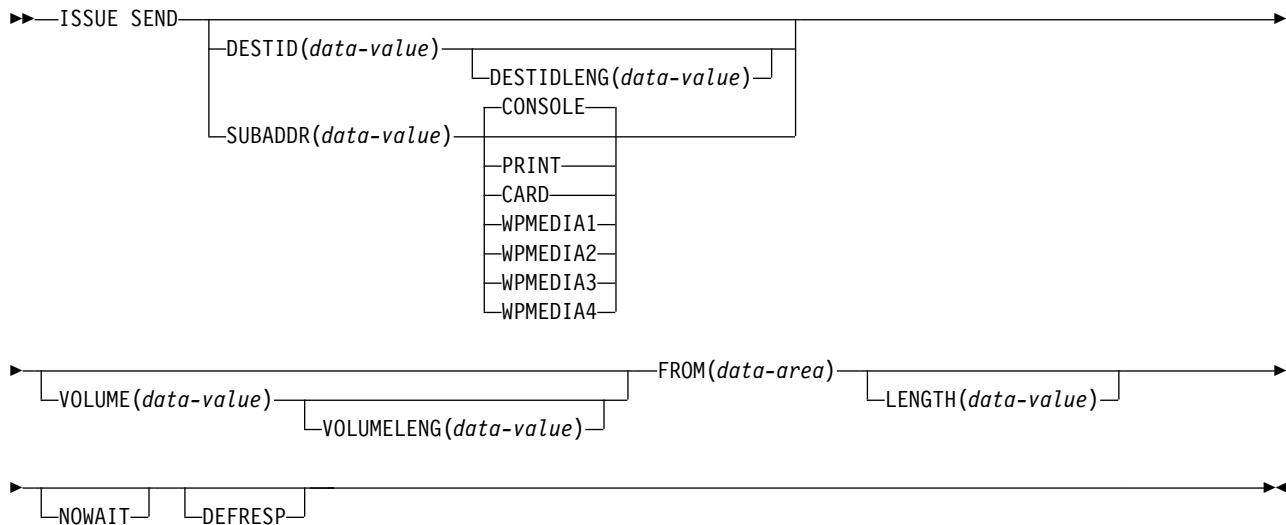

Conditions: FUNCERR, IGREQCD, INVREQ, SELNERR, UNEXPIN

Description

ISSUE SEND sends data to a named data set in an outboard controller, or to a selected medium in a batch logical unit or an LUTYPE4 logical unit. The options CONSOLE, PRINT, CARD, and WPMEDIA1–4 are alternatives to DESTID and DESTIDLENG.

Options

CARD

specifies that the output medium is a card reader or card punch device. This option is not valid with DESTID and DESTIDLENG.

CONSOLE

specifies that the output medium is that provided for messages to the operator. This option is not valid with DESTID and DESTIDLENG. This refers to a programmable subsystem such as the IBM 3790 data communication system. It does not refer to a CICS or system console.

DEFRESP

specifies that all terminal control commands issued as a result of the ISSUE SEND command request a definite response from the outboard batch program, irrespective of the specification of message integrity for the CICS task (by the system programmer).

DESTID(data-value)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(*data-value*)

specifies the length (halfword binary value) of the name specified in the DESTID option.

FROM(*data-area*)

specifies the data to be written to the data set.

LENGTH(*data-value*)

specifies a halfword binary value that is the length of the data to be written.

NOWAIT

specifies that the CICS task continues processing without waiting for the ISSUE SEND command to complete. If this option is not specified, the task activity is suspended until the command is completed.

PRINT

specifies that the output is to the print medium.

SUBADDR(*data-value*)

specifies the medium subaddress as a halfword binary value (in the range 0–15) that allows media of the same type, for example, “printer 1” or “printer 2”, to be defined. Value 15 means a medium of any type. The default is zero.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length of the name specified in the VOLUME option as a halfword binary value.

WPMEDIA1 through WPMEDIA4

specifies that for each specific LUTYPE4 device, a word processing medium is defined to relate to a specific input/output device.

Conditions

48 FUNCERR

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

57 IGREQCD

occurs when an attempt is made to execute an ISSUE SEND command after a SIGNAL RCD data-flow control code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN


occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

ISSUE SIGNAL (APPC)

Request change of direction from sending transaction on an APPC mapped conversation.

ISSUE SIGNAL (APPC)



Conditions: INVREQ, NOTALLOC, TERMERR

Description

ISSUE SIGNAL, in a transaction in receive mode, signals to the sending transaction that a mode change is needed. It raises the SIGNAL condition on the next SEND, RECEIVE, or CONVERSE command executed in the sending transaction, and a previously executed HANDLE CONDITION command for this condition can be used either to take some action, or to ignore the request.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal facility (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If both CONVID and SESSION are omitted, the principal facility is assumed.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- The command has been used on an APPC conversation that is not using the EXEC CICS interface, or is not a mapped conversation.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the specified CONVID value does not relate to a conversation that is owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE causes an ATCV abend.


A CANCEL TASK request by a user node error program (NEP) may cause TERMERR if the task has an outstanding terminal control request when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

ISSUE SIGNAL (LUTYPE6.1)

Request change of direction from sending transaction on LUTYPE6.1 conversation.

ISSUE SIGNAL (LUTYPE6.1)



Conditions: NOTALLOC, TERMERR

Description

ISSUE SIGNAL, in a transaction in receive mode, signals to the sending transaction that a mode change is needed. It raises the SIGNAL condition on the next SEND, RECEIVE, or CONVERSE command executed in the sending transaction, and a previously executed HANDLE CONDITION command for this condition can be used either to take some action, or to ignore the request.

If both CONVID and SESSION are omitted, the principal facility for the task is used.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal facility (returned by a previously executed ASSIGN command).

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used.

Conditions

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a session-related error. Any action on that conversation other than a FREE causes an ATCVabend.


A CANCEL TASK request by a user node error program (NEP) may cause TERMERR if the task has an outstanding terminal control request when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally withabend code ATNI.

ISSUE WAIT

Wait for an operation to be completed.

ISSUE WAIT

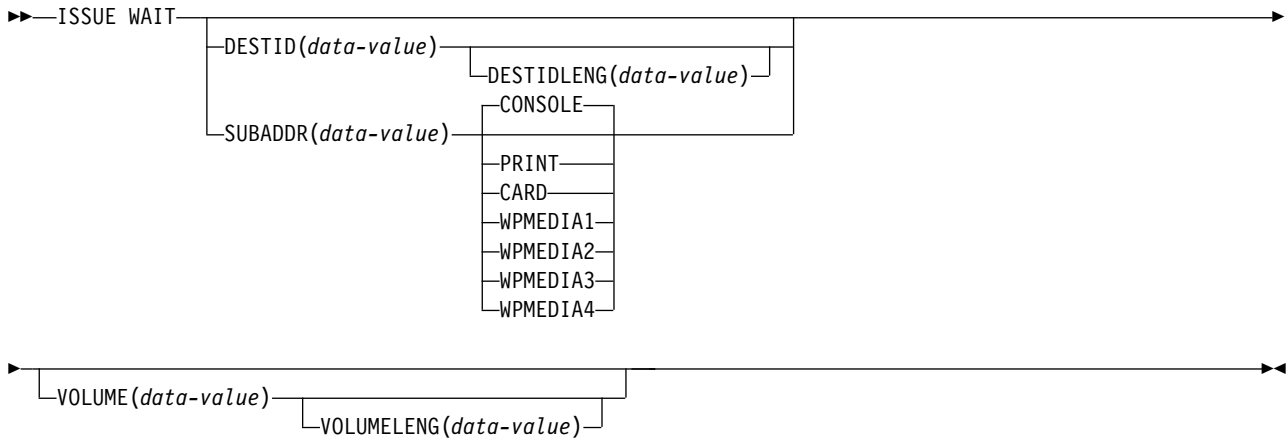

Conditions: FUNCERR, INVREQ, SELNERR, UNEXPIN

Description

ISSUE WAIT suspends task activity until the previous batch data interchange command is completed. This command is meaningful only when it follows an ISSUE ADD, ISSUE ERASE, ISSUE REPLACE, or ISSUE SEND command. The options CONSOLE, PRINT, CARD, and WPMEDIA1–4 are alternatives to DESTID and DESTIDLENG.

Options

CARD

specifies that the output medium is a card reader or card punch device. This option is not valid with DESTID and DESTIDLENG.

CONSOLE

specifies that the output medium is that provided for messages to the operator. This option is not valid with DESTID and DESTIDLENG.

This refers to a programmable subsystem such as the IBM 3790 data communication system. It does not refer to a CICS or system console.

DESTID(data-value)

specifies the name (1–8 characters) of the data set in the outboard destination.

DESTIDLENG(data-value)

specifies the length (halfword binary value) of the name specified in the DESTID option.

PRINT

specifies that the output is to the print medium.

SUBADDR(data-value)

specifies the medium subaddress as a halfword binary value (in the range

0–through 15) that allows media of the same type, for example, “printer 1” or “printer 2”, to be defined. Value 15 means a medium of any type. The default is zero.

VOLUME(*data-value*)

specifies the name (1–6 characters) of a diskette in an outboard destination that contains the data set specified in the DESTID option.

VOLUMELENG(*data-value*)

specifies the length of the name specified in the VOLUME option as a halfword binary value.

WPMEDIA1 through WPMEDIA4

specifies that, for each specific LUTYPE4 device, a word-processing medium is defined to relate to a specific input/output device.

Conditions

48 FUNCERR

occurs if there is an error during execution of the command. Destination selection is unaffected and other commands for the same destination may be successful.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

47 SELNERR

occurs if there is an error during destination selection. The destination is not selected and other commands for the same destination are unlikely to be successful.

Default action: terminate the task abnormally.

49 UNEXPIN

occurs when some unexpected or unrecognized information is received from the outboard controller.

Default action: terminate the task abnormally.

JOURNAL


Create a journal record.

This command is supported for compatibility with earlier releases of CICS. It is superseded by the WRITE JOURNALNAME command, which you are recommended to use instead.

LINK

Link to another program expecting return.

LINK

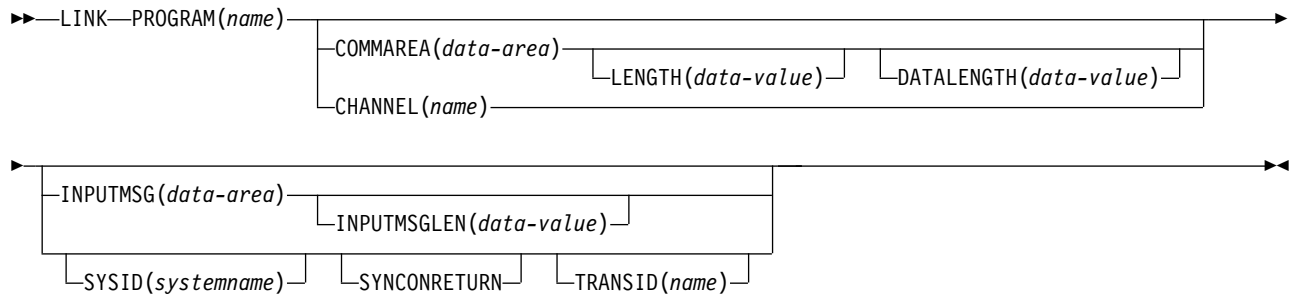

Conditions: CHANNELERR, INVREQ, LENGERR, NOTAUTH, PGMIDERR, RESUNAVAIL, ROLLEDBACK, SYSIDERR, TERMERR

This command is threadsafe when it is used to link to a program in a local CICS region, or in a remote CICS region over an IPIC connection. It is non-threadsafe when it is used to link to a program in a remote CICS region over another type of connection.

Description

LINK passes control from an application program at one logical level to an application program at the next lower logical level.

If the requested program is not defined to CICS, and AUTOINSTALL is active, CICS supplies a definition for the program. If this definition is local, and the linked-to program is not already in main storage, CICS loads it.

In some circumstances, the linked-to program might reside on another CICS region; see “Distributed program link” on page 390.

This command operates in the current application context. If the command is issued by a program that is running under a task for an application deployed on a platform, CICS searches first for the named program in the private program directory for the application. If the named program is not found there, CICS then searches the public program directory.

When this command is used to link to a program that is declared as an application entry point for an application deployed on a platform, the CICS bundle where the application entry point is declared must have a status of AVAILABLE. The link is made to the highest numbered version of the application that is installed, enabled, and available. To link to a specified version of an application deployed on a platform, use the INVOKE APPLICATION command instead of the LINK command.

When the RETURN command runs in the linked-to program, control is returned to the program initiating the link at the next sequential executable instruction.

The external CICS interface (EXCI) provides a LINK command that performs all six commands of the interface in one invocation. See The EXCI CALL interface in Developing applications for information about EXCI.

The linked-to program operates independently of the program that issues the LINK command with regard to handling conditions, attention identifiers, abends, and execution key. For example, the effects of **HANDLE CONDITION** commands in the linking program are not inherited by the linked-to program, but the original **HANDLE CONDITION** commands are restored on return to the linking program. See Using the HANDLE CONDITION command in Developing applications for more information and an illustration of the concept of logical levels.

You can use the **HANDLE ABEND** command to deal with abnormal terminations in other link levels. See Using the HANDLE CONDITION command in Developing applications for further details about the relationship between **LINK** and **HANDLE ABEND**.

Distributed program link

In any of the following cases, the link is a *distributed program link* (DPL):

- You specify a remote region name on the SYSID option, with or without the associated TRANSID and SYNCONRETURN options.
- The REMOTESYSTEM option on the installed PROGRAM definition specifies the name of a remote region.
- The installed program definition specifies DYNAMIC(YES), or there is no installed program definition, and the dynamic routing program routes the link request to a remote region.

In response to a distributed program link, the local CICS region (the *client region*) ships the link request to the remote region (the *server region*). The server region runs the linked-to program (the server program) on behalf of the program that issues the link request (the client program).

The SYSID and INPUTMSG options are mutually exclusive. If you specify both options on a LINK command, the translator issues error message DFH7230E indicating conflicting options.

A server program running in the server region is restricted to a DPL subset of the CICS API. In summary, the server program cannot issue these commands:

- Terminal control commands that reference the principal facility
- Options of ASSIGN that return terminal attributes
- BMS commands
- Sign-on and sign-off commands
- Batch data interchange commands
- Commands that address the TCTUA

For details of the restricted DPL subset of the API, see Exception conditions for LINK command in Reference -> Application development.

If a server program abends, the abend code is returned to the client program. If the client program is not written to handle the abend returned by the server program, the client program abends with the same abend code returned by the server program.

You cannot use DPL to link to the CICS master terminal program, DFHEMTA, or to the RDO program, DFHEDAP. The addresses passed as parameters to DFHEMTA and DFHEDAP are valid only in the region that issues the EXEC CICS LINK command, which means that you cannot route a DFHEMTA or DFHEDAP request to a remote CICS.

Important: For examples of the use of the LINK command when the linked program is remote, see Distributed Program Link (DPL) in Developing applications. For information about writing a dynamic routing program, see the *CICS Customization Guide*.

Options

CHANNEL(*name*)

Specifies the name (1 - 16 characters) of a channel that is to be made available to the called program. The acceptable characters are A - Z a - z 0 - 9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel in Developing applications.

Channel names are always in EBCDIC. The set of allowed characters for channel names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if channels are to be shipped between regions, it is advisable to restrict the characters used to name them to A-Z a-z 0-9 & : = , ; < > . - and _ .

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers in Developing applications.

The program that issues the LINK command can do one of the following:

- Have already created the channel by using one or more **PUT CONTAINER CHANNEL** or **PUT64 CONTAINER** commands.
- Specify its current channel, by name.
- Name a channel that does not currently exist. A new empty channel is created.

COMMAREA(*data-area*)

Specifies a communication area that is to be made available to the called program. In this option the data area is passed, and you must give it the name DFHCOMMAREA in the receiving program. See the section about passing data to other programs in the *CICS Application Programming Guide*.

DATALENGTH(*data-value*)

Specifies a halfword binary value that is the length of a contiguous area of storage, from the start of the COMMAREA, to be passed to the called program. For a remote LINK request, if the amount of data being passed in a COMMAREA is small, but the COMMAREA itself is large so that the linked-to program can return the requested data, specify DATALENGTH in the interest of performance.

The value of DATALENGTH is checked only when the LINK request is remote or dynamic. It is not checked for static local links.

DATALENGTH cannot be used at the same time as INPUTMSG.

INPUTMSG(*data-area*)

Specifies data to be supplied to the called program when it first issues a RECEIVE command. This data remains available until the execution of a RECEIVE or RETURN command. A called program can call a further program and so on, creating a chain of linked programs. If a linked-to chain exists, CICS supplies the INPUTMSG data to the first RECEIVE command run in the chain. If control returns to the program that issued the LINK with INPUTMSG before the INPUTMSG data has been accepted by a RECEIVE command, CICS assumes that a RECEIVE command has been issued. In this situation, the original INPUTMSG data is no longer available.

INPUTMSG cannot be used at the same time as DATALENGTH.

For more information about the INPUTMSG option, see INPUTMSG in Developing applications.

INPUTMSGLEN(*data-value*)

Specifies a halfword binary value to be used with INPUTMSG.

LENGTH(*data-value*)

Specifies a halfword binary value that is the length in bytes of the COMMAREA (communication area). This value must not exceed 24 KB if the COMMAREA is to be passed between any two CICS servers (for any combination of product, version, and release). This limit allows for the COMMAREA and space for headers.

Ensure that the value you specify matches the length of the data being passed in the COMMAREA. Do not specify 0 (zero) for LENGTH, because the resulting behavior is unpredictable and the EXEC CICS LINK command might fail.

When you use a COMMAREA to pass data, the program that is linked to must verify that the EIBCALEN field in the EIB of the task matches what the program expects. Discrepancies might result in storage violations or system failures. For more information, see COMMAREA in Developing applications.

PROGRAM(*name*)

Specifies the identifier (1 - 8 characters) of the program to which control is to be passed unconditionally.

In any of the following cases, the linked-to program is a server program in a remote region:

- The SYSID option specifies a remote region.
- The REMOTESYSTEM option on the installed PROGRAM definition specifies the name of a remote region.
- The installed program definition specifies DYNAMIC(YES), or there is no installed program definition, and the dynamic routing program routes the link request to a remote region.

Note the use of quotes:

PROGX is in quotes because it is the program name.

```
EXEC CICS LINK PROGRAM('PROGX')
```

DAREA is not in quotes because it is the name of a data area that contains the

```
EXEC CICS LINK PROGRAM(DAREA)
```

actual program name. If a data area is used to contain the program name, this data area must be defined as an 8 byte field in working storage.

Note: When a link is made to a CICS 3270 program that is to run under the Link3270 bridge mechanism, the PROGRAM name must be DFHL3270, not the name of the target 3270 program.

SYNCONRETURN

Specifies that the server region named on the SYSID option is to take a sync point on successful completion of the server program.

Changes to recoverable resources made by the server program are committed or rolled back independently of changes to recoverable resources made by the client program issuing the LINK request or changes made by the server in any subsequent LINK.

- The NORMAL condition is returned if changes to recoverable resources are committed before return from the server program.
- The ROLLEDBACK condition is returned if changes to recoverable resources are rolled back before return from the server program.
- The TERMERR condition is raised following failure of the communications link or the system in which the server program is running. The client program handles the condition and ensures that data consistency is restored.

SYNCONRETURN is only applicable to remote links, it is ignored if the link is local.

SYSID(systemname)

Specifies the system name of a CICS server region to where the program link request is to be routed.

If you do not specify a remote system name in the SYSID option or omit the SYSID option, CICS uses the REMOTESYSTEM attribute defined in the installed PROGRAM definition. If you specify a local system name in the SYSID option or the REMOTESYSTEM attribute, CICS ignores the name.

A remote system name specified on the SYSID option takes priority over any remote system name specified on the PROGRAM resource definition or returned by the dynamic routing program.

TRANSID(name)

Specifies the name of the mirror transaction that the remote region is to attach and under which it is to run the server program.

The transaction name that you specify on the LINK command takes priority over any transaction specified on the program resource definition. While you can specify your own name for the mirror transaction initiated by DPL requests, the transaction must be defined in the server region, and the transaction definition must specify the mirror program, DFHMIRS.

If you omit the TRANSID option, reference is made to PROGRAM resource definitions held locally if the installed PROGRAM definition specifies remote attribute DYNAMIC(YES). Otherwise, the server region attaches either CSMI, CPMI, or CVMI by default.

Specifying the TRANSID option with a blank transaction name is not valid. The error response in this case depends on how the link request is handled:

- If the linked-to program is defined locally, the link request succeeds in this situation.
- If the request is statically routed to a remote region, an INVREQ response is returned to the program initiating the link.
- If the request is dynamically routed to a remote region, a valid connection ID is returned, but after checking the TRANSID, CICS calls the dynamic

routing program again with the parameter DYRFUNC set to 1 and the parameter DYRError set to 8. If the dynamic routing program responds by running the program locally, the link request succeeds. If the dynamic routing program responds by retrying without success, the link request is rejected, and a PGMIDERR response is returned to the program initiating the link.

Conditions

122 CHANNELERR

RESP2 values:

- 1 The name specified on the CHANNEL option contains an illegal character or combination of characters.

16 INVREQ

RESP2 values:

- 8 A LINK command with the INPUTMSG option is issued for a program that is not associated with a terminal, or that is associated with an APPC logical unit, or an IRC session.
- 14 The SYNCONRETURN option is specified but the program issuing the link request (the client program) is already in conversation with a mirror task in the remote region specified on the SYSID option. That is, a unit of work (UOW) is in progress, or the system initialization parameter **MROFSE=YES** is specified in the client region, or the MIRRORLIFE IPCONN setting is specified as task or UOW in the remote region. In this case, the client program is in an incorrect state to support the SYNCONRETURN option.
- 15 The program issuing the link request is already in conversation with a mirror task and the TRANSID specified is different from the transaction identifier of the active mirror.
- 16 The TRANSID specified is all blanks.
- 17 The TRANSID supplied by the dynamic routing program is all blanks.
- 19 A LINK command with the INPUTMSG option is issued for a program that is the subject of a DPL request; that is, SYSID is also specified.
- 30 The program manager domain has not yet been initialized, probably because a link request was made in a first stage PLT.
- 48 A LINK has been attempted to a Java program, but the user class cannot be found.
- 51 A LINK has been attempted to a Java program, but the JVMSEVER resource cannot be found.
- 52 A LINK has been attempted to a Java program, but the JVMSEVER resource is not enabled.

Default action: end the task abnormally.

Note: RESP2 values are not returned to the client for conditions occurring in a DPL server program.

22 LENGERR

RESP2 values:

- 11 The COMMAREA length is less than 0 or greater than the permitted length.

- 12 The length specified on the DATALENGTH option is a negative value.
- 13 The length specified on the DATALENGTH option is greater than the length specified on the LENGTH option.
- 26 The COMMAREA address is zero, but the COMMAREA length is nonzero.
- 27 The INPUTMSG length is less than 0 or greater than 32767.

Also occurs (RESP2 not set) in any of the following situations:

- The length specified on the LENGTH option is greater than the length of the data area specified in the COMMAREA option, and while that data was being copied a destructive overlap occurred because of the incorrect length.

Default action: end the task abnormally.

Note: RESP2 values are not returned to the client for conditions occurring in a DPL server program.

70 NOTAUTH

RESP2 values:

- 101 A resource security check has failed on PROGRAM(name).

Default action: end the task abnormally.

27 PGMIDERR

RESP2 values:

- 1 A program has no installed resource definition and either program autoinstall was switched off or the program autoinstall control program indicated that the program should not be autoinstalled.

This RESP2 can also occur if the program is a private program for an application, which is not defined as entry point, and the tasks current application context does not permit it to be called.

- 2 A program is disabled.

- 3 A program was not loaded because

- This load of the program was the first one and the program load failed, typically because the load module was not found.
- This load of the program was a subsequent load, but the first load failed.

To reset the load status, the load module must be in the DFHRPL concatenation, and a SET PROGRAM NEWCOPY is required.

- 21 The program autoinstall control program failed either because the program autoinstall control program is incorrect, incorrectly defined, or as a result of an abend in the program autoinstall control program. Program autoinstall is disabled and message DFHPG0202 or DFHPG0203 is written to the CSPL.

- 22 The model returned by the program autoinstall control program was not defined to CICS or was not enabled.

- 23 The program autoinstall control program returned invalid data.

- 24 Define for the program failed because autoinstall returned an invalid program name or definition.

- 25 The dynamic routing program rejected the link request.

Default action: end the task abnormally.

Note: RESP2 values are not returned to the client for conditions occurring in a DPL server program.

121 RESUNAVAIL

RESP2 values:

- 0 A resource required by the linked-to program is unavailable on the target region. The RESUNAVAIL condition applies to dynamically routed distributed program link (DPL) requests.

RESUNAVAIL is returned on the **EXEC CICS LINK** command *executed by the mirror in the target region*, if an XPCERES global user exit program indicates that a required resource is unavailable on the target region. It is not returned to the application.

Default action: call again the dynamic routing program for route selection failure.

82 ROLLEDBACK

RESP2 values:

- 29 The SYNCONRETURN option is specified and the server program cannot successfully take a sync point. The server program has taken a rollback, and all changes made to recoverable resources in the remote region, in the current unit of work, are backed out.

Default action: end the task abnormally.

53 SYSIDERR

RESP2 values:

- 18 The SYSID specified cannot be found in the intersystem table.
- 20 The remote system specified by SYSID is an LUTYPE6.1-connected system. Distributed program link requests are not supported on LUTYPE6.1 connections.

Note:

1. No local queuing takes place in the event of a SYSIDERR.
2. RESP2 values are not returned for conditions occurring on DPL requests.

- 21 The CHANNEL option was used and the LINK request was shipped or routed to a remote system which does not support it. (IPIC and MRO connections.)
- 28 The remote system specified by SYSID is not in service. This response can also indicate that the transaction has not been defined on the remote system.
- 29 The remote system specified by SYSID is in service, but there are no sessions available, and the dynamic routing program has chosen not to queue the link request.
- 31 The request to allocate a session to the remote system has been rejected.
- 32 The queue of allocate requests for sessions to the remote system has failed because the session allocation queue is full or has been purged.

Default action: end the task abnormally.

81 TERMERR

RESP2 values:

- 17 An unrecoverable error occurs during the conversation with the mirror; for example, if the session fails, or if the server region fails.

Default action: end the task abnormally.

If the SYNCONRETURN option was not specified on the LINK, the client program must decide whether toabend or roll back on receipt of this condition.

Note: RESP2 values are not returned to the client for conditions occurring in a DPL server program.

Examples


The following example shows how to request a link to an application program called PROGRAM:

```
EXEC CICS LINK PROGRAM(PROGRAM)
      COMMAREA(COMA) LENGTH(LENA)
      DATALENGTH(LENI) SYSID('CONX')
```

LINK ACQPROCESS

Execute a CICS business transaction services process synchronously without context-switching.

LINK ACQPROCESS



Conditions: EVENTERR, INVREQ, IOERR, NOTAUTH, PGMIDERR, PROCESSBUSY, PROCESSERR

Description

LINK ACQPROCESS executes the CICS business transaction services process currently acquired by the requestor. The process is executed synchronously with the requestor, with no context-switching.

The only process that a program can link is the one that it has acquired in the current unit of work. (Note, however, that if the program is running as the activation of an activity, it must use a RUN, not a LINK, command to activate the process it has acquired.) See *Acquiring processes and activities in the CICS Business Transaction Services*.

To check the response from the process, the CHECK ACQPROCESS command must be used. This is because the response to the request to activate the process does not contain any information about the success or failure of the process itself—only about the success or failure of the request to activate it. Typically, the CHECK command is issued immediately after the LINK command.

LINK ACQPROCESS causes BTS to invoke the process's root activity and send it an input event. If the root activity is in its initial state—that is, if this is the first time it is to be run—CICS sends it the DFHINITIAL system event. If the root activity is not in its initial state, the input event must be specified on the INPUTEVENT option.

No context-switching

When an process is activated by a LINK ACQPROCESS command, it is invoked synchronously with the requestor and:

- In the same unit of work as the requestor
- With the transaction attributes (TRANSID and USERID) of the requesting transaction.

In other words, there is no context-switch. To invoke a process synchronously *with* context-switching—that is, in a separate UOW from that of the requesting transaction and with the TRANSID and USERID attributes specified on its DEFINE PROCESS command—use the RUN ACQPROCESS SYNCHRONOUS command.

Note: A context-switch always occurs when a process is run asynchronously.

If performance is more important than failure isolation, recoverability, and security, use LINK ACQPROCESS rather than RUN ACQPROCESS SYNCHRONOUS.

Options

ACQPROCESS

specifies that the process currently acquired by the requestor is to be run.

INPUTEVENT(data-value)

specifies the name (1–16 characters) of the event that causes the process to be attached.

You *must not* specify this option if the process's root activity is in its initial state; that is, if this is the first time the process is to be run. In this case, CICS sends the root activity the DFHINITIAL system event.

You *must* specify this option if the root activity is not in its initial state; that is, if it has been activated before.

If you specify INPUTEVENT, for the LINK command to be successful the root activity must have defined the named event as an input event.

Conditions

111 EVENTERR

RESP2 values:

- 7 The event named on the INPUTEVENT option has not been defined by the root activity of the process to be run as an input event; or its fire status is FIRED.

16 INVREQ

RESP2 values:

- 15 The task that issued the LINK command has not defined or acquired a process.
- 23 The process is suspended, and therefore cannot be run synchronously.
- 40 The program that implements the process to be run is remote.
- 44 A LINK has been attempted to a Java program, but the JVM pool is disabled.
- 45 A LINK has been attempted to a Java program, but the JVM profile cannot be found.
- 46 A LINK has been attempted to a Java program, but the JVM profile is not valid.
- 47 A LINK has been attempted to a Java program, but the system properties file cannot be found.
- 48 A LINK has been attempted to a Java program, but the user class cannot be found.
- 49 The shared class cache is STOPPED and autostart is disabled, so a Java program requesting use of the shared class cache cannot be executed.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to run the process.

27 PGMIDERR

RESP2 values:

- 1 A program has no installed resource definition and either program autoinstall was switched off, or the program autoinstall user program indicated that the program should not be autoinstalled.
- 2 A program is disabled.
- 3 A program could not be loaded because:
- This was the first load of the program and the program load failed, usually because the load module could not be found.
 - This was a subsequent load of the program, but the first load failed.

In order to reset the load status the load module must be in the DFHRPL or dynamic LIBRARY concatenation, and a SET PROGRAM NEWCOPY will be required.

- 21 The program autoinstall user program failed either because the program autoinstall user program is incorrect, incorrectly defined, or as a result of an abend in the program autoinstall user program. Program autoinstall is disabled and message DFHPG0202 or DFHPG0203 written to the CSPL.
- 22 The model returned by the program autoinstall user program was not defined to CICS, or was not enabled.
- 23 The program autoinstall user program returned invalid data.
- 24 Define for the program failed due to autoinstall returning an invalid program name or definition.

106 PROCESSBUSY

RESP2 values:

- 13 The request timed out. It may be that another task using this process-record has been prevented from ending.

108 PROCESSERR


RESP2 values:

- 6 Another process is current. That is, the program that issued the LINK command cannot link to the process it has acquired because it is itself running as an activation of a process.
- 9 The process-type could not be found.
- 14 The root activity of the process to be run is not in INITIAL or DORMANT mode.

LINK ACTIVITY

Execute a CICS business transaction services activity synchronously without context-switching.

LINK ACTIVITY



Conditions: ACTIVITYBUSY, ACTIVITYERR, EVENTERR, INVREQ, IOERR, LOCKED, NOTAUTH, PGMIDERR

Description

LINK ACTIVITY executes a CICS business transaction services activity synchronously with the requestor, with no context-switching. The activity must previously have been defined to BTS.

LINK ACTIVITY causes BTS to invoke the activity and send it an input event. If the activity is in its initial state—that is, if this is the first time it is to be run, or if it has been reset by a RESET ACTIVITY command—CICS sends it the DFHINITIAL system event. If the activity is not in its initial state, the input event must be specified on the INPUTEVENT option.

The only activities a program can link to are as follows:

- If it is running as the activation of an activity, its own child activities. It can link to several of its child activities within the same unit of work.
- The activity it has acquired, by means of an ACQUIRE ACTIVITYID command, in the current unit of work. (Note, however, that if the program is running as the activation of an activity, it must use a RUN, not a LINK, command to activate the activity it has acquired.)

To check the response from the activity, the CHECK ACTIVITY command must be used. This is because the response to the request to activate the activity does not contain any information about the success or failure of the activity itself—only about the success or failure of the request to activate it. Typically, the CHECK command is issued immediately after the LINK command.

No context-switching

When an activity is activated by a LINK ACTIVITY command, it is invoked synchronously with the requestor and:

- In the same unit of work as the requestor
- With the transaction attributes (TRANSID and USERID) of the requesting transaction.

In other words, there is no **context-switch**. To invoke an activity synchronously *with* context-switching—that is, in a separate UOW from that of the requesting transaction and with the TRANSID and USERID attributes specified on its DEFINE ACTIVITY command—use the RUN ACTIVITY SYNCHRONOUS command.

Note: A context-switch always occurs when an activity is run asynchronously.

If performance is more important than failure isolation, recoverability, and security, use LINK ACTIVITY rather than RUN ACTIVITY SYNCHRONOUS.

Options

ACQACTIVITY

specifies that the activity to be run is the one that the current unit of work has acquired by means of an ACQUIRE ACTIVITYID command.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the activity to be run. The name must be that of a child of the current activity.

INPUTEVENT(data-value)

specifies the name (1–16 characters) of the event that causes the activity to be attached.

You *must not* specify this option if the activity is in its initial state; that is, if this is the first time it is to be run, or if it has been reset by a RESET ACTIVITY command. In this case, CICS sends the activity the DFHINITIAL system event.

You *must* specify this option if the activity is not in its initial state; that is, if it has been activated before, and has not been reset by a RESET ACTIVITY command.

If you specify INPUTEVENT, for the LINK command to be successful the activity to be attached must have defined the named event as an input event.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.
- 14 The target activity is not in the correct mode to process the specified event option. If the INPUTEVENT option was not specified, the activity must be in INITIAL mode. If the INPUTEVENT option was specified, the activity must be in DORMANT mode.

111 EVENTERR

RESP2 values:

- 7 The event named on the INPUTEVENT option has not been defined by the activity to be run as an input event; or its fire status is FIRED.

16 INVREQ

RESP2 values:

- 4 The ACTIVITY option was used to name a child activity, but the command was issued outside the scope of a currently-active activity.
- 21 The activity is suspended, and therefore cannot be run synchronously.
- 24 The ACQACTIVITY option was used, but the issuing task has not acquired an activity.
- 40 The program that implements the activity is remote.

- 44 A LINK has been attempted to a Java program, but the JVM pool is disabled.
- 45 A LINK has been attempted to a Java program, but the JVM profile cannot be found.
- 46 A LINK has been attempted to a Java program, but the JVM profile is not valid.
- 47 A LINK has been attempted to a Java program, but the system properties file cannot be found.
- 48 A LINK has been attempted to a Java program, but the user class cannot be found.
- 49 The shared class cache is STOPPED and autostart is disabled, so a Java program requesting use of the shared class cache cannot be executed.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to run the activity.

27 PGMIDERR

RESP2 values:

- 1 A program has no installed resource definition and either program autoinstall was switched off, or the program autoinstall user program indicated that the program should not be autoinstalled.
- 2 A program is disabled.
- 3 A program could not be loaded because:
 - This was the first load of the program and the program load failed, usually because the load module could not be found.
 - This was a subsequent load of the program, but the first load failed.


In order to reset the load status the load module must be in the DFHRPL or dynamic LIBRARY concatenation, and a SET PROGRAM NEWCOPY will be required.
- 21 The program autoinstall user program failed either because the program autoinstall user program is incorrect, incorrectly defined, or as a result of an abend in the program autoinstall user program. Program autoinstall is disabled and message DFHPG0202 or DFHPG0203 written to the CSPL.
- 22 The model returned by the program autoinstall user program was not defined to CICS, or was not enabled.
- 23 The program autoinstall user program returned invalid data.

- 24 Define for the program failed due to autoinstall returning an invalid program name or definition.

LOAD

Load a program from the CICS DFHRPL or dynamic LIBRARY concatenation into main storage.

LOAD



Conditions: INVREQ, LENGERR, NOTAUTH, PGMIDERR

This command is threadsafe.

Note for dynamic transaction routing: Using LOAD with HOLD, or using a resource that has been defined with RELOAD=YES, could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see the *CICS Application Programming Guide*.

Description

Load makes a copy of an application program, table, or map available to the invoking task. If the program is defined with RELOAD=NO, it is fetched from the library concatenation where it resides only if there is not a copy already in main storage. If the program is defined with RELOAD=YES, a new copy is always fetched from the LIBRARY concatenation. (See the *CICS Application Programming Guide* for further details about maps.) Using LOAD can reduce system overhead.

This command operates in the current application context. If the command is issued by a program that is running under a task for an application deployed on a platform, CICS searches first for the named program in the private program directory for the application. If the named program is not found there, CICS then searches the public program directory.

Options

ENTRY(ptr-ref)

Specifies the pointer reference to be set to the address of the entry point in the program that has been loaded. CICS program load services set the entry point according to the addressing mode of the load module:

- AMODE(24): bit 0 is 0 and bit 31 is 0.
- AMODE(31): bit 0 is 1 and bit 31 is 0.
- AMODE(64): bit 0 is 0 and bit 31 is 1.

For assembler programs without an explicit ENTRY defined in the linkedit definitions, the entry point returned depends on whether there is a CICS stub, and whether the LOAD command is issued from a PLT program:

- If there is a CICS stub, the entry point address is incremented for this stub unless the LOAD command is issued from a PLT program run during the first phase of initialization or the final phase of shutdown.
- If there is not a CICS stub, the entry point address is the same as the load point address.

FLENGTH(*data-area*)

Specifies a fullword binary area to be set to the length of the loaded program, table, or map. Use FLENGTH if the length of the loaded program is greater than 32 KB.

HOLD

Specifies that the loaded program, table, or map is not to be released (if still available) when the task that issues the LOAD command is terminated; it is to be released only in response to a RELEASE command from this task or from another task.

If you omit HOLD, the program, table, or map is released when the task that issued the load terminates or issues a RELEASE command.

If, however, the program is defined with RELOAD=YES, neither of the above apply. RELEASE does not work, and a FREEMAIN request must be issued to remove the program.

LENGTH(*data-area*)

Specifies a halfword binary value to be set to the length of the loaded program, table, or map. To avoid raising the LENGERR condition, use FLENGTH if the length of the loaded program is likely to be greater than 32 KB.

PROGRAM(*name*)

Specifies the identifier (1 - 8 characters) of a program, table, or map to be loaded. The specified name must have been defined as a program to CICS, though if AUTOINSTALL is active, a definition is autoinstalled.

SET(*ptr-ref*)

Specifies the pointer reference that is to be set to the address at which a program, table, or map is loaded.

Conditions**16 INVREQ**

RESP2 values:

- 30** The program manager domain is not yet initialized. This is probably because a load request was made in a first stage PLT.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 19** LENGTH is used and the length of the loaded program is greater than 32 KB.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 101** A resource security check has failed on PROGRAM(name).

Default action: terminate the task abnormally.

27 PGMIDERR

RESP2 values:

- 1** A program, table, or map has no installed resource definition and

either program autoinstall was switched off, or the program autoinstall control program indicated that the program should not be autoinstalled.

- 2 A program is disabled.
- 3 A program could not be loaded for one of the following reasons:
 - This was the first load of the program and the program load failed, usually because the load module could not be found.
 - This was a subsequent load of the program, but the first load failed.To reset the load status, the load module must be in the DFHRPL or dynamic LIBRARY concatenation, and a SET PROGRAM NEWCOPY will be required.
- 9 The installed program definition is for a remote program.
- 21 The program autoinstall control program failed either because the program autoinstall control program is incorrect, or incorrectly defined, or as a result of an abend in the program autoinstall control program. Program autoinstall is disabled and message DFHPG0202 or DFHPG0203 written to the CSPL.
- 22 The model returned by the program autoinstall control program was not defined in CICS, or was not enabled.
- 23 The program autoinstall control program returned invalid data.
- 24 Define for the program failed because autoinstall returned an invalid program name or definition.
- 42 An attempt has been made to LOAD a JVM program. This action is not valid because Java byte code programs are not managed by CICS Loader.

Default action: terminate the task abnormally.

Example

The following example shows how to load a user-prepared table called TB1:

```
EXEC CICS LOAD PROGRAM('TB1') SET(PTR)
```

MONITOR

Code a user event-monitoring point.

MONITOR



Condition: INVREQ

This command is threadsafe.

Description

MONITOR provides information about the performance of your application transactions. It replaces the monitoring aspects of ENTER TRACEID.

In addition to the monitoring data collected at predefined event monitoring points (EMPs) in CICS, a user application program can contribute data to user fields in the CICS monitoring records. You can do this by using the MONITOR command to invoke user-defined EMPs. At each of these user EMPs, you can add or change 1 - 16384 bytes of your own data in each performance monitoring record. In those 16384 bytes, you can have any combination of the following:

- 0 through 256 counters
- 0 through 256 clocks
- A single 8192-byte character string

Options

DATA1(*data-area*)

Specifies a 4-byte variable whose contents depend on the type of user EMP being used:

- If the user EMP contains an ADDCNT, SUBCNT, NACNT, EXCNT, or ORCNT option, the DATA1 variable is an area used as defined by the MCT user EMP definition.
- If the MCT user EMP definition contains an MLTCNT option, the DATA1 variable is an area with the address of a series of adjacent fullwords containing the values to be added to the user count fields defined in the MCT user EMP definition.
- If the MCT user EMP definition contains a MOVE option, the DATA1 variable is an area with the address of the character string to be moved.

See *CICS Resource Definition Guide* for details of user EMP options.

DATA2(*data-area*)

Specifies a 4-byte variable whose contents depend on the type of user EMP being used:

- If the user EMP contains an ADDCNT, SUBCNT, NACNT, EXCNT, or ORCNT option, the DATA2 variable is an area used as defined by the MCT user EMP definition.
- If the MCT user EMP definition contains an MLTCNT option, the DATA2 variable is an area with the number of user count fields to be updated. The number specified in DATA2 overrides the default value defined in the MCT

for the operation. The default value depends on the option that you have defined in the EMP definition. If you specify a null value in DATA2, monitoring uses the default value that is specified in the EMP definition. If DATA2 is not specified, the MLTCNT operation raises an INVREQ condition although the operation was successful.

- If the MCT user EMP definition contains a MOVE option, the DATA2 variable is an area with the length of the character string to be moved. The number specified in DATA2 will override the default value defined in the MCT for the operation. The default value depends on the option that you have defined in the EMP definition. If you specify a null value in DATA2, monitoring uses the default value that is specified in the EMP definition. If DATA2 is not specified, the MOVE operation raises an INVREQ although the operation was successful.

CICS Performance Guide provides an example of how the default value is handled for EMP.

See *CICS Resource Definition Guide* for details of user EMP options.

ENTRYNAME(*data-area*)

Is the monitoring point entry name that qualifies the POINT value and is defined in the monitoring control table (MCT). ENTRYNAME defaults to USER if not specified. Specify in the data-area the name of the 8-byte field in your application program that contains the monitoring point entry name.

POINT(*data-value*)

Specifies the monitoring point identifier as defined in the MCT, and is in the range 0 - 255. Note, however, that point identifiers in the range 200 - 255 are reserved for use by IBM program products.

Conditions

16 INVREQ

RESP2 values:

- 1 Your POINT value is outside the range 1 through 255.
- 2 Your POINT value is not defined in the MCT.
- 3 Your DATA1 value is not valid.
- 4 Your DATA2 value is not valid.
- 5 You did not specify DATA1 for an MCT operation that required it.
- 6 You did not specify DATA2 for an MCT operation that required it.

Default action: terminate the task abnormally.

Examples

For example, you could use these user EMPs to count the number of times a certain event occurs, or to time the interval between two events.

Figure 2 on page 410 gives examples of MONITOR commands (and of the MCT entries you need for them).

Note:

1. Example 1 shows a user clock being started by an application identified as PROG3. This is the eleventh EMP in this application. To prevent confusion with

the eleventh EMP in another application, this EMP is uniquely identified by the tag ENTRY3.11. The clock that is being started is the first clock in a string.

2. Example 2 shows the same user clock being stopped, by the same application, but from a different EMP. The EMP is uniquely identified by the tag ENTRY3.12.
3. Example 3 shows some user data being loaded into the 32-byte character string reserved for that purpose. The loading starts at offset 0, and the data is no more than 32 bytes in length.

```
1:
EXEC CICS MONITOR
      POINT(11)
      ENTRYNAME(ENTRY3)
      needing: DFHMCT TYPE=EMP,
                CLASS=PERFORM,
                ID=(ENTRY3.11),
                CLOCK=(1,CLOCKA),
                PERFORM=SCLOCK(1)

2:
EXEC CICS MONITOR
      POINT(12)
      ENTRYNAME(ENTRY3)
      needing: DFHMCT TYPE=EMP,
                CLASS=PERFORM,
                ID=(ENTRY3.12),
                PERFORM=PCLOCK(1)


3:
EXEC CICS MONITOR
      POINT(13)
      DATA1(address of data)
      DATA2(length of data)
      ENTRYNAME(ENTRY3)
      needing: DFHMCT TYPE=EMP,
                CLASS=PERFORM,
                ID=(ENTRY3.13),
                PERFORM=MOVE(0,32)
```

Figure 2. Examples of coding user EMPs

MOVE CONTAINER (BTS)

Move a BTS data-container (and its contents) from one activity to another.

MOVE CONTAINER (BTS)

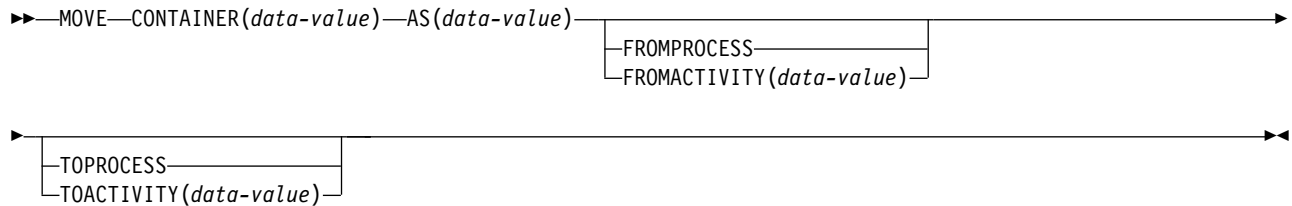

Conditions: ACTIVITYERR, CONTAINERERR, INVREQ, IOERR, LOCKED

Description

MOVE CONTAINER (BTS) moves a data-container (and its contents) from one BTS activity to another. After the move, the source container is destroyed.

The source and target containers are identified by name and by the activities that own them. The activity that owns the source container can be identified:

- Explicitly, by specifying the FROMPROCESS or FROMACTIVITY option.
- Implicitly, by omitting the FROMPROCESS and FROMACTIVITY options. If these are omitted, the current activity is implied.

Similarly, the activity that owns the target container can be identified:

- Explicitly, by specifying the TOPPROCESS or TOACTIVITY option.
- Implicitly, by omitting the TOPPROCESS and TOACTIVITY options. If these are omitted, the current activity is implied.

You can move a container:

- From the current activity to a child of the current activity
- From a child of the current activity to the current activity
- From the current activity to the current activity (thus renaming the container)
- From one child of the current activity to another

In addition, *if the current activity is the root activity*, you can move a container:

- From the current process to the current (root) activity
- From the current process to a child of the current activity
- From the current process to the current process (thus renaming the container)
- From the current activity to the current process
- From a child of the current activity to the current process

You can use MOVE CONTAINER, instead of GET CONTAINER and PUT CONTAINER, as a more efficient way of transferring data between activities—for an explanation, see Container commands in the *CICS Business Transaction Services*.

Note:

1. If the source container does not exist, an error occurs.
2. If the target container does not already exist, it is created. If the target container already exists, its previous contents are overwritten.

3. You cannot move containers from one process to another. Both the source and target containers must be within the scope of the current process.
4. Only the root activity can specify a process-container as the source or target of a MOVE CONTAINER command.

A process's containers are *not* the same as its root activity's containers.

See also “GET CONTAINER (BTS)” on page 281 and “PUT CONTAINER (BTS)” on page 425.

Options

AS(data-value)

specifies the name (1–16 characters) of the target container. If the target container already exists, its contents are overwritten.

CONTAINER(data-value)

specifies the name (1–16 characters) of the source container that is to be moved.

FROMACTIVITY(data-value)

specifies the name (1–16 characters) of the activity that owns the source container. If specified, this option must name a child of the current activity (or the current activity itself).

FROMPROCESS

specifies that the source container is owned by the current process—that is, the process that the program that issues the command is executing on behalf of.

TOACTIVITY(data-value)

specifies the name (1–16 characters) of the activity that owns the target container. If specified, this option must name a child of the current activity (or the current activity itself).

TOPROCESS

specifies that the target container is owned by the current process—that is, the process that the program that issues the command is executing on behalf of.

Conditions

109 ACTIVITYERR

RESP2 values:

- | | |
|---|---------------------------------------------------------------------------------|
| 8 | The activity named on the FROMACTIVITY or TOACTIVITY option could not be found. |
|---|---------------------------------------------------------------------------------|

110 CONTAINERERR

RESP2 values:

- | | |
|----|-------------------------------------------------------------------|
| 10 | The container named on the CONTAINER option could not be found. |
| 26 | The process container named on the CONTAINER option is read-only. |

16 INVREQ

RESP2 values:

- | | |
|----|---------------------------------------------------------------------------------------------------------------------------|
| 4 | The command was issued outside the scope of a currently-active activity. |
| 25 | The FROMPROCESS or TOPROCESS option was used, but the command was issued outside the scope of a currently-active process. |

17 IOERR

RESP2 values:

30 An input/output error has occurred on the repository file.

31 The record on the repository file is in use.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

MOVE CONTAINER (CHANNEL)

Move a container (and its contents) from one channel to another.

MOVE CONTAINER (CHANNEL)

►►—MOVE—CONTAINER(*data-value*)—AS(*data-value*)—┐CHANNEL(*data-value*)—┐TOCHANNEL(*data-value*)—►►

Conditions: CHANNELERR, CONTAINERERR, INVREQ

This command is threadsafe.

Description

MOVE CONTAINER (CHANNEL) moves a container from one channel to another. After the move, the source container no longer exists.

The source and target containers are identified by name and by the channels that own them. The channel that owns the source container can be identified:

- Explicitly, by specifying the CHANNEL option.
- Implicitly, by omitting the CHANNEL option. If this is omitted, the current channel is implied.

Similarly, the channel that owns the target container can be identified:

- Explicitly, by specifying the TOCHANNEL option.
- Implicitly, by omitting the TOCHANNEL option. If this is omitted, the current channel is implied.

You can move a container:

- From one channel to another.
- Within the same channel—for example, from the current channel to the current channel. This has the effect of renaming the container.

You can use MOVE CONTAINER, instead of GET CONTAINER and PUT CONTAINER, as a more efficient way of transferring data between channels.

Note:

1. The source channel must be within the scope of the program that issues the MOVE CONTAINER command.
2. If the target channel does not exist, within the scope of the program that issues the MOVE CONTAINER command, it is created.
3. If the source container does not exist, an error occurs.
4. If the target container does not already exist, it is created. If the target container already exists, its previous contents are overwritten.
5. If you try to overwrite a container with itself, nothing happens. That is, if you specify the same value for the CONTAINER and AS options, and either omit both the CHANNEL and TOCHANNEL options or give them the same value, so that the same channel is specified, the source container is not changed and not deleted. No error condition is raised.

Options

AS(data-value)

Specifies the name (1–16 characters) of the target container. If the target container already exists, its contents are overwritten.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

Container names are always in EBCDIC. The allowable set of characters for container names, listed above, includes some characters that do not have the same representation in all EBCDIC code pages. We therefore recommend that, if containers are to be shipped between regions, the characters used in naming them should be restricted to A-Z a-z 0-9 & : = , ; < > . - and _ .

CHANNEL(data-value)

Specifies the name (1–16 characters) of the channel that owns the source container. You can specify the channel name DFHTRANSACTION to use the transaction channel. If this option is not specified, the current channel is implied.

CONTAINER(data-value)

Specifies the name (1–16 characters) of the source container that is to be moved.

TOCHANNEL(data-value)

Specifies the name (1–16 characters) of the channel that owns the target container. If you are specifying a new channel, remember that the acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel in Developing applications

Channel names are always in EBCDIC. The allowable set of characters for channel names, listed above, includes some characters that do not have the same representation in all EBCDIC code pages. We therefore recommend that, if channels are to be shipped between regions, the characters used in naming them should be restricted to A-Z a-z 0-9 & : = , ; < > . - and _ .

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the task. For more information, see Channels and containers in Developing applications.

If this option is not specified, the current channel is implied.

Conditions

122 CHANNELERR

RESP2 values:

- 1 The name specified on the TOCHANNEL option contains an illegal character or combination of characters.
- 2 The channel specified on the CHANNEL option could not be found.
- 3 Either the current channel or the channel specified on the CHANNEL option is read-only.

110 CONTAINERERR

RESP2 values:

- 10** The container named on the CONTAINER option could not be found.
- 18** The name specified on the AS option contains an illegal character or combination of characters.

16 INVREQ


RESP2 values:

- 4** The CHANNEL or TOCHANNEL option (or both) was not specified, there is no current channel (because the program that issued the command was not passed one), and the command was issued outside the scope of a currently-active BTS activity.
- 30** You cannot move a CICS-defined read-only container.
- 31** You cannot move a container to (that is, overwrite) an existing, CICS-defined, read-only container.

POINT

Get information about an LUTYPE6.1 logical unit.

POINT



Condition: NOTALLOC

Description

POINT gets information about a named facility, such as whether it owns the given facility.

This command can be used on an MRO session.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If both this option and CONVID are omitted, the principal facility for the task is used.

Conditions

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

POP HANDLE

Restore the stack.

POP HANDLE

►►—POP HANDLE—◄◄

Condition: INVREQ

This command is threadsafe.

Description

Use the **POP HANDLE** command to restore the effect of **IGNORE CONDITION**, **HANDLE ABEND**, **HANDLE AID**, and **HANDLE CONDITION** commands to the state they were in before a **PUSH HANDLE** command was executed at the current link level.

Restriction: This command is supported only in COBOL, PL/I, and assembler language applications (but not AMODE(64) assembler language applications). It is not supported in all other supported high level languages.

This command can be useful, for example, during a branch to a subroutine embedded in a main program.

Normally, when a CICS program calls a subroutine (at the same logical level), the program or routine that receives control inherits the current **HANDLE** commands. These commands might not be appropriate in the called program. The called program can use **PUSH HANDLE** to suspend existing **HANDLE** commands, and before returning control to the caller, can then restore the original commands using the **POP HANDLE** command.

Note: When a CICS program uses EXEC CICS LINK to call another CICS program, the **HANDLE** effects are not inherited by the linked-to program, but CICS will search preceding logical levels for a **HANDLE ABEND** exit. See the *CICS Application Programming Guide* for further details about the relationship between LINK and **HANDLE ABEND**.

You can nest **PUSH HANDLE ... POP HANDLE** command sequences within a task. Each **POP HANDLE** command restores a set of specifications.

Conditions

16 INVREQ


Occurs if no matching **PUSH HANDLE** command has been executed at the current link level.

Default action: terminate the task abnormally.

POST

Request notification when a specified time has expired.

POST

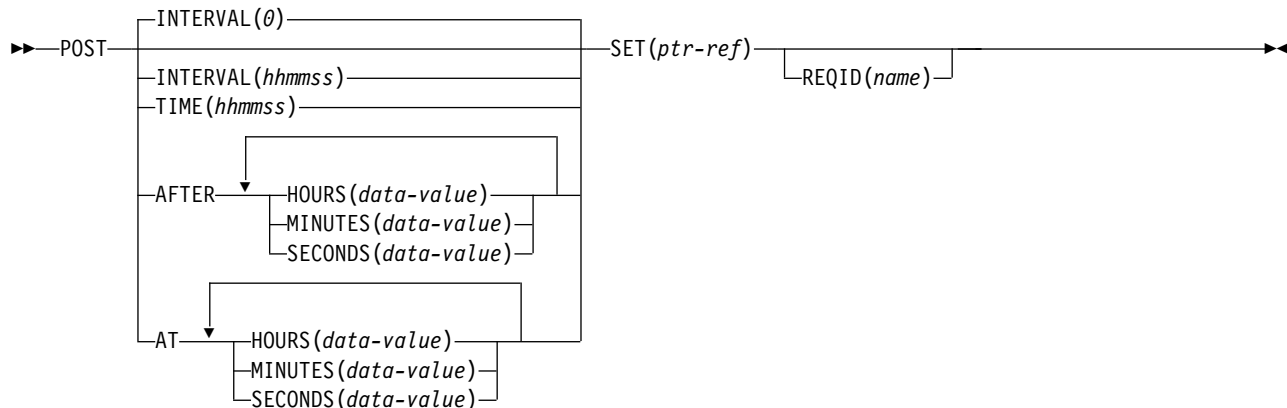

Conditions: EXPIRED, INVREQ

Note for dynamic transaction routing: Using POST if later CANCELED by another task could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

POST requests notification that a specified time has expired. In response to this command, CICS makes a timer-event control area available for testing. This 4-byte control area is initialized to binary zeros, and the pointer reference specified in the SET option is set to its address.

When the time you specify has expired, the timer-event control area is posted; that is, its first byte is set to X'40' and its third byte to X'80'. You can test posting in either of the following ways:

- By checking the timer-event control area at intervals. You must give CICS the opportunity to post the area; that is, the task must relinquish control of CICS before you test the area. Normally, this condition is satisfied as a result of other commands being issued; if a task is performing a long internal function, you can force control to be relinquished by issuing a SUSPEND command.
- By suspending task activity by a WAIT EVENT or WAIT EXTERNAL command until the timer-event control area is posted. This action is similar to issuing a DELAY command but, with a POST and WAIT EVENT or WAIT EXTERNAL command sequence, you can do some processing after issuing the POST command; a DELAY command suspends task activity at once. No other task should attempt to wait on the event set up by a POST command.
- By using WAITCICS.

The timer-event control area can be released for a variety of reasons. If this happens, the result of any other task issuing a WAIT command on the event set up by the POST command is unpredictable.

However, other tasks can cancel the event if they have access to the REQID associated with the POST command. (See the CANCEL command and the description of the REQID option.) A timer-event control area provided for a task is not released or altered (except as described above) until one of the following events occurs:

- The task issues a subsequent DELAY or POST command.
- The task issues a subsequent START command naming a transaction in the local system. (A START command that names a transaction on a remote system does not affect the event set up by the POST command, unless the transaction is defined with LOCALQ set to YES and local queuing is performed.)
- The task issues a CANCEL command to cancel the POST command.
- The task is terminated, normally or abnormally.
- Any other task issues a CANCEL command for the event set up by the POST command.

A task can have only one POST command active at any given time. Any DELAY or POST command, or a START command naming a transaction in the local system, supersedes a POST command previously issued by the task.

The default is INTERVAL(0), but for C the default is AFTER HOURS(0) MINUTES(0) SECONDS(0).

Options

AFTER

specifies the interval of time to elapse.

There are two ways to enter the time under AFTER and AT.

1. A combination of at least two of HOURS(0–99), MINUTES(0–59), and SECONDS(0–59). HOURS(1) SECONDS(3) would mean one hour and three seconds (the minutes default to zero).
2. As one of HOURS(0–99), MINUTES(0–5999), or SECONDS(0–359 999). HOURS(1) means one hour. MINUTES(62) means one hour and two minutes. SECONDS(3723) means one hour, two minutes, and three seconds.

AT

specifies the time of expiring. For the ways to enter the time, see the AFTER option.

HOURS(*data-value*)

specifies a fullword binary value in the range 0–99. This is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

INTERVAL(*hhmmss*)

specifies an interval of time that is to elapse from the time at which the POST command is issued. The **mm** and **ss** are in the range 0–59. The time specified is added to the current clock time by CICS when the command is executed to calculate the expiration time.

This option is used to specify when the posting of the timer-event control area should occur.

When using the C language, you are recommended to use the AFTER/AT HOURS, MINUTES, and SECONDS options as C does not provide a packed decimal data type. You may use INTERVAL, but if the value specified is **not** an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format.

MINUTES(*data-value*)

specifies a fullword binary value in the range 0–59, when HOURS or SECONDS are also specified, or 0–5999 when MINUTES is the only option specified. This is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

REQID(*name*)

specifies a name (1–8 characters), which should be unique, to identify the POST request. Using this option to specify an application-defined name is one way to enable another transaction to cancel the POST request.

If you do not specify your own REQID, CICS generates a unique request identifier for you in the EIBREQID field of the EXEC interface block. This, like your own REQID, can be used by another transaction to cancel the POST request.

To enable other tasks to cancel unexpired POST requests, you must make the request identifier dynamically available. For example, storing it in a TS queue, whose name is known to other applications that may want to cancel the POST request, is one way you can pass a request identifier to other transactions.

SECONDS(*data-value*)

specifies a fullword binary value in the range 0–59, when HOURS or MINUTES are also specified, or 0–359 999 when SECONDS is the only option specified. This is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

SET(*ptr-ref*)

specifies the pointer reference to be set to the address of the 4-byte timer-event control area generated by CICS. This area is initialized to binary zeros; on expiration of the specified time, the first byte is set to X'40', and the third byte to X'80'.

The timer-event control area always resides below the 16MB line in shared dynamic storage (SDSA).

TIME(*hhmmss*)

specifies the time when the posting of the timer-event control area should occur.

When using the C language, you are recommended to use the AFTER/AT HOURS, MINUTES, and SECONDS options as C does not provide a packed decimal data type. You may use TIME, but if the value specified is **not** an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format. See the section about expiration times in the *CICS Application Programming Guide*.

Conditions**31 EXPIRED**

occurs if the time specified has already expired when the command is issued.

Default action: ignore the condition.

16 INVREQ

RESP2 values:

- 4 Hours are out of range.
- 5 Minutes are out of range.
- 6 Seconds are out of range.

also occurs (RESP2 not set) in any of the following situations:

- The POST command is not valid for processing by CICS.

Default action: terminate the task abnormally.

Examples

The following example shows you how to request a timer-event control area for a task, to be posted after 30 seconds:

```
EXEC CICS POST  
      INTERVAL(30)  
      REQID('RBL3D')  
      SET(PREF)
```

The following example shows you how to ask to be notified when the specified time of day is reached. Because no request identifier is specified in the command, CICS automatically assigns one and returns it to the application program in the EIBREQID field in the EIB.

```
EXEC CICS POST  
      TIME(PACKTIME)  
      SET(PREF)
```

PURGE MESSAGE

Discontinue building a BMS logical message.

PURGE MESSAGE

►►—PURGE MESSAGE—◄◄

Conditions: Full BMS: INVREQ, TSIOERR

Description

PURGE MESSAGE discontinues the building of a BMS logical message. It deletes the current logical message, including any pages of device-dependent data stream already written to CICS temporary storage. The application program may then build a new logical message.

The portions of the logical message already built in main storage or in temporary storage are deleted.

See Appendix I, “BMS macros,” on page 931 for map definition macros.

PURGE MESSAGE is only available on full-function BMS. For further information about BMS, see the *CICS Application Programming Guide*.

Conditions

16 INVREQ

RESP2 values:

200 The command was called in a distributed program link server program.

Default action: terminate the task abnormally.

35 TSIOERR

occurs if there is an irrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

PUSH HANDLE

Suspend the stack.

PUSH HANDLE

►►—PUSH HANDLE—◄◄

This command is threadsafe.

Description

You can use the **PUSH HANDLE** command to suspend the current effect of the **IGNORE CONDITION**, **HANDLE ABEND**, **HANDLE AID**, and **HANDLE CONDITION** commands.

Restriction: This command is supported only in COBOL, PL/I, and assembler language applications (but not AMODE(64) assembler language applications). It is not supported in all other supported high level languages.

This command can be useful, for example, during a branch to a subroutine embedded in a main program.

Normally, when a CICS program calls a subroutine at the same logical level, the program or routine that receives control inherits the current **HANDLE** commands. These commands may not be appropriate in the called program. The called program can use **PUSH HANDLE** to suspend existing **HANDLE** commands.


Note: When a CICS program uses EXEC CICS LINK to call another CICS program, the **HANDLE CONDITION** options are not inherited by the linked-to program, but CICS will search preceding logical levels for a **HANDLE ABEND** exit. See the *CICS Application Programming Guide* for further details about the relationship between LINK and HANDLE ABEND.

You can nest **PUSH HANDLE ... POP HANDLE** command sequences within a task. Each **PUSH HANDLE** command stacks a set of specifications.

PUT CONTAINER (BTS)

Save data in a named BTS data-container.

PUT CONTAINER (BTS)

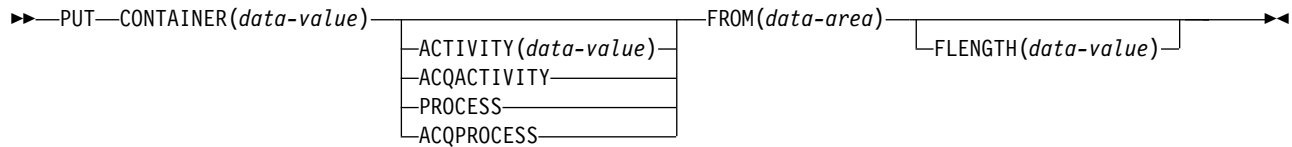

Conditions: ACTIVITYERR, CONTAINERERR, INVREQ, IOERR, LOCKED, PROCESSBUSY

Description

PUT CONTAINER (BTS) saves data and places it in a container associated with a specified BTS activity or process.

The container is identified by name. The process or activity that owns the container can be identified:

- Explicitly, by specifying one of the PROCESS- or ACTIVITY-related options.
- Implicitly, by omitting the PROCESS- and ACTIVITY-related options. If these are omitted, the current activity is implied.

Note:

1. There is no limit to the number of containers that can be associated with an activity.
2. Different activities can own identically-named containers—these are different containers.
3. If the named container does not already exist, it is created. If the named container already exists, its previous contents are overwritten.
4. Containers owned by a process (*process-containers*) can be read by every activity in the process. However, they can be updated only by the root activity, or by a program that has acquired the process.

A process's containers are *not* the same as its root activity's containers.

See also “GET CONTAINER (BTS)” on page 281 and “MOVE CONTAINER (BTS)” on page 411.

Options

ACQACTIVITY

specifies either of the following:

- If the program that issues the command has acquired a process, that the container is owned by the root activity of that process.
- Otherwise, that the container is owned by the activity that the program has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the container is owned by the process that the program that issues the command has acquired in the current unit of work.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the activity that owns the container.
This must be a child of the current activity.

CONTAINER(data-value)

specifies the name (1–16 characters) of the container into which data is to be placed.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

FLENGTH(data-value)

specifies, as a fullword binary value, the length of the data area from which data is to be read.

FROM(data-area)

specifies an area of working storage from which the data to be saved is to be read.

PROCESS

specifies that the container into which data is to be placed is owned by the current process—that is, the process that the program that issues the command is executing on behalf of.

Conditions**109 ACTIVITYERR**

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.

110 CONTAINERERR

RESP2 values:

- 10 The container named on the CONTAINER option could not be found.
- 18 The name specified on the CONTAINER option contains an illegal character or combination of characters.
- 26 The process container named on the CONTAINER option is read-only.

16 INVREQ

RESP2 values:

- 1 The DATATYPE option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) DATATYPE is valid only on PUT CONTAINER commands that specify (explicitly or implicitly) a channel. It is not valid on PUT CONTAINER (BTS) commands.
- 2 The FROMCCSID option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) FROMCCSID is valid only on PUT CONTAINER commands that specify (explicitly or implicitly) a channel. It is not valid on PUT CONTAINER (BTS) commands.
- 4 The command was issued outside the scope of a currently-active activity.
- 15 The ACQPROCESS option was used, but the unit of work that issued the request has not acquired a process.

24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.

25 The PROCESS option was used, but the command was issued outside the scope of a currently-active process.

17 IOERR

RESP2 values:

30 An input/output error has occurred on the repository file.

31 The record on the repository file is in use.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

106 PROCESSBUSY


RESP2 values:

13 The request could not be satisfied because the process record is locked by another task.

PUT CONTAINER (CHANNEL)

Place data in a named channel container.

PUT CONTAINER (CHANNEL)

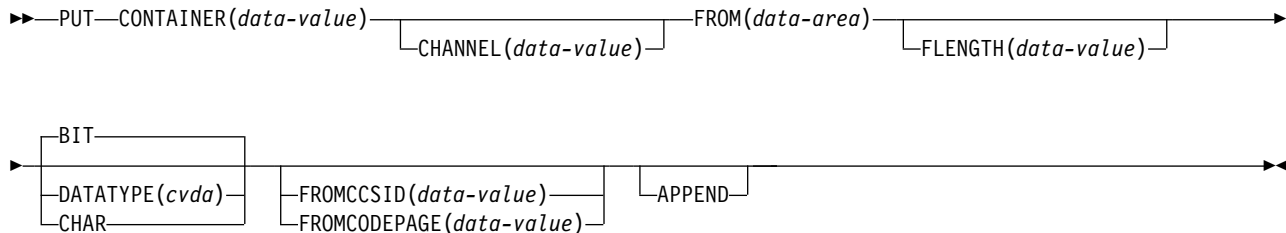

Conditions: CCSIDERR, CHANNELERR, CODEPAGEERR, CONTAINERERR, INVREQ, LENGERR

This command is threadsafe.

Description

`PUT CONTAINER (CHANNEL)` places data in a container associated with a specified channel.

The container is identified by name.

The channel that owns the container can be identified explicitly, by specifying the `CHANNEL` option, or implicitly, by omitting the `CHANNEL` option. When this option is omitted, the current channel is implied. If there is no current channel, the command is assumed to be an `EXEC CICS PUT CONTAINER (BTS)` command. For more information, see “`PUT CONTAINER (BTS)`” on page 425.

If the named container does not exist, it is created. If the named container exists, its previous contents are overwritten, unless you specify the `APPEND` option. If the named channel does not exist, it is created.

There is no limit to the number of containers that can be associated with a channel. The size of individual containers is limited only by the amount of storage available.

CAUTION:

If you create multiple large containers you might limit the amount of storage available to other applications.

Options

APPEND

Specifies that the data passed to the container is appended to the existing data in the container. If this option is not stated, the existing data in the container is overwritten by the data passed to the container.

CHANNEL(data-value)

Specifies the name (1–16 characters) of the channel that owns the container. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and

_. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

Channel names are always in EBCDIC. The set of allowed characters for channel names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if channels are to be shipped between regions, it is advisable to restrict the characters that are used to name them to A-Z a-z 0-9 & : = , ; < > . - and _.

If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers.

CONTAINER(*data-value*)

Specifies the name (1–16 characters) of the container into which data is placed.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and __. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

Do not use container names that begin with DFH, unless requested to do so by CICS.

Container names are always in EBCDIC. The set of allowed characters for container names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if containers are to be shipped between regions, it is advisable to restrict the characters used to name them to A-Z 0-9 & : = , ; < > . - and _.

DATATYPE(*cvda*)

Specifies the type of data to put into the container. This option applies only to new containers. If the container exists, its data type was established when it was created and cannot be changed. CVDA values are:

BIT Bit data. The data in the container cannot be converted. This is the default value, unless FROMCCSID is specified.

CHAR

Character data. The data to store in the container is converted (if required) according to the setting in the FROMCCSID or FROMCODEPAGE value. If the FROMCCSID and FROMCODEPAGE options are not specified, it is assumed that the data is encoded in the CCSID of the region, as specified in the **LOCALCCSID** system initialization parameter.

All the data in a container is converted as if it were a single character string. For SBCS code pages, a structure consisting of several character fields is equivalent to a single-byte character string. However, for DBCS code pages this is not the case. If you use DBCS code pages, you must put each character string into a separate container to ensure that data conversion works correctly.

FLENGTH(*data-value*)

Specifies, as a fullword binary value, the length of the data area from which data is read.

FROM(*data-area*)

Specifies the data area from which the data is written to the container.

FROMCCSID(*data-value*)

Specifies the current Coded Character Set Identifier (CCSID) of the character data to put into the container, as a fullword binary number. If you prefer to specify an IANA name for the code page, or if you prefer to specify the CCSID as alphanumeric characters, use the FROMCODEPAGE option instead. Use this option if the data to place in the container is not encoded in the CCSID of the region, as specified in the LOCALCCSID system initialization parameter.

If the FROMCCSID option is specified, DATATYPE(DFHVALUE(CHAR)) is implied.

FROMCODEPAGE(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the current code page of the character data to put into the container, using up to 40 alphanumeric characters, including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

If the FROMCODEPAGE option is specified, DATATYPE(DFHVALUE(CHAR)) is implied.

Conditions**123 CCSIDERR**

RESP2 values:

- 1 The CCSID specified on the FROMCCSID option is outside the range of valid CCSID values.
- 2 The CCSID specified on the FROMCCSID option and the CCSID of the container are an unsupported combination. The CCSID of the container is the value that was specified, or defaulted, on the first PUT CONTAINER command for this container. The first time each invalid combination is used, CICS issues error message DFHAP0802, which contains the pair of CCSIDs.
- 4 One or more characters could not be converted. Each unconverted character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container. This error can occur only when the target of the PUT is an existing, CICS-created container.

122 CHANNELERR

RESP2 values:

- 1 The name specified on the CHANNEL option contains an illegal character or combination of characters.
- 3 Either the current channel or the channel specified on the CHANNEL option is read-only.

125 CODEPAGEERR

RESP2 values:

- 1 The code page specified on the FROMCODEPAGE option is not supported.
- 2 The code page specified on the FROMCODEPAGE option and the CCSID of the container are an unsupported combination. The CCSID of the container is the value that was specified using either FROMCODEPAGE or FROMCCSID, or defaulted, on the first PUT CONTAINER command for this container. The first time each invalid combination is used, CICS issues error message DFHAP0802, which contains the pair of CCSIDs.
- 4 One or more characters could not be converted. Each unconverted character has been replaced by a blank in the converted data. This error can occur only when the target of the PUT is an existing container.
- 5 There was an internal error in the code page conversion of a container. This error can occur only when the target of the PUT is an existing, CICS-created container.

110 CONTAINERERR

RESP2 values:

- 18 The name specified on the CONTAINER option contains an illegal character or combination of characters.

Note: This occurrence might happen if the CHANNEL attribute is not set, and that there is no default CHANNEL. The command might be interpreted as PUT CONTAINER (BTS), and be validated according to the BTS naming rules.

16 INVREQ

RESP2 values:

- 1 The DATATYPE option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) DATATYPE is valid only on PUT CONTAINER commands that specify (explicitly or implicitly) a channel.
- 2 The FROMCCSID option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) FROMCCSID is valid only on PUT CONTAINER commands that specify (explicitly or implicitly) a channel.
- 4 The CHANNEL option was not specified, there is no current channel (because the program that issued the command was not passed one), and the command was issued outside the scope of a currently-active BTS activity.
- 30 You tried to write to a CICS-defined read only container.
- 32 A CVDA value other than CHAR or BIT was specified for DATATYPE.
- 33 An attempt was made to change the data-type of an existing container.
- 34 A data-type of BIT is invalid with a CCSID.

22 LENGERR

RESP2 values:


- 1 A negative number was specified on the FLENGTH option.

PUT64 CONTAINER

Place data from 64-bit storage in a named channel container. This command is for use only in non-Language Environment (LE) AMODE(64) assembler language application programs. CICS business transaction services (BTS) containers are not supported.

See Assembler language programming restrictions and requirements in Developing applications.

PUT64 CONTAINER

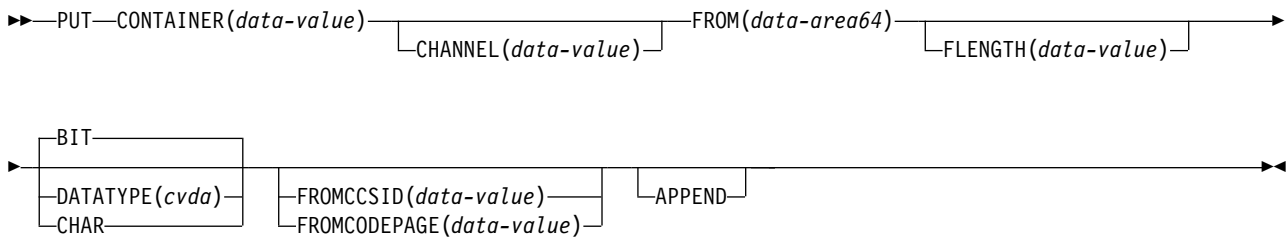

Conditions: CCSIDERR, CHANNELERR, CODEPAGEERR, CONTAINERERR, INVREQ, LENGERR

This command is threadsafe.

Description

PUT64 CONTAINER places data from 64-bit storage in a container that is associated with a specified channel.

The container is identified by name. The channel that owns the container can be identified explicitly, by specifying the CHANNEL option, or implicitly, by omitting the CHANNEL option. When this option is omitted, the current channel is implied.

If the named container does not exist, it is created. If the named container exists, its previous contents are overwritten, unless you specify the APPEND option. If the named channel does not exist, it is created.

There is no limit to the number of containers that can be associated with a channel. The size of individual containers is limited only by the amount of storage available.

Note: Be aware that if you create multiple large containers you might limit the amount of storage available to other applications.

Options

APPEND

Specifies that the data passed to the container is appended to the existing data in the container. If this option is not stated, the existing data in the container is overwritten by the data that is passed to the container.

CHANNEL(*data-value*)

Specifies the name (1–16 characters) of the channel that owns the container. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and

_. Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters.

Channel names are always in EBCDIC. The set of allowed characters for channel names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if channels are to be shipped between regions, it is advisable to restrict the characters that are used to name them to A-Z a-z 0-9 & : = , ; < > . - and _.

If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers.

CONTAINER(*data-value*)

Specifies the name (1–16 characters) of the container into which data is placed.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and __. Leading and embedded blank characters are not permitted. If the name supplied is fewer than 16 characters, it is padded with trailing blanks up to 16 characters.

Do not use container names that begin with DFH, unless requested to do so by CICS.

Container names are always in EBCDIC. The set of allowed characters for container names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if containers are to be shipped between regions, it is advisable to restrict the characters that are used to name them to A-Z 0-9 & : = , ; < > . - and _.

DATATYPE(*cvda*)

Specifies the type of data to put into the container. This option applies only to new containers. If the container exists, its data type was established when it was created and cannot be changed. CVDA values are as follows:

BIT Bit data. The data in the container cannot be converted. This is the default value, unless FROMCCSID is specified.

CHAR

Character data. The data to store in the container is converted (if required) according to the setting in the FROMCCSID or FROMCODEPAGE value. If the FROMCCSID and FROMCODEPAGE options are not specified, it is assumed that the data is encoded in the CCSID of the region, as specified in the **LOCALCCSID** system initialization parameter.

All the data in a container is converted as if it were a single character string. For SBCS code pages, a structure that consists of several character fields is equivalent to a single-byte character string. However, for DBCS code pages this is not the case. If you use DBCS code pages, you must put each character string into a separate container to ensure that data conversion works correctly.

FLENGTH(*data-value*)

Specifies, as a fullword binary value, the length of the data area from which data is read.

FROM(*data-area64*)

Specifies a 64-bit data area reference to an area from which the data is written to the container. *data-area64* refers to an area that is referenced by a 64-bit pointer and that can be in 64-bit (above-the-bar) storage.

FROMCCSID(*data-value*)

Specifies the current Coded Character Set Identifier (CCSID) of the character data to put into the container, as a fullword binary number. If you prefer to specify an IANA name for the code page, or if you prefer to specify the CCSID as alphanumeric characters, use the FROMCODEPAGE option instead. Use this option if the data to place in the container is not encoded in the CCSID of the region, as specified in the LOCALCCSID system initialization parameter.

If the FROMCCSID option is specified, DATATYPE(DFHVALUE(CHAR)) is implied.

FROMCODEPAGE(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the current code page of the character data to put into the container, using up to 40 alphanumeric characters, including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

If the FROMCCSID option is specified, DATATYPE(DFHVALUE(CHAR)) is implied.

Conditions**123 CCSIDERR**

RESP2 values:

- 1 The CCSID specified on the FROMCCSID option is outside the range of valid CCSID values.
- 2 The CCSID specified on the FROMCCSID option and the CCSID of the container are an unsupported combination. The CCSID of the container is the value that was specified, or defaulted, on the first PUT CONTAINER command for this container. The first time each invalid combination is used, CICS issues error message DFHAP0802, which contains the pair of CCSIDs.
- 4 One or more characters could not be converted. Each unconverted character is replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container. This error can occur only when the target of the PUT is an existing, CICS-created container.

122 CHANNELERR

RESP2 values:

- 1 The name specified on the CHANNEL option contains an invalid character or combination of characters.
- 3 Either the current channel or the channel specified on the CHANNEL option is read-only.

125 CODEPAGEERR

RESP2 values:

- 1 The code page specified on the FROMCODEPAGE option is not supported.
- 2 The code page specified on the FROMCODEPAGE option and the CCSID of the container are an unsupported combination. The CCSID of the container is the value that was specified using either FROMCODEPAGE or FROMCCSID, or defaulted, on the first PUT CONTAINER command for this container. The first time each invalid combination is used, CICS issues error message DFHAP0802, which contains the pair of CCSIDs.
- 4 One or more characters could not be converted. Each unconverted character is replaced by a blank in the converted data. This error can occur only when the target of the PUT is an existing container.
- 5 There was an internal error in the code page conversion of a container. This error can occur only when the target of the PUT is an existing, CICS-created container.

110 CONTAINERERR

RESP2 values:

- 18 The name specified on the CONTAINER option contains an invalid character or combination of characters.

16 INVREQ

RESP2 values:

- 1 The DATATYPE option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) DATATYPE is valid only on PUT CONTAINER commands that specify (explicitly or implicitly) a channel.
- 2 The FROMCCSID option was specified without the CHANNEL option, and there is no current channel (because the program that issued the command was not passed one.) FROMCCSID is valid only on PUT CONTAINER commands that specify (explicitly or implicitly) a channel.
- 4 The CHANNEL option was not specified and there is no current channel (because the program that issued the command was not passed one).
- 30 You tried to write to a CICS-defined read only container.
- 32 A CVDA value other than CHAR or BIT was specified for DATATYPE.
- 33 An attempt was made to change the data-type of an existing container.
- 34 A data-type of BIT is invalid with a CCSID.

22 LENGERR

RESP2 values:

- 1 A negative number was specified on the FLENGTH option.

QUERY CHANNEL

Count the number of containers that are in a channel.

QUERY CHANNEL

►►—QUERY CHANNEL(*data-value*)—CONTAINERCNT(*data-area*)—◄◄

Conditions: CHANNELERR

This command is threadsafe.

Description

QUERY CHANNEL counts the number of containers that are in a specified channel.

You must specify the CHANNEL option and identify the channel explicitly. You can use the QUERY CHANNEL command with any channel, including the transaction channel (DFHTRANSACTION), and channels that CICS created. To find the name of a program's current channel, that is, the channel with which the program was invoked, use the EXEC CICS ASSIGN CHANNEL command.

Options

CHANNEL(*data-value*)

Specifies the 1–16 character name of the channel.

CONTAINERCNT(*data-area*)

Returns, as a fullword binary value, a count of the number of containers that are in the specified channel.

Conditions

122 CHANNELERR


RESP2 values:

- 2 The channel specified on the CHANNEL option could not be found.

QUERY COUNTER and QUERY DOUNTER

Query a named counter. Use COUNTER for fullword signed counters and DOUNTER for doubleword unsigned counters.


QUERY COUNTER

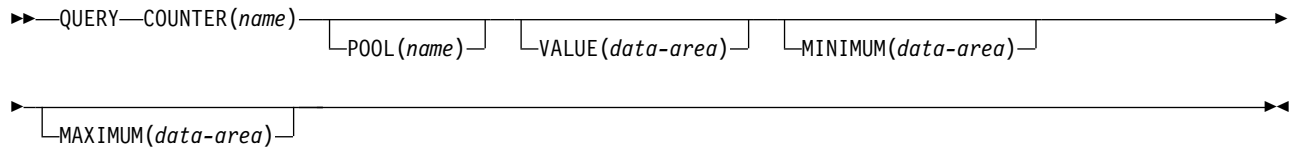

Conditions: INVREQ, LENGERR

This command is threadsafe.

QUERY DOUNTER

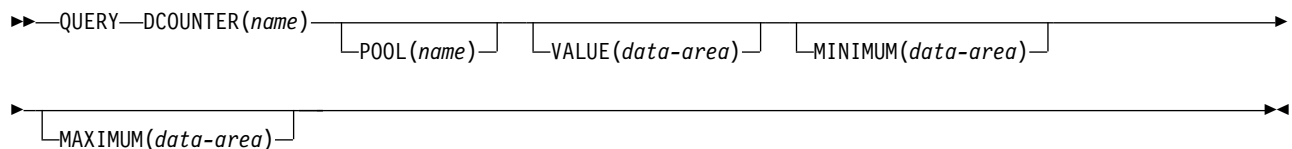

Conditions: INVREQ

This command is threadsafe.

Description

These counter commands return the current, maximum, and minimum values for the named counter.

For information about specifying fullword and doubleword variables on these named counter commands, see “CICS command argument values” on page 4.

Options

COUNTER(name)

Specifies the 16-character name of the fullword counter being queried. Valid characters for names are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

DOUNTER(name)

Specifies the 16-character name of the doubleword counter being queried. Valid characters for names are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

MAXIMUM(data-area)

Specifies the data area in which CICS is to return the maximum number for

the named counter. CICS returns a fullword signed binary value for the COUNTER command and a doubleword unsigned binary value for the DCOUNTER command.

MINIMUM(*data-area*)

Specifies the data area in which CICS is to return the minimum number for the named counter. CICS returns a fullword signed binary value for the COUNTER command and a doubleword unsigned binary value for the DCOUNTER command.

POOL(*poolname*)

Specifies the name of the pool in which the named counter resides.

Valid characters for the pool selector string are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 8 characters, the name must be padded with trailing blanks.

This parameter is optional. If you omit the name of the pool, a pool selector value of 8 blanks is assumed.

If there is no matching entry in the DFHNCOPT options table, CICS uses the name specified on the NCPLDFT system initialization parameter, which Specifies the default named counter pool.

For information about generating a named counter options table using the DFHNCO macro, see the *CICS Application Programming Guide*.

VALUE(*data-area*)

Specifies the data area in which CICS is to return the current value for the named counter. CICS returns a fullword signed binary value for the COUNTER command and a doubleword unsigned binary value for the DCOUNTER command.

Note that, if the named counter is in the counter-at-limit condition, CICS does not return an exception condition. In this case, CICS returns a normal response with a value that is 1 greater than the maximum value specified or assumed for the counter, using unsigned addition. If the maximum value is the largest positive number that can be held in a signed fullword, the value returned by QUERY COUNTER for a counter-at-limit condition is the largest negative number.

Conditions

16 INVREQ

RESP2 values:

- | | |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 201 | Named counter not found. |
| 301 | The server has reported an error code that is not understood by the named counter interface. Generally, this is not possible unless the interface load module, DFHNCIF, is at a lower maintenance or release level than the server itself. |
| 303 | An unexpected error, such as structure failure or loss of connectivity, has occurred on a macro used to access the coupling facility. Further information is in message DFHNC0441 in the application job log. |
| 304 | The pool selection parameter specified in the program cannot be resolved to a valid server name using the current options table. |
| 305 | The interface cannot establish a connection to the server for the selected named counter pool. Further information is in an AXM services message (AXMSCnnnn) in the application job log. |

- 306 An abend occurred during server processing of a request. Further information is in a message in the application job log and the server job log.
- 308 The DFHNCOPT options table module, required to resolve a pool name, cannot be loaded.
- 309 During processing of the options table, the named counter interface encountered an unknown entry format. Either the options table is not correctly generated, or the DFHNCIF interface load module is not at the same release level as the options table.
- 310 An options table entry that matches the given pool name specified a user exit program, but the user exit program is not link-edited with the options table and cannot be loaded.
- 311 A response from the named counter server to the client region interface module, DFHNCIF, indicates that a system-managed rebuild is in progress but the EXEC CICS interface does not recognize the condition. This means that the CICS region is at CICS TS 2.1 or earlier.
- 403 The POOL parameter contains invalid characters or embedded spaces.
- 404 The COUNTER parameter contains invalid characters or embedded spaces.

Default action: terminate the task abnormally.

22 LENGERR

LENGERR occurs for COUNTER commands only and does not apply to DCOUNTER requests. It occurs when a counter that was defined by a DCOUNTER command or by the CALL interface has a value which is too large to be correctly represented as a fullword signed binary value (that is, the counter uses more than 31 bits).

In each of the three cases of overflow, the named counter server completes the operation, and returns a warning response to CICS, which CICS returns to your application program as the RESP2 value. The data area contains the low-order 32 bits returned from the named counter server, which could be a negative number.

RESP2 values:

- 001 The current value that the server has attempted to return in one of the data areas has overflowed into the high-order (sign) bit (that is, the value returned is negative).


Note: LENGERR with RESP2=001 cannot occur for a named counter that is in the counter-at-limit condition. If the counter-at-limit condition has been reached, the value (which could be negative) is returned with a normal response.
- 002 A value is too large for a fullword data area by only 1 bit. In this case, the overflow value is exactly 1.
- 003 A value is too large for a fullword data area by a value greater than 1.

Default action: terminate the task abnormally.

QUERY SECURITY

To query the security authorization of the user.

QUERY SECURITY

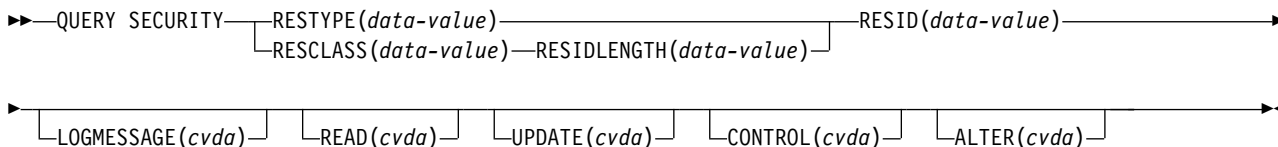

Conditions: INVREQ, LENGERR, NOTFND, QIDERR

This command is threadsafe.

Description

The **QUERY SECURITY** command allows the application to determine whether the user has access to resources defined in the external security manager (ESM). These resources can be:

- In CICS resource classes
- In user-defined resource classes

The user in this context is the user invoking the transaction that contains the **QUERY SECURITY** command.

For more information on the use of the **QUERY SECURITY** command, see Security checking using the Query Security command in *Securing*.

Options

ALTER(cvda)

Query whether the user has ALTER authority for the named resource. The cvda values returned by CICS are ALTERABLE and NOTALTERABLE.

CONTROL(cvda)

Query whether the user has CONTROL authority for the named resource. The cvda values returned by CICS are CTRLABLE and NOTCTRLABLE.

LOGMESSAGE(cvda)

Inhibit security violation messages. The values passed to CICS are LOG (the default value), or, to inhibit messages, NOLOG.

READ(cvda)

Query whether the user has READ authority command for the named resource. The cvda values returned by CICS are READABLE and NOTREADABLE. READ access authority usually permits nondestructive use of a resource as, for example, in the case of READ and INQUIRE commands.

RESCLASS(data-value)

Specifies an 8-character field identifying the name of a valid resource class, that could be non-CICS, in the ESM. The class name identified by RESCLASS is treated literally with no translation.

If the ESM is RACF, the class can be CICS-supplied or user-defined. RESCLASS enables you to define more narrowly the authorization to be queried; for example, you can query at the record or field level.

The responses returned by the command reflect the definition of the RESID resource as defined in the specified RESCLASS.

RESID(*data-value*)

Specifies the name of the CICS or user-defined resource that you want to query the users access to. The value is a character string (1-12 characters for a CICS resource, and 1-246 characters for a user-defined resource, unless you are using the COBOL3 translator option in which case the maximum length is 160 characters).

Note: RESID refers to a CICS-defined resource only when RESTYPE('SPCOMMAND') is specified, otherwise it refers to a user-defined resource. For a list of the CICS RESID values that you can use when RESTYPE('SPCOMMAND') is specified, see RESID values in Securing.

Note that the actual resource checked depends on whether RESCLASS or RESTYPE is specified in the command and whether prefixing is active (SECPRFX=YES or SECPRFX=*prefix* specified as a system initialization parameter).

If RESCLASS is specified, the resource checked is always the actual RESID data-value, whether or not prefixing is on or off. If RESTYPE is specified and SECPRFX=NO, the resource checked is the RESID data-value as specified. Otherwise the resource checked is the RESID data-value prefixed with either the CICS region userid (if SECPRFX=YES), or another prefix (if SECPRFX=*prefix*).

RESIDLENGTH(*data-value*)

Specifies the length, as a fullword binary, of the resource identifier in RESID. You only use this parameter when specifying the RESCLASS option.

RESTYPE(*data-value*)

Specifies the type of resource (1–12 characters) you want to query the user's access to.

The responses returned by the command reflect the results that would be obtained if an actual attempt was made to access the specified CICS resource. The value you specify for RESTYPE must be one of the following resource types:

Table 18. QUERY SECURITY RESTYPE values

| RESTYPE value | Xname parameter |
|---------------|-----------------|
| ATOMSERVICE | XRES |
| BUNDLE | XRES |
| DB2ENTRY | XDB2 |
| DOCTEMPLATE | XRES |
| EPADAPTER | XRES |
| EPADAPTERSET | XRES |
| EVENTBINDING | XRES |
| FILE | XFCT |
| JOURNALNAME | XJCT |
| JOURNALNUM 1 | XJCT |

Table 18. QUERY SECURITY RESTYPE values (continued)

| RESTYPE value | Xname parameter |
|---------------|-----------------|
| JVMSERVER | XRES |
| PROGRAM | XPPT |
| PSB | XPSB |
| SPCOMMAND 2 | XCMD |
| TDQUEUE | XDCT |
| TRANSACTION | XPCT |
| TRANSATTACH | XTRAN |
| TSQUEUE | XTST |
| TSQNAME | XTST |
| XMLTRANSFORM | XRES |

1. Supported for compatibility with earlier releases.
2. SPCOMMAND is a resource type that you can use to specify a RESID for a command.

The **XHFS** system initialization parameter controls resource security for zFS files and does not have a corresponding RESTYPE value on the **QUERY SECURITY** command. Access controls for zFS files follow the system of permissions used by z/OS UNIX System Services, so they operate in a different way.

With dynamic transaction routing, you do not have to install transaction definitions in terminal owning regions. A **QUERY SECURITY** command with a RESTYPE of TRANSATTACH returns the NOTFND condition if the transaction is not installed. Application developers must be aware that the transaction might be routed dynamically.

UPDATE (cvda)

Query whether the user has UPDATE authority for the named resource. The CVDA values returned by CICS are UPDATABLE and NOTUPDATABLE. UPDATE access authority usually permits destructive use of a resource as, for example, in the case of WRITE, DELETE, or UPDATE commands.

Conditions

16 INVREQ

RESP2 values:

- 7 The cvda value is not valid for the LOGMESSAGE.
- 9 The RESID is invalid or filled with blanks.
- 10 The external security manager (ESM) is inactive or not present.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 6 The RESIDLENGTH value is not valid, that is, not in the range 1 through 246.

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

- 1 The RESID is not valid.
- 2 The RESTYPE is not valid.
- 3 The RESID value for RESTYPE (SPCOMMAND) is not valid.
- 5 The RESCLASS is not defined to the external security manager (ESM).
- 8 The resource is not protected. This is only returned when QUERY SECURITY is used with the RESCLASS option (and never occurs with RESTYPE).

Possible causes include:

- RESCLASS not active.
- No profile found.
- ESM not active.

Default action: terminate the task abnormally.

44 QIDERR


RESP2 values:

- 1 An indirect queue name associated with the given RESID is not found.

Default action: terminate the task abnormally.

READ

Read a record from a file.

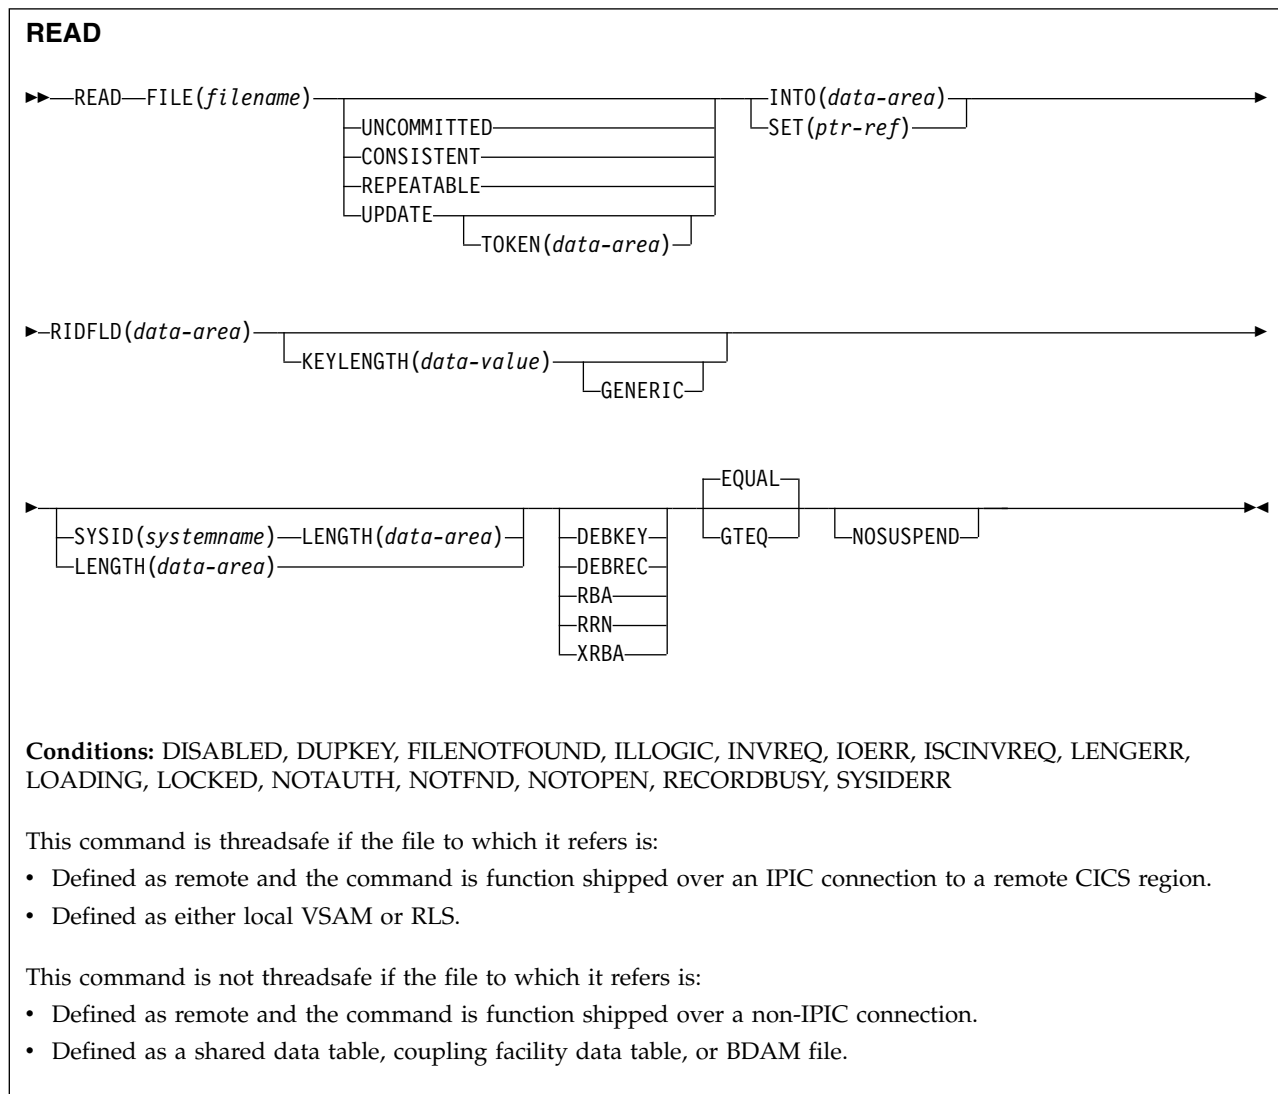

Description

READ reads a record from a file on a local or a remote system.

For both UPDATE and non-UPDATE commands, you must identify the record to be retrieved by the record identification field specified in the RIDFLD option. Immediately upon completion of a READ UPDATE command, the RIDFLD data area is available for reuse by the application program.

Data table considerations

When the READ command reads a CICS-maintained data table, a READ request with UPDATE or RBA is always satisfied by a call to VSAM. A full key read that is neither a generic read nor a READ UPDATE, is satisfied by a reference to the data table if possible. If the record is not found in the table, the source data set is

accessed, unless the table is known to be complete, that is, all records in the source are also present in the table (which is the case if loading is finished and none has been rejected by a user exit).

If you carry out a generic read (using the `GENERIC` option) on a CICS-maintained data table, and CICS returns a `NOTFND` condition because the record is not found in the table, CICS clears the `INTO()` and `RIDFLD()` areas to ensure that an incorrect record is not returned. This behavior optimizes performance, but it differs from the behavior for a generic read of a VSAM file, when the `INTO()` and `RIDFLD()` areas are left unchanged in the event of a `NOTFND` condition. When you convert a VSAM file to a CICS-maintained data table, ensure that any applications that carry out generic reads of the data take appropriate action if a `NOTFND` condition is returned and the `INTO()` and `RIDFLD()` areas are cleared.

When the `READ` command reads a user-maintained data table, only the data table is accessed once loading is complete; the VSAM file is not changed in any way.

When the `READ` command reads a coupling-facility data table, only the data table is accessed, even if the table is initially loaded from a VSAM source data set.

If a file that refers to a user-maintained or coupling facility data table is defined with `RLSACCESS(YES)`, the RLS-specific API options `CONSISTENT`, `NOSUSPEND`, and `REPEATABLE` are not supported.

Reading files accessed in RLS mode

When a file is accessed in RLS mode, non-update read requests can specify one of the read integrity options: `UNCOMMITTED`, `CONSISTENT`, or `REPEATABLE`.

If none of these keywords is specified, CICS uses the value specified on the `READINTEG` parameter of the `FILE` resource definition, for which the default is `UNCOMMITTED`.

If you want to use the level of read integrity specified in the `READINTEG` keyword of the `FILE` definition, and then you need to change from using a local file to a remote file, or if you change the location of a remote file, ensure that:

- The remote file-owning region supports the read integrity options.
- The `FILE` definition in the remote system specifies:
 - RLS mode
 - The correct read integrity values for your application.

`READ` requests that specify the `UPDATE` keyword, or a `CONSISTENT` or `REPEATABLE` read integrity option (either explicitly or implicitly in the `FILE` definition), return the `LOCKED` condition if they reference a record that has a retained lock. The key of a locked record is not returned to the application program. Thus, if an application program specifies `GTEQ` or `GENERIC` on the `READ` request it cannot tell which record key is locked.

If a request specifying read integrity is function-shipped to a member of the CICS family of products that does not support read integrity, the request fails:

- If an ISC link is used, the request receives an `ATNI` abend.
- If an MRO link is used, the request receives an `AXF8` abend.

The AXF8 abend code indicates that your program has attempted to function-ship a request that specifies file control options to a remote CICS region that does not support these options.

Retained and active locks

RECORDBUSY refers to active locks and LOCKED refers to retained locks.

These locks affect READ requests which acquire locks; that is, update requests and requests with read integrity. These are the kinds of READ requests which are referred to in the following bullets. Other READ requests are unaffected by the presence of retained or active locks.

- READ requests for records that have *retained* locks are always rejected with a LOCKED response.
- READ requests for records that have *active* locks wait for the lock to be released, except when the NOSUSPEND keyword is specified, in which case CICS returns the RECORDBUSY response.

Options

CONSISTENT (RLS only)

The record is read with a level of read integrity provided by a VSAM shared lock that lasts for the duration of the request.

If the record is being modified by another task, which therefore holds an exclusive lock, the READ request waits until the update is complete (unless NOSUSPEND is also specified) as follows:

- For a READ request against a non-recoverable file, the READ completes as soon as any VSAM request performing the update completes.
- For a READ request against a recoverable file, the READ request completes when the updating task completes its next sync point or rollback.

DEBKEY

(blocked BDAM) specifies that deblocking is to occur by key. If neither DEBREC nor DEBKEY is specified, deblocking does not occur.

DEBREC

(blocked BDAM) specifies that deblocking is to occur by relative record (relative to zero). If neither DEBREC nor DEBKEY is specified, deblocking does not occur.

EQUAL

specifies that the search is satisfied only by a record having the same key (complete or generic) as that specified in the RIDFLD option.

FILE(*filename*)

specifies the name of the file to be accessed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

GENERIC

(VSAM KSDS, paths and data tables) specifies that the search key is a generic key whose length is specified in the KEYLENGTH option. The search for a record is satisfied when a record is found that has the same starting characters (generic key) as those specified.

GTEQ

(VSAM KSDS, paths and data tables) specifies that, if the search for a record that has the same key (complete or generic) as that specified in the RIDFLD option is unsuccessful, the first record that has a greater key is retrieved.

INTO(*data-area*)

specifies the data area into which the record retrieved from the data set is to be written.

When INTO is specified, LENGTH must either be specified explicitly or must be capable of being defaulted from the INTO option using the length attribute reference in assembler language, or STG and CSTG in PL/I. LENGTH must be specified explicitly in C.

KEYLENGTH(*data-value*)

specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case the KEYLENGTH value is not valid. This option must be specified if GENERIC is specified, and it can be specified whenever a key is specified. However, if the length specified is different from the length defined for the data set and the operation is not generic, the INVREQ condition occurs.

The INVREQ condition also occurs if GENERIC is specified and the KEYLENGTH value is not less than that specified in the VSAM definition.

If KEYLENGTH(0) is used with the object of reading the first record in the data set, the GTEQ option must also be specified. If EQUAL is specified either explicitly or by default with KEYLENGTH(0), the results of the READ are unpredictable.

For remote files, the KEYLENGTH value can be specified in the FILE definition. If KEYLENGTH is not defined there, and is not specified in the application program, and the key is longer than 4 characters, the default value is 4.

LENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data area where the record is to be put. On completion of the READ command, the LENGTH parameter contains the actual length of the record.

This option must be specified if SYSID is specified.

If the file is on a remote system, the LENGTH parameter need not be set here but must be set in the file resource definition.

If the file is on a local system, the LENGTH parameter must be set for variable-length records, using the INTO option, but not for fixed-length records. It is, however, advisable to specify the length for fixed-length records because:

- It causes a check to be made that the record being read is not too long for the available data area.
- When reading fixed-length records into an area longer than the record being accessed, the LENGERR condition is raised for COBOL, C, PL/I, and assembler-language applications if the LENGTH option is specified. If the LENGTH option is not explicitly specified, then the LENGERR condition is returned if the length can be inferred from the data area. If the length specified exceeds the file record length, CICS uses the longer length for the move. If the target area in the application program is not large enough, storage is overlaid beyond the target area.

If you specify the SET option, you do not need to specify the LENGTH option.

When reading into a target data area that is longer than the record being read, the contents of the target data area, from the end of the retrieved record to the end of the target data area, are unpredictable.

If you specify the INTO option, the LENGTH argument must be a data area that specifies the largest record the program accepts. If the retrieved record is longer than the value specified in the LENGTH option, the record is truncated to the specified value and the LENGERR condition occurs. In this case, the LENGTH data area is set to the length of the record before truncation.

Note that a file control command issued against a variable-length record in a file defined on the local CICS system fails with a LENGERR condition if a length is not specified. However, if the same command is issued against a file defined on a remote system, the command does not fail.

NOSUSPEND (RLS only)

The request does not wait if the record is locked by VSAM with an active lock, including records locked as the result of a DEADLOCK.

Note: Requests that specify NOSUSPEND wait for at least 1 second before CICS returns the RECORDBUSY response.

RBA

(VSAM KSDS or ESDS base data sets, or CICS-maintained data tables only, but not paths) specifies that the record identification field specified in the RIDFLD option contains a relative byte address. This option should be used only when reading records from an ESDS base or when reading from a KSDS base and using relative byte addresses instead of keys to identify the records.

You cannot use RBA for:

- User-maintained data tables
- Coupling facility data tables
- Any KSDS file opened in RLS access mode
- KSDS files that use extended addressing

Also, you are recommended not to use RBA for ESDS files that hold more than 4GB. (Use XRBA instead.)

REPEATABLE (RLS only)

The record is read with a level of read integrity provided by a VSAM shared lock that lasts for the duration of the unit of work in which the read request is issued.

If the record is being modified by another task, which therefore holds an exclusive lock, the READ request waits until the update is complete (unless NOSUSPEND is also specified) as follows:

- For a recoverable file, the READ request completes when the updating transaction completes its next syncpoint or rollback.
- For a non-recoverable file, the READ completes as soon as the VSAM request performing the update completes.

After the READ request has completed, the record remains locked to the task that issued the READ. Other tasks may continue to read the record but no other task is allowed to update the record until the task that issued the READ performs its next syncpoint or rollback.

RIDFLD(data-area)

specifies the record identification field. The contents can be a key, a relative byte address, or relative record number (for VSAM data sets), or a block

reference, a physical key, and a deblocking argument (for BDAM data sets). For a relative byte address or a relative record number, the format of this field must be fullword binary. For a relative byte address, the RIDFLD value can be greater than or equal to zero. For a relative record number, the RIDFLD value must be greater than or equal to 1, even when the GTEQ option is specified.

See the *CICS Application Programming Guide* for more information about defining the record identification field.

Immediately upon completion of the command, the RIDFLD data area is available for reuse by the application program, even if UPDATE was specified.

Make sure that the variable specified by RIDFLD value is not shorter than the KEYLENGTH specified in this command or, if KEYLENGTH is not specified, the key length of the file you are reading; otherwise, the results are unpredictable.

RRN

(VSAM RRDS) specifies that the record identification field specified in the RIDFLD option contains a relative record number. This option should only be used with files that reference relative record data sets.

SET(ptr-ref)

indicates that CICS is to supply a buffer where the record is read, and specifies the pointer reference that is to contain the address of the retrieved record.

If the DUPKEY condition occurs in assembler language the specified register has not been set. The specified register can be loaded from DFHEITP1.

The pointer reference is valid until the next READ command for the same file or until completion of a corresponding REWRITE, DELETE, or UNLOCK command, or a SYNCPOINT in the case of READ UPDATE SET. If you want to retain the data within the field addressed by the pointer, it should be moved to your own area.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16 MB line.

If DATALOCATION(BELOW) is associated with the application program, the address of the data is below the 16 MB line.

If TASKDATAKEY (USER) is specified for the executing transaction, the data returned is in a user-key; otherwise it is in a CICS-key.

SYSID(systemname)

specifies the name of the system the request is directed to.

If you specify SYSID, and omit both RBA and RRN, you must also specify LENGTH and KEYLENGTH; they cannot be found in the resource definition.

TOKEN(data-area)

specifies, as a fullword binary value, a unique identifier for this READ UPDATE request. This is an output value returned by file control to the requesting task, for use in associating a subsequent REWRITE or DELETE (or UNLOCK) request with the record returned on this READ UPDATE request.

TOKEN can be function shipped. However, if a request specifying TOKEN is function shipped to a member of the CICS family of products that does not recognize this keyword, the request fails.

Note: If you specify TOKEN it implies update.

UNCOMMITTED

The record is read without read integrity.

The current value of the record, as known to VSAM, is returned. No attempt is made to serialize this read request with any concurrent update activity for the same record. The record may be in the process of being updated by another task, and the record data may change later if that update is subsequently backed out.

UPDATE

specifies that the record is to be obtained for updating or (for VSAM and data tables) deletion. If this option is omitted, a read-only operation is assumed.

UPDATE guarantees read integrity. The mechanism used to ensure data integrity depends on the type of file resource:

- For a VSAM file accessed in RLS mode, the record to be updated is locked by the SMSVSAM server.
- For a VSAM file accessed in non-RLS mode, the record to be updated is locked by CICS and, in addition, the control interval containing the record is held in exclusive control by VSAM.
- For a VSAM file accessed in non-RLS mode, and log(UNDO), CICS holds a record lock until the task syncpoints.
- For a BDAM file, the record to be updated is held in exclusive control by BDAM.
- For a user-maintained data table, the record to be updated is locked by CICS.
- For a CICS-maintained data table, the record to be updated is locked by CICS and, in addition, the control interval containing the record is held in exclusive control by VSAM. The VSAM control interval lock is required because changes to the data table are reflected in the source data set, which is accessed in non-RLS mode.
- For a coupling facility data table using the locking model, the record to be updated is locked by the coupling facility data table server.
- For a coupling facility data table using the contention model, records are not locked, enabling the records to be read for update by more than one task. If a record read for update by one task is then changed by another, the first task is notified, when it issues a REWRITE or DELETE command, by the CHANGED exception condition. If a record read for update by one task is then deleted by another, the first task is notified, when it issues a REWRITE or DELETE command, by the NOTFND condition.

If another task has issued a READ REPEATABLE request against the same record, your READ UPDATE request is made to wait until that task reaches SYNCPOINT (unless you issued NOSUSPEND).

XRBA

specifies that the record identification field specified in the RIDFLD option contains an extended relative byte address. This option should be used when reading records from an ESDS extended addressing data set.

KSDS data sets cannot be accessed by XRBA.

Conditions

84 DISABLED

RESP2 values:

50 A file is disabled because it was initially defined as disabled and has not since been enabled.

A file is disabled because it has been disabled by a SET FILE or a CEMT SET FILE command.

Default action: terminate the task abnormally.

15 DUPKEY

RESP2 values: (VSAM)

140 A record is retrieved by way of an alternate index with the NONUNIQUEKEY attribute, and another alternate index record with the same key follows

In assembler language, if the SET option is being used, the specified register has not been set, but can be loaded from DFHEITP1.

Default action: terminate the task abnormally.

12 FILENOTFOUND

RESP2 values:

1 The file name supplied in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

21 ILLOGIC

RESP2 values: (VSAM)

110 A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For user-maintained data tables, this condition occurs only for a non-UPDATE READ during loading when CICS has attempted to retrieve the record from the source data set.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

20 READ is not allowed according to the resource definition.

A READ command with the UPDATE option is issued to a file where update operations are not allowed according to the resource definition.

25 The KEYLENGTH and GENERIC options are specified, and the length specified in the KEYLENGTH option is greater than or equal to the length of a full key.

26 The KEYLENGTH option is specified (but the GENERIC option is not specified), and the specified length does not equal the length defined for the data set to which this file refers.

28 Following a READ UPDATE command without TOKEN, another READ UPDATE without TOKEN was issued against the same file without an intervening REWRITE, DELETE without RIDFLD specified, UNLOCK, or SYNCPOINT command. This condition may in some cases be raised despite the fact that the first READ UPDATE was not successful, for example because it timed out.

40 A BDAM key conversion error occurred.

- 42 The KEYLENGTH and GENERIC options are specified, and the length specified in the KEYLENGTH option is less than zero.
 - 44 The command does not conform to the format of READ for a user-maintained or coupling facility data table; for example, if RBA is specified.
 - 51 A READ to a KSDS file that is being accessed in RLS mode specifies the RBA keyword. RLS mode does not support relative byte address access to KSDS data sets.
 - 52 CONSISTENT is specified on a READ request to a non-RLS mode file, or to a data table that is specified with RLSACCESS(YES). CONSISTENT is not allowed if the file refers to a data table, even if the file definition specifies RLSACCESS(YES).
 - 53 REPEATABLE is specified on a READ request to a non-RLS mode file or to a data table that is specified with RLSACCESS(YES). REPEATABLE is not allowed if the file refers to a data table, even if the file definition specifies RLSACCESS(YES).
 - 55 NOSUSPEND is specified on a READ request to a non-RLS mode file or to a data table that is specified with RLSACCESS(YES). NOSUSPEND is not allowed if the file refers to a data table, even if the file definition specifies RLSACCESS(YES).
 - 56 An attempt to update a recoverable coupling facility data table has failed because the current unit of work has already updated 1024 recoverable coupling facility data tables. You cannot update more than 1024 recoverable coupling facility data tables within a unit of work.
 - 59 XRBA was specified, but the data set is not an extended ESDS.
- Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120 There is an I/O error during the READ operation. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR normally indicates a hardware error.

For user-maintained data tables, this condition occurs only for a non-UPDATE READ during loading when CICS has attempted to retrieve the record from the source data set.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

54 ISCVNREQ

RESP2 values:

- 70 The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 10 Neither the LENGTH option nor the SET option is specified on a READ command for a file with variable-length records or for a BDAM file with variable-length or undefined-format records.
- 11 The length of a record read with the INTO option specified exceeds the value specified in the LENGTH option; the record is truncated, and the data area supplied in the LENGTH option is set to the actual length of the record.
- 13 An incorrect length is specified for a file with fixed-length records.

Default action: terminate the task abnormally.

94 LOADING

RESP2 values:

- 104 The request cannot be satisfied because it is issued against a data table that is still being loaded. The condition can be raised for one of the following reasons:

- The READ specifies a record that has not yet been loaded into a coupling facility data table. Records can be read or modified while a CFDT is loading only if the requested key is within the range of those records already loaded.

The LOADING response can also be returned for a coupling facility data table that has failed during loading. For more information about what happens if the load for a coupling facility data table fails, see the description of the XD TLC global user exit in the *CICS Customization Guide*.

- The READ specifies the UPDATE option for a user-maintained data table. A user-maintained data table cannot be modified during loading.
- The READ specifies the GENERIC or GTEQ options for a user-maintained data table. While a UMT is being loaded, you can use read requests with precise keys only.

If your application programs encounter the LOADING condition persistently or too frequently, check that this is not caused by conflicting file definitions that reference the same data set.

Default action: terminate the task abnormally.

100 LOCKED

RESP2 values:

- 106 An attempt is being made to read a record either specifying the UPDATE keyword, or specifying (explicitly or implicitly) CONSISTENT or REPEATABLE, but the record is locked by a retained lock (see “Retained and active locks” on page 446).

The LOCKED condition can also occur for a READ UPDATE request to a recoverable CFDT that uses the locking model, if the record being read is locked by a retained lock. See the Coupling facility data table retained locks in the *CICS Recovery and Restart Guide* for information about investigating retained locks on records in a coupling facility data table.

Default action: abend the task with code AEX8.

70 NOTAUTH

RESP2 values:

101 A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

80 An attempt to retrieve a record based on the search argument provided is unsuccessful. For data tables, this condition occurs if an attempt to read a record is unsuccessful because there is no entry with the specified key in the data table. This does not mean that there is no such record in the source data set (if the table was created from one); it may be that such a record is present but was either rejected during initial loading by the user exit XDTRD, or was subsequently deleted from the data table. For remote files, this condition occurs if an attempt to read a record is made without keylength specified either in the application or the file definition, and the actual key is longer than 4 characters.

81 XRBA was specified, and the value of RIDFLD was greater than 4 GB, but the data set is not an extended ESDS.

Default action: terminate the task abnormally.

19 NOTOPEN

RESP2 values:

60 NOTOPEN (RESP2 60) is returned for one of the following reasons:

- The requested file is CLOSED and UNENABLED. The CLOSED, UNENABLED state is reached after a CLOSE request has been received against an OPEN ENABLED file and the file is no longer in use. You can also make CLOSED, UNENABLED the initial state, by specifying STATUS(UNENABLED) and OPENTIME(FIRSTREF) on the FILE resource definition. (For BDAM files, you use the FILSTAT parameter of DFHFCT TYPE=FILE.)
- The requested file is OPEN and in use by other transactions, but a CLOSE request against the file has been received.
- A READ command is issued against a data set that is quiesced, or is being quiesced, as a result of a SET DSNAME QUIESCED or IMMQUIESCED command.
- The requested file is CLOSED and ENABLED, so CICS has tried to open the file as part of executing the request. This file open has failed for some reason. You should examine the console for messages that explain why the file open has been unsuccessful.

This condition does not occur if the request is made to a CLOSED, DISABLED file. In this case, the DISABLED condition occurs.

Default action: terminate the task abnormally.

101 RECORDBUSY

RESP2 values:

107 The NOSUSPEND keyword is specified and the record is locked by an active lock (see "Retained and active locks" on page 446).

Default action: abend the task with code AEX9.

53 SYSIDERR

RESP2 values:

130 The SYSID option specifies a name that is neither the local system nor

a remote system that is defined by a CONNECTION or IPCONN definition. SYSIDERR also occurs when the link to the remote system is known but unavailable. In the case of an IPCONN, SYSIDERR occurs if the link is known but either the local or remote systems do not support file control commands that are function shipped using IP interconnectivity.

- 131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132 The READ is issued for a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

Examples

The following example shows you how to read a record from a file named MASTER into a specified data area:

```
EXEC CICS READ  
      INTO(RECORD)  
      FILE('MASTER')  
      RIDFLD(ACCTNO)
```


The following example shows you how to read a record for update from a VSAM file using a generic key and specifying a greater-or-equal key search.

```
EXEC CICS READ  
      INTO(RECORD)  
      LENGTH(RECLEN)  
      FILE('MASTVSAM')  
      RIDFLD(ACCTNO)  
      KEYLENGTH(4)  
      GENERIC  
      GTEQ  
      UPDATE
```

READNEXT

Read next record during a browse of a file.

READNEXT

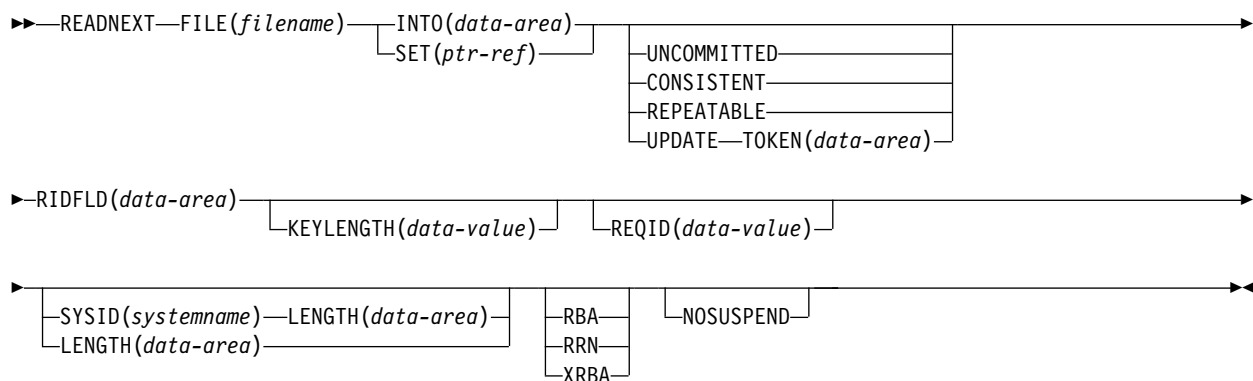

Conditions: DUPKEY, ENDFILE, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, LENGERR, LOADING, LOCKED, NOTAUTH, NOTFND, RECORDBUSY, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

READNEXT can be used repeatedly to read records in sequential order from a file on a local or a remote system. Such a series of sequential read commands is known as a *browse* of the file. A browse can also consist of a sequence of READNEXT and READPREV commands in any order. A browse must be initiated with the STARTBR command, to identify the starting point of the browse, and terminated with the ENDBR command.

You must provide, in the RIDFLD option, a data area that is sufficiently large to contain a complete identifier (full key, RBA, or RRN) of records in the file. This data area can be used both as an output and as an input parameter.

It is used as an output parameter when CICS, on completion of each READNEXT command, places the complete identifier of the record just retrieved into the RIDFLD data area. CICS then holds this identifier to mark the point from which the subsequent READNEXT is to continue.

It may, except for BDAM, also be used as an input parameter. Modifying the RIDFLD before issuing the next READNEXT command causes that command to reposition the browse to the new identifier, from which it continues in the usual way. If the browse was started with the GENERIC option, the modified RIDFLD must be generic. If the browse was started with the GTEQ option, the next record returned is the first record in the data set with a key greater than or equal to the modified RIDFLD.

A READNEXT command following a READPREV, or a STARTBR or RESETBR that specified a 'last' key value, is treated as though the RIDFLD value has been modified, and results in a reposition (as above).

Reading files accessed in RLS mode

For files accessed in RLS mode, you can include the UPDATE keyword on the READNEXT request to update some records during the browse. If you specify UPDATE you must also specify TOKEN. You can then update the record by issuing a DELETE or REWRITE command that specifies the TOKEN returned on the browse function.

Note: TOKEN without the UPDATE keyword implies UPDATE.

Use of the UPDATE option is subject to the following rules:

- You can specify UPDATE on a READNEXT command only if the file is accessed in RLS mode. If you specify UPDATE for a file accessed in non-RLS mode, CICS returns INVREQ.
- You can specify UPDATE on READNEXT, but not on the STARTBR or RESETBR commands.
- You can intermix UPDATE and non-update requests within the same browse.
- CICS does not preserve the UPDATE option for you from one READNEXT command to the next.

CICS supports only one TOKEN in a browse sequence, and the TOKEN value on each READNEXT invalidates the previous value.

Locks for UPDATE

Specifying UPDATE on a READNEXT command acquires an exclusive lock. The duration of these exclusive locks within a browse depends on the action your application program takes:

- If you decide to DELETE or REWRITE the last record acquired by a READNEXT UPDATE in a browse, using the associated token, the lock remains active as follows:
 - If the file is recoverable, the lock is released at completion of the next syncpoint or rollback.
 - If the file is non-recoverable, the lock will be released by the time ENDBR has completed, but might be released earlier.
- If you decide *not* to update the last record read, CICS frees the exclusive lock when your program either issues another READNEXT or READPREV command, or ends the browse.

Important: The UNLOCK command does *not* free an exclusive lock held by VSAM against a record acquired by READNEXT UPDATE. An UNLOCK in a browse invalidates the TOKEN returned by the last request.

Locks for read integrity

Specifying one of the read integrity options acquires a shared lock on each READNEXT. The duration of these shared locks with a browse depends on the type of read integrity you specify:

- If you specify CONSISTENT read integrity, the shared lock is held only for the duration of each read request—that is, until the record is returned to your program.
- If you specify REPEATABLE read integrity, the shared lock is held for the duration of the unit of work in which the browse is performed. In this case, your program could acquire a large number of shared locks, which will prevent the granting of exclusive locks for update functions. You should use REPEATABLE read integrity in a browse with caution.

Function shipping READNEXT with UPDATE or read integrity

If a READNEXT command that specifies UPDATE or one of the read integrity options is function-shipped to a member of the CICS family of products that does not support UPDATE or the read integrity options, the request fails:

- If an ISC link is used, the request receives an ATNI abend.
- If an MRO link is used, the request receives an AXF8 abend.

AXF8 is an abend code, received by the sending side of a function-shipped request. It indicates that an attempt has been made to send a request that specifies UPDATE on an MRO link to a CICS region that does not support update or read integrity options.

Read integrity

When a file is accessed in RLS mode, non-update read requests can specify read integrity options: UNCOMMITTED, CONSISTENT, or REPEATABLE.

If you do not specify any of these keywords, CICS uses the value specified on the READINTEG parameter of the FILE resource definition, for which the default is UNCOMMITTED.

If you want to use the level of read integrity specified in the READINTEG keyword of the FILE definition, and then you need to change from using a local file to a remote file, or if you change the location of a remote file, ensure that:

- The remote file-owning region is at the CICS Transaction Server for OS/390®, Version 1 Release 1 (or later) level.
- The FILE definition in the remote system specifies:
 - RLS mode
 - The correct read integrity values for your application.

Retained and active locks

RECORDBUSY refers to active locks, and LOCKED refers to retained locks.

These locks affect READNEXT requests which acquire locks; that is, update requests and requests with read integrity. These are the kinds of READNEXT requests which are referred to in the following bullets. Other READNEXT requests are unaffected by the presence of retained or active locks.

- READNEXT requests for records that have *retained* locks are always rejected with a LOCKED response.
- READNEXT requests for records that have *active* locks wait for the lock to be released, except when the NOSUSPEND keyword is specified, in which case CICS returns the RECORDBUSY response.

Options

CONSISTENT (RLS only)

The record is read with a level of read integrity provided by a VSAM shared lock that lasts for the duration of the request.

If the record is being modified by another task, which therefore holds an exclusive lock, the READNEXT request waits until the update is complete (unless NOSUSPEND is also specified) as follows:

- For a READNEXT request against a non-recoverable file, the READ completes as soon as any VSAM request performing the update completes.
- For a READNEXT request against a recoverable file, the READ request completes when the updating task completes its next sync point or rollback.

FILE(*filename*)

specifies the name of the file to be browsed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

INTO(*data-area*)

specifies the data area into which the record retrieved from the data set is to be written.

KEYLENGTH(*data-value*)

specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case KEYLENGTH is not valid.

If the browse was started without the GENERIC option (that is a full key browse) and if the length specified is different from the length defined for the data set, the INVREQ condition occurs.

If the browse was started with the GENERIC option (that is, a generic key browse), and if the length specified is greater than the length specified for the data set, the INVREQ condition occurs.

If GTEQ and GENERIC were specified on the most recent STARTBR or RESETBR command, issuing READNEXT with KEYLENGTH(0) specified repositions the BROWSE at the start of the file. If EQUAL had been specified, the effect of READNEXT KEYLENGTH(0) would be unpredictable.

For a generic browse, CICS maintains a current key length for the browse. The current key length is initialized to be the value specified as KEYLENGTH on the STARTBR command.

You can modify the current key length by specifying KEYLENGTH on a READNEXT or RESETBR command. If the current key length is changed, this causes the browse to be repositioned. The browse is repositioned to the key whose initial characters match the value specified in the RIDFLD for the current key length.

The current key length is zero after a request that specifies KEYLENGTH(0).

IF KEYLENGTH is omitted on a READNEXT command, the current key length remains the same and the browse continues without repositioning.

If KEYLENGTH is specified on a READNEXT command and is equal to the current key length, this is treated as being no change and the browse is not repositioned. The one exception to this is when KEYLENGTH(0) is specified, which always causes the browse to be repositioned to the beginning of the file.

KEYLENGTH can be specified during a generic browse with a value equal to the full key length. This does not cause the current key length to change and the browse is not repositioned. The ability to specify the full key length during a generic browse is provided to allow requests that specify SYSID to be able to tell the function-shipping transformers how long the key is, so that the transformers can ship the key to the file-owning region.

A browse can be repositioned by modifying the RIDFLD data area. A generic browse is repositioned only if the modification to RIDFLD changes the part of RIDFLD corresponding to the current key length. A consequence of this is that the browse cannot be repositioned by modifying the RIDFLD data area if the current key length is zero.

For remote files, the KEYLENGTH can be specified in the FILE definition. If KEYLENGTH is not defined there, and is not specified in the application program, and the key is longer than 4 characters, the default value is 4.

LENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data area where the record is to be put. On completion of the READNEXT command, the LENGTH parameter contains the actual length of the record.

This option must be specified if SYSID is specified.

If the file is on a remote system, the LENGTH parameter need not be set here but must be set in the file resource definition.

If the file is on a local system, the LENGTH parameter must be set for variable-length records, using the INTO option, but not for fixed-length records. It is, however, advisable to specify the length for fixed-length records because:

- It causes a check to be made that the record being read is not too long for the available data area.
- When browsing fixed-length records into an area longer than the record being accessed, the LENGERR condition is raised for COBOL, C, PL/I, and assembler-language applications if the LENGTH option is specified. If the LENGTH option is not explicitly specified, then the LENGERR condition is returned if the length can be inferred from the data area. If the length specified exceeds the file record length, CICS uses the longer length for the move. If the target area in the application program is not large enough, storage is overlaid beyond the target area.

If you specify the SET option, you need not also specify the LENGTH option.

When browsing into a target data area longer than the record being read, the contents of the target data area, from the end of the retrieved record to the end of the target data area, are unpredictable.

If you specify the INTO option, the LENGTH argument must be a data area that specifies the largest record the program accepts. If the retrieved record is longer than the value specified in the LENGTH option, the record is truncated to the specified value and the LENGERR condition occurs. In this case, the LENGTH data area is set to the length of the record before truncation.

Note that a file control command issued against a variable-length record in a file defined on the local CICS system fails with a LENGERR condition if a length is not specified. However, if the same command is issued against a file defined on a remote system, the command does not fail.

NOSUSPEND (RLS only)

The request does not wait if the record is locked by VSAM with an active lock, including records locked as the result of a DEADLOCK.

Note: Requests that specify NOSUSPEND wait for at least 1 second before CICS returns the RECORDBUSY response.

RBA

(VSAM KSDS or ESDS base data sets, or CICS-maintained data tables only, but not paths) specifies that the record identification field specified in the RIDFLD option contains a relative byte address.

This option must be specified when the STARTBR or RESETBR command specified the RBA option. It must not be specified when the STARTBR or RESETBR command did not specify RBA.

You cannot use RBA for:

- User-maintained data tables
- Coupling facility data tables
- Any KSDS file opened in RLS access mode
- KSDS files that use extended addressing

Also, you are recommended not to use RBA for ESDS files that hold more than 4GB. (Use XRBA instead.)

REPEATABLE (RLS only)

The record is read with a level of read integrity provided by a VSAM shared lock that lasts for the duration of the unit of work in which the read request is issued.

If the record is being modified by another task, which therefore holds an exclusive lock, the READNEXT request waits until the update is complete (unless NOSUSPEND is also specified) as follows:

- For a recoverable file, the READNEXT request completes when the updating transaction completes its next sync point or rollback.
- For a non-recoverable file, the READNEXT completes as soon as the VSAM request performing the update completes.

After the READNEXT request has completed, the record remains locked to the task that issued the READNEXT. Other tasks may continue to read the record but no other task is allowed to update the record until the task that issued the READNEXT performs its next syncpoint or rollback.

REQID(*data-value*)

specifies as a halfword binary value a unique request identifier for a browse, used to control multiple browse operations on a file. If this option is not specified, a default value of zero is assumed.

RIDFLD(*data-area*)

specifies the record identification field. The contents can be a key, a relative byte address, or relative record number (for VSAM data sets), or a block reference, physical key, and deblocking argument (for BDAM data sets). For a relative byte address or a relative record number, the format of this field must

be fullword binary. For a relative byte address, the RIDFLD can be greater than or equal to zero. For a relative record number, the RIDFLD value can be greater than or equal to 1.

See the *CICS Application Programming Guide* for more information about defining the record identification field.

Even if the browse is generic, this RIDFLD should always be large enough to accommodate the complete record identifier. This is because, on completion of the READNEXT command, the field is updated by CICS with the complete identification of the record retrieved.

RRN

(VSAM RRDS) specifies that the record identification field specified in the RIDFLD option contains a relative record number.

SET(ptr-ref)

specifies the pointer reference that is to be set to the address of the retrieved record.

In assembler language, if the DUPKEY condition occurs, the register specified will not have been set, but can be loaded from DFHEITP1.

The pointer reference is valid until the next READNEXT or READPREV command specifies SET for the same browse (REQID) for the same file. The pointer is no longer valid after an ENDBR or SYNCPOINT command. If you want to retain the data within the field addressed by the pointer, you must move it to your own area.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16 MB line.

If DATALOCATION(BELOW) is associated with the application program, the address returned in the SET pointer is below the 16 MB line.

If TASKDATAKEY(USER) is specified for the running task, the data returned is in user-key storage; otherwise it is in CICS-key storage.

SYSID(systemname)

specifies the name of the system to which the request is directed.

If you specify SYSID, and omit both RBA and RRN, you must also specify LENGTH and KEYLENGTH; they cannot be found in the resource definition.

TOKEN(data-area) (RLS only)

Returns, as a fullword binary value, the request identifier for this READNEXT UPDATE request. This is an output value returned by file control to the requesting task, for use in associating a subsequent REWRITE or DELETE (or UNLOCK) request with the record returned on this READNEXT command.

You must specify the returned TOKEN on a subsequent REWRITE or DELETE command to identify the record being rewritten or deleted. You can also specify the value returned by CICS on the TOKEN option on a subsequent UNLOCK command, to identify the token that is being invalidated.

You must specify TOKEN if you specify UPDATE (but UPDATE is assumed if you specify TOKEN without UPDATE).

CICS supports only one active TOKEN at a time for a given REQID. Thus, a TOKEN value remains valid only until the following READNEXT, READPREV, RESETBR, or ENDBR command for this browse, or until a REWRITE, DELETE, or UNLOCK command (whichever is first).

TOKEN can be function shipped. However, if a request specifying TOKEN is function shipped to a member of the CICS family of products that does not recognize this keyword, the request fails.

UNCOMMITTED

The record is read without read integrity. The current data, as known to VSAM, is returned. No attempt is made to serialize this read request with any concurrent update activity for the same record. The record may be being updated by another transaction, therefore the value of the record may change later if that update is subsequently backed out.

UPDATE (RLS only)

Specifies that the record is to be obtained for updating or deletion. If this option and TOKEN are both omitted, read only is assumed.

If you specify UPDATE, you must also specify TOKEN.

UPDATE is only valid for files defined to the local region

XRBA

specifies that the record identification field specified in the RIDFLD option contains an extended relative byte address. This option should be used when browsing records in an ESDS extended addressing data set.

You cannot specify XRBA on a READNEXT command unless the associated STARTBR or RESETBR command also specified XRBA.

KSDS data sets cannot be accessed by XRBA.

Conditions

15 DUPKEY

RESP2 values (VSAM):

140 A record is retrieved by way of an alternate index with the NONUNIQUEKEY attribute, and another alternate index record with the same key follows. It does not occur as a result of a READNEXT command that reads the last of the records having the nonunique key.

In assembler language, if the SET option is being used, the register specified will not have been set, but can be loaded from DFHEITP1.

Default action: terminate the task abnormally.

20 ENDFILE

RESP2 values:

90 An end-of-file condition is detected during the browse.

Default action: terminate the task abnormally.

12 FILENOTFOUND

RESP2 values:

1 A file name referred to in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

21 ILLOGIC

The browse that is currently in progress is terminated when this condition is raised.

RESP2 values (VSAM):

110 A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 20** The FILE definition does not allow updates.
- 25** The KEYLENGTH option is specified for a generic browse (that is, one where GENERIC was specified on the STARTBR or the last RESETBR) and the value of KEYLENGTH was greater than the full key length.
- 26** The KEYLENGTH option is specified for a nongeneric browse, and the specified length does not equal the length defined for the data set to which this file refers.
- 34** The REQID, SYSID, or file name does not match that of any successful STARTBR command, or a SYNCPOINT was issued causing STARTBR, READNEXT/READPREVs position to be lost.
- 37** The type of record identification (for example, key or relative byte address) used to access a data set during the browse has been changed. You cannot specify one type of addressing on STARTBR and another on READNEXT.
- 42** The KEYLENGTH option is specified for a generic browse (that is one where GENERIC was specified on the STARTBR or the last RESETBR) and the value of KEYLENGTH was less than zero.
- 52** CONSISTENT is specified on a READ request to a non-RLS mode file, or to a data table that is specified with RLSACCESS(YES). CONSISTENT is not allowed if the file refers to a data table, even if the file definition specifies RLSACCESS(YES).
- 53** REPEATABLE is specified on a READ request to a non-RLS mode file, or to a data table that is specified with RLSACCESS(YES). REPEATABLE is not allowed if the file refers to a data table, even if the file definition specifies RLSACCESS(YES).
- 54** UPDATE is not allowed because the file is not a VSAM file that is accessed in RLS mode.
- 55** NOSUSPEND is specified on a READ request to a non-RLS mode file, or to a data table that is specified with RLSACCESS(YES). NOSUSPEND is not allowed if the file refers to a data table, even if the file definition specifies RLSACCESS(YES).

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120** There is an I/O error during the READNEXT command. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

54 ISCVNREQ

RESP2 values:

- 70** The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 10** Neither the LENGTH nor the SET option is specified for a file with variable-length records or a BDAM file with undefined-format records.
- 11** The length of the record read with the INTO option specified exceeds the value specified in the LENGTH option; the record is truncated, and the data area supplied in the LENGTH option is set to the actual length of the record.
- 13** An incorrect length is specified for a file with fixed-length records.

Default action: terminate the task abnormally.

94 LOADING

RESP2 values:

- 104** The read request specifies a record key for a record in a coupling facility data table that is still being loaded, and the key is out of range of the records already loaded. Records can be browsed in a coupling facility data table during loading only if the requested key is within the range of those records already loaded.

The LOADING response can also be returned for a coupling facility data table that has failed during loading. For more information about what happens if the load for a coupling facility data table fails, see the description of the XD TLC global user exit in the *CICS Customization Guide*.

If your application programs encounter the LOADING condition persistently or too frequently, check that this is not caused by conflicting file definitions that reference the same data set.

100 LOCKED

RESP2 values:

- 106** The read request specifies the UPDATE keyword, or one of the read integrity keywords CONSISTENT or REPEATABLE, or the file resource definition specifies read integrity, but VSAM holds a retained lock against the record (see “Retained and active locks” on page 458).

The key of the locked record is not returned to your application program. If you handle this condition and control is returned to your program, the browse can continue and retrieve the record following the locked record by issuing another READNEXT request.

The LOCKED condition can also occur for a request to a recoverable CFDT that uses the locking model, if the record that is being read is locked by a retained lock. See the *CICS Recovery and Restart Guide* for information about investigating retained locks on records in a coupling facility data table.

Default action: abend the task with code AEX8.

70 NOTAUTH

RESP2 values:

101 A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

80 An attempt to retrieve a record based on the search argument provided is unsuccessful. This may occur if the READNEXT command immediately follows a STARTBR command that specified the key of the last record in the data set (a complete key of X'FF's).

81 XRBA was specified, and the value of RIDFLD was greater than 4 GB, but the data set is not an extended addressing ESDS.

Default action: terminate the task abnormally.

101 RECORDBUSY

RESP2 values:

107 NOSUSPEND is specified on the request but VSAM holds an active lock against the record, which would cause the request to wait (see "Retained and active locks" on page 458).

The key of the locked record is not returned to your application program. If you handle this condition and control is returned to your program, the browse can continue and retrieve the record following the locked record by issuing another READNEXT request.

Default action: abend the task with code AEX9.

53 SYSIDERR

RESP2 values:

130 The SYSID option specifies a name that is neither the local system nor a remote system that is defined by a CONNECTION or IPCONN definition. SYSIDERR also occurs when the link to the remote system is known but unavailable. In the case of an IPCONN, SYSIDERR occurs if the link is known but either the local or remote systems do not support file control commands that are function shipped using IP interconnectivity.

131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.


132 The READNEXT is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

READPREV

Read previous record during a file browse; VSAM and data tables only.

READPREV

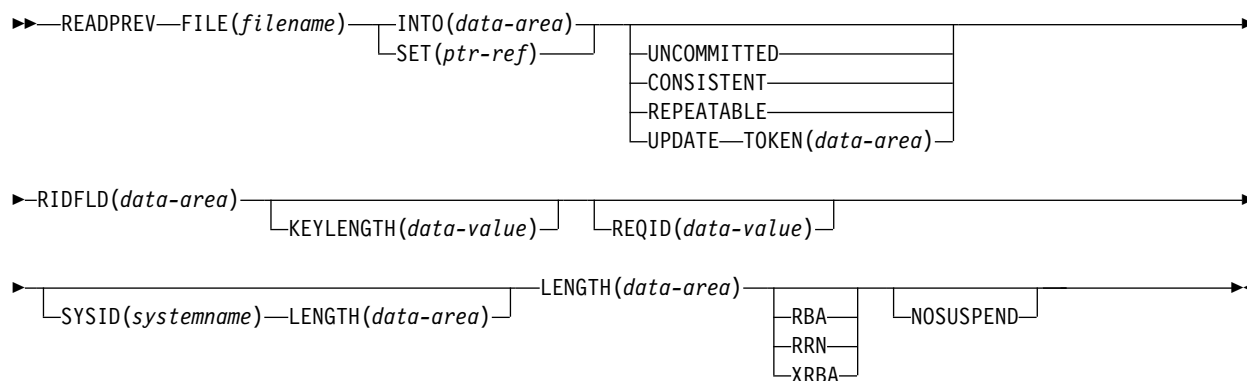

Conditions: DUPKEY, ENDFILE, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, LENGERR, LOCKED, NOTAUTH, NOTFND, RECORDBUSY, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

READPREV can be used repeatedly to read records in reverse sequential order from a VSAM file on a local or a remote system.

Such a series of sequential read commands is known as a *browse* of the file. A browse can also consist of a sequence of READNEXT and READPREV commands in any order. A browse must be initiated with the STARTBR command, to identify the start of the browse, and terminated with the ENDBR command.

You must provide, in the RIDFLD option, a data area that is sufficiently large to contain a complete identifier (full key, RBA, or RRN) of records in the file. This data area is used both as an output and as an input parameter.

It is used as an output parameter when CICS, on completion of each READPREV command, places the complete identifier of the record just retrieved into the RIDFLD data area. CICS then holds this identifier to mark the point from which the subsequent READPREV is to continue.

It may also be used as an input parameter. Modifying the RIDFLD before issuing the next READPREV command causes that command to reposition the browse to

the new identifier, from which it continues in the usual way. The modified record identifier must always be a full key, RBA, or RRN. A generic key may not be specified, nor may a browse that was started with the GENERIC option include a READPREV command.

If you include a READPREV command immediately following a STARTBR command, your STARTBR command RIDFLD must specify the key of a record that exists on the data set; otherwise the NOTFND condition will occur.

A READPREV command following a READNEXT, or a STARTBR or RESETBR that did not specify a 'last' key value, is treated as though the RIDFLD value had been modified and results in a reposition (as above).

Reading files accessed in RLS mode

For files accessed in RLS mode, you can include the UPDATE keyword on the READPREV request to update some records during the browse. If you specify UPDATE you must also specify TOKEN. You can then update the record by issuing a DELETE or REWRITE command that specifies the TOKEN returned on the browse function.

Note: TOKEN without the UPDATE keyword implies UPDATE.

Use of the UPDATE option is subject to the following rules:

- You can specify UPDATE on a READPREV command only if the file is accessed in RLS mode. If you specify UPDATE for a file accessed in non-RLS mode, CICS returns INVREQ.
- You can specify UPDATE on READPREV, but not on the STARTBR or RESETBR commands.
- You can intermix UPDATE and non-update requests within the same browse.
- CICS does not preserve the UPDATE option for you from one READPREV command to the next.

CICS supports only one TOKEN in a browse sequence, and the TOKEN value on each READPREV invalidates the previous value.

Locks for UPDATE

Specifying UPDATE on a READPREV command acquires an exclusive lock. The duration of these exclusive locks within a browse depends on the action your application program takes:

- If you decide to DELETE or REWRITE the last record acquired by a READPREV UPDATE in a browse, using the associated token, the lock remains active as follows:
 - If the file is recoverable, the lock is released at completion of the next sync point or rollback.
 - If the file is non-recoverable, the lock will be released by the time ENDBR has completed, but might be released earlier.
- If you decide *not* to update the last record read, CICS frees the exclusive lock when your program either issues another READNEXT or READPREV command, or ends the browse.

Important: The UNLOCK command does *not* free an exclusive lock held by VSAM against a record acquired by READPREV UPDATE. An UNLOCK in a browse invalidates the TOKEN returned by the last request.

Locks for read integrity

Specifying one of the read integrity options acquires a shared lock on each READPREV. The duration of these shared locks with a browse depends on the type of read integrity you specify:

- If you specify CONSISTENT read integrity, the shared lock is held only for the duration of each read request—that is, until the record is returned to your program.
- If you specify REPEATABLE read integrity, the shared lock is held for the duration of the unit of work in which the browse is performed. In this case, your program could acquire a large number of shared locks, which will prevent the granting of exclusive locks for update functions. You should use REPEATABLE read integrity in a browse with caution.

Function shipping READPREV with UPDATE or read integrity

If a READPREV command that specifies UPDATE or one of the read integrity options is function-shipped to a member of the CICS family of products that does not support UPDATE or the read integrity options, the request fails:

- If an ISC link is used, the request receives an ATNI abend.
- If an MRO link is used, the request receives an AXF8 abend.

AXF8 is an abend code, received by the sending side of a function-shipped request. It indicates that an attempt has been made to send a request that specifies UPDATE on an MRO link to a CICS region that does not support update or read integrity options.

Read integrity

When a file is accessed in RLS mode, non-update read requests can specify read integrity options: UNCOMMITTED, CONSISTENT, or REPEATABLE.

If you do not specify any of these keywords, CICS uses the value specified on the READINTEG parameter of the FILE resource definition, for which the default is UNCOMMITTED.

If you want to use the level of read integrity specified in the READINTEG keyword of the FILE definition, and then you need to change from using a local file to a remote file, or if you change the location of a remote file, ensure that:

- The remote file-owning region is at the CICS Transaction Server for OS/390, Version 1 Release 1 (or later) level.
- The FILE definition in the remote system specifies:
 - RLS mode
 - The correct read integrity values for your application.

Retained and active locks

RECORDBUSY refers to active locks and LOCKED refers to retained locks.

These locks affect READPREV requests which acquire locks; that is, update requests and requests with read integrity. These are the kinds of READPREV requests which are referred to in the following bullets. Other READPREV requests are unaffected by the presence of retained or active locks.

- READPREV requests for records that have *retained* locks are always rejected with a LOCKED response.
- READPREV requests for records that have *active* locks wait for the lock to be released, except when the NOSUSPEND keyword is specified, in which case CICS returns the RECORDBUSY response.

Options

CONSISTENT (RLS only)

The record is read with a level of read integrity provided by a VSAM shared lock that lasts for the duration of the request.

If the record is being modified by another task, which therefore holds an exclusive lock, the READPREV request waits until the update is complete (unless NOSUSPEND is also specified) as follows:

- For a READPREV request against a non-recoverable file, the READPREV completes as soon as any VSAM request performing the update completes.
- For a READPREV request against a recoverable file, the READPREV request completes when the updating task completes its next syncpoint or rollback.

FILE(*filename*)

specifies the name of the file being browsed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined in the file resource definition. Otherwise, the file definition is used to find out whether the data set is on a local or a remote system.

INTO(*data-area*)

specifies the data area into which the record retrieved from the data set is to be written.

KEYLENGTH(*data-value*)

specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case KEYLENGTH is not valid. If the length specified is different from the length defined for the data set, the INVREQ condition occurs.

For remote files, the KEYLENGTH can be specified in the FILE definition. If KEYLENGTH is not defined there, and is not specified in the application program, and the key is longer than 4 characters, the default value is 4.

LENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data area where the record is to be put. On completion of the READNEXT command, the LENGTH parameter contains the actual length of the record.

This option must be specified if SYSID is specified.

If the file is on a remote system, the LENGTH parameter need not be set here but must be set in the file resource definition

If the file is on a local system, the LENGTH parameter must be set for variable-length records, using the INTO option, but not for fixed-length records. It is, however, advisable to specify the length for fixed-length records because:

- It causes a check to be made that the record being read is not too long for the available data area.
- When browsing fixed-length records into an area longer than the record being accessed, the LENGERR condition is raised for COBOL, C, PL/I, and

assembler-language applications if the LENGTH option is specified. If the LENGTH option is not explicitly specified, then the LENGERR condition is returned if the length can be inferred from the data area. If the length specified exceeds the file record length, CICS uses the longer length for the move. If the target area in the application program is not large enough, storage is overlaid beyond the target area.

If you specify the SET option, you need not also specify the LENGTH option.

When browsing into a target data area longer than the record being read, the contents of the target data area, from the end of the retrieved record to the end of the target data area, are unpredictable.

If you specify the INTO option, the LENGTH argument must be a data area that specifies the largest record the program accepts. If the retrieved record is longer than the value specified in the LENGTH option, the record is truncated to the specified value and the LENGERR condition occurs. In this case, the LENGTH data area is set to the length of the record before truncation.

Note that a file control command issued against a variable-length record in a file defined on the local CICS system fails with a LENGERR condition if a length is not specified. However, if the same command is issued against a file defined on a remote system, the command does not fail.

NOSUSPEND (RLS only)

The request does not wait if the record is locked by VSAM with an active lock, including records locked as the result of a DEADLOCK.

Note: Requests that specify NOSUSPEND wait for at least 1 second before CICS returns the RECORDBUSY response.

RBA

(VSAM KSDS or ESDS base data sets, or CICS-maintained data tables only, but not paths) specifies that the record identification field specified in the RIDFLD option contains a relative byte address.

This option must be specified when the STARTBR or RESETBR command specified the RBA option. It must not be specified when the STARTBR or RESETBR command did not specify RBA.

You cannot use RBA for:

- User-maintained data tables
- Coupling facility data tables
- Any KSDS file opened in RLS access mode
- KSDS files that use extended addressing.

Also, you are recommended not to use RBA for ESDS files that hold more than 4GB. (Use XRBA instead.)

REPEATABLE (RLS only)

The record is read with a level of read integrity provided by a VSAM shared lock that lasts for the duration of the unit of work in which the read request is issued.

If the record is being modified by another task, which therefore holds an exclusive lock, the READPREV request waits until the update is complete (unless NOSUSPEND is also specified) as follows:

- For a recoverable file, the READPREV request completes when the updating transaction completes its next sync point or rollback.

- For a non-recoverable file, the READPREV completes as soon as the VSAM request performing the update completes.

After the READPREV request has completed, the record remains locked to the task that issued the READPREV. Other tasks can continue to read the record, but no other task is allowed to update the record until the task that issued the READPREV performs its next sync point or rollback.

REQID(*data-value*)

specifies as a halfword binary value a unique request identifier for a browse, used to control multiple browse operations on a file. If this option is not specified, a default value of zero is assumed.

RIDFLD(*data-area*)

specifies the record identification field. The contents can be a key, a relative byte address, or relative record number. For a relative byte address or a relative record number, the format of this field must be fullword binary. For a relative byte address, the RIDFLD value can be greater than or equal to zero. For a relative record number, the RIDFLD value can be greater than or equal to 1.

On completion of the READPREV command, this field is updated by CICS with the complete identification of the record retrieved.

RRN

(VSAM RRDS) specifies that the record identification field specified in the RIDFLD option contains a relative record number.

SET(*ptr-ref*)

specifies the pointer reference that is to be set to the address of the retrieved record.

In assembler language, if the DUPKEY condition occurs, the register specified will not have been set, but can be loaded from DFHEITP1.

The pointer reference is valid until the next READPREV or READNEXT command that specifies SET for the same browse (REQID) for the same file. The pointer is no longer valid after an ENDBR or SYNCPOINT command. If you want to retain the data within the field addressed by the pointer, you must move it to your own area.

If DATALOCATION(ANY) is associated with the application program, the address returned in the SET pointer can be above or below the 16 MB line.

If DATALOCATION(BELOW) is associated with the application program, the address returned in the SET pointer is below the 16 MB line.

If TASKDATAKEY(USER) is specified for the running task, the data returned is in user-key storage; otherwise it is in CICS-key storage.

SYSID(*systemname*)

specifies the name of the system to which the request is directed.

If you specify SYSID, and omit both RBA and RRN, you must also specify LENGTH and KEYLENGTH.

TOKEN(*data-area*) (RLS only)

Returns, as a fullword binary value, a unique identifier for this READPREV UPDATE request. This is an output value returned by file control to the requesting task, for use in associating a subsequent REWRITE or DELETE (or UNLOCK) request with the record returned on this READPREV command.

Your application program must specify the returned TOKEN on a subsequent REWRITE or DELETE command to identify the record being rewritten or deleted. Your application program can also specify the returned TOKEN on a subsequent UNLOCK command to identify the token that is being invalidated.

You must specify TOKEN if you specify UPDATE (but UPDATE is assumed if you specify TOKEN without UPDATE).

CICS supports only one active TOKEN at a time for a given REQID. Thus, a TOKEN value remains valid only until the following READNEXT, READPREV, or ENDBR command for this browse, or until a REWRITE, DELETE, or UNLOCK command (whichever is first).

TOKEN can be function shipped. However, if a request specifying TOKEN is function shipped to a member of the CICS family of products that does not recognize this keyword, the request fails.

UNCOMMITTED

The record is read without read integrity. The current data, as known to VSAM, is returned. No attempt is made to serialize this read request with any concurrent update activity for the same record. The record may be being updated by another transaction, therefore the value of the record may change later if that update is subsequently backed out.

UPDATE (RLS only)

Specifies that the record is to be obtained for updating or deletion. If this option and TOKEN are both omitted, read only is assumed.

If you specify UPDATE, you must also specify TOKEN.

UPDATE is only valid for files defined to the local region

XRBA

specifies that the record identification field specified in the RIDFLD option contains an extended relative byte address. This option should be used when browsing records in an ESDS extended addressing data set.

You cannot specify XRBA on a READPREV command unless the associated STARTBR or RESETBR command also specified XRBA.

KSDS data sets cannot be accessed by XRBA.

Conditions

15 DUPKEY

RESP2 values:

140 A record is retrieved by way of an alternate index with the NONUNIQUEKEY attribute, and another alternate index record with the same key exists.

In assembler language, if the SET option is being used, the specified register has not been set, but can be loaded from DFHEITP1.

Default action: terminate the task abnormally.

20 ENDFILE

RESP2 values:

90 An end-of-file condition is detected during a browse.

Default action: terminate the task abnormally.

12 FILENOTFOUND

RESP2 values:

1 A file name referred to in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

21 ILLOGIC

The browse that is currently in progress is terminated when this condition is raised.

RESP2 values (VSAM):

110 A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

20 The FILE definition does not allow updates.

24 A READPREV command is issued for a file for which the previous STARTBR or RESETBR command has the GENERIC option.

26 The KEYLENGTH option is specified and the specified length does not equal the length defined for the data set for this file refers to.

37 The type of record identification (for example, key or relative byte address) used to access a data set during the browse has been changed. You cannot specify one type of addressing on STARTBR and another on READPREV.

39 A READPREV is issued for a BDAM file.

41 The REQID, SYSID, or file name does not match that of any successful STARTBR command.

52 CONSISTENT is not allowed because the file is not a VSAM file that is accessed in RLS mode.

53 REPEATABLE is not allowed because the file is not a VSAM file that is accessed in RLS mode.

54 UPDATE is not allowed because the file is not a VSAM file that is accessed in RLS mode.

55 NOSUSPEND is not allowed because the file is not a VSAM file that is accessed in RLS mode.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

120 An I/O error occurred during the browse. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

54 ISCINVREQ

RESP2 values:

- 70** The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 10** Neither the LENGTH nor the SET option is specified for a file with variable-length records.
- 11** The length of the record read with the INTO option specified exceeds the value specified in the LENGTH option; the record is truncated, and the data area supplied in the LENGTH option is set to the actual length of the record.
- 13** An incorrect length is specified for a file with fixed-length records.

Default action: terminate the task abnormally.

100 LOCKED

RESP2 values:

- 106** The read request specifies the UPDATE keyword, or one of the read integrity keywords CONSISTENT or REPEATABLE, or the file resource definition specifies read integrity, but VSAM holds a retained lock against the record (see “Retained and active locks” on page 469).

The key of the locked record is not returned to your application program. If you handle this condition and control is returned to your program, the browse can continue and retrieve the record following the locked record by issuing another READPREV request.

The LOCKED condition also can occur for a request to a recoverable CFDT that uses the locking model, if the record that is being read is locked by a retained lock. See the *CICS Recovery and Restart Guide* for information about investigating retained locks on records in a coupling facility data table.

Default action: abend the task with code AEX8.

70 NOTAUTH

RESP2 values:

- 101** A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

- 80** An attempt to retrieve a record based on the search argument provided is unsuccessful. One place where this may occur is where the READPREV command immediately follows a STARTBR or RESETBR command that specified GTEQ and the key of a record that does not exist on the data set.
- 81** XRBA was specified, and the value of RIDFLD was greater than 4 GB, but the data set is not an extended addressing ESDS.

Default action: terminate the task abnormally.

101 RECORDBUSY

RESP2 values:

- 107 NOSUSPEND is specified on the request but VSAM holds an active lock against the record, which would cause the request to wait (see “Retained and active locks” on page 469).

The key of the locked record is not returned to your application program. If you handle this condition and control is returned to your program, the browse can continue and retrieve the record following the locked record by issuing another READPREV request.

Default action: abend the task with code AEX9.

53 SYSIDERR

RESP2 values:


- 130 The SYSID option specifies a name that is neither the local system nor a remote system that is defined by a CONNECTION or IPCONN definition. SYSIDERR also occurs when the link to the remote system is known but unavailable. In the case of an IPCONN, SYSIDERR occurs if the link is known but either the local or remote systems do not support file control commands that are function shipped using IP interconnectivity.
- 131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132 The READPREV is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

READQ TD

Read data from the transient data queue.

READQ TD

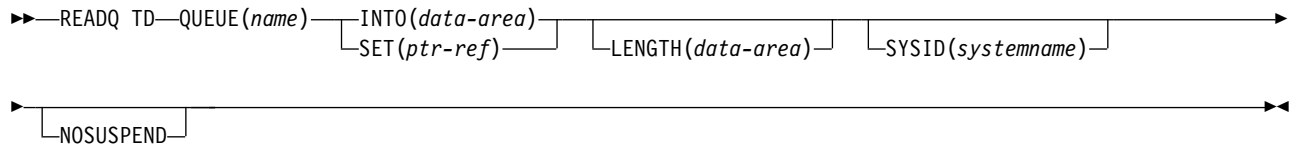

Conditions: DISABLED, INVREQ, IOERR, ISCINVREQ, LENGERR, LOCKED, NOTAUTH, NOTOPEN, QBUSY, QIDERR, QZERO, SYSIDERR

This command is threadsafe when it is used with a queue in a local CICS region, or function shipped to a remote CICS region over an IPIC connection. It is non-threadsafe when it is function shipped to a remote CICS region over another type of connection.

Description

READQ TD reads transient data from a queue (after which the record is no longer available).

If you are using automatic transaction initiation (ATI), your application should test for the QZERO condition to ensure that termination of an automatically initiated task occurs only when the queue is empty. For introductory information about ATI, see the *CICS Application Programming Guide*.

If the **READQ TD** command attempts to access a record in a logically recoverable intrapartition queue that is being written to, or deleted by, another task, and there are no more committed records, the command waits until the queue is no longer being used for output. If, however, the NOSUSPEND option has been specified, or there is an active HANDLE CONDITION for QBUSY, the QBUSY condition is raised.

Options

INTO (data-area)

Specifies the user data area into which the data read from the transient data queue is to be placed.

LENGTH (data-area)

Specifies the length, as a halfword binary value, of the record to be read.

If you specify the INTO option, LENGTH specifies the maximum length of data that the program accepts. If the value specified is zero or less than zero, a LENGERR condition will be raised. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs. On completion of the retrieval operation, the data area is set to the original length of the data record read from the queue.

If you specify the INTO option, LENGTH need not be specified if the length can be generated by the compiler from the INTO variable. See “LENGTH options in CICS commands” on page 11 for more information about when LENGTH must be specified.

NOSUSPEND

Specifies that if the application program attempts to read from a queue that is already being used for output, the task is not suspended until the queue becomes available. Instead, the QBUSY condition is raised.

Note, however, that if a HANDLE CONDITION for QBUSY is active when the command is executed, this also overrides the default action, and control is passed to the user label supplied in the HANDLE CONDITION. This takes precedence over the NOSUSPEND option but is, of course, negated by either NOHANDLE or RESP.

This option only applies to intrapartition queues.

QUEUE (*name*)

Specifies the symbolic name (1 - 4 alphanumeric characters) of the queue to be read from. The named queue must have been defined to CICS.

If SYSID is specified, the queue is assumed to be on a remote system whether or not it is defined as remote. Otherwise the transient data queue definition is used to find out whether the data set is on a local or a remote system.

SET (*ptr-ref*)

Specifies a pointer reference that is to be set to the address of the data read from the queue. CICS acquires an area large enough to hold the record and sets the pointer reference to the address of that area. The area is retained until another transient data command is executed. The pointer reference, unless changed by other commands or statements, is valid until the next **READQ TD** command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16 MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16 MB line, the data is copied below the 16 MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

SYSID (*systemname*)

(remote systems only) Specifies the name (1 - 4 characters) of the system to which the request is directed.

Conditions

84 DISABLED

occurs when the queue has been disabled.

Default action: terminate the task abnormally.

16 INVREQ

Occurs if **READQ** names an extrapartition queue that has been opened for output. This condition cannot occur for intrapartition queues.

Default action: terminate the task abnormally.

17 IOERR

Occurs when an input/output error occurs and the data record in error is skipped.

This condition occurs if the queue can be read; when the queue cannot be read, a QZERO condition occurs in this situation.

This condition can also occur if the FREE=CLOSE operand has been used in the data set definition for an extrapartition queue, and the queue has been closed and reopened.

Default action: terminate the task abnormally.

54 ISCINVREQ

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

22 LENGERR

Occurs if **READQ** names an INTO area that cannot hold all the data that is to be returned to the application or an invalid length has been supplied. The check is made after the XTDIN exit has been invoked.

Default action: terminate the task abnormally.

100 LOCKED

Occurs when the request cannot be performed because use of the queue has been restricted owing to a unit of work failing indoubt. This can happen on any request for a logically-recoverable queue defined with WAIT(YES) and WAITACTION(REJECT) in the TDQUEUE resource definition.

Specify WAIT(YES) and WAITACTION(QUEUE) in the TDQUEUE resource definition if you want the transaction to wait.

Default action: terminate the task abnormally.

70 NOTAUTH

Occurs when a resource security check has failed on QUEUE(name).

Default action: terminate the task abnormally.

19 NOTOPEN

Occurs if the destination is closed. This condition applies to extrapartition queues only.

Default action: terminate the task abnormally.

25 QBUSY

Occurs if a **READQ TD** command attempts to access a record in a logically recoverable intrapartition queue that is being written to or is being deleted by another task, and there are no more committed records.

The NOSUSPEND option must be specified, or a HANDLE for the condition must be active, for this condition to be raised.

This condition applies only to intrapartition queues.

Default action: ignore the condition.

44 QIDERR

Occurs if the symbolic destination to be used with **READQ TD** cannot be found.

Default action: terminate the task abnormally.

23 QZERO

Occurs when the destination (queue) is empty or the end of the queue has been reached.

Default action: terminate the task abnormally.

53 SYSIDERR

Occurs when the SYSID option specifies a name that is neither the local system nor a remote system (made known to CICS by defining a CONNECTION or an IPCONN). SYSIDERR also occurs when the link to the remote system is closed.

Default action: terminate the task abnormally.

Examples

The following example shows how to read a record from an intrapartition data set (queue), which in this case is the control system message log (CSML), into a data area specified in the request:

```
EXEC CICS READQ TD  
      QUEUE('CSML')  
      INTO(DATA)  
      LENGTH(LDATA)
```


The following example shows how to read a record from an extrapartition data set (queue) that has fixed-length records into a data area provided by CICS; the pointer reference specified by the SET option is set to the address of the storage area reserved for the data record. It is assumed that the record length is known.

```
EXEC CICS READQ TD  
      QUEUE(EX1)  
      SET(PREF)
```

READQ TS

Read data from a temporary storage queue.

READQ TS

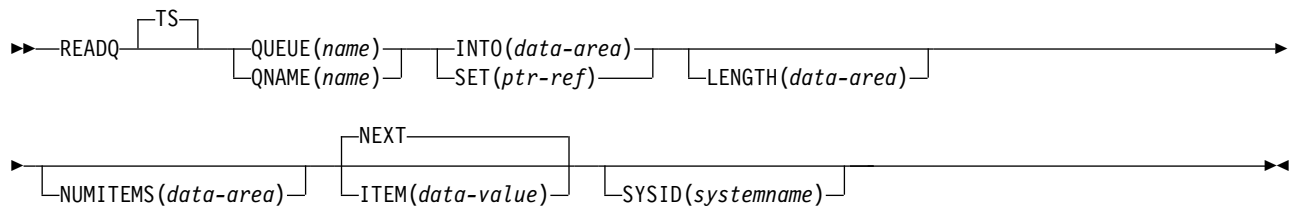

Conditions: INVREQ, IOERR, ISCINVREQ, ITEMERR, LENGERR, NOTAUTH, QIDERR, SYSIDERR

This command is threadsafe when it is used with a queue in main storage or auxiliary storage, either in a local CICS region, or function shipped to a remote CICS region over an IPIC connection. The command is non-threadsafe when it is function shipped to a remote CICS region over another type of connection, or when it is used with a queue in a shared temporary storage pool in a z/OS coupling facility that is managed by a temporary storage data sharing server (TS server).

Note for dynamic transaction routing: Using this command might create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see *Affinity in Developing applications*.

Description

READQ TS retrieves data from a temporary storage queue in main or auxiliary storage.

Options

INTO (data-area)

Specifies the data area into which the data is to be written. The data area can be any variable, array, or structure.

ITEM (data-value)

Provides a halfword binary value that specifies the item number of the logical record to be retrieved from the queue.

LENGTH (data-area)

Specifies the length, as a halfword binary value, of the record to be read.

If you specify the INTO option, LENGTH need not be specified if the length can be generated by the compiler from the INTO variable.

If you specify INTO, LENGTH defines the maximum length of data that the program accepts. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value that is specified, the data is truncated to that value and the LENGERR condition occurs.

On completion of the retrieval operation, the data area is set to the original length of the data record that is read from the queue.

If you specify the SET option, the LENGTH must be specified.

For more information about when LENGTH must be specified, see “LENGTH options in CICS commands” on page 11.

NEXT

Specifies retrieval for the next sequential logical record following the last record that was retrieved by any task, or the first record if no previous record has been retrieved.

Attention: It is possible for two tasks to interleave if they lose control during the browse operation. For example, task 1 might retrieve items 1, 3, and 6 while task 2 retrieves items 2, 4, and 5. Using the **READQ TS** command with **NEXT** from a threadsafe program increases the likelihood of tasks interleaving, because they are running in parallel on their own TCBs. If the order of retrieval of items is important, add serialization logic to the application in order to single thread the browse of the queue, especially if the application is to be defined with **CONCURRENCY(THREADSAFE)** or **CONCURRENCY(REQUIRED)**.

NUMITEMS(*data-area*)

Specifies a halfword binary field into which CICS stores a number that indicates how many items there are in the queue. This occurs only if the command completes normally.

QNAME(*name*)

An alternative to **QUEUE**, **QNAME** specifies the symbolic name (1 - 16 characters) of the queue to be read from. If the name has fewer than 16 characters, you must still use a 16-character field, padded with blanks if necessary.

QUEUE(*name*)

Specifies the symbolic name (1 - 8 characters) of the queue to be read from. If the name has fewer than 8 characters, you must still use an 8-character field, padded with blanks if necessary.

SET(*ptr-ref*)

Specifies the pointer reference that is set to the address of the retrieved data. The pointer reference, unless changed by other commands or statements, is valid until the next **READQ TS** command or the end of task.

If the application program is defined with **DATALOCATION(ANY)**, the address of the data can be above or below the 16 MB line. If the application program is defined with **DATALOCATION(BELOW)**, the address of the data is below the 16 MB line.

If **TASKDATAKEY(USER)** is specified for the running task, and storage protection is active, the data that is returned is in a user-key. If **TASKDATAKEY(CICS)** is specified and storage protection is active, the data that is returned is in a CICS-key.

SYSID(*systemname*)

(Remote and shared queues only) Specifies the system name (1 - 4 characters) identifying the remote system or shared queue pool to which the request is directed. **TSMODEL** resource definitions do not support specifying a **SYSID** for a queue that resides in a temporary storage data sharing pool. Use the **QUEUE** or **QNAME** option instead. Using an explicit **SYSID** for a shared queue pool requires the support of a temporary storage table (TST).

Conditions

16 INVREQ

Occurs in either of the following situations:

- The queue was created by CICS internal code.

- The queue name that is specified consists solely of binary zeros.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 5 There is an unrecoverable input/output error for a shared queue.

Default action: terminate the task abnormally.

54 ISCINVREQ

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

26 ITEMERR

Occurs in either of the following situations:

- The item number that is specified is invalid (that is, outside the range of item numbers that are written to the queue).
- An attempt is made to read beyond the end of the queue by using the NEXT (default) option.

Default action: terminate the task abnormally.

22 LENGERR

Occurs when the length of the stored data is greater than the value specified by the LENGTH option.

This condition applies only to the INTO option and cannot occur with SET.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 101 A resource security check has failed on QUEUE(name).

Default action: terminate the task abnormally.

44 QIDERR

Occurs when the queue specified cannot be found, either in main or in auxiliary storage.

Default action: terminate the task abnormally.

53 SYSIDERR

RESP2 values:

- 4 Occurs in any of the following situations:

- The SYSID option specifies a name that is not the local system or a remote system (made known to CICS by defining a CONNECTION or an IPCONN).
- When IPIC connectivity is used, the local system, the remote system, or both, are not CICS TS 4.2 or later regions.
- The link to the remote system is closed.
- The CICS region in which the temporary storage command is executed fails to connect to the TS server that manages the TS pool that supports the referenced temporary storage queue. For example, this situation can occur if the CICS region is not authorized to access the temporary storage server.

This condition can also occur if the temporary storage server is not started, or because the server has failed (or been stopped) while CICS continues to run.

Default action: terminate the task abnormally.

Examples

The following example shows how to read the first (or only) record from a temporary storage queue into a data area that is specified in the request. The LENGTH data area is given the value of the length of the record.

```
EXEC CICS READQ TS  
      ITEM(1)  
      QUEUE(UNIQNAME)  
      INTO(DATA)  
      LENGTH(LDATA)
```


The following example shows how to read the next record from a temporary storage queue into a data area that is provided by CICS. The pointer reference that is specified by the SET option is set to the address of the storage area that is reserved for the data record, and the LENGTH data area is given the value of the length of the record.

```
EXEC CICS READQ TS  
      QUEUE(DESCRQ )  
      SET(PREF)  
      LENGTH(LENG)  
      NEXT
```

RECEIVE (z/OS Communications Server default)

Receive data from standard CICS terminal support or from a task that is not attached to a terminal.

RECEIVE (default)

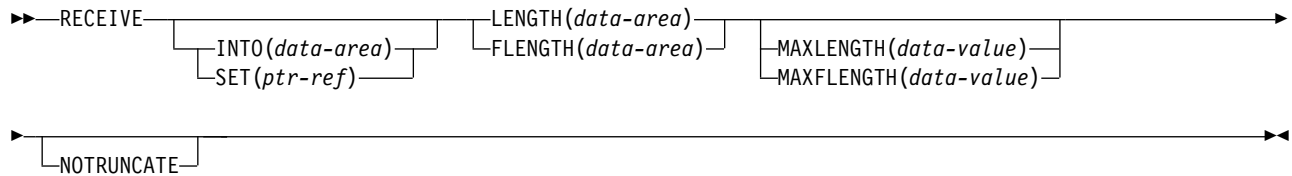

Conditions: INVREQ, LENGERR, NOTALLOC

Description


This form of the RECEIVE command is used by all CICS-supported terminals for which the other RECEIVE descriptions are not appropriate.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (APPC)

Receive data on an APPC mapped conversation.

RECEIVE (APPC)

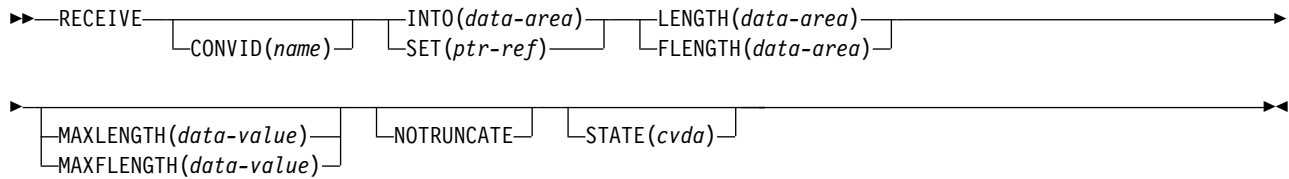

Conditions: EOC, INVREQ, LENGERR, NOTALLOC, SIGNAL, TERMERR


Description

RECEIVE receives data from the conversation partner in an APPC mapped conversation.

RECEIVE (LUTYPE2/LUTYPE3)

Receive data from a 3270-display logical unit (LUTYPE2) or a 3270-printer logical unit (LUTYPE3).

RECEIVE (LUTYPE2/LUTYPE3)

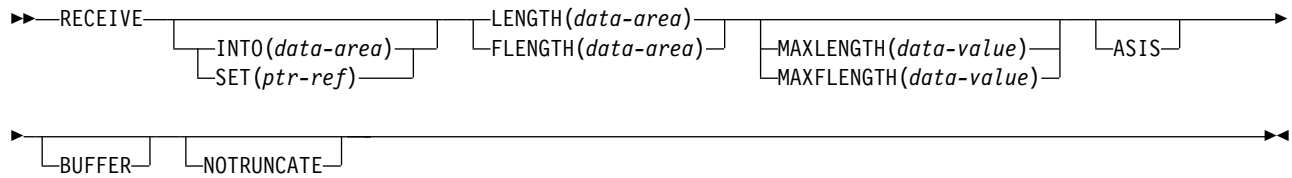

Conditions: EOC, INVREQ, LENGERR, TERMERR

Description


RECEIVE receives data from the terminal.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) (and BUFFER has not been specified), you can omit both the INTO and SET options.

RECEIVE (LUTYPE4)

Receive data from an LUTYPE4 logical unit.

RECEIVE (LUTYPE4)

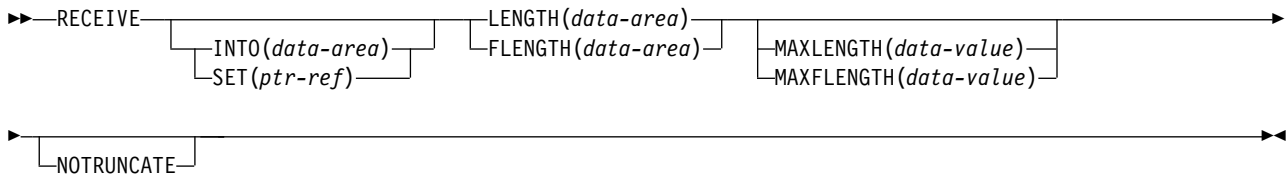

Conditions: EOC, EODS, INBFMH, INVREQ, LENGERR, SIGNAL, TERMERR

Description


`RECEIVE` receives data from the terminal.

If data is to be received, you must specify either the `INTO` or the `SET` option. If a `RECEIVE` is issued purely to detect an attention identifier (AID) you can omit both the `INTO` and `SET` options.

RECEIVE (LUTYPE6.1)

Receive data on an LUTYPE6.1 session.

RECEIVE (LUTYPE6.1)

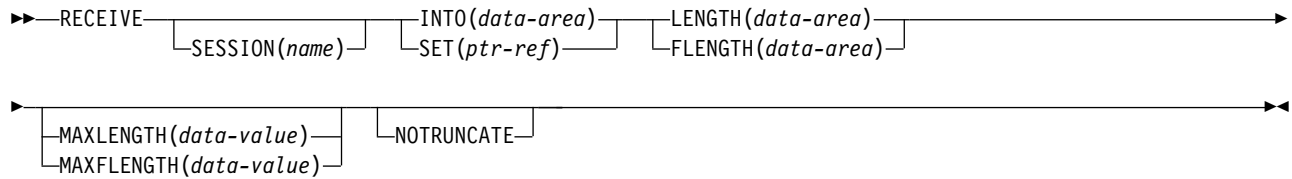

Conditions: EOC, INBFMH, INVREQ, LENGERR, NOTALLOC, SIGNAL, TERMERR


Description

RECEIVE receives data from the conversation partner in an LUTYPE6.1 conversation.

RECEIVE (3270 logical)

Receive data from a 3270 logical unit.

RECEIVE (3270 logical)

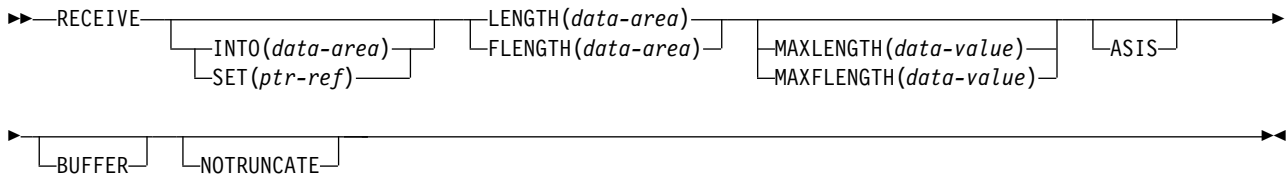

Conditions: INVREQ, LENGERR, TERMERR

Description


RECEIVE receives data from a terminal.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) (and BUFFER has not been specified), you can omit both the INTO and SET options.

RECEIVE (3600 pipeline)

Receive initial input data from a 3600 pipeline logical unit. Subsequent RECEIVES for further input data are not allowed.

RECEIVE (3600 pipeline)

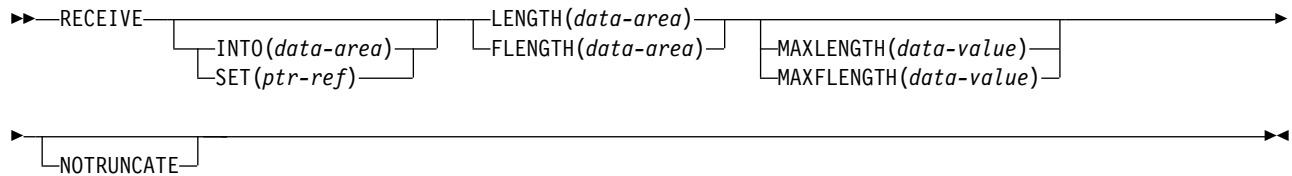

Conditions: INVREQ, LENGERR, NOTALLOC


Description

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (3600-3601)

Receive data from a 3600 (3601) logical unit.

RECEIVE (3600-3601)

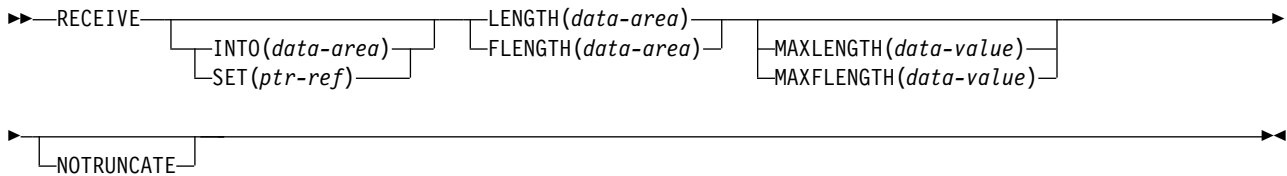

Conditions: EOC, EODS, INBFMH, INVREQ, LENGERR, SIGNAL, TERMERR

Description


RECEIVE receives data from the terminal. This form of RECEIVE also applies to the 3630 plant communication system.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (3600-3614)

Receive data from a 3600 (3614) logical unit.

RECEIVE (3600-3614)

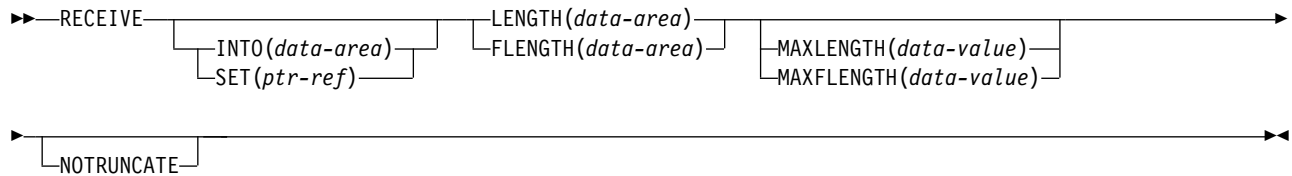

Conditions: INVREQ, LENGERR, TERMERR

Description

RECEIVE receives data from the terminal.

The data-stream and communication format used between a CICS application program and a 3614 is determined by the 3614. The application program is therefore device dependent when handling 3614 communication.


For further information about designing 3614 application programs for CICS, refer to the *IBM 4700/3600/3630 Guide*.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (3650)

Receive data from 3650 logical units.

RECEIVE (3650)

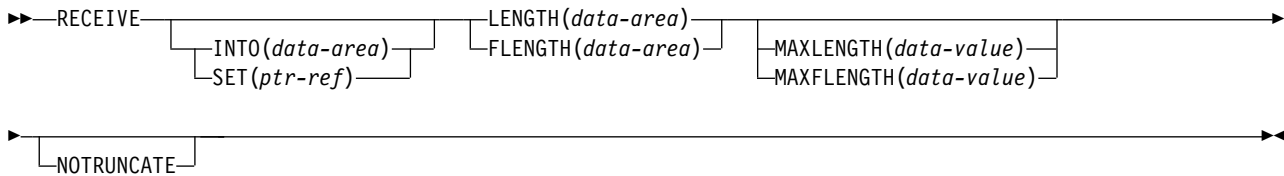

Conditions: EOC, EODS, INBFMH, INVREQ, LENGERR, TERMERR

Description

RECEIVE receives data from the terminal. This form of RECEIVE also applies to the following 3650 devices:


- Interpreter logical unit
- Host conversational (3270) logical unit
- Host conversational (3653) logical unit
- 3650/3680 command processor logical unit

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (3767)

Receive data from a 3767 interactive logical unit.

RECEIVE (3767)

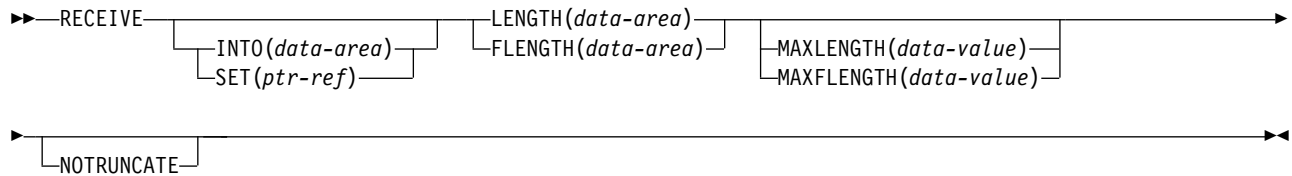

Conditions: EOC, INVREQ, LENGERR, SIGNAL, TERMERR

Description


RECEIVE receives data from the terminal. This form of RECEIVE also applies to the 3770 interactive logical unit.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (3770)

Receive data from a 3770 batch logical unit.

RECEIVE (3770)

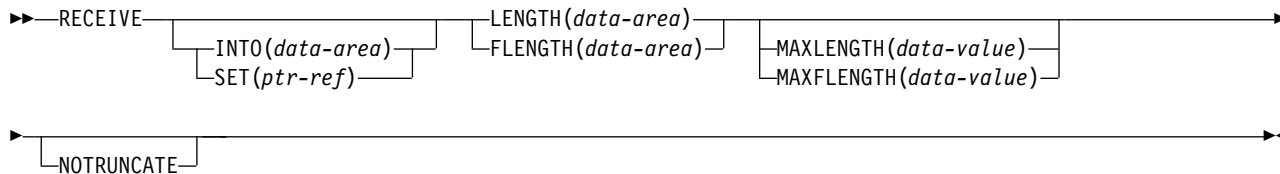

Conditions: EOC, EODS, INBFMH, INVREQ, LENGERR, SIGNAL, TERMERR


Description

RECEIVE receives data from the terminal. If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (3790 full-function or inquiry)

Receive data from a 3790 full-function or inquiry logical unit.

RECEIVE (3790 full-function or inquiry)

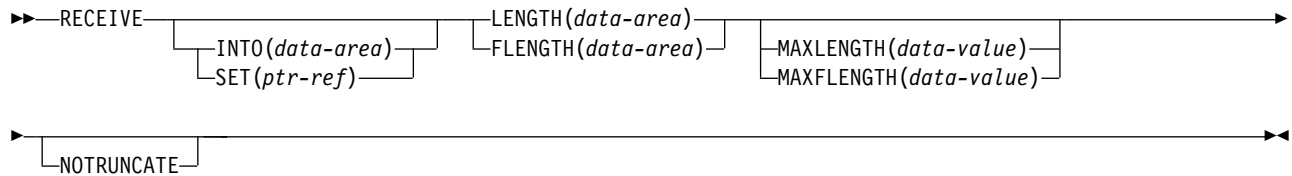

Conditions: EOC, EODS, INBFMH, INVREQ, LENGERR, SIGNAL, TERMERR

Description

RECEIVE receives data from the terminal. This form of RECEIVE also applies to the following devices:

- 3650/3680 full-function logical unit
- 3770 full-function logical unit

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE: z/OS Communications Server options

Common options used on the RECEIVE command (z/OS Communications Server).

Options

ASIS

specifies that lowercase characters in the 3270 input data stream are not translated to uppercase; this allows the current task to receive a message containing both uppercase and lowercase data.

This option has no effect on the first RECEIVE command of a transaction, because terminal control performs a READ INITIAL and uses the terminal defaults to translate the operation data.

This option has no effect if the screen contains data before a transaction being initiated. This data is read and translated in preparation for the next task and the first RECEIVE command in that task retrieves the translated data.

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only.

BUFFER

specifies that the contents of the 3270 buffer are to be read, beginning at buffer location 1 and continuing until all contents of the buffer have been read. All character and attribute sequences (including nulls) appear in the input data stream in the same order as they appear in the 3270 buffer.

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs should use CONVID.

If this option is omitted, the principal facility is assumed.

FLENGTH(*data-area*)

An alternative to LENGTH. For architectural reasons, this option is limited to a maximum of 32K for all terminal-related RECEIVE commands.

INTO(*data-area*)

specifies the receiving field for the data read from the logical unit or terminal, or the application target data area into which data is to be received from the application program connected to the other end of the current conversation.

LENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data received.

If you specify the INTO option, but omit the MAXLENGTH option, the argument must be a data area that specifies the maximum length that the program accepts. If the value specified is less than zero, zero is assumed.

If you specify the SET option, the argument must be a data area. When the data has been received, the data area is set to the length of the data.

MAXLENGTH(*data-value*)

A fullword alternative to MAXLENGTH.

MAXLENGTH(*data-value*)

specifies the maximum amount (halfword binary value) of data that CICS is to recover. If INTO is specified, MAXLENGTH overrides the use of LENGTH as an input to CICS. If SET is specified, MAXLENGTH provides a way for the program to limit the amount of data it receives at one time.

If the length of data exceeds the value specified and the NOTRUNCATE option is not present, the data is truncated to that value and the LENGERR condition occurs. The data area specified in the LENGTH option is set to the original length of data.

If the length of data exceeds the value specified and the NOTRUNCATE option is present, CICS retains the remaining data and uses it to satisfy subsequent RECEIVE commands. The data area specified in the LENGTH option is set to the length of data returned.

If this option is omitted, the value indicated in the LENGTH option is assumed.

NOTRUNCATE

specifies that, when the data available exceeds the length requested, the remaining data is not to be discarded but is to be retained for retrieval by subsequent RECEIVE commands.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If this option is omitted, the principal facility for the task is used.

SET(*ptr-ref*)

specifies the pointer reference that is to be set to the address of the data read from the logical unit or terminal, or the partner transaction. The pointer reference is valid until the next receive command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

STATE(*cvda*)

gets the state of the current conversation. The cvda values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE

- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

Some of the following conditions may occur in combination with others. CICS checks for these conditions in the following order:

1. EODS
2. INBFMH
3. EOC

If more than one occurs, only the first is passed to the application program. EIBRCODE, however, is set to indicate all the conditions that occurred.

06 EOC

occurs when a request/response unit (RU) is received with end-of-chain-indicator set. Field EIBEOC also indicates this condition.

Default action: ignore the condition.

05 EODS (interpreter logical unit only)

occurs when an end-of-data-set indicator is received.

Default action: terminate the task abnormally.

07 INBFMH

occurs if a request/response unit (RU) contains a function management header (FMH). Field EIBFMH contains this indicator and it should be used in preference to INBFMH. The IGNORE CONDITION command can be used to ignore the condition.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

also occurs (RESP2 not set) in any of the following situations:

- The command is used on an APPC conversation that is not using the EXEC CICS interface or that is not a mapped conversation.

Default action: terminate the task abnormally.

22 LENGERR

occurs if data is discarded by CICS because its length exceeds the maximum the program accepts and the NOTRUNCATE option is not specified.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the RECEIVE command is issued by a transaction that has been started as a nonterminal task by the START command, or if the CONVID value or facility specified in the command does not relate to a conversation owned by the application.

Default action: terminate the task abnormally.

24 SIGNAL

occurs when an inbound SIGNAL data-flow control command is received from a partner transaction. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs for a session-related or terminal-related error. Any action on that conversation other than a FREE causes an ATCV abend.


A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

RECEIVE (non-z/OS Communications Server default)

Receive data from a task that is not attached to a terminal.

RECEIVE (default)

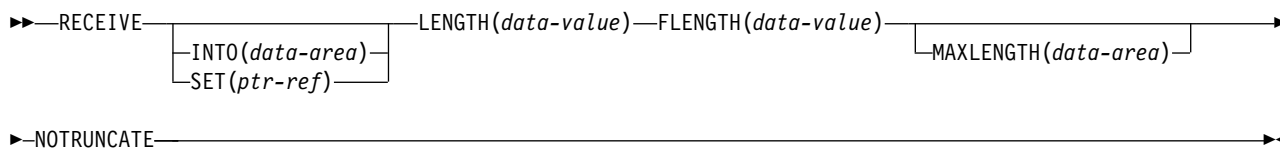

Conditions: INVREQ, LENGERR, NOTALLOC

Description


This form of the RECEIVE command is used by all CICS-supported terminals for which the other RECEIVE descriptions are not appropriate.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (MRO)

Receive data on an MRO conversation.

RECEIVE (MRO)

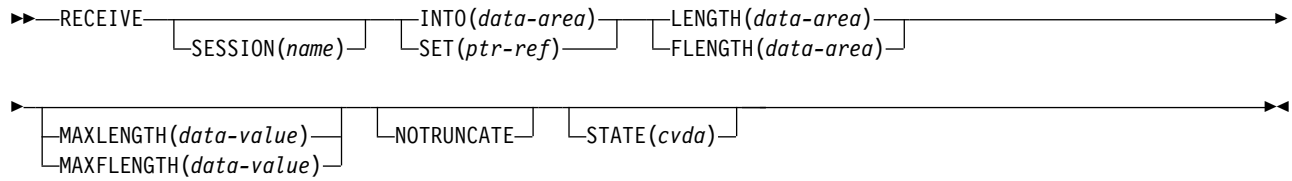

Conditions: EOC, INBFMH, INVREQ, LENGERR, NOTALLOC, TERMERR


Description

RECEIVE receives data from the conversation partner in an MRO conversation.

RECEIVE (2260)

Receive data from a 2260 or 2265 display station.

RECEIVE (2260)

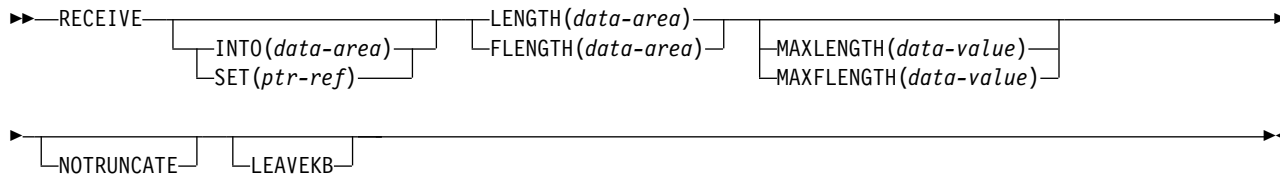

Conditions: INVREQ, LENGERR

Description


RECEIVE receives data from the terminal.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

RECEIVE (2980)

Receive data from a 2980 general banking terminal system.

RECEIVE (2980)

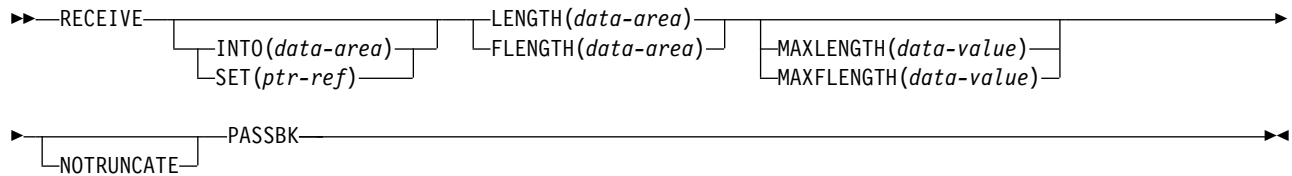

Conditions: INVREQ, LENGERR, NOPASSBKRD

Description

RECEIVE receives data from the terminal.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) you can omit both the INTO and SET options.

Passbook control

All input and output requests to the passbook area of a 2980 are dependent on the presence of a passbook. The PASSBK option is used to specify that communication is with a passbook. The conditions NOPASSBKRD (RECEIVE) and NOPASSBKWR (SEND) occur on input and output requests respectively when a passbook is not present. These conditions can be handled by a HANDLE CONDITION command and appropriate handling routines.

If the passbook is present on an input request, the application program generally writes back to the passbook area to update the passbook. If the NOPASSBKWR condition occurs, CICS allows immediate output to the terminal. In a routine for the NOPASSBKWR condition, the application program should send an error message to the journal area of the terminal to inform the 2980 operator of this error condition. To allow the operator to insert the required passbook, CICS causes the transaction to wait 23.5 seconds before continuing.

On regaining control from CICS after sending the error message, the application program can attempt again to update the passbook when it has ensured that the print element is positioned correctly in the passbook area. This is generally accomplished by issuing two carrier returns followed by the number of tabs required to move the print element to the correct position.

If the NOPASSBKWR condition occurs during the second attempt to write to the passbook area, the application program can send another error message or take some alternative action (for example, place the terminal out of service). The presence of the Auditor Key on a 2980 Administrative Station Model 2 is controlled by the SEND PASSBK command and may be used in a manner similar to that described above.

Output control

The unit of transmission for a 2980 is called a **segment**. However, for the passbook and journal areas, CICS allows an application program to send messages that exceed the buffer size. For the passbook area, the maximum length of message is limited to one line of a passbook to avoid spacing (*indexing*) past the bottom of the passbook. For the journal area, the maximum length of message is specified in the LENGTH option of the SEND command.

For example, consider a 2972 buffer size of 48 characters and a 2980 Teller Station Model 4 passbook print area of 100 characters per line. The application program can send a message of 100 characters to this area; CICS segments the message to adjust to the buffer size. The application program must insert the passbook indexing character (X'25') as the *last* character written in one output request to the passbook area. This is done to control passbook indexing and thereby achieve positive control of passbook presence.

If a message contains embedded passbook indexing characters, and segmentation is necessary because of the length of the message, the output is terminated if the passbook spaces beyond the bottom of the passbook; the remaining segments are not printed.

Output to a common buffer

The SEND CBUFF command is used to transmit data to a common buffer. The data is translated to the character set of the receiving 2980 model. If more than one 2980 model type is connected to the 2972 control unit, the lengths are truncated if they exceed the buffer size.

The DFH2980 structure

The DFH2980 structure contains constants that may only be used when writing COBOL or PL/I application programs for the 2980. The structure is obtained by copying DFH2980 into the application program.

For COBOL, DFH2980 is copied into the working-storage section; for PL/I, DFH2980 is included using a %INCLUDE statement.

The station identification is given in the field STATIONID, whose value must be determined by the ASSIGN command. To test whether a normal or alternate station is being used, the STATIONID field is compared with values predefined in DFH2980. The values are:

STATION-**n**-A or STATION-**n**-N-

STATION_**n**_A or STATION_**n**_N

where **n** is an integer (0 through 9) and A and N signify alternate and normal stations. (The break symbol is hyphen (-) for COBOL, and underscore (_) for PL/I.)

The teller identification on a 2980 Teller Station Model 4 is given in the 1-byte character field TELLERID. An ASSIGN command must be used to find out the TELLERID value.

Tab characters (X'05') must be included in the application program. The number of tabs required to position the print element to the first position of a passbook area

is given in the field NUMTAB. An ASSIGN command must be used to find out the NUMTAB value. The value of NUMTAB is specified by the system programmer and may be unique to each terminal.

Other tab characters are inserted as needed to control formatting.

Any of the DFH2980 values TAB-ZERO through TAB-NINE for COBOL and PL/I, may be compared with NUMTAB to find out the number of tab characters that need to be inserted in an output message to get correct positioning of the print element. The tab character is included in DFH2980 as TABCHAR.


Thirty special characters are defined in DFH2980. Twenty-three of these can be referred to by the name SPECCHAR-# or SPECCHAR_# (for American National Standard COBOL or PL/I) where # is an integer (0 through 22). The seven other characters are defined with names that imply their usage, for example, TABCHAR.

Several other characters defined in DFH2980, such as HOLDPCF or TCTTEPCR, are intended for use in application programs using CICS macros, and should not be required in application programs using CICS commands.

RECEIVE (3790 3270-display)

Receive data from a 3790 (3270-display) logical unit.

RECEIVE (3790 3270-display)

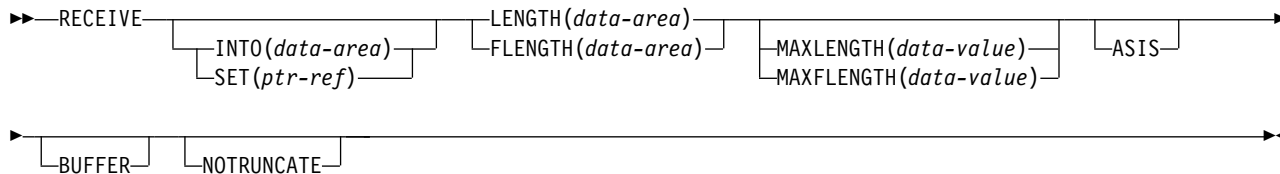

Conditions: INVREQ, LENGERR, TERMERR

Description

RECEIVE receives data from the terminal.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID) (and BUFFER has not been specified), you can omit both the INTO and SET options.

RECEIVE: non-z/OS Communications Server options

Common options used on the RECEIVE command (non-z/OS Communications Server).

Options

ASIS

indicates that output is to be sent in transparent mode (with no recognition of control characters and accepting any of the 256 possible combinations of eight bits as valid transmittable data).

This option has no effect on the first RECEIVE command of a transaction, because terminal control performs a READ INITIAL operation and uses the terminal defaults to translate the data.

This option has no effect if the screen contains data before a transaction being initiated. This data is read and translated in preparation for the next task and the first RECEIVE command in that task retrieves the translated data.

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only.

BUFFER

specifies that the contents of the 3270 buffer are to be read, beginning at buffer location one and continuing until all contents of the buffer have been read. All character and attribute sequences (including nulls) appear in the input data stream in the same order that they appear in the 3270 buffer.

LENGTH(*data-area*)

A fullword alternative to LENGTH.

INTO(*data-area*)

specifies the receiving field for the data read from the terminal or logical unit, or the application target area receiving the data from the application program connected to the other end of the current conversation.

If you specify the INTO option, but omit the MAXLENGTH option, the argument for the LENGTH option must be a data area that specifies the maximum length that the program accepts. If the value specified is less than zero, zero is assumed.

If the length of the data exceeds the value specified, but the NOTTRUNCATE option is not specified, the data is truncated to that value and the LENGERR condition occurs. When the data has been received, the data area for the LENGTH option is set to the original length of the data.

LEAVEKB

specifies that the keyboard is to remain locked at the completion of the data transfer.

LENGTH(*data-area*)

specifies the length, as a halfword binary value, of the data transmitted.

If you specify the INTO option, but omit the MAXLENGTH option, the argument must be a data area that specifies the maximum length that the program accepts. If the value specified is less than zero, zero is assumed.

If the length of the data exceeds the value specified, but the NOTRUNCATE option is not specified, the data is truncated to that value and the LENGERR condition occurs. When the data has been received, the data area is set to the original length of the data.

If you specify the SET option, the argument must be a data area. When the data has been received, the data area is set to the length of the data.

For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

MAXLENGTH(*data-value*)

A fullword alternative to MAXLENGTH.

MAXLENGTH(*data-value*)

specifies the maximum amount (halfword binary value) of data that CICS is to recover. If INTO is specified, MAXLENGTH overrides the use of LENGTH as an input to CICS. If SET is specified, MAXLENGTH provides a way for the program to limit the amount of data it receives at one time.

If the value specified is less than zero, zero is assumed.

If the length of data exceeds the value specified and the NOTRUNCATE option is not present, the data is truncated to that value and the LENGERR condition occurs. The data area specified in the LENGTH option is set to the original length of data.

If the length of data exceeds the value specified and the NOTRUNCATE option is present, CICS retains the remaining data and uses it to satisfy subsequent RECEIVE commands. The data area specified in the LENGTH option is set to the length of data returned.

If this option is omitted, the value indicated in the LENGTH option is assumed.

NOTRUNCATE

specifies that, when the data available exceeds the length requested, the remaining data is not to be discarded but is to be retained for retrieval by subsequent RECEIVE commands.

PASSBK

specifies that communication is with a passbook.

PSEUDOBIN

specifies that the data being read is to be translated from System/7 pseudobinary representation to hexadecimal.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If this option is omitted, the principal facility for the task is used.

SET(*ptr-ref*)

specifies a pointer reference that is to be set to the address of data received from the conversation partner in an MRO conversation. The pointer reference is valid until the next receive command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data can be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

If you specify the SET option, the argument for the LENGTH option must be a data area. When the data has been received, the data area is set to the length of the data.

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- FREE
- PENDFREE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

The following conditions can occur in combination with others. CICS checks for these conditions in the order:

1. INBFMH
2. EOC

If more than one occurs, only the first is passed to the application program. EIBRCODE, however, is set to indicate all the conditions that occurred.

08 ENDINPT

occurs when an end-of-input indicator is received.

Default action: terminate the task abnormally.

06 EOC

occurs when a request/response unit (RU) is received with the end-of-chain indicator set. Field EIBEOC also contains this indicator.

Default action: ignore the condition.

04 EOF

occurs when an end-of-file indicator is received.

Default action: terminate the task abnormally.

07 INBFMH

occurs if a request/response unit (RU) contains a function management header (FMH). Field EIBFMH contains this indicator and it should be used in preference to INBFMH. The IGNORE CONDITION command can be used to ignore the condition.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

22 LENGERR

occurs if data is discarded by CICS because its length exceeds the maximum the program accepts and the NOTRUNCATE option is not specified.

Default action: terminate the task abnormally.

50 NOPASSBKRD

occurs if no passbook is present.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

02 RDATT

occurs if a RECEIVE command is terminated by the attention (ATTN) key rather than the return key.

Default action: ignore the condition.

81 TERMERR

occurs for a terminal-related error, such as a session failure. This condition applies to z/OS Communications Server-connected terminals only.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.


Default action: terminate the task abnormally with abend code ATNI.

RECEIVE MAP

Receive screen input into an application data area.

For further information about BMS, see the *CICS Application Programming Guide*.

RECEIVE MAP

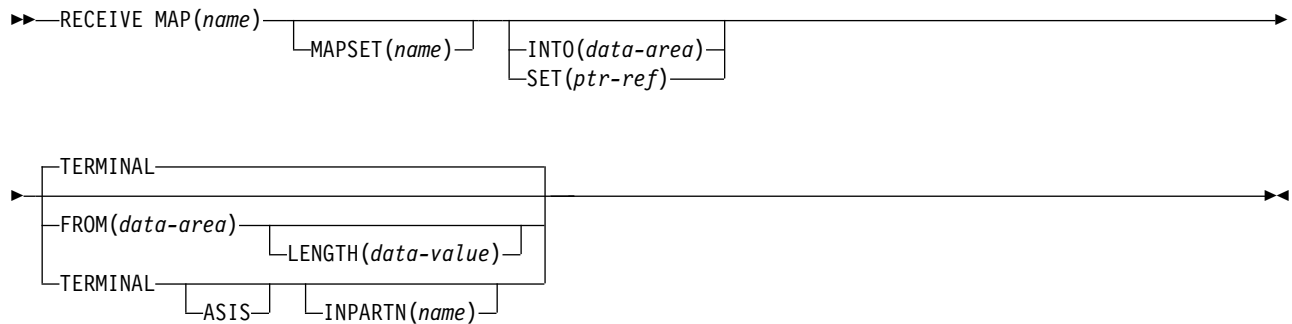

Conditions: EOC, EODS, INVMPSZ, INVPARTN, INVREQ, MAPFAIL, PARTNFAIL, RDATT, UNEXPIN

Note: INPARTN is supported by Standard and full BMS

Description

RECEIVE MAP maps input data from a terminal into a data area in an application program.

Data from certain logical units is not mapped, but is left unaltered. Refer to the appropriate CICS subsystem guide to see if this is true for a particular logical unit.

Following a RECEIVE MAP command, the inbound cursor position is placed in EIBCPOSN, and the terminal attention identifier (AID) placed in EIBAID.

See Appendix I, "BMS macros," on page 931 for map definitions.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID), you can omit both the INTO and the SET options.

Options

ASIS

specifies that lowercase characters in the 3270 input data stream are not translated to uppercase; this allows the current task to receive a message containing both uppercase and lowercase data.

This option has no effect on the first RECEIVE command of a transaction, or if the screen contains data before a transaction being initiated. For example, if a transaction is initiated by another transaction, and begins by receiving data originally output by that transaction, it cannot suppress uppercase translation on the data. This data is read and translated in preparation for the next task and the first RECEIVE command in that task retrieves the translated data.

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only.

FROM(*data-area*)

specifies the data area containing the data to be mapped by a RECEIVE MAP command. This includes the 12-byte prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and specifying NODDS in the BMS operand).

INPARTN(*name*)

specifies the name (1–2 characters) of the partition in which the terminal operator is expected to enter data. If the terminal operator enters data in some other partition, the INPARTN partition is activated, the keyboard is unlocked for the partition, and an error message is output to any error message partition. This option is ignored if the terminal does not support partitions, or if there is no application partition set.

INTO(*data-area*)

specifies the data area into which the mapped data is to be written. If this field is not specified, the name defaults to the name of the map suffixed with an I.

LENGTH(*data-value*)

specifies the length of the data to be formatted as a halfword binary value. It must not exceed the length of the FROM data area, but this should include the length of the 12-byte prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and specifying NODDS in the BMS operand).

For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

MAP(*name*)

specifies the name (1–7 characters) of the map to be used.

MAPSET(*name*)

specifies the unsuffixed name (1–7 characters) of the mapset to be used. The mapset must reside in the CICS program library. The mapset can be defined either by using RDO or by program autoinstall when the mapset is first used. If this option is not specified, the name given in the MAP option is assumed to be that of the mapset.

SET(*ptr-ref*)

specifies the pointer that is to be set to the address of the 12-byte prefix to the mapped data. The 12-byte prefix is generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and specifying NODDS in the BMS operand).

The pointer reference is valid until the next receive command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data may be above or below the 16MB line. The data area includes the 12-byte prefix. Ensure that the 12-byte prefix is not overwritten, because this might cause a storage violation.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

TERMINAL

specifies that input data is to be read from the terminal that originated the transaction.

Conditions

Some of the following conditions can occur in combination. If more than one occurs, only the first is passed to the application program.

EIBRCODE, however, is set to indicate all the conditions that occurred.

06 EOC

occurs if the request/response unit (RU) is received with the end-of-chain (EOC) indicator set. It applies only to logical units.

Default action: ignore the condition.

05 EODS

occurs if no data is received (only an FMH). It applies only to 3770 batch LUs and to 3770 and 3790 batch data interchange LUs.

Default action: terminate the task abnormally.

38 INVMPsz

occurs if the specified map is too wide or too long for the terminal.

Default action: terminate the task abnormally.

65 INVPARTN

occurs if the specified partition is not defined in the partition set associated with the application program.

Default action: terminate the task abnormally.

16 INVREQ

occurs if a RECEIVE MAP command is issued in a nonterminal task; these tasks do not have a TIOA or a TCTTE.

Default action: terminate the task abnormally.

36 MAPFAIL

occurs if the data to be mapped has a length of zero or does not contain a set-buffer-address (SBA) sequence. It applies only to 3270 devices. The receiving data area contains the unmapped input data stream. The amount of unmapped data moved to the user's area is limited to the length specified in the LENGTH option. The input map is not set to nulls.

This condition also arises if a program issues a RECEIVE MAP command to which the terminal operator responds by pressing a CLEAR or PA key, or by pressing ENTER or a function key without entering data.

Default action: terminate the task abnormally.

66 PARTNFAIL

occurs if the terminal operator attempts to enter data more than three times in a partition other than that specified by the INPARTN option.

Default action: terminate the task abnormally.

02 RDATT

occurs if a RECEIVE MAP command is terminated by the operator using the ATTN key rather than the RETURN key. It applies only to the 2741 Communications Terminal, and only if 2741 read attention support has been generated for CICS.

Default action: ignore the condition.

49 UNEXPIN

occurs when unexpected or unrecognized data is received. This only applies to batch data interchange terminals.


Default action: terminate the task abnormally.

RECEIVE MAP MAPPINGDEV

Receive screen input into an application data area, without reference to the principal facility, if any. Terminal characteristics are obtained from the **MAPPINGDEV** parameter.

For further information about BMS, see Basic mapping support in Developing applications.

RECEIVE MAP MAPPINGDEV

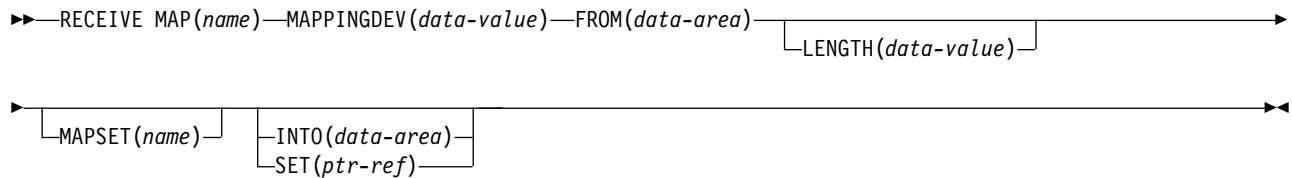

Conditions: INVMPSZ, INVREQ, MAPFAIL,

Description

RECEIVE MAP MAPPINGDEV allows the mapping of input data from a 3270 terminal that is not necessarily the principal facility of the transaction.

MAPPINGDEV specifies the name of a 3270 terminal whose BMS characteristics were used to create the input data stream. This might be a terminal from which the data was originally received using a RECEIVE command.

Options

AID(*data-value*)

Specifies the one-byte data area containing the value of the 3270 attention identifier (AID) to be used when performing the mapping operation. Usually this will be the value contained in EIBAID following the RECEIVE operation that originally received the datastream from the terminal.

The value specified is moved into field EIBAID in the EXEC interface block on completion of the operation. No check is made that the AID value specified is valid.

If AID(*data-value*) is not specified, then the AID value defaults to X'7D' (the Enter key).

If the AID byte (either explicitly, or by default) indicates an operation other than CLEAR, PA1, PA2, or PA3, and CURSLOC=YES is specified for the map, then the field containing the cursor is flagged by setting the X'02' bit in its flag byte.

If the AID (whether specified explicitly, or by default) is the subject of a HANDLE AID command, the specified branch will be taken in the usual way.

CURSOR(*data-value*)

Specifies an unsigned halfword binary field containing the cursor position (relative to zero) to be used. Usually this will be the value contained in EIBCPOSN following the RECEIVE operation that originally received the datastream from the terminal.

The value specified is moved into EIBCPOSN in the EXEC interface block on completion of the operation. No check is made that the CURSOR value specified is valid.

If CURSOR(data-value) is not specified, then the cursor value defaults to X'0000'.

FROM(data-area)

Specifies the data area containing the data to be mapped. This must be in the format of a TIOA and must contain a 12-byte prefix.

INTO(data-area)

Specifies the data area into which the mapped data is to be written. If this field is not specified, the name defaults to the name of the map suffixed with an I.

LENGTH(data-value)

Specifies the length of the data to be formatted as a halfword binary value. It must not exceed the length of the FROM data area, but this should include the length of the 12-byte prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and specifying NODDS in the BMS operand). For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

MAP(name)

Specifies the name (1–7 characters) of the map to be used.

MAPPINGDEV(data-value)

Specifies the name of a 3270 terminal whose characteristics match those of the terminal from which the data was originally received using a RECEIVE command.

MAPSET(name)

Specifies the unsuffixed name (1–7 characters) of the mapset to be used. The mapset must reside in the CICS program library. The mapset can be defined either by using RDO or by program autoinstall when the mapset is first used. If this option is not specified, the name given in the MAP option is assumed to be that of the mapset.

SET(ptr-ref)

Specifies the pointer that is to be set to the address of the 12-byte prefix to the mapped data. The pointer reference is valid until the next RECEIVE or RECEIVE MAP command, or until the end of the transaction, unless the application releases it by using a FREEMAIN request.

If TASKDATALOC(ANY) is specified for the running task, the data returned may be above or below the 16MB line.

If TASKDATALOC(BELOW) is specified for the running task, the data returned is below the 16MB line.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in CICS-key.

Conditions

Some of the following conditions may occur in combination. If more than one occurs, only the first is passed to the application program.

38 INVMP SZ

occurs if the specified map is too wide or too long for the terminal.

Default action: terminate the task abnormally.

16 INVREQ

occurs if the terminal specified by MAPPINGDEV does not exist, does not support BMS, or is not a 3270 printer or display.

Default action: terminate the task abnormally.

36 MAPFAIL

occurs if the data to be mapped has a length of zero or does not contain a set-buffer-address (SBA) sequence.

Default action: terminate the task abnormally.

RECEIVE PARTN

Receive data from an 8775 terminal partition. This command is only available on standard and full BMS.

For further information about BMS, see Basic mapping support in Developing applications.

RECEIVE PARTN

►►—RECEIVE PARTN(*data-area*)—————►►

Standard and full BMS:

RECEIVE PARTN

►►—INTO(*data-area*)—LENGTH(*data-value*)—ASIS—————►►
SET(*ptr-ref*)

Conditions: EOC, EODS, INVPARTN, INVREQ, LENGERR

Description

RECEIVE PARTN reads data from a partition on an 8775 terminal. It indicates which partition the data came from, and puts the data into the INTO or the SET data area. You can then treat the data as though it had originated from a terminal in base (unpartitioned) state.

Following a RECEIVE PARTN command, the inbound cursor position is placed in EIBCPOSN, and the terminal attention identifier (AID) placed in EIBAID. EIBAID and EIBCPOSN are also updated at task initiation for non-ATI tasks as well as after each terminal control and BMS input.

See Appendix I, “BMS macros,” on page 931 for map definitions.

If data is to be received, you must specify either the INTO or the SET option. If a RECEIVE is issued purely to detect an attention identifier (AID), you can omit both the INTO and the SET options.

Options

ASIS

specifies that lowercase characters in the 3270 input data stream are not translated to uppercase; this allows the current task to receive a message containing both uppercase and lowercase data.

The ASIS option has no effect on the first RECEIVE command of a transaction, or if the screen contains data prior to a transaction being initiated. For example, if a transaction is initiated by another transaction, and begins by receiving data originally output by that transaction, it cannot suppress uppercase translation on the data. This data is read and translated in preparation for the next task and the first RECEIVE command in that task retrieves the translated data.

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only.

INTO(*data-area*)

specifies the area into which the input data stripped of partition controls is to be written. The length of this area must be specified by the LENGTH option. If the area is not large enough to hold the input data, the input data is truncated, and the LENGERR condition raised. The length option data area is set to the length of data received, before any truncation.

LENGTH(*data-value*)

specifies the length of the data to be formatted as a halfword binary value. It must be set to the length of any INTO area before the command. After the command, BMS sets the LENGTH option to the length of data received before any truncation if the INTO area is too small.

For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

PARTN(*data-area*)

is set to the name (1–2 characters) of the input partition. The partition can be defined either by using RDO or by program autoinstall when the partition is first used.

SET(*ptr-ref*)

specifies the pointer that is to be set to the address of the 12-byte prefix to the mapped data. The pointer reference is valid until the next receive command or the end of task.

If DATALOCATION(ANY) is associated with the application program, the address of the data may be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

Conditions

Some of the following conditions can occur in combination. If more than one occurs, only the first one is passed to the application program.

06 EOC

occurs if the request/response unit (RU) is received with the end-of-chain (EOC) indicator set. It applies only to logical units.

Default action: ignore the condition.

05 EODS

occurs if no data is received (only an FMH). It applies only to 3770 batch LUs and to 3770 and 3790 batch data interchange LUs.

Default action: terminate the task abnormally.

65 INVPARTN

occurs if the specified partition is not defined in the partition set associated with the application program.

Default action: terminate the task abnormally.

16 INVREQ

occurs if a RECEIVE PARTN command is issued in a nonterminal task; these tasks do not have a TIOA or a TCTTE.

Default action: terminate the task abnormally.

22 LENGERR

occurs if the INTO area of a RECEIVE PARTN command is not large enough to hold the input data.

Default action: truncate the data to fit within the INTO area.

RELEASE

Release a loaded program, table, or mapset.

RELEASE

►►—RELEASE—PROGRAM(*name*)—◄◄

Conditions: INVREQ, NOTAUTH, PGMIDERR

This command is threadsafe.

Note for dynamic transaction routing: Using RELEASE of a program LOADED with HOLD could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

RELEASE releases the program, table, or mapset previously loaded by a LOAD command. This means that the issuing task can no longer use the resource unless another LOAD is issued.

Note: RELEASE does not remove a program from storage. It reduces the RESCOUNT by 1 and when the count reaches zero, the storage occupied by the program can be released by CICS storage manager.

This command operates in the current application context. If the command is issued by a program that is running under a task for an application deployed on a platform, CICS searches first for the named program in the private program directory for the application. If the named program is not found there, CICS then searches the public program directory.

If the HOLD option is specified in the LOAD command, the loaded resource is not released at the end of the task. It can only be released by a RELEASE command. This RELEASE command may be issued by the task that loaded the resource or by any other task.

If the HOLD option is not specified in the LOAD command, the loaded resource is released at the end of the task. It may, however, be released before this by the task that loaded the resource issuing a RELEASE command.

Options

PROGRAM(*name*)

specifies the identifier (1–8 characters) of a program, table, or mapset to be released.

Conditions

16 INVREQ

RESP2 values:

- 5 An invalid attempt is made by the program to release itself. A RELEASE command for the program that contains this command is allowed only when a corresponding LOAD command for the program

has been issued from the same task, or when a LOAD command with the HOLD option has been issued from another task.

- 6 The command is issued for a program that is not loaded.
- 7 Either the command is issued for a program that was loaded, without the HOLD option, by another task; or the program has been enabled as a global user exit .
- 17 The program is defined with RELOAD=YES. It must be released by a FREEMAIN rather than a RELEASE command.
- 30 The program manager domain has not yet been initialized. This is probably due to a release request having been made in a first stage PLT.

Default action: terminate the task abnormally.

70 NOTAUTH

occurs when a resource security check has failed on PROGRAM(name).

Default action: terminate the task abnormally.

27 PGMIDERR

RESP2 values:

- 1 A program, table, or mapset has no installed resource definition.
- 2 A program, table, or mapset is disabled.
- 9 The installed program definition is for a remote program.
- 42 An attempt has been made to RELEASE a JVM program. This is invalid because Java byte codes programs are not managed by CICS Loader.

Default action: terminate the task abnormally.

Examples

The following example shows how to release an application program, called PROG4, loaded in response to a LOAD command:

```
EXEC CICS RELEASE PROGRAM('PROG4')
```

REMOVE SUBEVENT

Remove a sub-event from a BTS composite event.

REMOVE SUBEVENT

►►—REMOVE—SUBEVENT(*data-value*)—EVENT(*data-value*)—————►►

Conditions: EVENTERR, INVREQ

Description

REMOVE SUBEVENT removes a sub-event from a named BTS composite event.

This call does not delete the removed event. Nor does it reset the event's fire status. Note that, after this call, the removed event—because it is no longer a sub-event—will cause the current activity to be reattached if it fires.

Removing a sub-event causes the composite's predicate to be re-evaluated.

Options

EVENT(*data-value*)

specifies the name (1–16 characters) of the composite event.

SUBEVENT(*data-value*)

specifies the name (1–16 characters) of the event which is to be removed from the named composite event.

Conditions

111 EVENTERR

RESP2 values:

- 4 The event specified on the EVENT option is not recognized by BTS.
- 5 The sub-event specified on the SUBEVENT option is not recognized by BTS.

16 INVREQ

RESP2 values:

- 1 The command was issued outside the scope of an activity.
- 2 The event specified on the EVENT option is not a composite event.
- 3 The event specified on the SUBEVENT option is not a sub-event of the composite event specified on the EVENT option.

REQUEST PASSTICKET

Request an external security manager to build a PassTicket.

REQUEST PASSTICKET

►— REQUEST PASSTICKET—(*—data-area—*)—ESMAPNAME—(*—data-area—*)—ESMRESP—(*—data-value—*)—►

Conditions: NOTAUTH, INVREQ

This command is threadsafe.

Description

The **REQUEST PASSTICKET** command requests an external security manager (ESM), such as RACF, to build a PassTicket. The PassTicket is a password substitute that your program can use to sign on to a particular application on a particular system, such as another CICS region. You must use the ESMAPPNAME option to specify the profile name by which the external security manager refers to the application to which you are signing on.

The PassTicket that the external security manager generates is for the user ID associated with the task that issues the **REQUEST PASSTICKET** command. Use the **EXEC CICS ASSIGN** command with the USERID option to identify the user ID that is associated with the task.

A PassTicket must be used within 10 minutes of being generated. If the PassTicket times out (because, for example, of a session failure), your application must generate another before attempting to sign on again. Repeated failed sign-on attempts with PassTickets can result in the user ID being revoked.

PassTickets are not displayed when the CICS execution diagnostic facility (EDF) is used.

Before using PassTickets, you must ensure that the system clocks for the target system and the originating system are synchronized to within the valid time range. You must also define a Secure Signon key for each target system. For information on the requirements for using PassTickets, see Generating and using PassTickets for secure sign-on in *Securing*.

Options

ESMAPNAME (*data-area*)

Specifies the eight-character profile name by which the external security manager refers to the application for which the supplied PassTicket is used. For example, if the application is another CICS region, the profile name might be the APPLID of the CICS region. If the external security manager is RACF, for more information about RACF profile names and PassTickets, see Using the secured signon function in *z/OS Security Server RACF Security Administrator's Guide*.

ESMRESP (*data-area*)

Returns the response code from the external security manager, as a fullword

binary variable. When RACF is in use, the possible values are the return codes that are supplied when using the RACF secured signon service to generate a PassTicket, as follows:

0 A PassTicket was produced.

8 A PassTicket was not produced.

PASSTICKET(*data-area*)

Returns the 8-character PassTicket generated by the external security manager.

Conditions

16 INVREQ

RESP2 values:

251 The interface between CICS and the external security manager is not active.

252 The value returned by the external security manager in ESMRESP is not classified by CICS.

254 The external security manager does not support requests for a PassTicket.

70 NOTAUTH

RESP2 values:

250 PassTicket not built successfully. The external security manager does not authorize a request for a PassTicket for the combination of the user ID associated with the task that issued this command, and the profile name specified in ESMAPPNAME.

RESET ACQPROCESS

Reset a BTS process to its initial state.

RESET ACQPROCESS

►►—RESET—ACQPROCESS—◄◄

Conditions: INVREQ, IOERR, LOCKED, NOTAUTH, PROCESSBUSY, PROCESSERR

Description

RESET ACQPROCESS resets the currently-acquired BTS process to its initial state. Any descendant activities of the root activity are deleted.

Note: RESET has no effect on the process containers, nor on the root activity's containers, the contents of which are unchanged.

Issue this command, before a second RUN command, when a process needs to be retried. When the process is re-run, the root activity is sent a DFHINITIAL event.

To be eligible to be reset, a process must:

1. Have been acquired in the current unit of work—that is, it must be the currently-acquired process.
2. Be in one of the following modes:
 - COMPLETE. This is the usual case. Perhaps the process has completed abnormally, and needs to be reset before being retried.
 - INITIAL. The process has not yet been run.

Options

ACQPROCESS

specifies that the process that is currently acquired by the requestor is to be reset.

Conditions

16 INVREQ

RESP2 values:

- 15 The unit of work that issued the request has not acquired a process.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

70 NOTAUTH

RESP2 values:

101 The user associated with the issuing task is not authorized to reset the process.

106 PROCESSBUSY

RESP2 values:

13 The request timed out. It may be that another task using this process-record has been prevented from ending.

108 PROCESSERR

RESP2 values:

14 The process to be reset is not in COMPLETE or INITIAL mode.

RESET ACTIVITY

Reset a BTS activity to its initial state.

RESET ACTIVITY

►►—RESET—ACTIVITY(*data-value*)—◄◄

Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED, NOTAUTH

Description

RESET ACTIVITY resets a BTS child activity to its initial state. Its completion event is added to the parent's event pool, with the fired status set to NOTFIRED. If the activity has children of its own, they are deleted.

Note: RESET has no effect on the contents of the activity's data containers, which are unchanged.

Issue this command, before a second RUN command, when an activity needs to be retried. When the activity is re-run, it is sent a DFHINITIAL event.

To be eligible to be reset, an activity must:

1. Be a child of the activity that issues the RESET command.
2. Be in one of the following modes:
 - COMPLETE. This is the usual case. Perhaps the activity has completed abnormally, and needs to be reset before being retried.
 - INITIAL. The activity has not yet been run.

Options

ACTIVITY(*data-value*)

specifies the name (1–16 characters) of the activity to be reset. This must be a child of the current activity.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named in the ACTIVITY option is not a child of the current activity.
- 14 The activity to be reset is not in COMPLETE or INITIAL mode.

16 INVREQ

RESP2 values:

- 4 The RESET ACTIVITY command was issued outside the scope of a currently-active activity.

17 IOERR

RESP2 values:

29 The repository file is unavailable.

30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

70 NOTAUTH


RESP2 values:

101 The user associated with the issuing task is not authorized to reset the activity.

RESETBR

Reset the start of a browse.

RESETBR

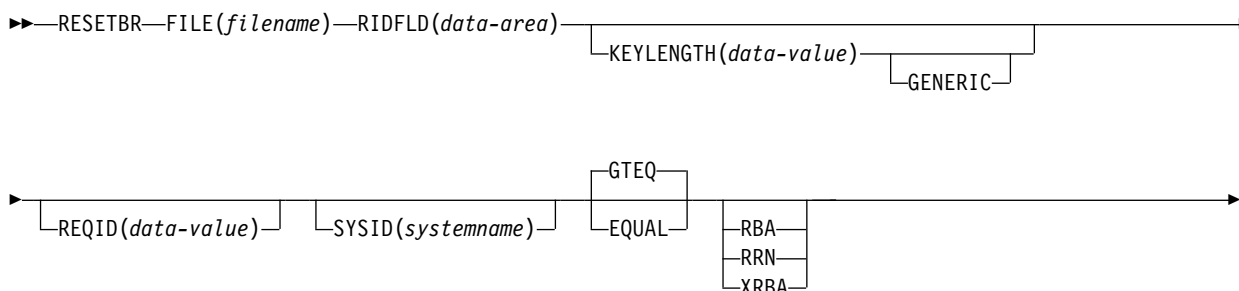

Conditions: FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, NOTAUTH, NOTFND, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

RESETBR specifies, during a browse, the record in a file or data table on a local or a remote system, where you want the browse to be repositioned.

When browsing a VSAM file or data table, you can use the RESETBR command to reposition the browse (which you can also achieve by modifying the RIDFLD data area on a READNEXT or READPREV command) and you can also change the browse characteristics from those specified on STARTBR, without ending the browse. The characteristics that can be changed are those specified by the GENERIC, GTEQ, and RBA options.

When browsing a BDAM file, you can include this command at any time before issuing any other browse command. It is similar to an ENDBR-STARTBR sequence (but with less function), and gives the BDAM user the sort of skip sequential capability that is available to VSAM users through use of the READNEXT command.

If a RESETBR request specifies the precise key at which the browse is to start (that is, it specifies a full key and the EQUAL keyword) the record returned on the following READNEXT (or READPREV) command might not be the same as the record specified by the RESETBR command for a file opened in VSAM NSR or RLS mode. This can occur because the initial record specified on the RESETBR command can be deleted by another transaction in between the RESETBR

completing and a READNEXT or READPREV command being issued. In VSAM LSR mode, the initial record cannot be deleted between the RESETBR and the READNEXT.

Note: RESETBR invalidates a TOKEN set by a previous READ or READNEXT command.

Options

EQUAL

specifies that the search is satisfied only by a record having the same key (complete or generic) as that specified in the RIDFLD option.

FILE(*filename*)

(VSAM and data table) specifies the name of the file to be accessed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

GENERIC

(VSAM KSDS, path or data table) specifies that the search key is a generic key whose length is specified in the KEYLENGTH option. The search for a record is satisfied when a record is found that has the same starting characters (generic key) as those specified.

GTEQ

(VSAM and data table) specifies that if the search for a record that has the same key (complete or generic) as that specified in the RIDFLD option is unsuccessful, the first record that has a greater key is retrieved. Use this option only with keyed or RRN.

KEYLENGTH(*data-value*)

specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case KEYLENGTH is not valid.

This option must be specified if GENERIC is specified, and it can be specified whenever a key is specified. If the length specified is different from the length defined for the data set and the operation is not generic, the INVREQ condition occurs.

The INVREQ condition also occurs if a RESETBR command specifies GENERIC, and the KEYLENGTH value is not less than that specified in the VSAM definition.

If KEYLENGTH(0) is used with the object of reading the first record in the data set, the GTEQ option must also be specified. If EQUAL is specified either explicitly or by default with KEYLENGTH(0), the results of the STARTBR are unpredictable.

For remote files, the KEYLENGTH can be specified in the FILE definition. If KEYLENGTH is not defined there, and is not specified in the application program, and the key is longer than 4 characters, the default value is 4.

RBA

(VSAM KSDS or ESDS base data sets, or CICS-maintained data tables only, not paths) specifies that the record identification field specified in the RIDFLD

option contains a relative byte address. Use this option only when browsing an ESDS or KSDS base and using relative byte addresses instead of keys to identify the records.

You cannot use RBA for:

- User-maintained data tables
- Coupling facility data tables
- Any KSDS file opened in RLS access mode
- KSDS files that use extended addressing

Also, you are recommended not to use RBA for ESDS files that hold more than 4 GB. (Use XRBA instead.)

REQID(*data-value*)

specifies as a halfword binary value a unique request identifier for a browse, used to control multiple browse operations on a data set. If this option is not specified, a default value of zero is assumed.

RIDFLD(*data-area*)

specifies the record identification field. The contents can be a key, a relative byte address, or a relative record number (for VSAM data sets), or a block reference, physical key, and a deblocking argument (for BDAM data sets). For a relative byte address or a relative record number, the format of this field must be fullword binary. For a relative byte address, the RIDFLD value can be greater than or equal to zero. For a relative record number, the RIDFLD value can be greater than or equal to 1.

For VSAM, a full record ID of X'FF's indicates that the browse is to be positioned at the end of the data set in preparation for a backwards browse using READPREV commands.

RRN

(VSAM RRDS) specifies that the record identification field specified in the RIDFLD option contains a relative record number.

SYSID(*systemname*)

specifies the name of the system to which the request is directed.

If you specify SYSID, and omit both RBA and RRN, you must also specify KEYLENGTH; it cannot be found in the resource definition.

XRBA

specifies that the record identification field specified in the RIDFLD option contains an extended relative byte address. This option should be used when browsing records in an ESDS extended addressing data set.

You cannot specify XRBA on a RESETBR command unless the associated STARTBR command also specified XRBA.

Conditions

12 FILENOTFOUND

RESP2 values:

1 A file name referred to in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

21 ILLOGIC

RESP2 values VSAM):

110 A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 25** The KEYLENGTH and GENERIC options are specified, and the length specified in the KEYLENGTH option is greater than or equal to the length of a full key.
- 26** The KEYLENGTH option is specified (but the GENERIC option is not specified), and the specified length does not equal the length defined for the data set to which this file refers.
- 36** The REQID, SYSID, or file name does not match that of any successful STARTBR command.
- 37** The type of record identification (for example, key or relative byte address) used to access a data set during the browse has been changed. You cannot specify one type of addressing on STARTBR and another on RESETBR.
- 42** The KEYLENGTH and GENERIC options are specified, and the length specified in the KEYLENGTH option is less than zero.
- 44** The command does not conform to the format of RESETBR for a user-maintained or coupling facility data table; for example, RBA is specified.
- 51** A RESETBR command to a KSDS file that is being accessed in RLS mode specifies the RBA keyword. RLS mode does not support RBA access to KSDS data sets.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120** There is an I/O error during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

54 ISCINVREQ

RESP2 values:

- 70** The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

101 A resource security check has failed on FILE(*filename*).

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

80 An attempt to retrieve a record based on the search argument provided is unsuccessful.

NOTFND can also occur if a generic RESETBR with KEYLENGTH(0) specifies the EQUAL option.

81 XRBA was specified, and the value of RIDFLD was greater than 4 GB, but the data set is not an extended addressing ESDS.

Default action: terminate the task abnormally.

53 SYSIDERR

RESP2 values:

130 The SYSID option specifies a name that is neither the local CICS region nor a remote system (as defined by a CONNECTION definition). SYSIDERR also occurs when the link to the remote system is closed

131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.


132 The RESETBR is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the *Setting up and running a coupling facility data table server in the CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

RESUME

Resume a suspended BTS process or activity.

RESUME



Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED, PROCESSERR

Description

RESUME resumes a BTS process or activity that has previously been suspended (by means of a SUSPEND command). That is, it allows the process or activity to be reattached when events in its event pool are fired. If events that would normally have caused reattachment have occurred during the time the process or activity was suspended, the latter is reattached for all these events.

The only process a program can resume is the one it has acquired in the current unit of work.

The only activities a program can resume are as follows:

- If it is running as the activation of an activity, its own child activities. It can resume several of its child activities within the same unit of work.
- The activity it has acquired, by means of an ACQUIRE ACTIVITYID command, in the current unit of work.

Options

ACQACTIVITY

specifies that the activity to be resumed is the one that the current unit of work has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the process that is currently acquired by the requestor is to be resumed.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the child activity to be resumed.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.
- 14 The activity is in COMPLETE or CANCELLING mode, and therefore cannot be resumed.

16 INVREQ

RESP2 values:

- 4 The ACTIVITY option was used to name a child activity, but the command was issued outside the scope of a currently-active activity.
- 15 The ACQPROCESS option was used, but the unit of work that issued the request has not acquired a process.
- 24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

108 PROCESSERR


RESP2 values:

- 14 The process is in COMPLETE or CANCELLING mode, and therefore cannot be resumed.

RETRIEVE

Retrieve data stored for a task.

RETRIEVE

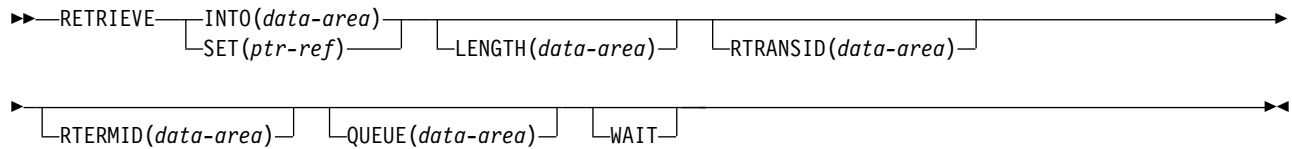

Conditions: ENDDATA, ENVDEFERR, INVREQ, IOERR, LENGERR

Note for dynamic transaction routing: Using RETRIEVE with WAIT could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

The RETRIEVE command retrieves data stored by expired START commands. It is the only method available for accessing such data.

A task that is not associated with a terminal can access only the single data record associated with the original START command; it does so by issuing a RETRIEVE command. The storage occupied by the data associated with the task is normally released on execution of the RETRIEVE command, or on termination of the task if no RETRIEVE command is executed before termination.

If the START command specified ATTACH, the storage is not released. (ASSIGN STARTCODE in such a task returns 'U' rather than 'S' or 'SD').

A task that is associated with a terminal can access all data records associated with all expired START commands having the same transaction identifier and terminal identifier as this task, that is the task issuing the RETRIEVE command; it does so by issuing consecutive RETRIEVE commands. Expired data records are presented to the task on request in expiration-time sequence, starting with any data stored by the command that started the task, and including data from any commands that have expired since the task started. Each data record is retrieved from temporary storage using the REQID of the original START command as the identification of the record in temporary storage.

When all expired data records have been retrieved, the ENDDATA condition occurs. The storage occupied by the single data record associated with a START command is released after the data has been retrieved by a RETRIEVE command; any storage occupied by data that has not been retrieved is released when the CICS system is terminated.

If the retrieved data contains FMHs (Function Management Headers), as specified by the FMH option on the associated START command, field EIBFMH in the EIB is set to X'FF'. If no FMH is present, EIBFMH is set to X'00'.

Options

INTO(*data-area*)

specifies the user data area into which retrieved data is to be written.

LENGTH(*data-area*)

specifies a halfword binary value to define the length of the data area the retrieved data is written into.

If you specify the INTO option, the argument must be a data area that specifies the maximum length of data that the program is prepared to handle. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs. On completion of the retrieval operation, the data area is set to the original length of the data.

If you specify the SET option, the argument must be a data area. On completion of the retrieval operation, the data area is set to the length of the data.

For a description of a safe upper limit, see “LENGTH options in CICS commands” on page 11.

QUEUE(*data-area*)

specifies the 8-character area for the temporary storage queue name that may be accessed by the transaction issuing the RETRIEVE command.

RTERMID(*data-area*)

specifies a 4-character area that can be used in the TERMID option of a START command that may be executed subsequently.

RTRANSID(*data-area*)

specifies a 4-character area that can be used in the TRANSID option of a START command that may be executed subsequently.

SET(*ptr-ref*)

specifies the pointer reference to be set to the address of the retrieved data.

If DATALOCATION(ANY) is associated with the application program, the address of the data may be above or below the 16MB line.

If DATALOCATION(BELOW) is associated with the application program, and the data resides above the 16MB line, the data is copied below the 16MB line, and the address of this copy is returned.

If TASKDATAKEY(USER) is specified for the running task, and storage protection is active, the data returned is in a user-key. If TASKDATAKEY(CICS) is specified and storage protection is active, the data returned is in a CICS-key.

If you use SET you must also include LENGTH.

WAIT

specifies that, if all expired data records have already been retrieved, the task is to be put into a wait state until further expired data records become available. Although this means that the ENDDATA condition is not raised at the time the RETRIEVE command is issued, it is raised later if CICS enters shutdown or if the task is subject to deadlock timeout and it waits for longer than the deadlock timeout interval. (See the DTIMOUT option of RDO DEFINE TRANSACTION.)

An attempt to issue RETRIEVE WAIT during shutdown leads to an AICB abend if there is no data record already available to satisfy the request.

If you use WAIT, you must have at least one other option.

Conditions

29 ENDDATA

occurs in any of the following situations:

- No more data is stored for the task issuing a RETRIEVE command. It can be considered a normal end-of-file response when retrieving data records sequentially.
- The RETRIEVE command is issued by a task that is started by a START command that did not specify any of the data options FROM, RTRANSID, RTERMID, or QUEUE.
- The RETRIEVE command is issued by a nonterminal task that was not created as a result of a START command.
- WAIT was specified and the task was waiting for a data record but none became available before the deadlock timeout interval (see the DTIMOUT option of RDO DEFINE TRANSACTION).
- WAIT was specified and the task was waiting when CICS entered shutdown. An attempt to issue RETRIEVE WAIT during shutdown leads to an AICB abend if there is no data record already available to satisfy the request.
- A RETRIEVE command with the WAIT option is issued when no data is available; the task was initiated by a START command that specified an APPC connection or terminal in the TERMID option.

Default action: terminate the task abnormally.

56 ENVDEFERR

occurs when a RETRIEVE command specifies an option not specified by the corresponding START command.

Default action: terminate the task abnormally.

16 INVREQ

occurs if the RETRIEVE command is not valid for processing by CICS.

Default action: terminate the task abnormally.

17 IOERR

occurs if an input/output error occurs during a RETRIEVE operation. The operation can be retried by reissuing the RETRIEVE command.

Default action: terminate the task abnormally.

22 LENGERR

occurs if the length specified is less than the actual length of the stored data.

Default action: terminate the task abnormally.

Examples

The following example shows how to retrieve data stored by a START command for the task, and store it in the user-supplied data area called DATAFLD.

```
EXEC CICS RETRIEVE  
      INTO(DATAFLD)  
      LENGTH(LENG)
```

The following example shows how to request retrieval of a data record stored for a task into a data area provided by CICS; the pointer reference (PREF) specified by the SET option is set to the address of the storage area reserved for the data


record.

```
EXEC CICS RETRIEVE  
      SET(PREF)  
      LENGTH(LENG)
```

RETRIEVE REATTACH EVENT

Retrieve the name of an event that caused the current BTS activity to be reattached.

RETRIEVE REATTACH EVENT



Conditions: END, INVREQ

Description

RETRIEVE REATTACH EVENT:

- Returns the name of the next event in the current BTS activity's reattachment queue.
- If the retrieved event is atomic, resets its fire status to NOTFIRED. (Composite events are not reset by this command, but only when their predicates become false.)

Use this command to find the name of the event that caused the activity to be reattached. In some cases, reattachment could result from the firing of more than one event—if, for example, the activity has previously been suspended, and reattachment events occurred while it was suspended; or if two or more timer events fire simultaneously. The event name or names are placed on the reattachment queue, from where they can be retrieved by issuing one or more RETRIEVE REATTACH EVENT commands.

Each time it is activated, an activity must deal with at least one reattachment event. That is, it must issue at least one RETRIEVE REATTACH EVENT command, and (if this is not done automatically by CICS) reset the fire status of the retrieved event to NOTFIRED—see *Resetting and deleting reattachment events in the CICS Business Transaction Services*. Failure to do so results in the activity completing abnormally, because it has made no progress—it has not reset any reattachment events and is therefore in danger of getting into an unintentional loop.

If there are multiple events on its reattachment queue, an activity can, by issuing multiple RETRIEVE REATTACH EVENT commands, deal with several or all of them in a single activation. Alternatively, it can deal with them singly, by issuing only one RETRIEVE command per activation and returning; it is then reactivated to deal with the next event on its reattachment queue. Which approach you choose is a matter of program design. Bear in mind, if you deal with several reattachment events in the same activation, that a syncpoint does not occur until the activation returns.

Note: The retrieval of a composite event from the reattachment queue does not reset the state of the composite event to NOTFIRED. Thus, if it retrieves a composite reattachment event, the activity program may need to issue one or more RETRIEVE SUBEVENT commands, to retrieve (and reset) the sub-event or sub-events that have fired. This in turn causes the fire status of the composite event to be re-evaluated.

Options

EVENT(data-area)

returns the 16-character name of the event which caused this activity to be reattached.

EVENTTYPE(cvda)

returns the type of the reattachment event. CVDA values are:

ACTIVITY

Activity completion.

COMPOSITE

Composite.

INPUT

Input

SYSTEM

The BTS system event, DFHINITIAL.

TIMER

Timer.

Conditions

83 END

RESP2 values:

8 There are no more events to retrieve.

16 INVREQ

RESP2 values:

1 The command was issued outside the scope of an activity.

RETRIEVE SUBEVENT

Retrieve the name of the next sub-event in a BTS composite event's sub-event queue.

RETRIEVE SUBEVENT

►►—RETRIEVE—SUBEVENT(*data-area*)—EVENT(*data-value*)—
└EVENTTYPE(*cvda*)┐—►►

Conditions: END, EVENTERR, INVREQ

Description

RETRIEVE SUBEVENT:

- Retrieves the name of the next sub-event in a BTS composite event's sub-event queue.
- Resets the retrieved sub-event's fire status to NOTFIRED.
- Causes the composite event's fire status to be re-evaluated.

The firing of a composite event results from the firing of a set of one or more sub-events. The names of sub-events that have fired are placed on the composite event's sub-event queue, from which they can be retrieved, in sequence, by issuing successive RETRIEVE SUBEVENT commands.

You can use this command to discover which sub-event or sub-events caused a composite event to fire.

Note:

1. The presence of events on the sub-event queue does not imply that the composite event has fired. (Some sub-events in the set required to fire the composite event may still be in NOTFIRED state, and not yet on the sub-event queue.) To discover whether a composite event has fired, use the TEST EVENT command.
2. Retrieval is destructive; when the name of a fired sub-event is retrieved, that sub-event cannot be retrieved again.
3. Because it resets the fire status of the sub-event, RETRIEVE SUBEVENT causes the fire status of the composite event to be re-evaluated.

Options

EVENT(*data-value*)

specifies the name (1–16 characters) of the composite event.

EVENTTYPE(*cvda*)

returns the type of the sub-event. CVDA values are:

ACTIVITY

Activity completion.

INPUT

Input

TIMER

Timer.

SUBEVENT(data-area)

returns the 16-character name of the sub-event at the head of the sub-event queue.

Conditions**83 END**

RESP2 values:

- 9 There are no more sub-events to retrieve.
- 10 The composite event contains no sub-events (it is empty).

111 EVENTERR

RESP2 values:

- 4 The event specified on the EVENT option is not recognized by BTS.

16 INVREQ


RESP2 values:

- 1 The command was issued outside the scope of an activity.
- 2 The event specified on the EVENT option is invalid. It is not a composite event.

RETURN

Return program control.

RETURN

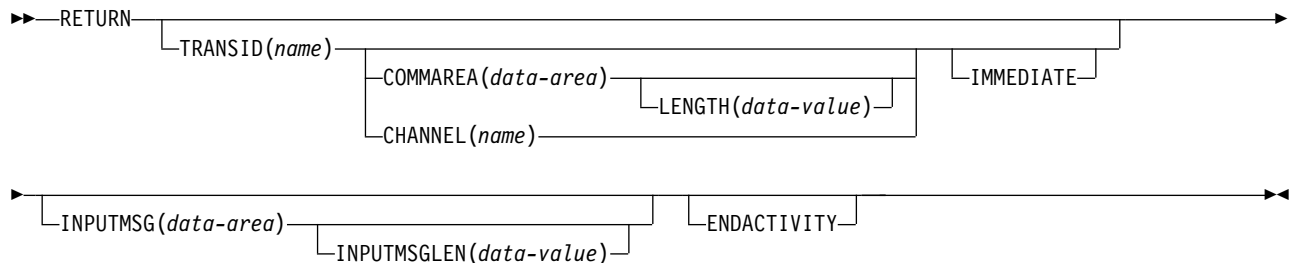

Conditions: CHANNELERR, INVREQ, LENGERR

This command is threadsafe.

Description

RETURN returns control from an application program either to an application program at the next higher logical level, or to CICS.

When returning a communications area (COMMAREA), the LENGTH option specifies the length of the data to be passed. The LENGTH value being passed must not be greater than the length of the data area specified in the COMMAREA option. If it is, the results are unpredictable and may result in a LENGERR condition, as described in the section about passing data to other programs in the *CICS Application Programming Guide*.

The valid range for the COMMAREA length is 0 through 32 763 bytes. If the length provided is outside this range, the LENGERR condition occurs.

The COMMAREA, IMMEDIATE, and CHANNEL options can be used only when the RETURN command is returning control to CICS; otherwise, the INVREQ condition occurs.

No resource security checking occurs on the RETURN TRANSID command. However, transaction security checking is still available when CICS attaches the returned transaction.

For information about the use of this command in the CICS BTS environment, see the *CICS Business Transaction Services* manual.

Options

CHANNEL(name)

specifies the name (1–16 characters) of a channel that is to be made available to the next program that receives control. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and _ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it

is padded with trailing blanks up to 16 characters. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see *The scope of a channel*.

Channel names are always in EBCDIC. The allowable set of characters for channel names, listed above, includes some characters that do not have the same representation in all EBCDIC code pages. We therefore recommend that, if a channel is to be shipped between regions (that is, if the transaction named on the TRANSID option is remote), the characters used in naming it should be restricted to A-Z a-z 0-9 & : = , ; < > . - and _.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see *Channels and containers*.

The program that issues the RETURN command can do one of the following:

- Have already created the channel by means of one or more PUT CONTAINER CHANNEL commands
- Specify its current channel, by name
- Name a non-existent channel, in which case a new, empty, channel is created

This option is valid only on a RETURN command issued by a program at the highest logical level; that is, a program returning control to CICS.

COMMAREA (data-area)

specifies a communication area that is to be made available to the next program that receives control. In a COBOL receiving program, you must give this data area the name DFHCOMMAREA. See the *CICS Application Programming Guide* for more information about the CICS COMMAREA. Because the data area is freed before the next program starts, a copy of the data area is created and a pointer to the copy is passed.

The communication area specified is passed to the next program that runs at the terminal. To ensure that the communication area is passed to the correct program, include the IMMEDIATE option.

This option is valid only on a RETURN command issued by a program at the highest logical level, that is, a program returning control to CICS.

ENDACTIVITY

This option is for use by programs that implement CICS business transaction services (BTS) activities. It specifies that the current activity is completing, and is not to be reactivated.

If there are no user events in the activity's event pool, the activity completes normally.

If there are user events (fired or unfired) in the activity's event pool:

- If one or more of the events are activity completion events, the activity abends. Trying to force an activity to complete before it has dealt with one or more of its child activities is a program logic error.
- If none of the events are activity completion events, the events are deleted and the activity completes normally.

For information about BTS in general and the ENDACTIVITY option in particular, see *CICS Business Transaction Services*.

This option is ignored outside the CICS BTS environment.

IMMEDIATE

ensures that the transaction specified in the TRANSID option is attached as the next transaction regardless of any other transactions enqueued by ATI for this terminal. The next transaction starts immediately and appears to the operator as having been started by terminal data. If the terminal is using bracket protocol, the terminal is also held in bracket. This option is valid only on a RETURN command issued by a program at the highest logical level, that is a program returning control to CICS.

Note that in a multi region environment, using IMMEDIATE does not affect the transaction definition as this is still found in the terminal-owning region (TOR).

INPUTMSG(*data-area*)

specifies data to be passed either to another transaction, identified by the TRANSID option, or to a calling program in a multiprogram transaction. You can also use INPUTMSG when returning control to CICS from a user-written dynamic transaction routing program, when you might want to modify the initial input.

In all cases, the data in the INPUTMSG data area is passed to the first program to issue a RECEIVE command following the RETURN.

See the *CICS Application Programming Guide* for more information and illustrations about the use of INPUTMSG.

INPUTMSGLEN(*data-value*)

specifies a halfword binary value to be used with INPUTMSG.

LENGTH(*data-value*)

specifies a halfword binary value that is the length in bytes of the COMMAREA. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

TRANSID(*name*)

specifies the transaction identifier (1–4 characters) to be used with the next input message entered from the terminal with which the task that issued the RETURN command has been associated. The specified name must have been defined as a transaction to CICS.

If TRANSID is specified for a program running on a terminal that is defined with a permanent transaction ID, the terminal's permanent transaction is initiated next rather than the transaction specified on the RETURN.

If you specify a TRANSID of binary zeros, the transaction identifier for the next program to be associated with the terminal may be determined from subsequent input from the terminal. Issuing a RETURN with a TRANSID of binary zeros and a COMMAREA can cause unpredictable results if the next transaction is not coded to handle the COMMAREA or if it receives a COMMAREA not intended for it.

If you specify TRANSID on a program that is not at the highest level, and there is a subsequent error on COMMAREA, INPUTMSG, or CHANNEL on the final RETURN, the TRANSID is cleared.

The next transaction identifier is also cleared on an abnormal termination of the transaction.

If IMMEDIATE is specified with this option, control is passed to the transaction specified in the TRANSID option in preference to any transactions enqueued by ATI.

If IMMEDIATE is not specified with this option, an ATI initiated transaction of the same name enqueued to the terminal nullifies this option.

This option is not valid if the transaction issuing the RETURN command is not associated with a terminal, or is associated with an APPC logical unit.

Conditions

122 CHANNELERR

RESP2 values:

- 1 The name specified on the CHANNEL option contains an illegal character or combination of characters.

16 INVREQ

RESP2 values:

- 1 A RETURN command with the TRANSID option is issued in a program that is not associated with a terminal.
- 2 A RETURN command with the CHANNEL, COMMAREA, or IMMEDIATE option is issued by a program that is not at the highest logical level.
- 4 A RETURN command with the TRANSID option is issued in a program that is associated with an APPC logical unit.
- 8 A RETURN command with the INPUTMSG option is issued for a program that is not associated with a terminal, or that is associated with an APPC logical unit, or an IRC session.
- 30 PG domain not initialized. Parameters are not allowed on the EXEC RETURN statement in first stage PLT programs.
- 200 A RETURN command is issued with an INPUTMSG option by a program invoked by DPL.
- 203 The CHANNEL option was specified but the remote region to which control is returned does not support channels.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 11 The COMMAREA length is less than 0 or greater than 32763.
- 26 The COMMAREA ADDRESS passed was zero, but the commarea length was non-zero.
- 27 The INPUTMSG LENGTH was less than 0 or greater than 32767.

Default action: terminate the task abnormally.

REWIND COUNTER and REWIND DCOUNTER

Rewind a named counter that has reached its limit (that is, the maximum number has been assigned). Use COUNTER for fullword signed counters and DCOUNTER for doubleword unsigned counters.

REWIND COUNTER

►►—REWIND—COUNTER(*name*)—┐POOL(*name*)┐┐INCREMENT(*data-value*)┐—►►

Conditions: INVREQ, SUPPRESSED

This command is threadsafe.

REWIND DCOUNTER

►►—REWIND—DCOUNTER(*name*)—┐POOL(*name*)┐┐INCREMENT(*data-area*)┐—►►

Conditions: INVREQ, SUPPRESSED

This command is threadsafe.

Description

These counter commands reset the current value of the named counter to its defined minimum number.

For information about specifying fullword and doubleword variables on these named counter commands, see “CICS command argument values” on page 4.

Options

COUNTER(*name*)

Specifies the name of the named counter to reset to its minimum value. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

DCOUNTER(*name*)

Specifies the name of the named counter to reset to its minimum value. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

INCREMENT(*data-value*)

Specifies, as a fullword signed binary value (or doubleword unsigned binary value for DCOUNTER), an increment to use to determine whether the named counter is in a valid state to be reset. If a previous GET command (that did not specify the REDUCE option) specified an increment that caused the GET command to fail, specify the same increment on the REWIND. The named counter server applies the increment before testing whether the counter is in a counter-at-limit condition.

See the INCREMENT option on the GET command for more details.

POOL(*poolname*)

Specifies an 8-character string to use as a pool selection parameter to select the pool in which the named counter resides. The string can be a logical pool name, or the actual pool name.

Valid characters for the pool selector string are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 8 characters, the name must be padded with trailing blanks.

This parameter is optional. If you omit the name of the pool, a pool selector value of 8 blanks is assumed.

If there is no matching entry in the DFHNCOPT options table, CICS uses the name specified on the NCPLDFT system initialization parameter, which specifies the default named counter pool.

For information about generating a named counter options table using the DFHNCO macro, see the *CICS Application Programming Guide*.

Conditions

16 INVREQ

RESP2 values:

- | | |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 201 | Named counter not found. |
| 301 | The server has reported an error code that is not understood by the named counter interface. Generally, this is not possible unless the interface load module, DFHNCIF, is at a lower maintenance or release level than the server itself. |
| 303 | An unexpected error, such as structure failure or loss of connectivity, has occurred on a macro used to access the coupling facility. Further information is in message DFHNC0441 in the application job log. |
| 304 | The pool selection parameter specified in the program cannot be resolved to a valid server name using the current options table. |
| 305 | The interface cannot establish a connection to the server for the selected named counter pool. Further information is in an AXM services message (AXMSCnnnn) in the application job log. |
| 306 | An abend occurred during server processing of a request. Further information is in a message in the application job log and the server job log. |
| 308 | The DFHNCOPT options table module, required to resolve a pool name, cannot be loaded. |
| 309 | During processing of the options table, the named counter interface encountered an unknown entry format. Either the options table is not correctly generated, or the DFHNCIF interface load module is not at the same release level as the options table. |
| 310 | An options table entry that matches the given pool name specified a user exit program, but the user exit program is not link-edited with the options table and cannot be loaded. |
| 311 | A response from the named counter server to the client region interface module, DFHNCIF, indicates that a system-managed rebuild is in progress but the EXEC CICS interface does not recognize the condition. This means that the CICS region is at CICS TS 2.1 or earlier. |

- 403 The POOL parameter contains invalid characters or embedded spaces.
- 404 The COUNTER parameter contains invalid characters or embedded spaces.
- 406 The INCREMENT value is invalid. The value specified cannot be greater than the total range of the counter ((maximum value - minimum value) + 1).

Default action: terminate the task abnormally.

72 SUPPRESSED

RESP2 values:

- 102 The named counter has not yet reached its limit (that is, the current value is not equal to the maximum value plus 1, giving the counter-at-limit condition). This error condition is returned if the named counter is not at its limit even after applying any specified increment.

Default action: terminate the task abnormally.

REWRITE

Update a record in a file.

REWRITE

```
►—REWRITE—FILE(filename)—┐—FROM(data-area)—►
                           └─TOKEN(data-area)─┘

►—┐—SYSID(systemname)—LENGTH(data-value)—┐—NOSUSPEND—►
  └─LENGTH(data-value)—┐
```

Conditions: CHANGED, DUPREC, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCVREQ, LENGERR, LOCKED, NOSPACE, NOTAUTH, NOTFND, RECORDBUSY, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

REWRITE updates a record in a file on a local or a remote system. You must always precede this command with a read with the UPDATE option.

For VSAM data sets, you must not change the key field in the record.

When this command is used to update a record in a CICS-maintained data table, the update is made to both the source VSAM KSDS and the in-memory data table. The details of the command for a CICS-maintained table are the same as for a VSAM KSDS.

When this command is used to update a record in a user-maintained data table, the update is made to the in-memory data table.

When this command is used to update records in a coupling facility data table, the update is made only to the data table in the coupling facility.

If an update to a user-maintained table or coupling facility data table does not succeed because there is insufficient space, a NOSPACE response is returned to the command. CICS also issues message DFHFC0432 to alert system administrators to the situation.

Options

FILE(*filename*)

specifies the name of the file to be accessed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

FROM(*data-area*)

specifies the record that is to be written to the data set referred to by this file.

LENGTH(*data-value*)

specifies the length, as a halfword binary value, of the data area where the record is written from.

This option must be specified if SYSID is specified.

If the file is on a remote system, the LENGTH parameter need not be set here but must be set in the file resource definition.

If the file is on a local system, the LENGTH parameter must be set for variable-length records, using the INTO option, but not for fixed-length records. It is, however, advisable to specify the length for fixed-length records because it causes a check to be made that the record being written is not longer than that defined for the data set.

NOSUSPEND (RLS only)

The request does not wait if VSAM is holding an active lock against the record, including records locked as the result of a DEADLOCK.

Lock contention can occur if the update involves changes made in RLS mode to records in a VSAM data set that has one or more alternate indexes, and an alternate index is defined with unique keys.

In most other cases, you should not need this option because the active lock is acquired when the task issues the **READ UPDATE** command.

Note: Requests that specify NOSUSPEND wait for at least 1 second before CICS returns the RECORDBUSY response.

SYSID(*systemname*)

specifies the name of the system to which the request is directed.

TOKEN(*data-area*)

specifies as a fullword binary value a unique request identifier for a REWRITE, used to associate it with a previous READ, READNEXT, or READPREV command that specified UPDATE.

TOKEN can be function shipped. However, if a request specifying TOKEN is function shipped to a member of the CICS family of products that does not support the TOKEN option, the request fails:

Conditions

105 CHANGED

RESP2 values:

- 109** A REWRITE command is issued for a file that is defined as a coupling facility data table using the contention update model, and for which the record has been changed since the application program read it for update. To successfully update the record, repeat the READ for UPDATE to get the latest version of the record, reapply the change, and try the rewrite again.

Default action: terminate the task abnormally.

14 DUPREC

RESP2 values:

- 150** An attempt is made to rewrite a record to a data set whose upgrade set has an alternate index with the UNIQUEKEY attribute, if the corresponding alternate key already exists in the alternate index.

Default action: terminate the task abnormally.

12 FILENOTFOUND

RESP2 values:

- 1** A file name referred to in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

21 ILLOGIC

Any browse that is currently in progress is terminated when this condition is raised.

RESP2 values: (VSAM)

- 110** A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 30** A REWRITE command is issued without a token and no previous READ for UPDATE (also without a token) can be found.

A possible reason for the previous READ for UPDATE not being found is that it failed for some reason, and the failure has not been correctly handled or has been ignored.
- 46** A REWRITE command has attempted to change the length of a BDAM variable length record or block.
- 47** A REWRITE instruction includes a token whose value cannot be matched against any token that is in use for an existing READ for UPDATE request.
- 55** NOSUSPEND is not allowed because the file is not a VSAM file that is accessed in RLS mode.
- 56** An attempt to update a recoverable coupling facility data table has failed because the current unit of work has already updated 1024 recoverable coupling facility data tables. You cannot update more than 1024 recoverable coupling facility data tables within a unit of work

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120** An I/O error occurred during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

54 ISCVREQ

RESP2 values:

- 70** The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 10** The LENGTH option is not specified for a file with variable-length records, or for a BDAM file with undefined format records.
- 12** The length specified exceeds the maximum record size (of the source data set for a data-table); the record is truncated.
- 14** An incorrect length is specified for a file with fixed-length records.

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

- 80** For user-maintained data tables, this condition occurs when an attempt to REWRITE a record has failed because the REWRITE is associated with a READ UPDATE request for a record that this transaction has deleted (using DELETE with RIDFLD) after it was read for update. This may be caused by a logic error in the application program.

This condition can also occur when a REWRITE command is issued to a coupling facility data table using the contention model and the record has been deleted since it was read for update.

Default action: terminate the task abnormally.

100 LOCKED

RESP2 values:

- 106** An attempt has been made to update a record, but a retained lock exists against a unique alternate key that is involved in the request.

Default action: abend the task with code AEX8.

18 NOSPACE

RESP2 values:

- 100** No space is available on the direct access device for adding the updated record to the data set.
- 102** The maximum number of records specified for a recoverable coupling facility data table has been exceeded. This can occur on a rewrite operation because an extra record is required in the coupling facility data table for recovery purposes until the update has been committed.
- 103** For user-maintained data tables, this condition occurs if CICS is unable to get sufficient storage in the CICS address space to store the updated data table entry.

- 108** For coupling facility data tables, this condition occurs if there is insufficient space in the coupling facility data table pool to store the updated record.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 101** A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

101 RECORDBUSY

RESP2 values:

- 107** NOSUSPEND is specified but VSAM holds an active lock against a unique alternate index key that is involved in the request, which would cause the request to wait. See Retained and active locks for more information.

Default action: abend the task with code AEX9.

53 SYSIDERR

RESP2 values:

- 130** The SYSID option specifies a name that is neither the local system nor a remote system (made known to CICS by defining a CONNECTION). SYSIDERR also occurs when the link to the remote system is closed.
- 131** For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132** The REWRITE is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

Retained and active locks: RECORDBUSY refers to active locks and LOCKED refers to retained locks:

- REWRITE requests for records that have *retained* locks are always rejected with a LOCKED response.
- REWRITE requests for records that have *active* locks wait for the lock to be released, except when the NOSUSPEND keyword is specified, in which case CICS returns the RECORDBUSY response.

Examples

Here is an example of a simple REWRITE command:


```
EXEC CICS REWRITE  
      FROM(RECORD)  
      FILE('MASTER')  
      TOKEN(APTOK)
```

ROUTE

Route a BMS message. This command is only available on full BMS.

For more information about BMS, see Basic mapping support in Developing applications.

ROUTE

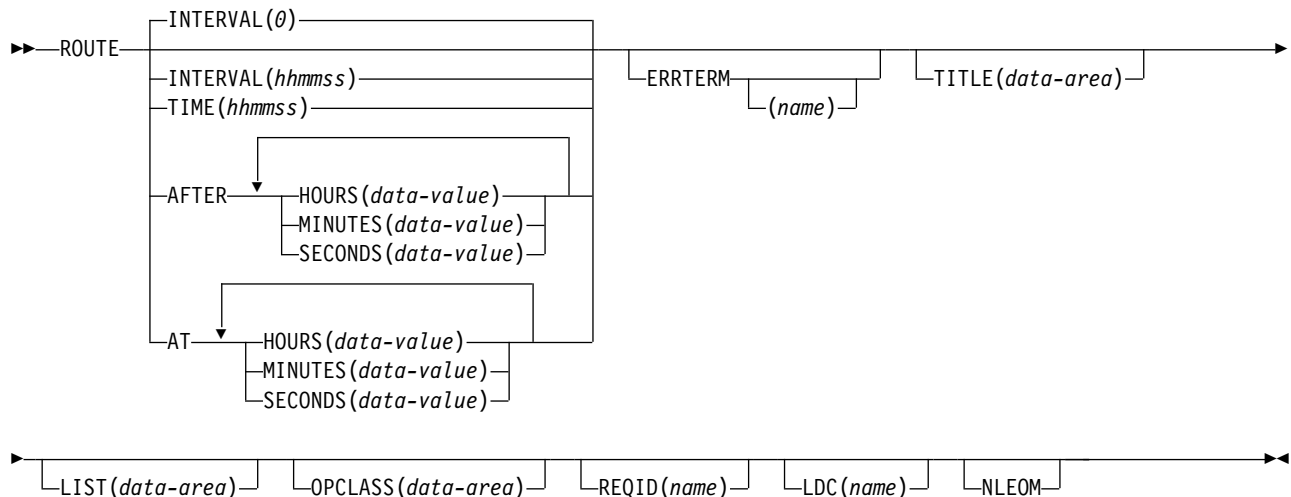

Conditions: IGREQID, INVERRTERM, INVLDC, INVREQ, RTEFAIL, RTESOME

Description

ROUTE routes a BMS logical message to one or more terminals or terminal operators.

The default is INTERVAL(0), but for C the default is AFTER HOURS(0) MINUTES(0) SECONDS(0).

Options

AFTER

specifies the amount of time to elapse before the route.

There are two ways to enter the time under AFTER and AT.

1. A combination of at least two of HOURS(0–99), MINUTES(0–59), and SECONDS(0–59). HOURS(1) SECONDS(3) would mean one hour and three seconds (the minutes default to zero).
2. As one of HOURS(0–99), MINUTES(0–5999), or SECONDS(0–359 999). HOURS(1) means one hour. MINUTES(62) means one hour and two minutes. SECONDS(3723) means one hour, two minutes, and three seconds.

AT

specifies the time of the route. For the ways to enter the time, see the AFTER option.

ERRTERM(name)

specifies the name of the terminal to be notified if the message is deleted

because it is undeliverable. The message number, title identification, and destination are indicated. If no name is specified, the originating terminal is assumed.

This option is effective only if PRGDLAY has been specified in the system initialization parameters.

HOURS (*data-value*)

specifies a fullword binary value in the range 0–99. This is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

INTERVAL (*hhmmss*)

specifies the interval of time after which the data is to be transmitted to the terminals specified in the ROUTE command. The **mm** and **ss** are in the range 0–59.

When using the C language, you are recommended to use the AFTER/AT HOURS, MINUTES, and SECONDS options as C does not provide a packed decimal data type. You may use INTERVAL, but if the value specified is **not** an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format.

LDC(*name*) – **logical units only**

specifies a 2-character mnemonic to be used to determine the logical device code (LDC) to be transmitted in the FMH to the logical unit. The mnemonic identifies an LDC entry defined by the DFHTCT TYPE=LDC macro.

When an LDC is specified, BMS uses the device type, the page size, and the page status associated with the LDC mnemonic to format the message. These values are taken from the extended local LDC table for the LU, if it has one. If the LU has only a local (unextended) LDC table, the values are taken from the system LDC table. The numeric value of the LDC is obtained from the local LDC table, unless this is an unextended table and the value is not specified, in which case it is taken from the system table.

If the LDC option is omitted, the LDC mnemonic specified in DFHMSD is used; see “DFHMSD” on page 955 for further details. If the LDC option has also been omitted from DFHMSD, the action depends on the type of logical unit, as follows:

3601 LU

The first entry in the local or extended local LDC table is used, if there is one. If a default cannot be obtained in this way, a null LDC numeric value (X'00') is used. The page size used is the value that is specified by the RDO TYPETERM options PAGESIZE or ALTPAGE, or (1,40) if such a value is not specified.

LUTYPE4 LU, batch LU, or batch data interchange LU

The local LDC table is not used to supply a default LDC; instead, the message is directed to the LU console. (Here, LU console means any medium on which the LU elects to receive such messages. For a batch data interchange LU, this does not imply sending an LDC in an FMH). The page size is obtained in the manner described for the 3601 LU.

For message routing, the LDC option of the ROUTE command takes precedence over all other sources. If this option is omitted and a route list is specified (LIST option), the LDC mnemonic in the route list is used; if the route list contains no LDC mnemonic, or no route list is specified, a default LDC is chosen as described above.

LIST(*data-area*)

specifies the data area that contains a list of terminals and operators to which data is to be directed. If this option is omitted, all terminals supported by BMS receive the data (unless the OPCLASS option is in effect). See the *CICS Application Programming Guide* for the format of the route list.

MINUTES(*data-value*)

specifies a fullword binary value in the range 0–59, when HOURS or SECONDS are also specified, or 0–5999 when MINUTES is the only option specified. This is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

NLEOM

specifies that data for a 3270 printer or a 3275 display with the printer adapter feature should be built with blanks and new-line (NL) characters, and that an end-of-message (EM) character should be placed at the end of the data. As the data is printed, each NL character causes printing to continue on the next line, and the EM character terminates printing.

The option is ignored if the device receiving the message (direct or routed) is not one of those mentioned above.

If this option is used, buffer updating and attribute modification of fields previously written into the buffer are not allowed. CICS includes the ERASE option with every write to the terminal.

The NL character occupies a buffer position. A number of buffer positions, equivalent to the value of the RDO options PAGESIZE or ALTPAGE for that terminal, are unavailable for data. This may cause data to wrap around in the buffer; if this occurs, the PAGESIZE or ALTPAGE value must be reduced.

OPCLASS(*data-area*)

specifies the data area that contains a list of operator classes to which the data is to be routed. The classes are supplied in a 3-byte field, each bit position corresponding to one of the codes in the range 1 through 24 but in reverse order, that is, the first byte corresponds to codes 24 through 17, the second byte to codes 16 through 9, and the third byte to codes 8 through 1.

REQID(*name*)

specifies a prefix (2-character field) to be used as part of a temporary storage identifier for CICS message recovery. Only one prefix can be specified for each logical message. The default prefix is **.

BMS message recovery is provided for a logical message only if the PAGING option is specified in the BMS SEND commands, and if the syncpoint has been reached.

SECONDS(*data-value*)

specifies a fullword binary value in the range 0–59, when HOURS or MINUTES are also specified, or 0–359 999 when SECONDS is the only option specified. This is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

TIME(*hhmmss*)

specifies the time of day at which data is to be transmitted to the terminals specified in the ROUTE command.

When using the C language, you are recommended to use the AFTER/AT HOURS, MINUTES, and SECONDS options as C does not provide a packed decimal data type. You may use TIME, but if the value specified is **not** an

integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format.

TITLE (*data-area*)

specifies the data area that contains the title to be used with a routing logical message. This title appears as part of the response to a page query command. See the *CICS Application Programming Guide* for the format of the title option.

Conditions

39 IREQID

occurs if the prefix specified in the REQID option is different from that established by a previous REQID option, or by default for this logical message—REQID (**).

37 INVERRTERM

occurs if the terminal identifier specified in the ERRTERM option is not valid or is assigned to a type of terminal not supported by BMS.

Default action: terminate the task abnormally.

41 INVLDC

occurs if the specified LDC mnemonic is not included in the LDC list for the logical unit.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 4 Hours out of range
- 5 Minutes out of range
- 6 Seconds out of range
- 200 BMS commands are not supported for distributed program link.

also occurs (RESP2 not set) in the following situations:

- Bytes 10 through 15 of a route list entry do not contain blanks.

Default action: terminate the task abnormally.

33 RTEFAIL

occurs in any of the following situations:

- A ROUTE command would result in the message being sent only to the terminal that initiated the transaction.
- A ROUTE command is issued against a remote, shippable terminal that is not yet installed in the application-owning region.

Default action: return control to the application program at the point immediately following the ROUTE command.

34 RTESOME


occurs if any of the terminals specified by the ROUTE command options do not receive the message.

Default action: return control to the application program at the point immediately following the ROUTE command.

RUN

Execute a CICS business transaction services process or activity synchronously or asynchronously, with context-switching.

RUN

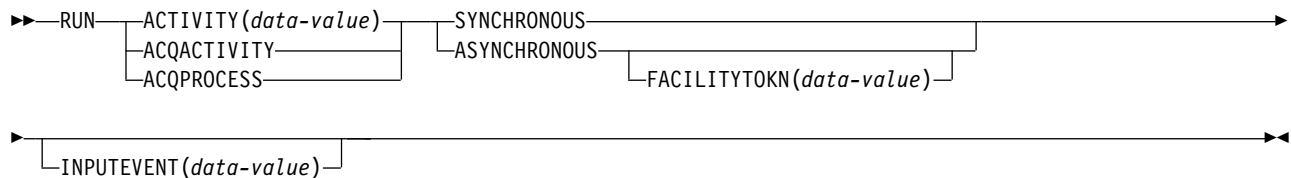

Conditions: ACTIVITYBUSY, ACTIVITYERR, EVENTERR, INVREQ, IOERR, LOCKED, NOTAUTH, PROCESSBUSY, PROCESSERR

Description

RUN executes a CICS business transaction services process or activity synchronously or asynchronously with the requestor, with context-switching. The process or activity must previously have been defined to BTS.

RUN causes BTS to attach the process or activity, by sending it an input event. If the process or activity is in its initial state—that is, if this is the first time it is to be run, or if the activity has been reset by a RESET ACTIVITY command—CICS sends it the DFHINITIAL system event. If the process or activity is dormant—that is, waiting for a reattachment event to occur—the input event must be specified on the INPUTEVENT option.

If the process or activity is in any mode other than INITIAL or DORMANT, it cannot be run.

The SYNCHRONOUS and ASYNCHRONOUS options allow you to specify whether the process or activity should be executed synchronously or asynchronously with the requestor.

Context-switching

When a process or activity is activated by a RUN command, it is run:

- In a separate unit of work from the requestor.
- With the transaction attributes (TRANSID and USERID) specified on the DEFINE PROCESS or DEFINE ACTIVITY command.

In other words, a **context-switch** takes place. The relationship of the process or activity to the requestor is as between separate transactions, except that:

- Data can be passed between the two units of work
- The start and finish of the activity is related to the requestor's syncpoints.

To run a process or activity *without* context-switching—that is, in the same UOW and with the same TRANSID and USERID attributes as the requesting

transaction—use the LINK ACQPROCESS, LINK ACQACTIVITY, or LINK ACTIVITY command. This is possible only if the process or activity is run synchronously.

If the ability to isolate a failure is more important than performance, use RUN SYNCHRONOUS rather than LINK.

Activities

The only activities a program can run are as follows:

- If it is running as the activation of an activity, its own child activities. It can run several of its child activities within the same unit of work.
- The activity it has acquired, by means of an ACQUIRE ACTIVITYID command, in the current unit of work.

To check the response from the activity, the CHECK ACTIVITY command must be used. This is because the response to the request to run the activity does not contain any information about the success or failure of the activity itself—only about the success or failure of the request to run it.

Typically, if the activity is run synchronously, the CHECK command is issued immediately after the RUN command. If it is run asynchronously, the CHECK command could be issued:

- When the activity's parent is reattached due to the firing of the activity's completion event
- When the requestor is reattached due to the expiry of a timer.

The activity's completion event is one of the following:

1. The event named on the EVENT option of the DEFINE command for the activity.
2. If the DEFINE command did not specify a completion event, an event of the same name as the activity.

To retry an activity:

1. Issue a RESET ACTIVITY command to reset the activity to its initial state.
2. Issue a RUN command.

Processes

The only process that a program can run is the one that it has acquired in the current unit of work—see Acquiring processes and activities in the *CICS Business Transaction Services*.

To check the response from the process, the CHECK ACQPROCESS command must be used. This is because the response to the request to run the process does not contain any information about the success or failure of the process itself—only about the success or failure of the request to run it.

Typically, if the process is run synchronously, the CHECK command is issued immediately after the RUN command. If the process is run asynchronously, the CHECK command could be issued when the requestor is reattached due to the expiry of a timer.

Options

ACQACTIVITY

specifies that the activity to be run is the one that the current unit of work has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the process currently acquired by the requestor is to be run.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the activity to be run. The name must be that of a child of the current activity.

ASYNCHRONOUS

specifies that the process or activity is to be executed asynchronously with the requestor.

FACILITYOKEN(data-value)

specifies an 8-byte bridge facility token.

This option applies when a BTS client activity runs a 3270-based pseudoconversational transaction. To ensure that the existing bridge facility is reused for the next transaction in the pseudoconversation, the client passes its token to the next child activity. This is explained in more detail in Reusing existing 3270 applications in BTS in the *CICS Business Transaction Services*.

INPUTEVENT(data-value)

specifies the name (1–16 characters) of the event that causes the process or activity to be attached.

You *must not* specify this option if the process or activity is in its initial state; that is, if this is the first time it is to be run, or if the activity has been reset by a RESET ACTIVITY command. In this case, CICS sends the process or activity the DFHINITIAL system event.

You *must* specify this option if the process or activity is not in its initial state; that is, if it has been activated before, and has not been reset by a RESET ACTIVITY command.

If you specify INPUTEVENT, for the RUN command to be successful the process or activity to be attached must have defined the named event as an input event.

If you issue multiple asynchronous RUN commands against the same activity within the same unit of work:

- If you specify *the same input event*, each RUN command after the first fails.
- If you specify *different input events*, the activity may or may not be invoked as many times as the number of RUN requests—the only guarantee is that it will be invoked at least once. For example, if , within the same unit of work, you issue five asynchronous RUN requests for the same activity, specifying different input events, the activity might be invoked twice. At the first invocation, three input events might be presented, and at the second two.

SYNCHRONOUS

specifies that the process or activity is to be executed synchronously with the requestor.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.
- 14 The activity to be run is not in INITIAL or DORMANT mode.
- 27 The activity named on the RUN SYNCHRONOUS command has abended.

111 EVENTERR

RESP2 values:

- 7 The event named on the INPUTEVENT option has not been defined by the activity or process to be run as an input event; or its fire status is FIRED.

16 INVREQ

RESP2 values:

- 4 The ACTIVITY option was used to name a child activity, but the command was issued outside the scope of a currently-active activity.
- 15 The task that issued the RUN ACQPROCESS command has not defined or acquired a process.
- 20 The SYNCHRONOUS option was used, but the activity to be run is suspended.
- 24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.
- 28 CICS could not attach the transaction associated with the process or activity to be run. (This response occurs only on RUN SYNCHRONOUS commands.)
- 32 The SYNCHRONOUS option was used, but the transaction associated with the process or activity to be run is defined as remote. You cannot run a process or activity synchronously if its transaction is remote.
- 40 The program that implements the process or activity to be run is remote.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to run the process or activity.

106 PROCESSBUSY

RESP2 values:

- 13 The request timed out. It may be that another task using this process-record has been prevented from ending.

108 PROCESSERR

RESP2 values:

- 6 You cannot run the current process.
- 9 The process-type could not be found.
- 14 The process to be run is not in INITIAL or DORMANT mode.
- 27 The process named on the RUN SYNCHRONOUS command has abended.

SEND (z/OS Communications Server default)

Write data to a standard CICS supported terminal.

SEND (z/OS Communications Server default)

►►—SEND—FROM(*data-area*)—┐LENGTH(*data-value*)—┐
└FLENGTH(*data-value*)┘└WAIT┘—►◄

Conditions: INVREQ, LENGERR, NOTALLOC


Description

SEND writes data to a terminal. This form of the send command can be used by all CICS-supported terminals for which the other SEND descriptions are not appropriate.

SEND (APPC)

Send data on an APPC mapped conversation.

SEND (APPC)

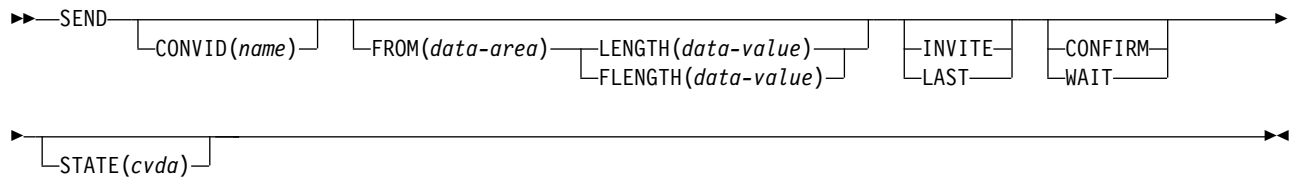

Conditions: INVREQ, LENGERR, NOTALLOC, SIGNAL, TERMERR


Description

SEND sends data to a conversation partner on an APPC mapped conversation.

SEND (LUTYPE2/LUTYPE3)

Write data to a 3270-display logical unit (LUTYPE2) or a 3270-printer logical unit (LUTYPE3).

SEND (LUTYPE2/LUTYPE3)

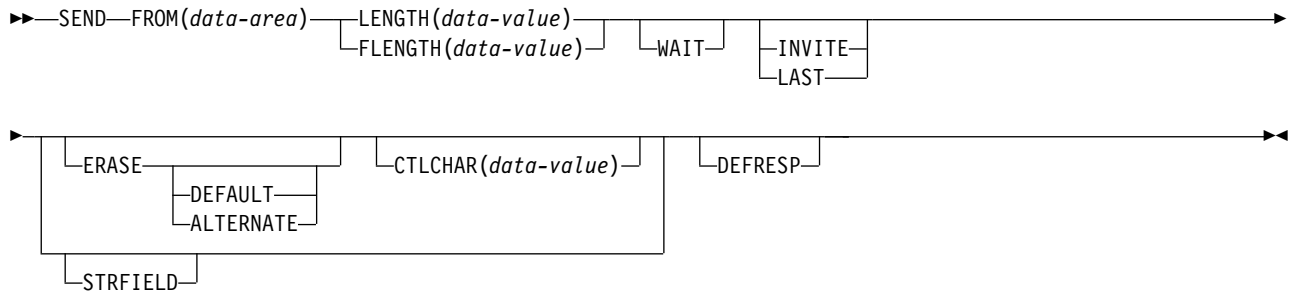

Conditions: INVREQ, LENGERR, TERMERR


Description

The **SEND** command writes data to a terminal.

SEND (LUTYPE4)

Write data to a LUTYPE4 logical unit.

SEND (LUTYPE4)



Conditions: INVREQ, IREQCD, LENGERR, SIGNAL, TERMERR


Description

SEND writes data to a terminal.

SEND (LUTYPE6.1)

Send data on an LUTYPE6.1 conversation.

SEND (LUTYPE6.1)

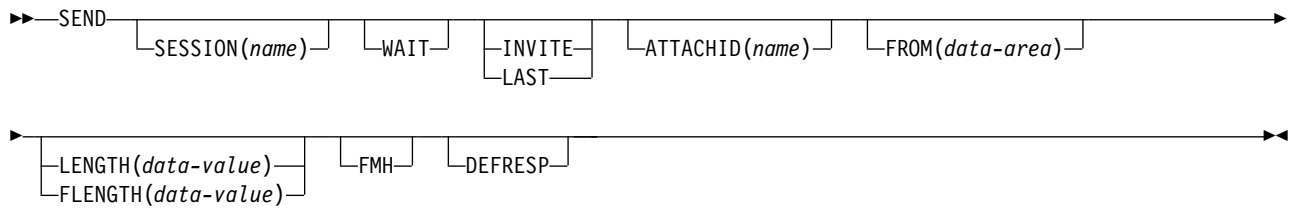

Conditions: CBIDERR, INVREQ, LENGERR, NOTALLOC, SIGNAL, TERMERR


Description

SEND sends data to a conversation partner on an LUTYPE6.1 conversation.

SEND (SCS)

Write data to a 3270 SCS printer logical unit.

SEND (SCS)

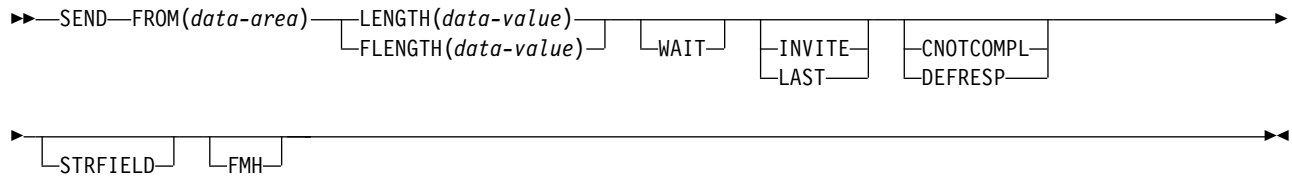

Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a logical unit. The SCS printer logical unit accepts a character string as defined by Systems Network Architecture (SNA).

SEND (3270 logical)

Write data to a 3270 logical unit.

SEND (3270 logical)

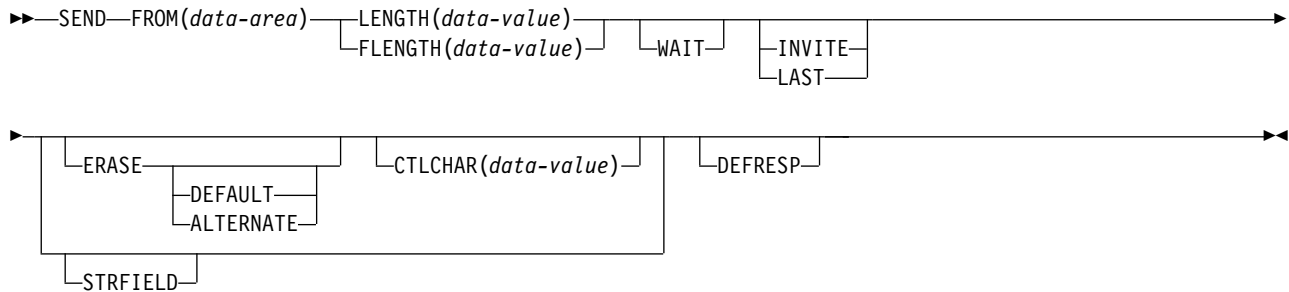

Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3600 pipeline)

Write data to a 3600 pipeline logical unit.

SEND (3600 pipeline)



Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3600-3601)

Write data to a 3600 (3601) logical unit.

SEND (3600-3601)

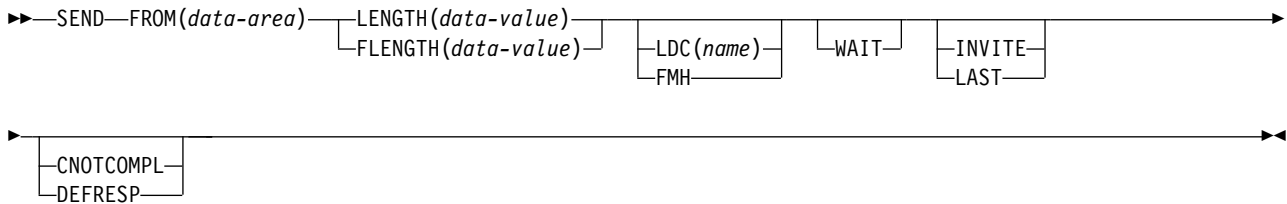

Conditions: INVREQ, LENGERR, SIGNAL, TERMERR

Description

SEND writes data to a terminal. This form of SEND also applies to the 4770 and the 3630 plant communication system.

A logical device code (LDC) is a code that can be included in an outbound FMH to specify the disposition of the data (for example, to which subsystem terminal it should be sent). Each code can be represented by a unique LDC mnemonic.

The installation can specify up to 256 2-character mnemonics for each TCTTE, and two or more TCTTEs can share a list of these mnemonics. Corresponding to each LDC mnemonic for each TCTTE is a numeric value (0 through 255).

A 3600 device and a logical page size are also associated with an LDC. LDC or *LDC value* is used in this information to refer to the code specified by the user. *LDC mnemonic* refers to the 2-character symbol that represents the LDC numeric value.


When the LDC option is specified, the numeric value associated with the mnemonic for the particular TCTTE, is inserted in the FMH. The numeric value associated with the LDC mnemonic is chosen by the installation, and is interpreted by the 3601 application program.

On output, the FMH can be built by the application program or by CICS. If your program supplies the FMH, you place it at the front of your output data and specify the FMH option on your SEND command. If you omit the FMH option, CICS will provide an FMH but you must reserve the first three bytes of the message for CICS to complete.

SEND (3600-3614)

Write data to a 3600 (3614) logical unit.

SEND (3600-3614)



Conditions: INVREQ, LENGERR, TERMERR

Description


SEND writes data to a terminal. The data stream and communication format used between a CICS application program and a 3614 is determined by the 3614. The application program is therefore device dependent when handling 3614 communication.

For further information about designing 3614 application programs for CICS, refer to the *IBM 4700/3600/3630 Guide*.

SEND (3650 interpreter)

Write data to a 3650 interpreter logical unit.

SEND (3650 interpreter)



Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3650-3270)

Write data to a 3650 logical unit.

SEND (3650-3270)

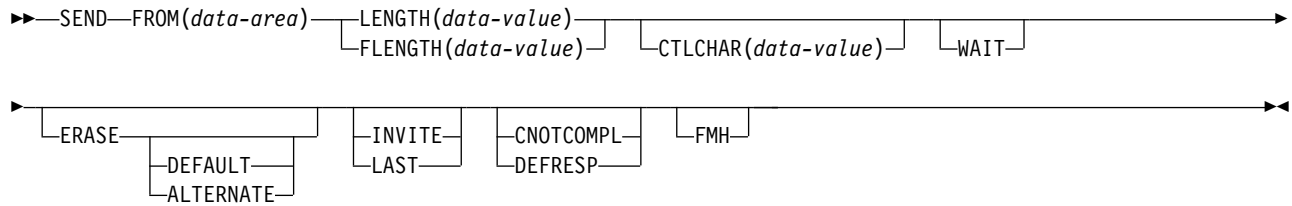

Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3650-3653)

Write data to a 3650 (3653) logical unit.

SEND (3650-3653)



Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3650-3680)

Write data to a 3650 (3680) logical unit.

SEND (3650-3680)



Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3767)

Write data to a 3767 interactive logical unit.

SEND (3767)



Conditions: INVREQ, LENGERR, SIGNAL, TERMERR


Description

SEND writes data to a terminal. This form of SEND also applies to the 3770 interactive logical unit.

SEND (3770)

Write data to a 3770 batch logical unit.

SEND (3770)



Conditions: INVREQ, LENGERR, SIGNAL, TERMERR


Description

SEND writes data to a terminal.

SEND (3790 full-function or inquiry)

Write data to a 3790 full-function or inquiry logical unit.

SEND (3790 full-function or inquiry)



Conditions: INVREQ, LENGERR, SIGNAL, TERMERR

Description


SEND writes data to a terminal. This form of SEND also applies to the following devices:

- 3650/3680 full-function logical unit
- 3770 full-function logical unit

SEND (3790 SCS)

Write data to a 3790 SCS printer logical unit.

SEND (3790 SCS)



Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3790 3270-display)

Write data to a 3790 (3270-display) logical unit.

SEND (3790 3270-display)

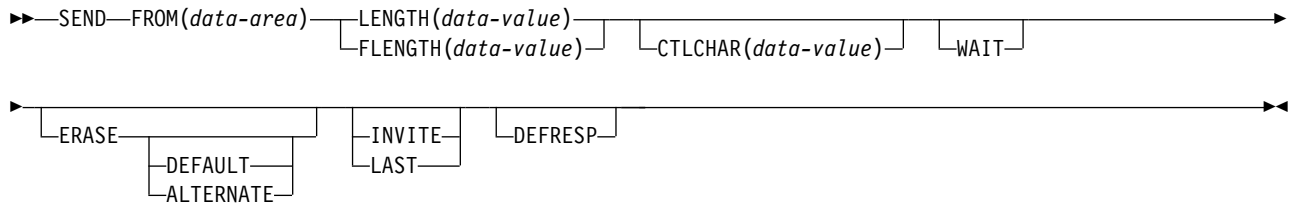

Conditions: INVREQ, LENGERR, TERMERR


Description

SEND writes data to a terminal.

SEND (3790 3270-printer)

Write data to a 3790 (3270-printer) logical unit.

SEND (3790 3270-printer)

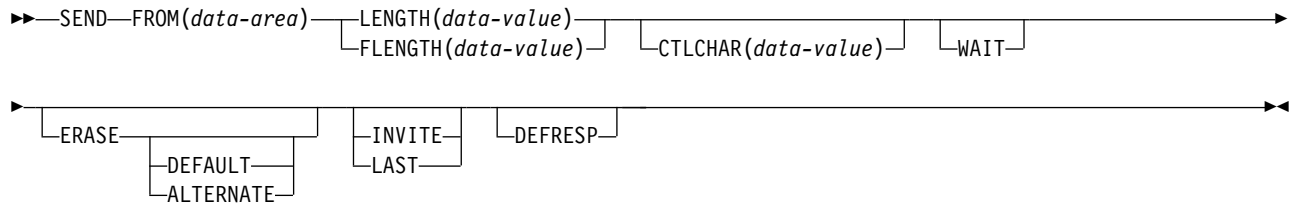

Conditions: INVREQ, LENGERR, TERMERR

Description

SEND writes data to a terminal.

SEND: z/OS Communications Server options

Common options used on the SEND command (z/OS Communications Server).

Options

ALTERNATE

Sets the terminal to use the ALTERNATE screen size.

ATTACHID(*name*)

Specifies that an attach header (created by a **BUILD ATTACH** command) is to precede, and be concatenated with, the user data supplied in the FROM option. "name" (1–8 characters) identifies the attach header control block to be used in the local task.

CNOTCOMPL

Indicates that the request/response unit (RU) sent as a result of this **SEND** command does not complete the chain. If this option is omitted and chain assembly is specified, the RU terminates the chain.

CONFIRM

Indicates that an application using a synchronization level 1 or 2 conversation requires a response from the remote application. A remote CICS application can respond positively by running an **ISSUE CONFIRMATION** command, or negatively, by running an **ISSUE ERROR** command, in which case the sending application has EIBERR and EIBERRCD set. CICS does not return control to the sending application until the response is received.

CONVID(*name*)

Identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previous **ALLOCATE** command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previous **ASSIGN** command).

For compatibility with earlier releases, SESSION is accepted as a synonym for CONVID. New programs must use CONVID.

If this option is omitted, the principal facility is assumed.

CTLCHAR(*data-value*)

Specifies a 1-byte write control character (WCC) that controls a **SEND** command for a 3270. These characters are described in IBM 3270 Data Stream Programmers Reference. A COBOL user must specify a data area containing this character. If the option is omitted, all modified data tags are reset to zero and the keyboard is restored.

DEFAULT

Sets the terminal to use the DEFAULT screen size.

DEFRESP

Indicates that a definite response is required when the output operation completes.

ERASE

Specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.

The first output operation in any transaction, or in a series of pseudoconversational transactions, must always specify the ERASE option. For transactions attached to 3270 screens or printers, unless explicitly overridden

by the DEFAULT or ALTERNATE option, this options also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the PROFILE resource definition.

FLENGTH(*data-value*)

An alternative to the LENGTH option. For architectural reasons, this option is limited to a maximum of 32 KB for all terminal-related **SEND** commands.

FMH

Specifies that a function management header is included in the data to be written. If the ATTACHID option is specified as well, the concatenated FMH flag is set in the attach FMH.

The use of FMH is optional and is not supported for all terminal types. If not supplied, CICS takes no action, except for 3600/4700 terminals, where an FMH is mandatory. In this case, if FMH is not specified, CICS supplies one and places it in the first 3 bytes of the message, which you must reserve for this purpose.

FROM(*data-area*)

Specifies the data to be written to the logical unit, or a partner transaction.

INVITE

For the **SEND** (APPC) command, an application can use the INVITE option to add a change-direction indicator to data already sent to a process in a connected APPC system. Control data is not transmitted by CICS until the subsequent WAIT or a **SYNCPOINT** command, unless CONFIRM or WAIT is also coded on the **GDS SEND INVITE** command.

For the other **SEND** commands, INVITE specifies that the next terminal control command to be run for this facility is a RECEIVE. This allows optimal flows to occur.

LAST

Specifies that this is the last **SEND** command for a transaction.

LDC(*name*)

Specifies the 2-character mnemonic used to determine the appropriate logical device code (LDC) numeric value. The mnemonic represents an LDC entry in the terminal control table TYPE=LDC.

LENGTH(*data-value*)

Specifies the length, as a halfword binary value, of the data to be written. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

SESSION(*name*)

Specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If this option is omitted, the principal facility for the task is used.

STATE(*cvda*)

Gets the state of the current conversation. The CVDA values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE

- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

STRFIELD

Specifies that the data area specified in the FROM option contains structured fields. If this option is specified, the contents of all structured fields must be handled by the application program. The **CONVERSE** command, rather than a **SEND** command, must be used if the data area contains a read partition structured field. Structured fields are described in IBM 3270 Data Stream Device Guide.)

The CTLCHAR and ERASE options are mutually exclusive with STRFIELD, and their use with STRFIELD generates an error message.

WAIT

Specifies that processing of the command must be completed before any subsequent processing is attempted.

If the WAIT option is not specified, control is returned to the application program when processing of the command starts. A subsequent input or output request (terminal control, BMS, or batch data interchange) to the terminal associated with the task causes the application program to wait until the previous request completes.

Conditions

Some of the following conditions might occur in combination. If more than one occurs, only the first is passed to the application program. EIBRCODE, however, is set to indicate all the conditions that occurred.

62 CBIDERR

Occurs if the requested attach header control block named in ATTACHID cannot be found.

Default action: terminate the task abnormally.

57 IGREQCD

Occurs when an attempt is made to run a **SEND** command after a SIGNAL data flow control command with a request change direction (RCD) code has been received from the logical unit.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application attempted to send on its function-shipping session (its principal facility).

For **SEND** (APPC), a distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Also occurs (RESP2 not set) in any of the following situations:

- The CONFIRM option has been specified, but the APPC conversation is not sync level 1 or 2.
- The SEND command has been used on an APPC conversation that is not a mapped conversation or that is not using the EXEC CICS interface.

Default action: terminate the task abnormally.

22 LENGERR

Occurs if an out-of-range value is supplied in the LENGTH or FLENGTH option.

Default action: terminate the task abnormally.

61 NOTALLOC

Occurs if the CONVID value in the command does not relate to a conversation that is owned by the application, or if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

24 SIGNAL

Occurs when an inbound SIGNAL data flow control command is received from a logical unit or session. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

Occurs for a session-related error. Any action on that conversation other than a FREE causes an ATCV abend.

A CANCEL TASK request by a user node error program (NEP) might cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

SEND (non-z/OS Communications Server default)

Write data to standard CICS terminal support.

SEND (non-z/OS Communications Server default)

►►—SEND—FROM(*data-area*)—┐LENGTH(*data-value*)—┐
└FLENGTH(*data-value*)┘└WAIT┘—►◄

Conditions: INVREQ, LENGERR, NOTALLOC


Description

SEND writes data to a terminal. This form of the send command can be used by all CICS-supported terminals for which the other SEND descriptions are not appropriate.

SEND (MRO)

Send data on an MRO conversation.

SEND (MRO)

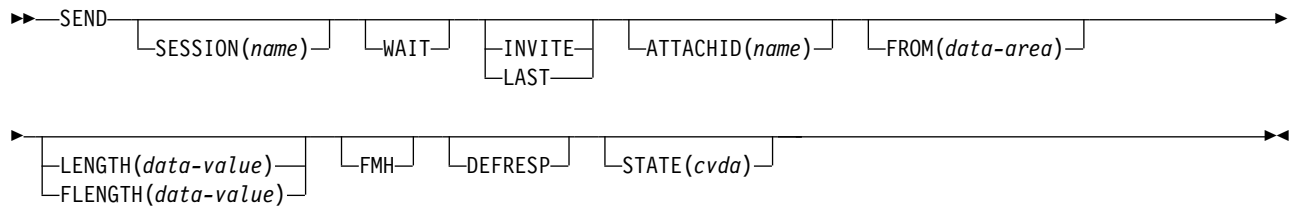

Conditions: CBIDERR, INVREQ, LENGERR, NOTALLOC, TERMERR


Description

SEND sends data to a conversation partner on an MRO conversation.

SEND (2260)

Write data to a 2260 or 2265 display station.

SEND (2260)

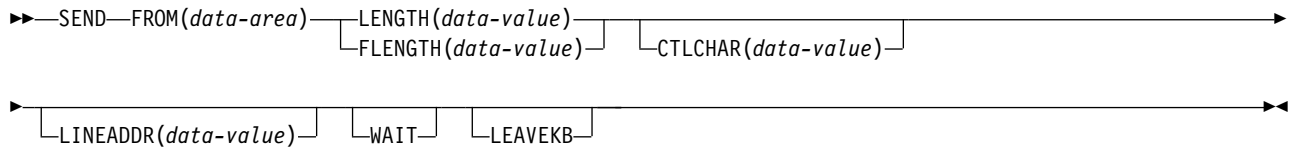

Conditions: INVREQ, LENGERR


Description

SEND writes data to a terminal.

SEND (2980)

Write data to a 2980 general banking terminal system.

SEND (2980)



Conditions: INVREQ, LENGERR, NOPASSBKWR

Description

SEND writes data to a terminal. For more information about the 2980 general banking system, see “RECEIVE (2980)” on page 505.

SEND: non-z/OS Communications Server options

Common options used on the SEND command (non-z/OS Communications Server).

Options

ALTERNATE

sets the terminal to use the ALTERNATE screen size.

ASIS

indicates that output is to be sent in transparent mode (with no recognition of control characters and accepting any of the 256 possible combinations of eight bits as valid transmittable data).

Note: If you are using a katakana terminal, you might see some messages containing mixed English and katakana characters. That is because katakana terminals cannot display mixed-case output. Uppercase characters in the data stream appear as uppercase English characters, but lowercase characters appear as katakana characters. If this happens, ask your system programmer to specify MSGCASE=UPPER in the system initialization parameters so that messages contain uppercase characters only.

ATTACHID(*name*)

specifies that an attach header (created by a BUILD ATTACH command) is to precede, and be concatenated with, the user data supplied in the FROM option. “name” (1–8 characters) identifies the attach header control block to be used in the local task.

CBUFF

specifies that data is to be written to a common buffer in a 2972 control unit. The WAIT option is implied.

CNOTCOMPL

indicates that the request/response unit (RU) sent as a result of this SEND command does not complete the chain. If this option is omitted and chain assembly has been specified, the RU terminates the chain.

CTLCHAR(*data-value*)

specifies a 1-byte write control character (WCC) that controls a SEND command for a 3270. These are documented in the *IBM 3270 Data Stream Programmer's Reference*. A COBOL user must specify a data area containing this character. If the option is omitted, all modified data tags are reset to zero and the keyboard is restored.

DEFAULT

sets the terminal to use the DEFAULT screen size.

DEFRESP

indicates that a definite response is required when the output operation has been completed.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct

screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE resource definition.

LENGTH(*data-value*)

A fullword alternative to LENGTH.

FMH

specifies that a function management header has been included in the data in the FROM area. If the ATTACHID option is specified as well, the concatenated FMH flag is set in the attach FMH.

FROM(*data-area*)

specifies the data to be written to the logical unit or terminal.

INVITE

specifies that the next terminal control command to be executed for this facility is a RECEIVE. This allows optimal flows to occur.

LAST

specifies that this is the last output operation for a transaction and therefore the end of a bracket.

LEAVEKB

specifies that the keyboard is to remain locked at the completion of the data transfer.

LENGTH(*data-value*)

specifies the length, as a halfword binary value, of the data to be written. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

LINEADDR(*data-value*)

specifies that the writing is to begin on a specific line of a 2260/2265 screen. The data value is a halfword binary value in the range 1 through 12 for a 2260, or 1 through 15 for a 2265.

PASSBK

specifies that communication is with a passbook. The WAIT option is implied.

PSEUDOBIN (*start-stop only*)

specifies that the data being written is to be translated from System/7 hexadecimal to pseudobinary.

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If this option is omitted, the principal facility for the task is used.

STATE(*cvda*)

gets the state of the transaction program. The cvda values returned by CICS are:

- ALLOCATED
- FREE
- PENDFREE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

STRFIELD

specifies that the data area specified in the FROM option contains structured fields. If this option is specified, the contents of all structured fields must be handled by the application program. The CONVERSE command, rather than a SEND command, must be used if the data area contains a read partition structured field. (Structured fields are described in the *CICS 3270 Data Stream Device Guide*.)

CTLCHAR and ERASE are mutually exclusive with STRFIELD, and their use with STRFIELD generates an error message.

WAIT

specifies that processing of the command must be completed before any subsequent processing is attempted.

If the WAIT option is not specified, control is returned to the application program when processing of the command has started. A subsequent input or output request (terminal control, BMS, or batch data interchange) to the terminal associated with the task causes the application program to wait until the previous request has been completed.

Conditions**62 CBIDERR**

occurs if the requested attach header control block named in ATTACHID cannot be found.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 occurs if a distributed program link server application attempted to send on its function-shipping session (its principal facility)

Default action: terminate the task abnormally.

22 LENGERR

occurs if an out-of-range value is supplied in the LENGTH or FLENGTH option.

Default action: terminate the task abnormally.

51 NOPASSBKW

occurs if no passbook is present.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

81 TERMERR

occurs for a terminal-related error, such as a session failure. This condition applies to z/OS Communications Server-connected terminals only.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program (DFHZNAC) handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

03 WRBRK

occurs if the command is terminated by the attention key.

Default action: ignore the condition.

SEND CONTROL


Send device controls to a terminal without map or text data. The keywords are separated into those supported by minimum, standard, and full BMS.

For further information about BMS, see Basic mapping support in Developing applications.

SEND CONTROL

➤➤—SEND CONTROL—➤➤


SEND CONTROL Minimum BMS

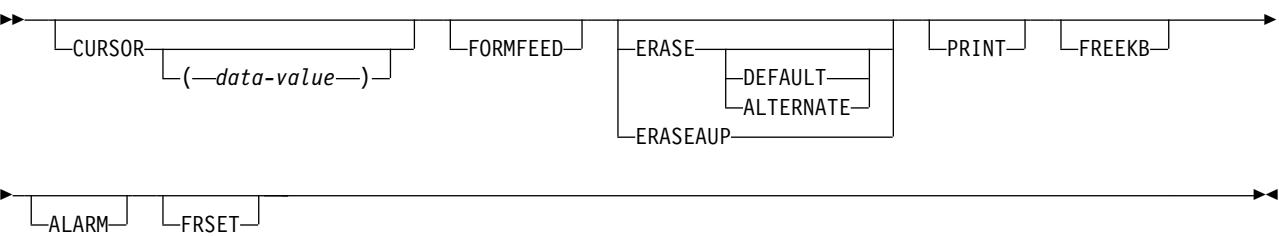

SEND CONTROL Standard BMS



SEND CONTROL Full BMS

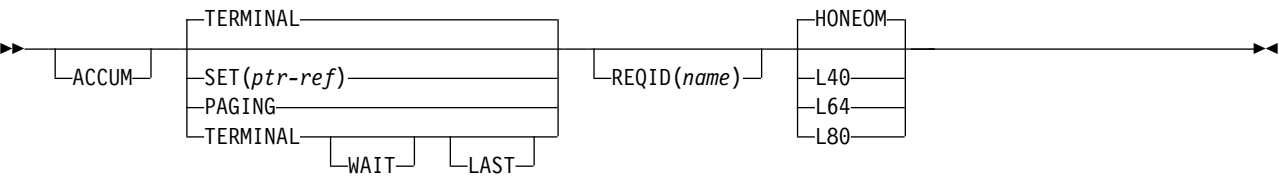

Conditions: IGREQCD, IGREQID, INVLDC, INVPARTN, INVREQ, RETPAGE, TSIOERR, WRBRK

Description

SEND CONTROL sends device controls to a terminal.

When using the SEND CONTROL command with any of the ALARM, FREEKB, FRSET, HONEOM, L40, L64, L80, or PRINT options, see DFHMDI options, CTRL for a description of the option priority.

ACCUM

specifies that this command is one of a number of commands that are used to build a logical message. The logical message is completed by a SEND PAGE command, or deleted by a PURGE MESSAGE command.

ACTPARTN(*name*)

specifies the name (1–2 characters) of the partition to be activated. Activating a partition moves the cursor into the specified partition, and unlocks the keyboard for the specified partition.

This option is ignored if the target terminal does not support partitions, or if there is no application partition set.

ALARM

specifies that the 3270 audible alarm feature is to be activated. For logical units supporting FMHs (except interactive and batch logical units), ALARM instructs BMS to set the alarm flag in the FMH.

ALTERNATE

sets the terminal to use the ALTERNATE screen size.

CURSORM(*data-value*)

specifies the location the 3270 or 3604 cursor is returned to on completion of a SEND CONTROL command.

The data value must be a halfword binary value that specifies the cursor position relative to zero; the range of values that can be specified depends on the size of the screen being used.

If ACCUM is being used, the most recent value of CURSOR specified is used to position the cursor.

The value specified in the CURSOR option must be positive. A negative value leads to unpredictable results.

If this option is omitted, the cursor is positioned at position zero of the screen.

DEFAULT

sets the terminal to use the DEFAULT screen size.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

ERASEAUP

specifies that all unprotected character locations in the partition or the entire screen are to be erased. (This option applies only to the 3270 and 8775.)

FORMFEED

specifies that a new page is required. For 3270 printers and displays, the FORMFEED character is positioned at the start of the buffer. The application program must thus ensure that this buffer position is not overwritten by map or text data. It is ignored if the target terminal does not support FORMFEED (that is, the RDO TYPETERM option FORMFEED was not used).

FREEKB

specifies that the 3270 keyboard is to be unlocked. If FREEKB is omitted, the keyboard remains locked.

Note that the keyboard lock status is maintained separately for each partition on a terminal that supports partitions.

FRSET

specifies that the modified data tags (MDTs) of all fields currently in the 3270 (or partition) buffer are to be reset to the unmodified condition (that is, field reset).

This allows the ATTRB operand of DFHMDF for the next requested map to control the final status of fields written or rewritten in response to a BMS command, if no other attribute information has been written in the symbolic map.

HONEOM

specifies that the default printer line length is to be used. This length should be the same as that specified using the RDO TYPETERM options PAGESIZE or ALTPAGE.

LAST

specifies that this is the last output operation for a transaction and, therefore, the end of a bracket. This option applies to logical units only.

LDC(*name*)

specifies a 2-character mnemonic to be used to determine the logical device code (LDC) to be transmitted in the FMH to the logical unit. The mnemonic identifies an LDC entry defined by a DFHTCT TYPE=LDC macro. When an LDC is specified, BMS uses the device type, the page size, and the page status associated with the LDC mnemonic to format the message. These values are taken from the extended local LDC table for the LU, if it has one. If the LU has only a local (unextended) LDC table, the values are taken from the system LDC table. The numeric value of the LDC is obtained from the local LDC table, unless this is an unextended table and the value is not specified, in which case it is taken from the system table.

L40, L64, or L80

specifies the line length for a 3270 printer; a carrier return and line feed are forced after 40, 64, or 80 characters have been printed on a line. Unacceptable results are likely if this differs from the page width specified by the RDO TYPETERM options PAGESIZE or ALTPAGE.

When using the options, refer to DFHMDI options, CTRL for a description of the option priority.

MSR(*data-value*)

specifies the 4-byte data value that controls the 10/63 magnetic stripe reader attached to an 8775 or 3643 terminal. A set of constants is provided in DFHMSRCA to assist in setting this 4-byte area. See "Magnetic slot reader (MSR) control value constants, DFHMSRCA" on page 928 for a complete list. This option is ignored if the RDO TYPETERM option MSRCONTROL was not used.

OUTPARTN(*name*)

specifies the name (1–2 characters) of the partition to which data is to be sent. This option is ignored if the terminal does not support partitions, or if there is no application partition set associated with the terminal. If there is an application partition set, and the OUTPARTN option is omitted, data is sent to the partition named by the PARTN operand of the DFHMSD (see "DFHMSD" on page 955) or the DFHMDI (see "DFHMDI" on page 946) map definition macros. If maps are not used, or if there is no PARTN operand, the output is sent to the first partition in the partition set.

PAGING

specifies that the output data is not to be sent immediately to the terminal, but is to be placed in temporary storage and displayed in response to paging commands entered by the terminal operator.

If PAGING is specified with a REQID prefix that is used for temporary storage queues that are defined as recoverable, CICS provides message recovery for logical messages if the task has reached a syncpoint.

PRINT

specifies that a print operation is to be started at a 3270 printer or at a 3275 with the printer adapter feature, or that data on an LUTYPE2 (3274/76 or 3790) is to be printed on a printer allocated by the controller. If this option is omitted, the data is sent to the printer buffer but is not printed.

REQID(*name*)

specifies a 2-character prefix to be used as part of a temporary storage identifier for CICS message recovery. Only one prefix can be specified for each logical message. The default prefix is **.

BMS message recovery is provided for a logical message only if the PAGING option is specified in the BMS SEND commands, and if the syncpoint has been reached.

SET(*ptr-ref*)

specifies the pointer to be set to the address of the output data.

The SET option specifies that completed pages are to be returned to the application program. The pointer is set to the address of a list of completed pages.

If TIOAPFX=YES is specified in the map definition, the pointer returned contains the address of the TIOA prefix. The user data starts at offset X'0C' from the start of the TIOA prefix.

TERMINAL

specifies that the output data is to be sent to the terminal that originated the transaction.

WAIT

specifies that control should not be returned to the application program until the output operation has been completed.

If WAIT is not specified, control returns to the application program when the output operation has started. A subsequent input or output command (terminal control, BMS, or batch data interchange) causes the application program to wait until the previous command has been completed.

Conditions**57 IGREQCD**

occurs when an attempt is made to execute a SEND CONTROL command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

39 IGREQID

occurs if the prefix specified in the REQID option is different from that established by a previous REQID option, or by default for this logical message—REQID (**).

Default action: terminate the task abnormally.

41 INVLDC

occurs if the specified LDC mnemonic is not included in the LDC list for the logical unit.

Default action: terminate the task abnormally.

65 INVPARTN

occurs if the specified partition is not defined in the partition set associated with the application program.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application attempted to send on its function-shipping session (its principal facility).

also occurs (RESP2 not set) in the following situation:

- Control information is output to the same partition or LDC as mapped data while a BMS logical message is active. If neither partitions nor LDCs are in use, control information is output to the same device as mapped data.

Default action: terminate the task abnormally.

32 RETPAGE

occurs if the SET option is specified and a completed page is ready for return to the application program.

Default action: return control to the application program at the point immediately following the BMS SEND command.

35 TSI0ERR

occurs if there is an irrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

03 WRBRK

occurs if the command is interrupted by the terminal operator pressing the ATTN key. It applies only to the 2741 Communication Terminal, and only if write break is supported for CICS.

Default action: ignore the condition.


SEND MAP

Send mapped output data to a terminal. The keywords are separated into those supported by minimum, standard, and full BMS. For further information about BMS, see Basic mapping support in Developing applications.


SEND MAP

►►—SEND MAP(*name*)—►►


SEND MAP Minimum BMS

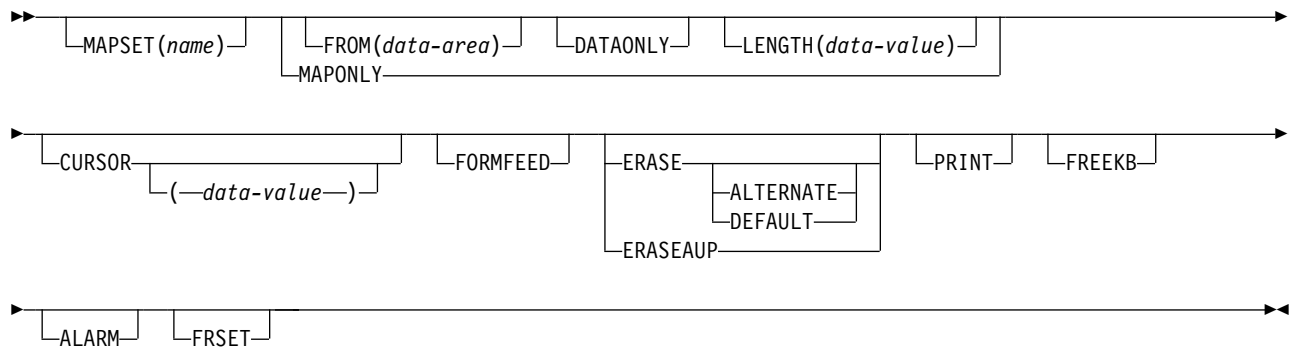

SEND MAP Standard BMS



SEND MAP Full BMS

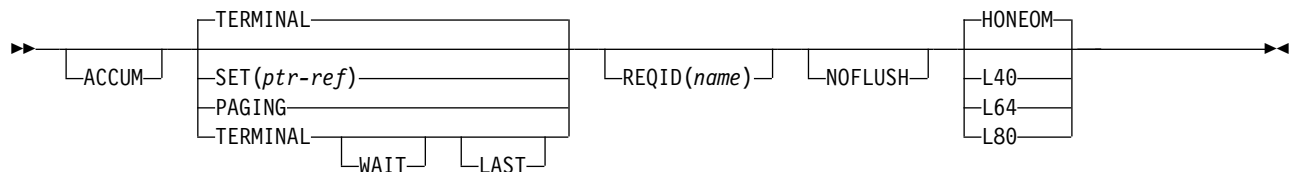

Conditions: IGREQCD, IGREQID, INVLDC, INVMPsz, INVpartn, INVREQ, OVERFLOW, RETPAGE, TSIOERR, WRBRK

Description

SEND MAP sends output data to a terminal.

When using the SEND MAP command with any of the ALARM, FREEKB, FRSET, HONEOM, L40, L64, L80, or PRINT options, see DFHMDI options, CTRL for a description of the option priority.

See BMS macros in Reference -> Application development for map definition.

Options

ACCUM

specifies that this command is one of a number of commands that are used to build a logical message. The logical message is completed by a SEND PAGE command, or deleted by a PURGE MESSAGE command.

ACTPARTN(*name*)

specifies the name (1–2 characters) of the partition to be activated. Activating a partition moves the cursor into the specified partition, and unlocks the keyboard for the specified partition.

This option is ignored if the target terminal does not support partitions, or if there is no application partition set.

ALARM

specifies that the 3270 audible alarm feature is to be activated. For logical units supporting FMHs (except interactive and batch logical units), ALARM instructs BMS to set the alarm flag in the FMH.

When using the ALARM option, refer to DFHMDI options, CTRL for a description of the option priority.

ALTERNATE

sets the terminal to use the ALTERNATE screen size.

CURSOR(*data-value*)

specifies the location to which the 3270 or 3604 cursor is to be returned upon completion of a SEND MAP command.

The data value must be a halfword binary value that specifies the cursor position relative to zero; the range of values that can be specified depends on the size of the screen being used. If no data value is specified, symbolic cursor positioning is assumed.

This option overrides any IC option of the ATTRB operand of DFHMDI. If ACCUM is being used, the most recent value of CURSOR specified is used to position the cursor.

The value specified in the CURSOR option must be positive. A negative value leads to unpredictable results.

DATAONLY

specifies that only application program data is to be written. The attribute characters (3270 only) must be specified for each field in the supplied data. If the attribute byte in the user-supplied data is set to X'00', the attribute byte on the screen is unchanged. Any default data or attributes from the map are ignored.

DEFAULT

sets the terminal to use the DEFAULT screen size.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

ERASEAUP

specifies that before this page of output is displayed, all unprotected character locations in the partition or the entire screen are to be erased. (This option applies only to the 3270 and 8775.)

FMHPARM(*name*)

specifies the name (1–8 characters) of the outboard map to be used. (This option applies only to 3650 logical units with outboard formatting.)

FORMFEED

specifies that a new page is required. For 3270 printers and displays, the FORMFEED character is positioned at the start of the buffer. The application program must thus ensure that this buffer position is not overwritten by map or text data. It is ignored if the target terminal does not support FORMFEED (that is, the RDO TYPETERM option FORMFEED was not used).

FREEKB

specifies that the 3270 keyboard should be unlocked after the data is written. If FREEKB is omitted, the keyboard remains locked.

Note that the keyboard lock status is maintained separately for each partition on a terminal that supports partitions.

When using the FREEKB option, refer to DFHMDI options, CTRL for a description of the option priority.

FROM(*data-area*)

specifies the data area containing the data to be processed. If this field is not specified, the name defaults to the name of the map suffixed with an O. This includes the 12-byte prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and Specifying NODDS in the BMS operand).

FRSET

specifies that the modified data tags (MDTs) of all fields currently in the 3270 (or partition) buffer are to be reset to the unmodified condition (that is, field reset) before any map data is written to the buffer.

This allows the ATTRB operand of DFHMDF for the requested map to control the final status of fields written or rewritten in response to a BMS command, if no other attribute information has been written in the symbolic map.

When using the FRSET option refer to DFHMDI options, CTRL for a description of the option priority.

HONEOM

specifies that the default printer line length is to be used. This length should be the same as that specified using the RDO TYPETERM options PAGESIZE or ALTPAGE, and the same as the printer platen width; otherwise the data may not format correctly.

When using the HONEOM option, refer to DFHMDI options, CTRL for a description of the option priority.

LAST

specifies that this is the last output operation for a transaction and, therefore, the end of a bracket. This option applies to logical units only.

LDC(*name*)

specifies a 2-character mnemonic to be used to determine the logical device code (LDC) to be transmitted in the FMH to the logical unit. The mnemonic identifies an LDC entry defined by a DFHTCT TYPE=LDC macro.

When an LDC is specified, BMS uses the device type, the page size, and the page status associated with the LDC mnemonic to format the message. These values are taken from the extended local LDC table for the logical unit, if it has one. If the logical unit has only a local (unextended) LDC table, the values are taken from the system LDC table. The numeric value of the LDC is obtained from the local LDC table, unless this is an unextended table and the value is not specified, in which case it is taken from the system table.

If the LDC option is omitted, the LDC mnemonic specified in the DFHMSD macro is used; see DFHMSD. If the LDC option has also been omitted from the DFHMSD macro, the action depends on the type of logical unit, as follows:

3601 logical unit

The first entry in the local or extended local LDC table is used, if there is one. If a default cannot be obtained in this way, a null LDC numeric value (X'00') is used. The page size used is the value that is specified in the RDO TYPETERM options PAGESIZE or ALTPAGE, or (1,40) if such a value is not specified.

LUTYPE4 logical unit, batch logical unit, or batch data interchange logical unit

The local LDC table is not used to supply a default LDC; instead, the message is directed to the logical unit console (that is, to any medium that the logical unit elects to receive such messages). For a batch data interchange logical unit, this does not imply sending an LDC in an FMH. The page size is obtained in the manner described for the 3601 logical unit.

LENGTH(*data-value*)

specifies the length of the data to be formatted as a halfword binary value.

If the data area sending the map is longer than the data to be mapped, LENGTH should be specified. This should include the length of the 12-byte prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and Specifying NODDS in the BMS operand). For a description of a safe upper limit, see LENGTH options in CICS commands.

L40, L64, or L80

specifies the line length for a 3270 printer; a carrier return and line feed are forced after 40, 64, or 80 characters have been printed on a line. Unacceptable results are likely if this differs from the page width specified by the RDO TYPETERM options PAGESIZE or ALTPAGE.

When using the options, refer to DFHMDI options, CTRL for a description of the option priority.

MAP(*name*)

specifies the name (1–7 characters) of the map to be used.

MAPONLY

specifies that only default data from the map is to be written.

MAPSET(*name*)

specifies the unsuffixed name (1–7 characters) of the mapset to be used. The mapset must reside in the CICS program library. The mapset can be defined either by using RDO or by program autoinstall when the mapset is first used. If this option is not specified, the name given in the MAP option is assumed to be that of the mapset.

The number of maps per mapset is limited to a maximum of 9 998.

MSR(*data-value*)

specifies the 4-byte data value that controls the 10/63 magnetic stripe reader attached to an 8775 or 3643 terminal. A set of constants is provided in DFHMSRCA to assist in setting this 4-byte area. See Magnetic slot reader (MSR) control value constants, DFHMSRCA for a complete list. This option is ignored if the RDO TYPETERM option MSRCONTROL was not used.

NLEOM

specifies that data for a 3270 printer or a 3275 display with the printer adapter feature should be built with blanks and new-line (NL) characters, and that an end-of-message (EM) character should be placed at the end of the data. As the data is printed, each NL character causes printing to continue on the next line, and the EM character terminates printing.

This option must be specified in the first SEND MAP command used to build a logical message. The option is ignored if the device receiving the message (direct or routed) is not one of those mentioned above.

If this option is used, buffer updating and attribute modification of fields previously written into the buffer are not allowed. CICS includes the ERASE option with every write to the terminal.

The NL character occupies a buffer position. A number of buffer positions, equivalent to the value of the RDO TYPETERM options PAGESIZE or ALTPAGE, for that terminal, is unavailable for data. This may cause data to wrap around in the buffer; if this occurs, the PAGESIZE or ALTPAGE value must be reduced.

The NLEOM option overrides the ALARM option if the latter is present.

NOFLUSH

specifies that CICS does not clear pages on completion but returns control to the program (having set the OVERFLOW condition in EIBRESP).

OUTPARTN(*name*)

specifies the name (1–2 characters) of the partition to which data is to be sent. This option is ignored if the terminal does not support partitions, or if there is no application partition set associated with the terminal. If there is an application partition set, and the OUTPARTN option is omitted, data is sent to the partition named by the PARTN operand of the DFHMSD or DFHMDI map definitions. If maps are not used, or if there is no PARTN operand, the output is sent to the first partition in the partition set.

PAGING

specifies that the output data is not to be sent immediately to the terminal, but is to be placed in temporary storage and displayed in response to paging commands entered by the terminal operator.

If PAGING is specified with a REQID prefix that is used for temporary storage queues that are defined as recoverable, CICS provides message recovery for logical messages if the task has reached a syncpoint.

PRINT

specifies that a print operation is to be started at a 3270 printer or at a 3275 with the printer adapter feature, or that data on an LUTYPE2 (3274/76 or 3790) is to be printed on a printer allocated by the controller. If this option is omitted, the data is sent to the printer buffer but is not printed.

When using the PRINT option, refer to DFHMDI options, CTRL for a description of the option priority.

REQID(*name*)

specifies a 2-character prefix to be used as part of a temporary storage identifier for CICS message recovery. Only one prefix can be specified for each logical message. The default prefix is **.

BMS message recovery is provided for a logical message only if the PAGING option is specified in the BMS SEND commands and if the syncpoint has been reached.

SET(*ptr-ref*)

specifies the pointer to be set to the address of the input or output data.

The SET option specifies that completed pages are to be returned to the application program. The pointer is set to the address of a list of completed pages.

The application program regains control either immediately following the SEND MAP command (if the current page is not yet completed), or at the label specified in a HANDLE CONDITION RETPAGE command, if the page has been completed.

If TIOAPFX=YES is specified in the map definition, the pointer returned contains the address of the TIOA prefix. The user data starts at offset X'0C' from the start of the TIOA prefix.

TERMINAL

specifies that the output data is to be sent to the terminal that originated the transaction.

WAIT

specifies that control should not be returned to the application program until the output operation has been completed.

If WAIT is not specified, control returns to the application program when the output operation has started. A subsequent input or output command (terminal control, BMS, or batch data interchange) causes the application program to wait until the previous command has been completed.

Conditions

Some of the following conditions may occur in combination. If more than one occurs, only the first is passed to the application program.

57 IGREQCD

occurs when an attempt is made to execute a SEND MAP command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

39 IGREQID

occurs if the prefix specified in the REQID option is different from that established by a previous REQID option, or by default for this logical message -REQID (**).

Default action: terminate the task abnormally.

41 INVLDC

occurs if the specified LDC mnemonic is not included in the LDC list for the logical unit.

Default action: terminate the task abnormally.

38 INVMP SZ

occurs if the specified map is too wide for the terminal, or if a HANDLE CONDITION OVERFLOW command is active and the specified map is too long for the terminal.

Default action: terminate the task abnormally.

65 INV PARTN

occurs if the specified partition is not defined in the partition set associated with the application program.

Default action: terminate the task abnormally.

16 INV REQ

RESP2 values:

200 Command not allowed for a distributed program link server program.

also occurs (RESP2 not set) in any of the following situations:

- Text data is output to the same partition or LDC as mapped data while a BMS logical message is active. If neither partitions nor LDCs are in use, text data is output to the same logical message as mapped data.
- A separate SEND MAP command with the ACCUM option is issued to the terminal that originated the transaction while a routed logical message is being built.
- A SEND MAP command is issued for a map without field specifications by specifying the FROM option without the DATAONLY option.
- During overflow processing, data is sent to a different LDC from the LDC that caused page overflow.
- Partitions are in use, the OUTPARTN option has not been coded on the SEND MAP command, but the PARTN operand has been coded in the mapset definition. If the condition arises, it suggests that different versions of the mapset have different PARTN values, and that the suffix deduced for the partition is not the same as the suffix of the loaded mapset.
- A SEND MAP command with the DATAONLY option is issued with a data area, supplied by the user, that resides above the 16MB line. But the length of this data area is not longer than the TIOA prefix.

Default action: terminate the task abnormally.

40 OVERFLOW

occurs if the mapped data does not fit on the current page. This condition is only raised if a HANDLE CONDITION OVERFLOW command is active.

Default action: ignore the condition.

32 RETPAGE

occurs if the SET option is specified and a completed page is ready for return to the application program.

Default action: return control to the application program at the point immediately following the BMS SEND MAP command.

35 TSIOERR

occurs if there is an irrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

03 WRBRK

occurs if a SEND MAP command is interrupted by the terminal operator

pressing the ATTN key. It applies only to the 2741 Communication Terminal, and only if write break is supported for CICS.

Default action: ignore the condition.


SEND MAP MAPPINGDEV

Create mapped output data to be sent to a terminal described by MAPPINGDEV at some later time.

For further information about BMS, see Basic mapping support in Developing applications.

Minimum BMS:

SEND MAP MAPPINGDEV

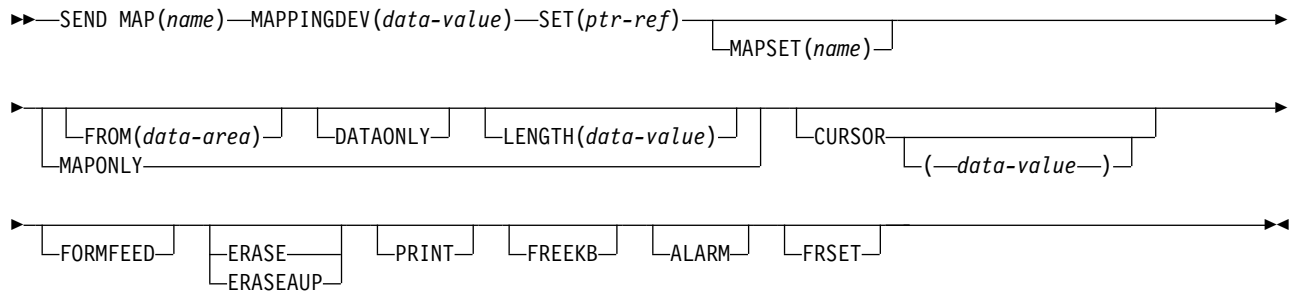

Conditions: INVMPSZ, INVREQ

Description

SEND MAP MAPPINGDEV creates mapped output data to be sent to a terminal that is not the principal facility of the transaction. The terminal characteristics to be used are defined by MAPPINGDEV.

The mapped data is not transmitted but is returned to the application in a buffer defined by the SET option.

Options

ALARM

specifies that the 3270 audible alarm feature is to be activated. For logical units supporting FMHs (except interactive and batch logical units), ALARM instructs BMS to set the alarm flag in the FMH.

When using the ALARM option, refer to DFHMDI options, CTRL for a description of the option priority.

CURSOR(data-value)

specifies the location to which the 3270 cursor is to be returned upon completion of a SEND MAP MAPPINGDEV command.

The data value must be a halfword binary value that specifies the cursor position relative to zero; the range of values that can be specified depends on the size of the screen being used. If no data value is specified, symbolic cursor positioning is assumed.

This option overrides any IC option of the ATTRB operand of DFHMDI.

The value specified in the CURSOR option must be positive. A negative value leads to unpredictable results.

DATAONLY

specifies that only application program data is to be written. The attribute characters (3270 only) must be specified for each field in the supplied data. If the attribute byte in the user-supplied data is set to X'00', the attribute byte on the screen is unchanged. Any default data or attributes from the map are ignored.

ERASE

specifies that the screen printer buffer is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

ERASEAUP

specifies that before this page of output is displayed, all unprotected character locations in the entire screen are to be erased. (This option applies only to the 3270 and 8775.)

FORMFEED

specifies that a new page is required. For 3270 printers and displays, the FORMFEED character is positioned at the start of the buffer. The application program must thus ensure that this buffer position is not overwritten by map or text data. It is ignored if the target terminal does not support FORMFEED (that is, the RDO TYPETERM option FORMFEED was not used, or the terminal control table TYPE=TERMINAL does not specify FF=YES).

FREEKB

specifies that the 3270 keyboard should be unlocked after the data is written. If FREEKB is omitted, the keyboard remains locked.

When using the FREEKB option, refer to CTRL DFHMDI options, CTRL for a description of the option priority.

FROM(*data-area*)

specifies the data area containing the data to be processed. If this field is not specified, the name defaults to the name of the map suffixed with an O. This includes the 12-byte prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and Specifying NODDS in the BMS operand).

FRSET

specifies that the modified data tags (MDTs) of all fields currently in the 3270 buffer are to be reset to the unmodified condition (that is, field reset) before any map data is written to the buffer.

This allows the ATTRB operand of DFHMDI for the requested map to control the final status of fields written or rewritten in response to a BMS command, if no other attribute information has been written in the symbolic map.

When using the FRSET option refer to DFHMDI options, CTRL for a description of the option priority.

LENGTH(*data-value*)

specifies the length of the data to be formatted as a halfword binary value.

If the data area sending the map is longer than the data to be mapped, LENGTH should be specified. This should include the length of the 12-byte

prefix generated by the TIOAPFX=YES option on the DFHMDI and DFHMSD BMS map definitions (see DFHMDI operands, TERM and Specifying NODDS in the BMS operand). For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

MAP(name)

specifies the name (1–7 characters) of the map to be used.

MAPPINGDEV(data-value)

specifies the name of a 3270 terminal whose BMS characteristics match those of the terminal to which the data will eventually be sent using a SEND TEXT MAPPED command or a terminal control SEND or CONVERSE.

MAPONLY

specifies that only default data from the map is to be written.

MAPSET(name)

specifies the unsuffixed name (1–7 characters) of the mapset to be used. The mapset must reside in the CICS program library. The mapset can be defined either by using RDO or by program autoinstall when the mapset is first used. If this option is not specified, the name given in the MAP option is assumed to be that of the mapset.

The number of maps per mapset is limited to a maximum of 9 998.

PRINT

specifies that a print operation is to be started at a 3270 printer or at a 3275 with the printer adapter feature, or that data on an LUTYPE2 (3274/76 or 3790) is to be printed on a printer allocated by the controller. If this option is omitted, the data is sent to the printer buffer but is not printed.

When using the PRINT option, refer to DFHMDI options, CTRL for a description of the option priority.

SET(ptr-ref)

specifies the pointer to be set to the address of the mapped data.

The storage area containing the mapped data has the same format as the page buffer returned when using the SET option in the full BMS SEND command. For more guidance about using the SET option, see the information about the MAPPINGDEV facility in the *CICS Application Programming Guide*.

Conditions

Some of the following conditions may occur in combination. If more than one occurs, only the first is passed to the application program.

38 INVMPsz

occurs if the specified map is too wide for the terminal specified by MAPPINGDEV or if a HANDLE CONDITION OVERFLOW command is active and the specified map is too long for the terminal specified by MAPPINGDEV.

Default action: terminate the task abnormally.

16 INVREQ


occurs if the terminal specified by MAPPINGDEV does not exist, does not support BMS, or is not a 3270 printer or display.

Default action: terminate the task abnormally.

SEND PAGE

Send last page of data.

SEND PAGE

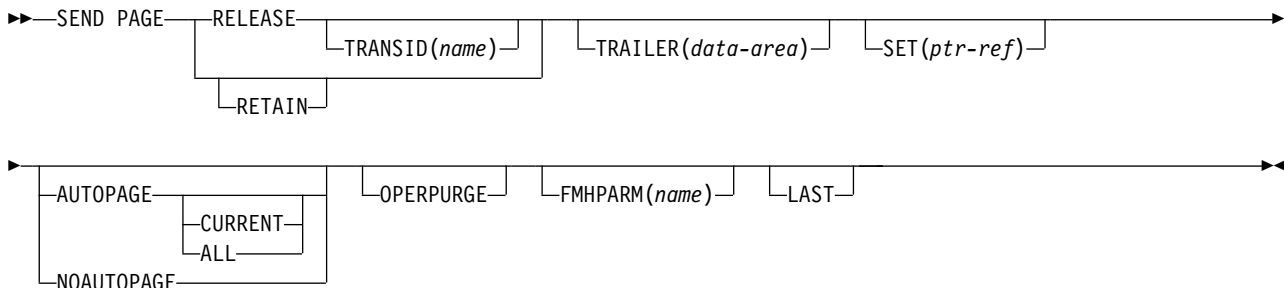

Conditions: IGREQCD, INVREQ, RETPAGE, TSIOERR, WRBRK

Description

SEND PAGE completes a BMS logical message. It causes BMS to generate a device-dependent data stream for the last (perhaps the only) page of data. Typically, this last page is only partially full. SEND PAGE is supplied only by full BMS. For further information about BMS, see the *CICS Application Programming Guide*.

Options can be included to specify how much control the terminal operator should have over the disposition of the logical message (AUTOPAGE, NOAUTOPAGE, and OPERPURGE), to determine whether control should return to the application program after transmission of the logical message (RELEASE or RETAIN), to add trailer data to a text logical message (TRAILER), and to return the device-dependent data stream for the last page of a logical message to the application program (SET). If this is a paging message, the last page of the logical message is transmitted to temporary storage and the terminal operator paging transaction is initiated. If it is a terminal logical message, the last page is transmitted to the terminal.

This is supported by full BMS only.

Options

ALL

specifies that if the ATTN key on a 2741 is pressed while a BMS logical message is being sent to the terminal, and the WRBRK condition is not active, transmission of the current page is to cease and no additional pages are to be transmitted. The logical message is deleted.

AUTOPAGE

specifies that each page of a BMS logical message is to be sent to the terminal as soon as it is available. If paging on request is specified for the terminal by the RDO TYPETERM option AUTOPAGE(NO), AUTOPAGE overrides it for this logical message.

AUTOPAGE is assumed for 3270 printers; it does not apply to 3270 display terminals. If neither AUTOPAGE nor NOAUTOPAGE is specified, the terminal has the paging status specified for it using the RDO TYPETERM option AUTOPAGE.

CURRENT

specifies that if the ATTN key on a 2741 is pressed while a BMS logical message is being sent to the terminal, and the WRBRK condition is not active, transmission of the current page is to cease and transmission of the next page (if any) is to begin.

FMHPARM(*name*)

specifies the name (1–8 characters) of the outboard map to be used. This option applies only to 3650 logical units with outboard formatting.

LAST

specifies that this is the last output operation for a transaction and, therefore, the end of a bracket. If RELEASE is specified, LAST is assumed unless the SEND PAGE command is terminating a routing operation. This option applies to logical units only.

NOAUTOPAGE

specifies that pages of a BMS logical message are to be sent one at a time to the terminal. BMS sends the first page to the terminal when the terminal becomes available or on request of the terminal operator. Subsequent pages are sent to the terminal in response to requests from the terminal operator.

If automatic paging is specified for the terminal by the RDO TYPETERM option AUTOPAGE(YES), NOAUTOPAGE overrides it for this logical message. For logical units, NOAUTOPAGE applies to all pages for all LDCs in the logical message. NOAUTOPAGE does not apply to 3270 printers.

OPERPURGE

specifies that CICS is to delete the BMS logical message only when the terminal operator requests deletion. If the option is omitted, CICS deletes the message if the operator enters data that is not a paging command.

RELEASE

specifies that, after the SEND PAGE command, control is to be returned to CICS.

RETAIN

specifies that after the SEND PAGE command, control is returned to the application program when the operator has finished displaying the pages.

SET(*ptr-ref*)

specifies the pointer to be set to the address of the output data.

The SET option specifies that the last or only page is returned to the application program. The pointer is set to the address of the current page. A list of addresses is created and, if the ROUTE command is in operation, there is an address entry for each device. If the ROUTE command is not in operation, the list contains only the one entry.

The application program regains control either immediately following the SEND PAGE command (if the current page is not yet completed), or at the label specified in a HANDLE CONDITION RETPAGE command if the page has been completed.

If TIOAPFX=YES is specified in the map definition, the pointer returned contains the address of the TIOA prefix. The user data starts at offset X'0C' from the start of the TIOA prefix.

TRAILER(*data-area*)

specifies the text data area that contains trailer data to be placed at the bottom of the last page only. The format of the trailer is:

2 bytes

Binary length of the data (n)

2 bytes

Binary zero

n bytes

Data.

See the *CICS Application Programming Guide* for more information.

TRANSID(*name*)

specifies the transaction identifier (1–4 alphanumeric characters) to be used with the next input message from the terminal the task is attached to. The identifier must have been defined to CICS via a RDO TRANSACTION resource definition. TRANSID is valid only if SEND PAGE RELEASE is specified.

If this option is specified in a program that is not at the highest logical level, the specified transaction identifier is used only if a new transaction identifier is not provided in another SEND PAGE command (or in a RETURN program control command) issued in a program at a higher logical level.

Conditions**57 IGREQCD**

occurs when an attempt is made to execute a SEND PAGE command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 Command not allowed for a distributed program link server program.

also occurs (RESP2 not set) in any of the following situations:

- The disposition (TERMINAL, PAGING, or SET) of a BMS logical message is changed before its completion by the SEND PAGE command.
- Text data is output to the same partition or LDC as mapped data while a BMS logical message is active. If neither partitions nor LDCs are in use, text data is output to the same logical message as mapped data.
- The TRAILER option is specified when terminating a logical message built with SEND MAP commands only.
- During overflow processing data is sent to a different LDC from the LDC that caused page overflow.
- The length of the trailer is negative.

Default action: terminate the task abnormally.

32 RETPAGE

occurs if the SET option is specified and the last or only completed page is ready for return to the application program.

Default action: return control to the application program at the point immediately following the BMS SEND PAGE command.

35 TSI0ERR

occurs if there is an unrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

03 WRBRK

occurs if the SEND PAGE command is interrupted by the terminal operator pressing the ATTN key. It applies only to the 2741 Communication Terminal, and only if write break is supported for CICS.

Default action: ignore the condition.

SEND PARTNSET

Associates the partition set specified by the PARTNSET option with the application program.

SEND PARTNSET

►►—SEND PARTNSET—┐
└(—name—)┘◄◄

Conditions: INVPARTNSET, INVREQ

Description

SEND PARTNSET associates the partition set specified by the PARTNSET option with the application program. If the partition set name is omitted, the terminal is reset to the base (unpartitioned) state. This command is available on standard and full BMS only. For further information about BMS, see the *CICS Application Programming Guide*.

Note: A SEND PARTNSET command must not be followed immediately by a RECEIVE command. The two commands must be separated by a SEND MAP, SEND TEXT, or SEND CONTROL command, so that the partition set is sent to the terminal.

Conditions

The following conditions may occur together. If both occur, only the first one is passed to the application program.

64 INVPARTNSET

occurs if the partition set named in the SEND PARTNSET command is not a valid partition set (for example, it may be a mapset).

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 Command not allowed for a distributed program link server program.

also occurs (RESP2 not set) in the following situation:

- A SEND PARTNSET command is issued while a logical message is active.

Default action: terminate the task abnormally.


SEND TEXT

Send data without mapping. The keywords are separated into those supported by standard and full BMS. For further information about BMS, see the *CICS Application Programming Guide*.


SEND TEXT

►►—SEND TEXT—►►

SEND TEXT Standard BMS

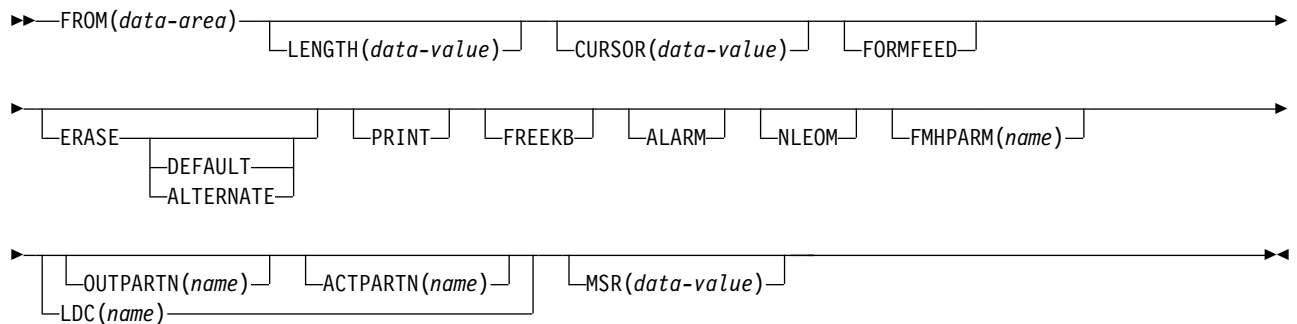

SEND TEXT Full BMS

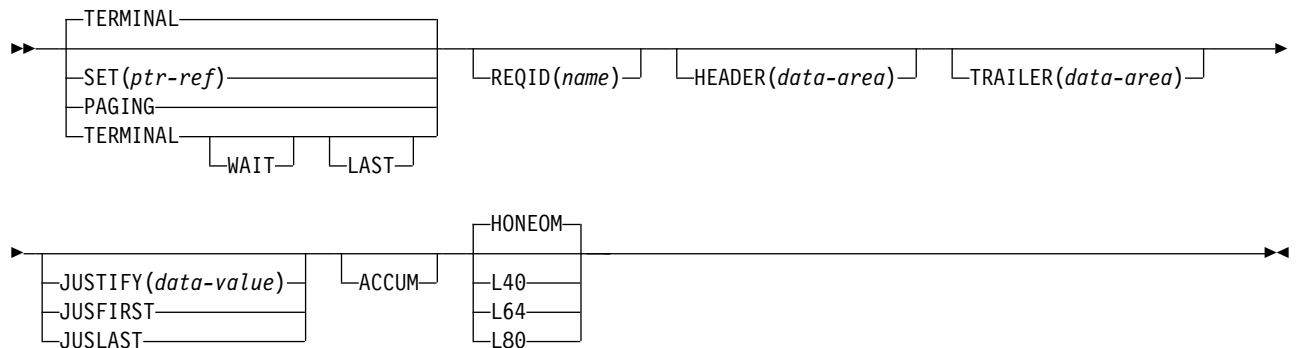

Conditions: IGREQCD, IGREQID, INVLDC, INVPARTN, INVREQ, LENGERR, RETPAGE, TSIOERR, WRBRK

Description

SEND TEXT sends text data without mapping. The text is split into lines of the same width as the terminal, such that words are not broken across line boundaries. If the text exceeds a page, it is split into pages that fit on the terminal with application-defined headers and trailers.

When using the SEND TEXT command with any of the ALARM, FREEKB, FRSET, HONEOM, L40, L64, L80, or PRINT options, see DFHMDI options, CTRL for a description of the option priority.

Options

ACCUM

specifies that this command is one of a number of commands that are used to build a logical message. The logical message is completed by a SEND PAGE command, or deleted by a PURGE MESSAGE command.

HEADER, JUSFIRST, JUSLAST, JUSTIFY and TRAILER all imply ACCUM.

ACTPARTN(*name*)

specifies the name (1–2 characters) of the partition to be activated. Activating a partition moves the cursor into the specified partition, and unlocks the keyboard for the specified partition.

This option is ignored if the target terminal does not support partitions, or if there is no application partition set.

ALARM

specifies that the 3270 audible alarm feature is to be activated. For logical units supporting FMHs (except interactive and batch logical units), ALARM instructs BMS to set the alarm flag in the FMH.

ALTERNATE

sets the terminal to use the ALTERNATE screen size.

CURSOR(*data-value*)

specifies the location to which the 3270 or 3604 cursor is to be returned on completion of a SEND TEXT command.

The data value must be a halfword binary value that specifies the cursor position relative to zero; the range of values that can be specified depends on the size of the screen being used.

This option overrides any IC option of the ATTRB operand of DFHMDF. If ACCUM is being used, the most recent value of CURSOR specified is used to position the cursor.

The value specified in the CURSOR option must be positive. A negative value leads to unpredictable results.

DEFAULT

sets the terminal to use the DEFAULT screen size.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

FMHPARM(*name*)

specifies the name (1–8 characters) of the outboard map to be used. (This option applies only to 3650 logical units with outboard formatting.)

FORMFEED

specifies that a new page is required. For 3270 printers and displays, the FORMFEED character is positioned at the start of the buffer. The application program must thus ensure that this buffer position is not overwritten by map

or text data. It is ignored if the target terminal does not support FORMFEED (that is, the RDO TYPETERM option FORMFEED was not used).

The FORMFEED option can appear on any SEND TEXT ACCUM command. You need only specify it once within a physical page because it always forces a FORMFEED at the start of the physical page. To force a FORMFEED at the start of a particular SEND TEXT ACCUM command, use the JUSFIRST option instead.

FREEKB

specifies that the 3270 keyboard should be unlocked after the data is written. If FREEKB is omitted, the keyboard remains locked.

When using the FREEKB option, see DFHMDI options, CTRL for a description of the option priority.

Note that the keyboard lock status is maintained separately for each partition on a terminal that supports partitions.

FROM(data-area)

specifies the data area containing the data to be sent.

HEADER(data-area)

specifies the header data to be placed at the beginning of each page of text data. The format of the header is:

2 bytes

Binary length of the data (n).

1 byte Page numbering required or not (blank).

1 byte Reserved field.

n bytes

Data.

See the *CICS Application Programming Guide* for more information.

HONEOM

specifies that the default printer line length is to be used. This length should be the same as that specified using the RDO TYPETERM options PAGESIZE or ALTPAGE, and the same as the printer platen width; otherwise the data may not format correctly.

When using the HONEOM option, see DFHMDI options, CTRL for a description of the option priority.

JUSFIRST

specifies that the text data is to be placed at the top of the page. Any partially formatted page from previous requests is considered to be complete. If the HEADER option is specified, the header precedes the data. See also the description of the JUSTIFY option.

JUSLAST

specifies that the text data is to be positioned at the bottom of the page. The page is considered to be complete after the request has been processed. If the TRAILER option is specified, the trailer follows the data. See also the description of the JUSTIFY option.

JUSTIFY(data-value)

specifies the line of the page at which the text data is to be positioned. The data value must be a halfword binary value in the range 1 through 240. Although they may not be specified as constants, the special values -1 and -2 can be supplied dynamically to signify JUSFIRST or JUSLAST, respectively.

LAST

specifies that this is the last output operation for a transaction and, therefore, the end of a bracket. This option applies to logical units only.

LDC(*name*)

specifies a 2-character mnemonic to be used to determine the logical device code (LDC) to be transmitted in the FMH to the logical unit. The mnemonic identifies an LDC entry defined by a DFHTCT TYPE=LDC macro.

When an LDC is specified, BMS uses the device type, the page size, and the page status associated with the LDC mnemonic to format the message. These values are taken from the extended local LDC table for the logical unit, if it has one. If the logical unit has only a local (unextended) LDC table, the values are taken from the system LDC table. The numeric value of the LDC is obtained from the local LDC table, unless this is an unextended table and the value is not specified, in which case it is taken from the system table.

LENGTH(*data-value*)

specifies the length of the data to be sent as a halfword binary value. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

L40, L64, or L80

specifies the line length for a 3270 printer; a carrier return and line feed are forced after 40, 64, or 80 characters have been printed on a line. Unacceptable results are likely if this differs from the page width specified by the RDO TYPETERM options PAGESIZE or ALTPAGE.

When using the options, see DFHMDI options, CTRL for a description of the option priority.

MSR(*data-value*)

specifies the 4-byte data value that controls the 10/63 magnetic stripe reader attached to an 8775 or 3643 terminal. A set of constants is provided in DFHMSRCA to assist in setting this 4-byte area. See "Magnetic slot reader (MSR) control value constants, DFHMSRCA" on page 928 for a complete list. This option is ignored if the RDO TYPETERM option MSRCONTROL was not used.

NLEOM

specifies that data for a 3270 printer or a 3275 display with the printer adapter feature should be built with blanks and new-line (NL) characters, and that an end-of-message (EM) character should be placed at the end of the data. As the data is printed, each NL character causes printing to continue on the next line, and the EM character terminates printing.

This option must be specified in the first SEND TEXT command used to build a logical message. The option is ignored if the device receiving the message (direct or routed) is not one of those mentioned above.

If this option is used, buffer updating and attribute modification of fields previously written into the buffer are not allowed. CICS includes the ERASE option with every write to the terminal.

The NL character occupies a buffer position. A number of buffer positions, equivalent to the value of the RDO TYPETERM options PAGESIZE or ALTPAGE for that terminal, is unavailable for data. This may cause data to wrap around in the buffer; if this occurs, the PAGESIZE value must be reduced.

The NLEOM option overrides the ALARM option if the latter is present.

OUTPARTN(*name*)

specifies the name (1–2 characters) of the partition to which data is to be sent. This option is ignored if the terminal does not support partitions, or if there is no application partition set associated with the terminal. If there is an application partition set, and the OUTPARTN option is omitted, data is sent to the partition named by the PARTN operand of the DFHMSD or DFHMDI map definition. If maps are not used, or if there is no PARTN operand, the output is sent to the first partition in the partition set.

PAGING

specifies that the output data is not to be sent immediately to the terminal, but is to be placed in temporary storage and displayed in response to paging commands entered by the terminal operator.

If PAGING is specified with a REQID prefix that is used for temporary storage queues that are defined as recoverable, CICS provides message recovery for logical messages if the task has reached a syncpoint.

PRINT

specifies that a print operation is to be started at a 3270 printer or at a 3275 with the printer adapter feature, or that data on an LUTYPE2 (3274/76 or 3790) is to be printed on a printer allocated by the controller. If this option is omitted, the data is sent to the printer buffer but is not printed.

When using the PRINT option, see DFHMDI options, CTRL for a description of the option priority.

REQID(*name*)

specifies a 2-character prefix to be used as part of a temporary storage identifier for CICS message recovery. Only one prefix can be specified for each logical message. The default prefix is **.

BMS message recovery is provided for a logical message only if the PAGING option is specified in the BMS SEND commands and if the syncpoint has been reached.

SET(*ptr-ref*)

specifies the pointer to be set to the address of the data. It specifies that completed pages are to be returned to the application program. The pointer is set to the address of a list of completed pages.

The application program regains control either immediately following the BMS SEND command (if the current page is not yet completed), or at the label specified in a HANDLE CONDITION RETPAGE command if the page has been completed.

If TIOAPFX=YES is specified in the map definition, the pointer returned contains the address of the TIOA prefix. The user data starts at offset X'0C' from the start of the TIOA prefix.

TERMINAL

specifies that data is to be sent to the terminal that originated the transaction.

TRAILER(*data-area*)

specifies the text data area that contains trailer data to be placed at the bottom of each output page. The format of the trailer is:

2 bytes

Binary length of the data (n)

1 byte Page numbering required or not (blank)

1 byte Reserved field

n bytes

Data

See the the *CICS Application Programming Guide* for more information.

WAIT

specifies that control should not be returned to the application program until the output operation has been completed.

If WAIT is not specified, control returns to the application program when the output operation has started. A subsequent input or output command (terminal control, BMS, or batch data interchange) causes the application program to wait until the previous command has been completed.

Conditions

57 IGREQCD

occurs when an attempt is made to execute a SEND TEXT command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

39 IGREQID

occurs if the prefix specified in the REQID option on a BMS SEND command is different from that established by a previous REQID option, or by default for this logical message—REQID (**).

Default action: terminate the task abnormally.

41 INVLDC

occurs if the specified LDC mnemonic is not included in the LDC list for the logical unit.

Default action: terminate the task abnormally.

65 INVPARTN

occurs if the specified partition is not defined in the partition set associated with the application program.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 Command not allowed for a distributed program link server program.

also occurs (RESP2 not set) in any of the following situations:

- Text data is output to the same partition or LDC as mapped data while a BMS logical message is active. If neither partitions nor LDCs are in use, text data is output to the same logical message as mapped data.
- During overflow processing, data is sent to a different LDC from the LDC that caused page overflow.
- The length of a header on a SEND TEXT command is negative.
- The length of a trailer on a SEND TEXT command is negative.

Default action: terminate the task abnormally.

22 LENGERR

occurs if an out-of-range value is supplied in the LENGTH option.

Default action: terminate the task abnormally.

32 RETPAGE

occurs if the SET option is specified and a completed page is ready for return to the application program.

Default action: return control to the application program at the point immediately following the BMS SEND TEXT command.

35 TSIOERR

occurs if there is an irrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

03 WRBRK


occurs if a SEND command is interrupted by the terminal operator pressing the ATTN key. It applies only to the 2741 Communication Terminal, and only if write break is supported for CICS.

Default action: ignore the condition.

SEND TEXT MAPPED

Send data with mapping. Only supplied by full BMS. For further information about BMS, see the *CICS Application Programming Guide*.

SEND TEXT MAPPED

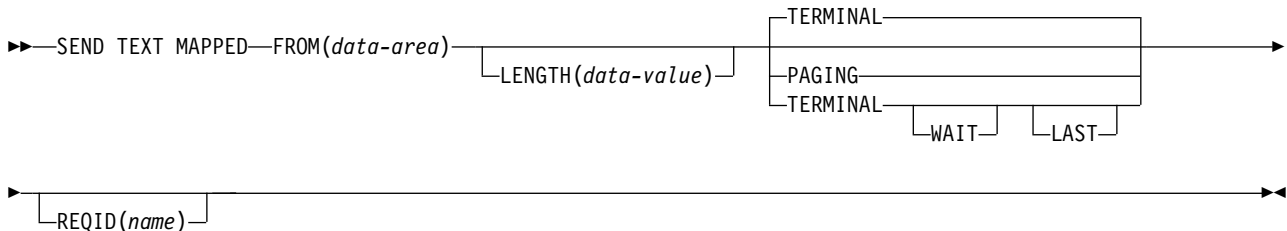

Conditions: IGREQCD, IGREQID, INVREQ, TSIOERR, WRBRK

Description

SEND TEXT MAPPED sends a page of a device-dependent data stream previously built by BMS, and returned to the application program with the SET option.

It must only be used to send data previously generated by a BMS SEND command specifying the SET option. It references a 4-byte page control area (PGA) that BMS placed at the end of the device-dependent data stream.

The length of the device-dependent data stream set in the TIOATDL field of the page buffer returned by the SET option does not include the PGA. The LENGTH option of the SEND TEXT MAPPED command should be set from this TIOATDL, and hence does not include the PGA. However, if the application program copies the page buffer returned by the SET option, it should include the PGA in the copied data.

This command is only supported by full BMS.

Options

FROM(data-area)

specifies the data area containing the data to be sent.

LAST

specifies that this is the last output operation for a transaction and, therefore, the end of a bracket. This option applies to logical units only.

LENGTH(data-value)

specifies the length of the data to be formatted as a halfword binary value. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

PAGING

specifies that the output data is not to be sent immediately to the terminal, but is to be placed in temporary storage and displayed in response to paging commands entered by the terminal operator.

If PAGING is specified with a REQID prefix that is used for temporary storage queues that are defined as recoverable, CICS provides message recovery for logical messages if the task has reached a syncpoint.

REQID(*name*)

specifies a 2-character prefix to be used as part of a temporary storage identifier for CICS message recovery. Only one prefix can be specified for each logical message. The default prefix is **.

BMS message recovery is provided for a logical message only if the PAGING option is specified in the BMS SEND commands and if the syncpoint has been reached.

TERMINAL

specifies that input data is to be sent to the terminal that originated the transaction.

WAIT

specifies that control should not be returned to the application program until the output operation has been completed.

If WAIT is not specified, control returns to the application program when the output operation has started. A subsequent input or output command (terminal control, BMS, or batch data interchange) causes the application program to wait until the previous command has been completed.

Conditions

57 IGRQCD

occurs when an attempt is made to execute a SEND TEXT command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

39 IGRQID

occurs if the prefix specified in the REQID option on a BMS SEND command is different from that established by a previous REQID option, or by default for this logical message—REQID (**).

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

35 TSIOERR

occurs if there is an irrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

03 WRBRK


occurs if a SEND command is interrupted by the terminal operator pressing the ATTN key. It applies only to the 2741 Communication Terminal, and only if write break is supported for CICS.

Default action: ignore the condition.

SEND TEXT NOEDIT

Send a page. Only supplied by full BMS. For further information about BMS, see the *CICS Application Programming Guide*.

SEND TEXT NOEDIT

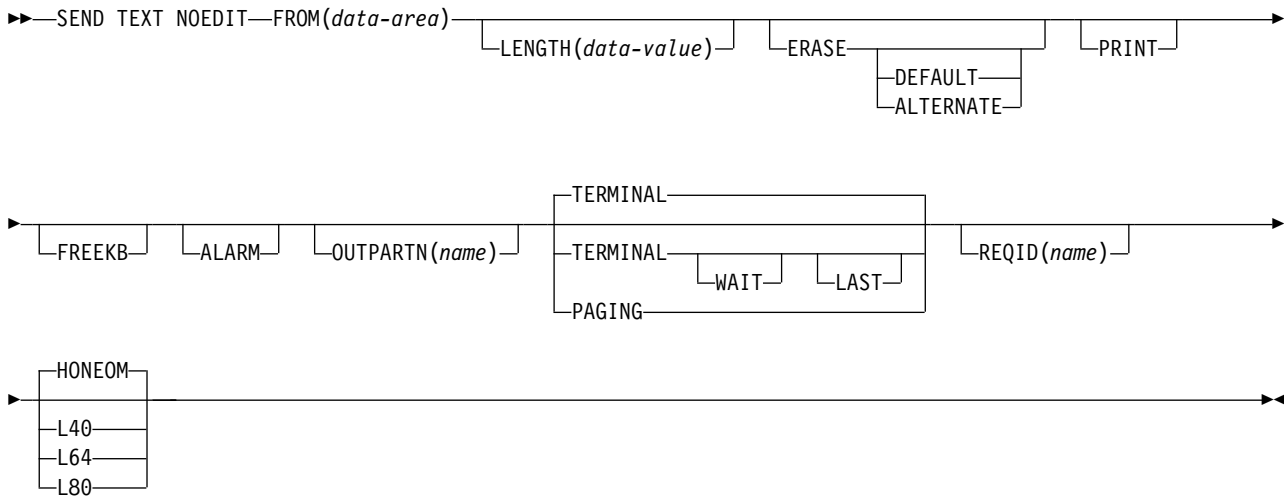

Conditions: IGREQCD, IGREQID, INVREQ, INVPARTN, TSIOERR, WRBRK

Description

SEND TEXT NOEDIT sends a page of a device-dependent data stream built by the application program. The data stream cannot contain structured fields. This command differs from a terminal control SEND, because the data stream may be written to temporary storage and interfaced to the terminal operator paging transaction (using the PAGING option). Also the device-dependent data stream can be sent to a partition (using the OUTPARTN option).

If the OUTPARTN option is specified, the data stream is sent to the specified partition. This command is used to output a user-generated data stream. It differs from a terminal control SEND in that data may be output to temporary storage (using the PAGING option), or routed like any other BMS data.

When using the SEND TEXT NOEDIT command with any of the ALARM, FREEKB, FRSET, HONEOM, L40, L64, L80, or PRINT options, see DFHMDI options, CTRL for a description of the option priority.

This command is supported on full BMS only.

Options

ALARM

specifies that the 3270 audible alarm feature is to be activated. For logical units supporting FMHs (except interactive and batch logical units), ALARM instructs BMS to set the alarm flag in the FMH.

ALTERNATE

sets the terminal to use the ALTERNATE screen size.

DEFAULT

sets the terminal to use the DEFAULT screen size.

ERASE

specifies that the screen printer buffer or partition is to be erased and the cursor returned to the upper left corner of the screen. (This option applies only to the 3270, or 8775, and to the 3604 Keyboard Display.)

The first output operation in any transaction, or in a series of pseudoconversational transactions, should always specify ERASE. For transactions attached to 3270 screens or printers, unless explicitly overridden by the DEFAULT or ALTERNATE option, this also ensures that the correct screen size is selected, as defined for the transaction by the SCRNSIZE option in the RDO PROFILE definition.

FREEKB

specifies that the 3270 keyboard should be unlocked after the data is written. If FREEKB is omitted, the keyboard remains locked.

Note that the keyboard lock status is maintained separately for each partition on a terminal that supports partitions.

When using the FREEKB option, refer to DFHMDI options, CTRL for a description of the option priority.

FROM(*data-area*)

specifies the data area containing the data to be sent.

HONEOM

specifies that the default printer line length is to be used. This length should be the same as that specified using the RDO TYPETERM options PAGESIZE or ALTPAGE, and the same as the printer platen width; otherwise the data may not format correctly.

When using the HONEOM option, refer to DFHMDI options, CTRL for a description of the option priority.

LAST

specifies that this is the last output operation for a transaction and, therefore, the end of a bracket. This option applies to logical units only.

LENGTH(*data-value*)

specifies the length of the data to be sent as a halfword binary value. For a description of a safe upper limit, see "LENGTH options in CICS commands" on page 11.

L40, L64, or L80

specifies the line length for a 3270 printer; a carrier return and line feed are forced after 40, 64, or 80 characters have been printed on a line. Unacceptable results are likely if this differs from the page width specified by the RDO TYPETERM options PAGESIZE or ALTPAGE.

When using the options, refer to CTRL DFHMDI options, CTRL for a description of the option priority.

OUTPARTN(*name*)

specifies the name (1–2 characters) of the partition to which data is to be sent. This option is ignored if the terminal does not support partitions, or if there is no application partition set associated with the terminal. If there is an application partition set, and the OUTPARTN option is omitted, data is sent to

the partition named by the PARTN operand of the DFHMSD or DFHMDI map definition. If maps are not used, or if there is no PARTN operand, the output is sent to the first partition in the partition set.

PAGING

specifies that the output data is not to be sent immediately to the terminal, but is to be placed in temporary storage and displayed in response to paging commands entered by the terminal operator.

If PAGING is specified with a REQID prefix that is used for temporary storage queues that are defined as recoverable, CICS provides message recovery for logical messages if the task has reached a syncpoint.

PRINT

specifies that a print operation is to be started at a 3270 printer or at a 3275 with the printer adapter feature, or that data on an LUTYPE2 (3274/76 or 3790) is to be printed on a printer allocated by the controller. If this option is omitted, the data is sent to the printer buffer but is not printed.

When using the PRINT option, refer to DFHMDI options, CTRL for a description of the option priority.

REQID(*name*)

specifies a 2-character prefix to be used as part of a temporary storage identifier for CICS message recovery. Only one prefix can be specified for each logical message. The default prefix is **.

TERMINAL

specifies that the data is to be sent to the terminal that originated the transaction.

WAIT

specifies that control should not be returned to the application program until the output operation has been completed.

If WAIT is not specified, control returns to the application program when the output operation has started. A subsequent input or output command (terminal control, BMS, or batch data interchange) causes the application program to wait until the previous command has been completed.

Conditions

57 IGREQCD

occurs when an attempt is made to execute a SEND TEXT command after a SIGNAL data-flow control command with a request change direction (RCD) code has been received from an LUTYPE4 logical unit.

Default action: terminate the task abnormally.

39 IGREQID

occurs if the prefix specified in the REQID option on a BMS SEND command is different from that established by a previous REQID option, or by default for this logical message—REQID (**).

Default action: terminate the task abnormally.

65 INVPARTN

occurs if the specified partition is not defined in the partition set associated with the application program.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

200 Command not allowed for a distributed program link server program.

also occurs (RESP2 not set) in any of the following situations:

- Text data is output to the same partition or LDC as mapped data while a BMS logical message is active. If neither partitions nor LDCs are in use, text data is output to the same logical message as mapped data.
- During overflow processing, data is sent to a different LDC from the LDC that caused page overflow.
- The length of a header on a SEND TEXT command is negative.
- The length of a trailer on a SEND TEXT command is negative.

Default action: terminate the task abnormally.

35 TSIOERR

occurs if there is an irrecoverable temporary storage input/output error.

Default action: terminate the task abnormally.

03 WRBRK


occurs if a SEND command is interrupted by the terminal operator pressing the ATTN key. It applies only to the 2741 Communication Terminal, and only if write break is supported for CICS.

Default action: ignore the condition.

SIGNAL EVENT

Identify a place in an application program where one or more events could be emitted.

SIGNAL EVENT



Conditions: CHANNELERR, EVENTERR, LENGERR

This command is threadsafe.

Description

The **SIGNAL EVENT** identifies a place in an application program where one or more events could be emitted. Events are emitted when the following conditions are satisfied:

- Event processing is active.
- There is at least one matching capture specification enabled. A capture specification matches if it has a capture point of **SIGNAL EVENT**, and all its predicates evaluate to true.

SIGNAL EVENT has a primary predicate of **EVENT**, and allows secondary predicates on the **FROM** data-area or the **FROMCHANNEL** and its containers. The data in any CICS Event emitted as a result of **SIGNAL EVENT** is defined in the Business Event that contains the matching capture specification.

Options

EVENT(*data-value*)

Specifies an identifier (1 – 32 characters) that identifies this **SIGNAL EVENT**.

The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and . Leading and embedded blank characters are not permitted. If the name supplied is fewer than 32 characters, it is padded with trailing blanks up to 32 characters.

Event identifiers are always in EBCDIC. The allowable set of characters for event identifiers, listed above, includes some characters that do not have the same representation in all EBCDIC code pages. We therefore recommend that the characters used in naming them should be restricted to A-Z a-z 0-9 & : = , ; < > . - and .

FROMCHANNEL(*data-value*)

Specifies the name (1 – 16 characters) of a channel containing data for this event. You can specify the channel name DFHTRANSACTION to use the transaction channel.

FROM(*data-area*)

Specifies a data area containing data for this event.

FROMLENGTH(data-value)

Specifies a fullword binary value that is the length in bytes of the **FROM** data area.

Conditions**122 CHANNELERR**

RESP2 values:

- 2 The channel specified on the FROMCHANNEL option could not be found.

111 EVENTERR

RESP2 values:

- 6 The identifier specified on the EVENT option contains an incorrect character or combination of characters.

22 LENGERR

RESP2 values:

- 3 The length that you have specified in FROMLENGTH is not greater than zero.

SIGNOFF

Sign off from a terminal.

SIGNOFF

►►—SIGNOFF—◄◄

Condition: INVREQ

This command is threadsafe.

Description

SIGNOFF enables you to sign off from the terminal or principal facility that you previously signed on to. When sign-off is complete, the terminal reverts to the security capabilities and operator characteristics associated with the default user for this CICS region. The national language reverts to the national language of the default user, if defined, or the national language associated with the definition of the terminal.

When this command is executed, CICS immediately recognizes the sign-off and establishes the default attributes for the terminal. The transaction (and any associated task-related user exits, function shipping, or distributed transaction processing) may have invoked other resource managers (RMs), for example, IMS, DB2, or VSAM. **It is unpredictable whether these other RMs recognize the sign-off before the transaction terminates.**

The default attributes apply for all RMs invoked by subsequent transactions at the terminal.

Conditions

16 INVREQ

RESP2 values:


- | | |
|-----|----------------------------------------------------------------------------------------|
| 1 | No user is currently signed on. This could be because the CICS ESM is not initialized. |
| 2 | There is no terminal with this task. |
| 3 | This task's terminal has preset security. |
| 4 | Sign-off is attempted using transaction routing without using the CRTE transaction. |
| 18 | The CICS ESM interface is not initialized. |
| 200 | Command not allowed for a distributed program link server program. |

Default action: terminate the task abnormally.

SIGNON

Sign on to a terminal.

SIGNON

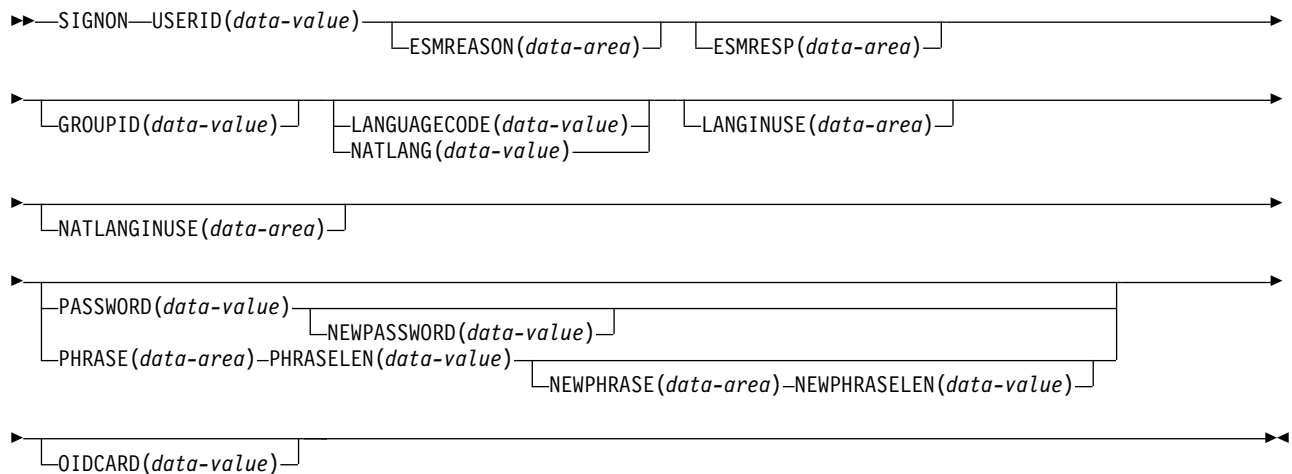

Conditions: INVREQ, LENGERR, NOTAUTH, USERIDERR

This command is threadsafe.

Description

The SIGNON command enables your application to associate a new user ID with the current terminal. When you use the SIGNON command, the following rules apply:

- The sign-on operation is terminal related only. Sign-on has no meaning if the transaction does not have a terminal as its principal facility.
- When you issue an EXEC CICS SIGNON command, CICS modifies the state of the terminal that is the principal facility of the transaction that issues the command.
- Signon does not affect the user ID and security capabilities currently in effect for the transaction issuing the command. This is because:
 - A transaction's user ID and security capabilities are established at transaction-attach time. It is not possible to modify these subsequently during the life of the transaction.
 - All actions performed by a transaction (whether to a local or remote resource, or to a connected system) take place in the security context established at the time the transaction was attached.
- If authorization is required, you can sign on with either a valid password or a valid password phrase. However you cannot set a new password phrase using a password for authentication, nor can you set a new password using a password phrase for authentication.

If you supply an incorrect password on the **SIGNON** request, the invalid attempt count is increased for the user ID. If you supply multiple incorrect passwords on successive **SIGNON** requests, the user ID may be revoked by the external security manager. CICS issues message DFHXS1201 when you supply an incorrect

password on a **SIGNON** request. When you supply a correct password following one or more invalid attempts, CICS issues message DFHXS1206, which includes a count of the invalid attempts.

There is no implied sign-off with the SIGNON command. If your application program attempts to associate a new user with a terminal that already has a signed-on user ID, CICS returns an INVREQ (Resp2=9) error response. Note that there is no default value for the USERID option.

PASSWORD is used as a parameter which means that if CICS has a memory dump, the password may be visible. You should therefore clear the PASSWORD field as soon as possible after using it in a SIGNON command.

For more information on how CICS uses the USERID and GROUPLD, see Verifying CICS users in the *CICS RACF Security Guide*.

Options

If an optional input field contains all blanks, it is ignored.

ESMREASON(*data-area*)

returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF reason code.

ESMRESP(*data-area*)

returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF return code.

GROUPLD(*data-value*)

assigns, to a RACF user group, the user that is being signed on. This overrides, for this session only, the default group name specified for the user in the RACF database.

LANGUAGECODE(*data-value*)

specifies the national language that the user being signed on wants CICS to use. You specify the language as a standard 3-character IBM code. This is an alternative to the 1-character code that you specify on the NATLANG option.

See Appendix C, "National language codes," on page 909 for possible values of the code.

LANGINUSE(*data-area*)

the LANGINUSE option allows an application program to receive the national language chosen by the sign-on process. The language is identified as a standard three-character IBM code, instead of the one-character code used by NATLANGINUSE. It is an alternative to the existing NATLANGINUSE option.

See Appendix C, "National language codes," on page 909 for possible values of the code.

NATLANG(*data-value*)

specifies a 1-character field identifying the national language the user wants to use during the signed-on session.

See Appendix C, "National language codes," on page 909 for possible values of the code.

NATLANGINUSE(*data-area*)

specifies a one character the national language used during the signed-on session. The current implementation always returns the character E (U.S. English), which corresponds to the language supplied in the NATLANG option. NATLANGINUSE corresponds to the following (in order of decreasing priority):

- The language supplied in the NATLANG option of the SIGNON command.
- The language associated with the user. This is specified in the ESM language segment.
- The language associated with the definition of the terminal.
- The language associated with the default USERID for the CICS region.
- The default language specified in the system initialization parameters.

See Appendix C, “National language codes,” on page 909 for possible values of the code.

NEWPASSWORD(*data-value*)

specifies an optional 8-byte field defining a new password. This option is valid only if PASSWORD is also specified. You cannot enter a password phrase in this field.

NEWPHRASE(*data-area*)

specifies an optional 1-to 8-character new password or a 9- to 100-character new password phrase required by the ESM. This option is valid only if PHRASE is also specified.

NEWPHRASELEN(*data-value*)

specifies the length of the new password phrase as a fullword binary value. This option is valid only if NEWPHRASE is also specified.

OIDCARD(*data-value*)

specifies an optional 65-byte field containing further security data from a magnetic strip reader (MSR) on 32xx devices.

PASSWORD(*data-value*)

specifies an 8-byte password required by the external security manager (ESM).

PHRASE(*data-area*)

specifies a optional 1-to 8-character password or a 9- to 100-character password phrase required by the ESM.

PHRASELEN(*data-value*)

specifies the length of the password phrase as a fullword binary value. This option is valid only if PHRASE is also specified.

USERID(*data-value*)

specifies the 8-byte sign-on USERID.

Conditions**16 INVREQ**

RESP2 values:

- | | |
|----|-----------------------------------------------------------------------------------------------------------------|
| 2 | A password cannot be used to change a password phrase or a password phrase cannot be used to change a password. |
| 9 | The terminal is already signed on. |
| 10 | No terminal is associated with this task. |
| 11 | This task's terminal has preset security. |

- 12 The response from CICS security modules is unrecognized.
- 13 There is an unknown return code in ESMRESP from the external security manager; or the external security manager (ESM) is not active, or has failed in an unexpected way.
- 14 The required national language is not available.
- 15 Signon was attempted using transaction routing without using the CRTE transaction.
- 18 The CICS ESM interface is not initialized (SEC=NO specified as a System initialization parameter).
- 25 The terminal is of an invalid type.
- 26 An error occurred during SNSCOPE checking. The limit of MVS ENQ requests was reached.
- 27 The external security manager (ESM) is not active.
- 28 The required national language is invalid.
- 29 The user is already signed on. This relates to the sign-on scope checking.
- 200 Command not allowed for a distributed program link server program.
Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

- 1 PHRASELEN was out-of-range .
- 2 NEWPHRASELEN was out-of-range .

70 NOTAUTH

RESP2 values:

- 1 A password or password phrase is required.
- 2 The supplied password or password phrase is wrong.
- 3 A new password or password phrase is required.
- 4 The new password or password phrase is not acceptable.
- 5 An OIDCARD is required.
- 6 The supplied OIDCARD is wrong.
- 16 The USERID is not authorized to use this terminal.
- 17 The USERID is not authorized to use the application.
- 19 The USERID is revoked.
- 20 The USERID's access to the specified group has been revoked.
- 21 The sign-on failed during SECLABEL checking.
- 22 The sign-on failed because the ESM is not currently accepting sign-on.
- 23 The GROUPID is not known to the ESM.
- 24 The USERID is not contained in the GROUPID.

Default action: terminate the task abnormally.

69 USERIDERR

RESP2 values:

8 The USERID is not known to the external security manager.


30 The USERID is all blanks or nulls.

Default action: terminate the task abnormally.

SIGNON TOKEN

Validate a security token and sign on to a terminal with the user ID extracted from the token.

SIGNON TOKEN

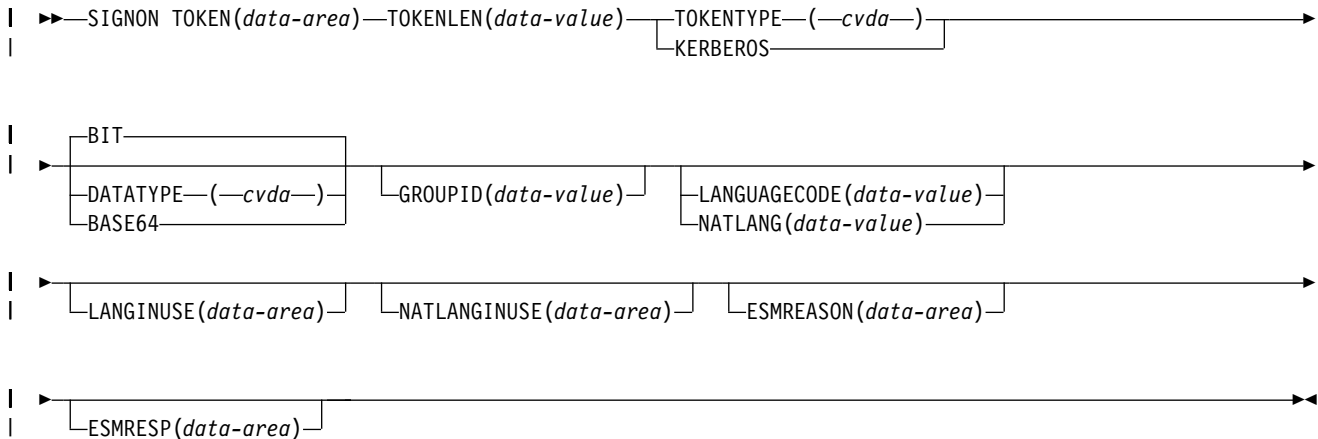

Conditions: INVREQ, LENGERR, NOTAUTH

This command is threadsafe.

Description

The SIGNON TOKEN command enables your application to validate a Kerberos security token, as determined by an external security manager (ESM), and associate a new user ID with the current terminal. When you use the SIGNON TOKEN command, the following applies:

- The sign-on operation is terminal related only. Sign-on has no meaning if the transaction does not have a terminal as its principal facility.
- When you issue an EXEC CICS SIGNON TOKEN command, CICS modifies the state of the terminal that is the principal facility of the transaction that issues the command.
- Sign-on does not affect the user ID and security capabilities currently in effect for the transaction issuing the command. This is because:
 - A transaction's user ID and security capabilities are established at transaction-attach time. It is not possible to modify these subsequently during the life of the transaction.
 - All actions performed by a transaction (whether to a local or remote resource, or to a connected system) take place in the security context established at the time the transaction was attached.
- The SIGNON TOKEN command uses the z/OS Security Server to verify that the token is a valid Kerberos token and that it can be used by the CICS region.
- If the ESM is RACF, the CICS region in which the command is run must be authorized by RACF so that the Kerberos principal for the token can be obtained. For more information, see Configuring RACF for Kerberos.

- There is no implied sign-off with the SIGNON TOKEN command. If your application program attempts to associate a new user with a terminal that already has a signed-on user ID, CICS returns an INVREQ (Resp2=9) error response.

For more information about how CICS uses the USERID and GROUPID, see Verifying CICS users in Securing.

For more information about a security failure of this command, see the error messages that are written to destination CSCS.

Options

If an optional input field contains all blanks, it is ignored.

DATATYPE

Specifies the type of data in the token. CVDA values are as follows:

BIT Bit data. This is the default value.

BASE64

Base64 encoded character data. The acceptable characters are A-Z a-z 0-9 + / =

If your character data is not in a US EBCDIC compatible character CCSID you must convert it. You can use the CONTAINER API to do the conversion.

ESMREASON(*data-area*)

Returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF reason code.

The ESM does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values that are returned by this command in addition to checking the ESMRESP and ESMREASON values.

ESMRESP(*data-area*)

Returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the ESM is RACF, this field is the RACF return code.

The ESM does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values that are returned by this command in addition to checking the ESMRESP and ESMREASON values.

GROUPID(*data-value*)

Assigns, to a RACF user group, the user that is being signed on. This overrides, for this session only, the default group name specified for the user in the RACF database.

LANGUAGECODE(*data-value*)

Specifies the national language that the user being signed on wants CICS to use. You specify the language as a standard 3-character IBM code. This is an alternative to the 1-character code that you specify on the NATLANG option.

See Appendix C, "National language codes," on page 909 for possible values of the code.

LANGINUSE(*data-area*)

The LANGINUSE option allows an application program to receive the national language chosen by the sign-on process. The language is identified as a standard three-character IBM code, instead of the one-character code used by NATLANGINUSE. It is an alternative to the existing NATLANGINUSE option.

See Appendix C, “National language codes,” on page 909 for possible values of the code.

NATLANG(*data-value*)

Specifies a 1-character field identifying the national language the user wants to use during the signed-on session.

See Appendix C, “National language codes,” on page 909 for possible values of the code.

NATLANGINUSE(*data-area*)

Specifies a one-character code for the national language used during the signed-on session. The current implementation always returns the character E (U.S. English), which corresponds to the language supplied in the NATLANG option. NATLANGINUSE corresponds to the following (in order of decreasing priority):

- The language supplied in the NATLANG option of the SIGNON TOKEN command.
- The language associated with the user. This is specified in the ESM language segment.
- The language associated with the definition of the terminal.
- The language associated with the default USERID for the CICS region.
- The default language specified in the system initialization parameters.

See Appendix C, “National language codes,” on page 909 for possible values of the code.

TOKEN(*data-area*)

A token that has been obtained from a Security Token Service (STS).

TOKENLEN(*data-value*)

The length of the token as a fullword binary value.

TOKENTYPE(*cvda*)

Indicates the type of token.

KERBEROS

The token is a Kerberos token.

Conditions

16 INVREQ

RESP2 values:

- | | |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 9 | The terminal is already signed on. |
| 10 | No terminal is associated with this task. |
| 11 | This task's terminal has preset security. |
| 12 | The response from CICS security modules is unrecognized. |
| 13 | There is an unknown return code in ESMRESP from the external security manager (ESM), or the ESM is not active, or has failed in an unexpected way. |
| 14 | The required national language is not available. |


| | | |
|--|-------------------|-------------------------------------------------------------------------------------------------------------|
| | 15 | Signon was attempted using transaction routing without using the CRTE transaction. |
| | | |
| | 18 | The CICS ESM interface is not initialized (SEC=NO specified as a System initialization parameter). |
| | | |
| | 25 | The terminal is of an invalid type. |
| | 26 | An error occurred during SNSCOPE checking. The limit of MVS ENQ requests was reached. |
| | | |
| | 27 | The ESM is not active. |
| | 28 | The required national language is invalid. |
| | 29 | The user is already signed on. This relates to the sign-on scope checking. |
| | | |
| | 30 | The ESM is not responding. |
| | 31 | A CVDA value other than KERBEROS was specified for TOKENTYPE . |
| | 32 | A CVDA value other than BASE64 or BIT was specified for DATATYPE . |
| | 36 | A data-type of BASE64 was specified, but TOKEN does not contain BASE64 data. |
| | | |
| | 40 | The key distribution center is not started or is terminating. |
| | 41 | The key distribution center is not responding. |
| | | |
| | 47 | |
| | | The ESM does not have a user ID defined for the Kerberos principal that is associated with the token. |
| | | |
| | 50 | |
| | | The data specified in TOKEN is not a Kerberos token |
| | 200 | Command not allowed for a distributed program link server program. |
| | | Default action: terminate the task abnormally. |
| | 22 LENGERR | |
| | | RESP2 values: |
| | 45 | The length of the Kerberos token exceeds the maximum value of 65535. |
| | 70 NOTAUTH | |
| | | RESP2 values: |
| | 16 | The USERID is not authorized to use this terminal. |
| | 17 | The USERID is not authorized to use the application. |
| | 19 | The USERID is revoked. |
| | 20 | The USERID's access to the specified group has been revoked. |
| | 21 | The sign-on failed during SECLABEL checking. |
| | 22 | The sign-on failed because the ESM is not currently accepting sign-on. |
| | 23 | The GROUPID is not known to the ESM. |
| | 24 | The USERID is not contained in the GROUPID. |
| | 40 | The ESM does not authorize the request to verify the token. Error messages are written to destination CSCS. |
| | | |

- | **42** A Kerberos request cannot be completed because the associated ticket
- | has expired.
- | **43** The authenticator has expired.
- | Default action: terminate the task abnormally.
- |

SOAPFAULT ADD

Adds information to an existing SOAPFAULT object. You can use this command only in a program that is invoked from a CICS-supplied SOAP message handler.

SOAPFAULT ADD

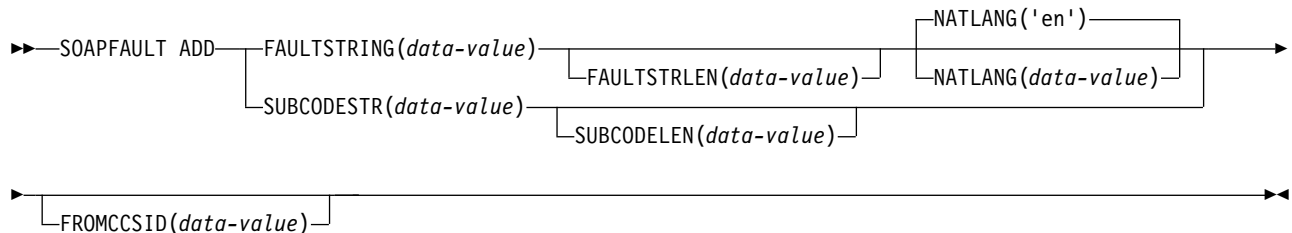

Conditions: CHANNELERR, INVREQ, LENGERR

This command is threadsafe.

Description

This command adds information to a SOAPFAULT object that was created with an earlier **SOAPFAULT CREATE** command. The information that can be added comprises:

- A subcode
- A fault string for a particular national language. If the fault already contains a fault string for the language, then this command replaces the fault string for that language. In SOAP 1.1, only the fault string for the original language is used.

This command requires information that is held in containers on the channel of the supplied SOAP message handler. To use this command, you must have access to the channel. Only the following types of programs have this access:

- Programs that are invoked as SOAP header handlers
- Programs that are invoked directly from a CICS-supplied SOAP message handler
- Programs deployed with the CICS web services assistant that have a channel interface. Programs with a COMMAREA interface do *not* have access to the channel.
- Programs that are using global user exits to monitor web services.

Many of the options on this command apply to SOAP 1.1 and SOAP 1.2 faults, although their behavior is slightly different for each level of SOAP. Other options apply to one SOAP level or the other, but not to both, and if you specify any of them when the message uses a different level of SOAP, the command raises an INVREQ condition. To help you determine which SOAP level applies to the message, container DFHWS-SOAPLEVEL contains a binary fullword with one of the following values:

- 1 The request or response is a SOAP 1.1 message.
- 2 The request or response is a SOAP 1.2 message.
- 10 The request or response is not a SOAP message.

Options

SUBCODESTR(*data-value*)

Specifies the contents of a <Subcode> element that is to be added to the SOAPFAULT object. The subcode can be up to 64 characters in length, and must be an XML qualified name (QName).

- For SOAP 1.1, this option is ignored.
- For SOAP 1.2, this option supplies the contents of the <Subcode> element.

SUBCODELEN(*data-value*)

specifies the length, as a fullword binary value, of the <Subcode> element specified in the SUBCODESTR option.

FAULTSTRING(*data-value*)

Specifies a human-readable explanation of the fault. The FAULTSTRING value can be up to 2056 characters in length.

- For SOAP 1.1, this option supplies the contents of the <faultstring> element.
- For SOAP 1.2, this option supplies the contents of the <Reason> element.

FAULTSTRLEN(*data-value*)

Specifies the length, as a fullword binary value, of the FAULTSTRING option.

FROMCCSID(*data-value*)

Specifies, as a fullword binary number, the current Coded Character Set Identifier (CCSID) of the character data to be put into the SOAP fault. If this option is not specified, CICS uses the value that is specified in the **LOCALCCSID** system initialization parameter. For more information about CCSIDs, and a list of the CCSIDs supported by CICS, see CICS-supported conversions in Reference -> Connectivity and standards.

NATLANG(*data-value*)

Specifies an 8 character field containing the national language used for the FAULTSTRING. The language is specified using the XML 1.0 language identification. The default value is 'en' (English).

When the language identifier is shorter than eight characters, you must pad it on the right with space characters in the character set specified in the FROMCCSID option (or the CICS LOCALCCSID). For example, if you specify the UTF-8 character set with FROMCCSID(1208), you must pad the NATLANG value with X'20' characters.

This option is used only for SOAP 1.2 faults.

Conditions

122 CHANNELERR

RESP2 values are:

- 3** The channel where this SOAPFAULT object is being added is read-only.

16 INVREQ

RESP2 values are:

- 3** The command was issued outside the environment of a CICS-supplied SOAP handler.
- 7** No SOAP fault present
- 11** Invalid subcode

22 LENGERR


RESP2 values are:

- 6** The FAULTSTRLEN value is invalid
- 10** The SUBCODELEN value is invalid

SOAPFAULT CREATE

Create a SOAP fault response message that is returned as the response to a web service request. The web service application response is not processed.

SOAPFAULT CREATE

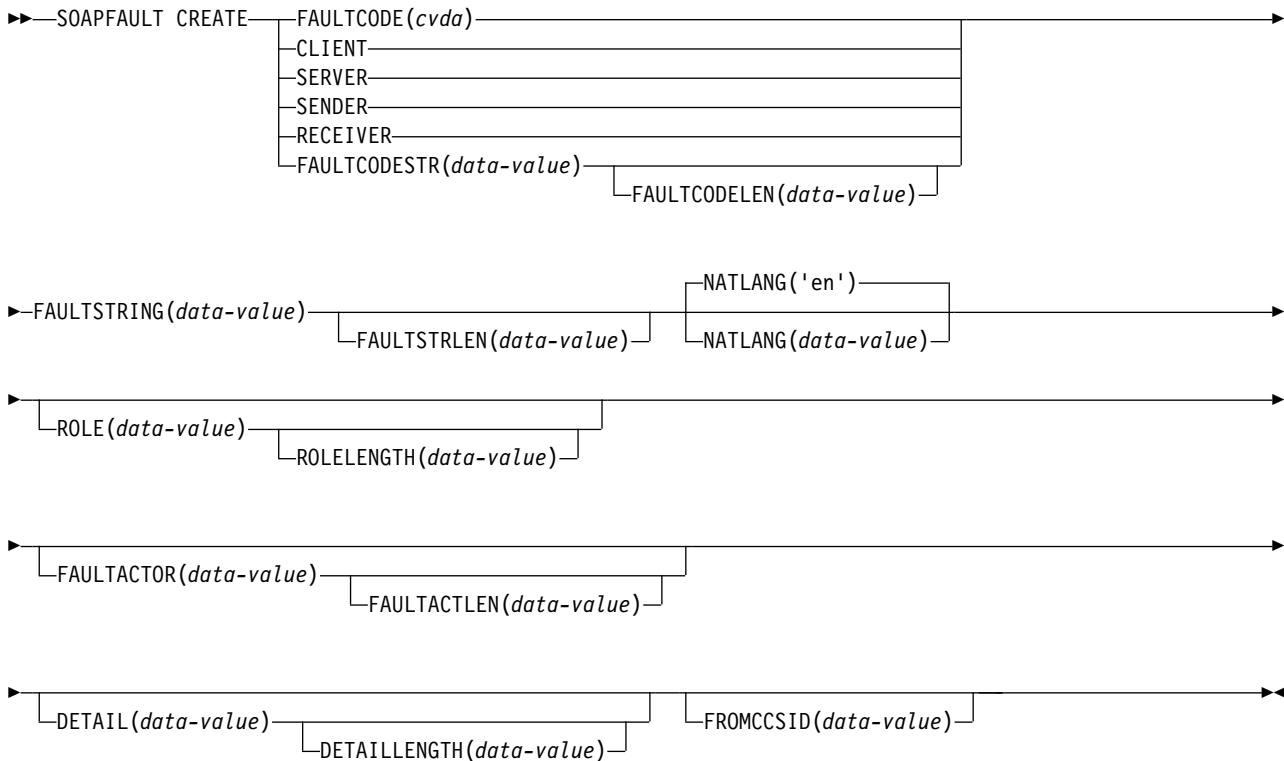

Conditions: CCSIDERR, CHANNELERR, INVREQ, LENGERR

This command is threadsafe.

Description

SOAPFAULT CREATE creates a SOAP fault. If a SOAP fault already exists in the context of the SOAP message that is being processed by the message handler, the existing fault is overwritten. This command can be used only in programs attached from a supplied SOAP handler. Axis2 applications hosted in a Java pipeline in CICS cannot make use of this command.

This command requires information that is held in containers on the channel of the supplied SOAP message handler. To use this command, you must have access to the channel. Only the following types of programs have this access:

- Programs that are invoked as SOAP header handlers
- Programs that are invoked directly from a CICS-supplied SOAP message handler
- Programs deployed with the CICS web services assistant that have a channel interface. Programs with a COMMAREA interface do *not* have access to the channel.

- Programs that are using global user exits to monitor web services.

Many of the options on this command apply to SOAP 1.1 and SOAP 1.2 faults, although their behavior is slightly different for each level of SOAP. Other options apply to one SOAP level or the other, but not to both, and if you specify any of them when the message uses a different level of SOAP, the command raises an INVREQ condition. To help you determine which SOAP level applies to the message, container DFHWS-SOAPLEVEL contains a binary fullword with one of the following values:

- 1 The request or response is a SOAP 1.1 message.
- 2 The request or response is a SOAP 1.2 message.
- 10 The request or response is not a SOAP message.

Options

DETAIL(*data-value*)

Specifies the following contents:

- For SOAP 1.1, this option supplies the contents of the <detail> element of the SOAP fault.
- For SOAP 1.2, this option supplies the contents of the <Detail> element of the SOAP fault.

It should contain either one or more valid namespace-qualified XML elements, or white space. Refer to the appropriate SOAP specifications for a full description of the valid content of the element.

The element carries application-specific error information related to the <Body> element, and is used when the contents of the <Body> element could not be successfully processed. For SOAP 1.1, the <detail> element must be present if the contents of the <Body> element could not be successfully processed; for SOAP 1.2, the <Detail> element is optional.

If the SOAPFAULT CREATE command is issued in a header handler program, the detail content is carried in a header block for SOAP 1.1. For SOAP 1.2 the <Detail> element is carried within the SOAP fault.

DETAILLENGTH(*data-value*)

Specifies the length, as a fullword binary value, of the DETAIL option.

FAULTACTLEN(*data-value*)

Specifies the length, as a fullword binary value, of the FAULTACTOR option.

FAULTACTOR(*data-value*)

Specifies the following contents:

- For SOAP 1.1, this option supplies the contents of the <faultactor> element.
- For SOAP 1.2, this option supplies the contents of the <Node> element.

The FAULTACTOR option can be up to 2056 characters in length, and must be a valid URI (anyURI).

FAULTCODE(*cvda*)

CVDA values are as follows:

CLIENT

For SOAP 1.1, the CVDA value of Client should be specified. However, if you specify Sender for a SOAP 1.1 fault response message, CICS will use the CVDA value of Client.

SENDER

For SOAP 1.2, the CVDA value of Sender should be specified. However, if you specify Client for a SOAP 1.2 fault response message, CICS will use the CVDA value of Sender.

SERVER

For SOAP 1.1, the CVDA value of Server should be specified. However, if you specify Receiver for a SOAP 1.1 fault response message, CICS will use the CVDA value of Server.

RECEIVER

For SOAP 1.2, the CVDA value of Receiver should be specified. However, if you specify Server for a SOAP 1.2 fault response message, CICS will use the CVDA value of Receiver.

FAULTCODELEN(*data-value*)

Specifies the length, as a fullword binary value, of the FAULTCODESTR option.

FAULTCODESTR(*data-value*)

Specifies a user-defined SOAP fault code for a SOAP 1.1 message. The fault code can be up to 64 characters in length, and must be an XML qualified name (QName). The use of the dot (.) character to separate fault code values is not supported. For SOAP 1.1, this option supplies the contents of the <faultcode> element.

If you set this option for a SOAP 1.2 message, an INVREQ condition occurs.

FAULTSTRING(*data-value*)

Specifies a human-readable explanation of the fault. The FAULTSTRING value can be up to 2056 characters in length.

- For SOAP 1.1, this option supplies the contents of the <faultstring> element.
- For SOAP 1.2, this option supplies the contents of the <Reason> element.

FAULTSTRLEN(*data-value*)

Specifies the length, as a fullword binary value, of the FAULTSTRING option.

FROMCCSID(*data-value*)

Specifies, as a fullword binary number, the current Coded Character Set Identifier (CCSID) of the character data to be put into the SOAP fault. If this option is not specified, CICS uses the value that is specified in the **LOCALCCSID** system initialization parameter. For more information about CCSIDs, and a list of the CCSIDs supported by CICS, see CICS-supported conversions in Reference -> Connectivity and standards.

NATLANG(*data-value*)

Specifies an 8 character field containing the national language used for the FAULTSTRING. The language is specified using the XML 1.0 language identification. The default value is 'en' (English).

When the language identifier is shorter than eight characters, you must pad it on the right with space characters in the character set specified in the FROMCCSID option (or the CICS LOCALCCSID). For example, if you specify the UTF-8 character set with FROMCCSID(1208), you must pad the NATLANG value with X'20' characters.

This option is used only for SOAP 1.2 faults.

ROLE(*data-value*)

Specifies the URI that describes the role of the SOAP node that generated the fault. The ROLE option can be up to 2056 characters in length, and must be a valid URI (XML type anyURI).

- For SOAP 1.1, this option is ignored.
- For SOAP 1.2, this option supplies the contents of the <Role> element.

ROLELENGTH(*data-value*)

Specifies the length, as a fullword binary value, of the ROLE option.

Conditions

123 CCSIDERR

RESP2 values are:

- 13** An invalid CCSID has been specified.
- 14** An unsupported CCSID has been specified.

122 CHANNELERR

RESP2 values are:

- 3** The channel where this SOAPFAULT object is being created is read-only.

16 INVREQ

RESP2 values are:

- 3** The command was issued outside the environment of a CICS-supplied SOAP handler.
- 11** The FAULTCODE specified is invalid or FAULTCODESTR was specified for a SOAP 1.2. fault.
- 13** The DETAIL option does not contain valid namespace-qualified XML or whitespace.

22 LENGERR

RESP2 values are:

- 5** The FAULTCODELEN value is invalid
- 6** The FAULTSTRLEN value is invalid
- 7** The ROLELENGTH value is invalid
- 8** The FAULTACTLEN value is invalid
- 9** The DETAILLENGTH value is invalid

SOAPFAULT DELETE

Deletes an existing SOAPFAULT object. You can use it only in a program that is invoked from a CICS-supplied SOAP message handler.

SOAPFAULT DELETE

►►—SOAPFAULT DELETE—◄◄

Conditions: CHANNELERR, INVREQ, NOTFND

This command is threadsafe.

Description

This command deletes a SOAPFAULT object that was created with an earlier **SOAPFAULT CREATE** command.

This command requires information that is held in containers on the channel of the supplied SOAP message handler. To use this command, you must have access to the channel. Only the following types of programs have this access:

- Programs that are invoked as SOAP header handlers
- Programs that are invoked directly from a CICS-supplied SOAP message handler
- Programs deployed with the CICS web services assistant that have a channel interface. Programs with a COMMAREA interface do *not* have access to the channel.
- Programs that are using global user exits to monitor web services.

Conditions

122 CHANNELERR

- 3 The channel where this SOAPFAULT object is being deleted is read-only.

16 INVREQ

RESP2 values are:

- 3 The function was called when a CICS-supplied SOAP node was not in use.


13 NOTFND

- 2 There is no SOAPFAULT object to delete.

SPOOLCLOSE

Close a spool report.

SPOOLCLOSE TOKEN

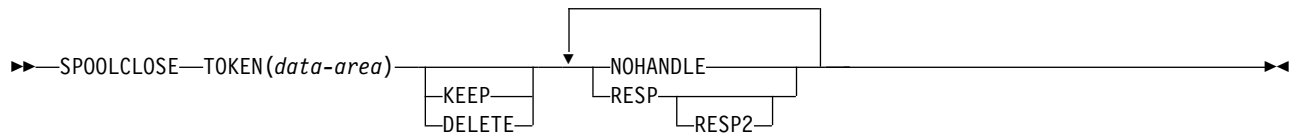

Conditions: ALLOCERR, INVREQ, NOSPOOL, NOSTG, NOTFND, NOTOPEN, STRELERR

Description

The SPOOLCLOSE command closes a CICS spool report and, optionally, changes its retention characteristics. If more than one transaction is trying to read reports from JES, SPOOLCLOSE should **not** be immediately followed by SPOOLOPEN. It should be followed by a WAIT, so that other transactions can use the interface.

A default disposition is taken if both KEEP and DELETE are omitted from the SPOOLCLOSE command, or if the report is closed implicitly by a SYNCPOINT or RETURN command:

- When an INPUT report is explicitly closed by a SPOOLCLOSE command, the default disposition is DELETE.
- In all other cases, the default disposition is KEEP.

Options

DELETE

For an INPUT report, DELETE specifies that the **next** report is to be read on the subsequent OPEN INPUT.

For an OUTPUT report, DELETE specifies that the report is to be purged.

Note: When a JCL job is submitted using the internal reader (INTRDR) with the DELETE option specified, the job is sometimes run before the output is deleted.

KEEP

For an INPUT report, KEEP specifies that the report is to be read again when SPOOLOPEN INPUT is next issued.

For an OUTPUT report, KEEP specifies that the report is to be sent to its destination node.

TOKEN(data-area)

specifies the 8-character CICS-allocated token used to identify a report.

Conditions

Note: There are no default actions.

85 ALLOCERR

occurs in any of the following situations:

- Dynamic allocation has rejected a request to allocate an input data set.

RESP2 gives the dynamic allocation response code that denotes this error. The first two characters are the information reason code (S99INFO), and the second two are the error reason code (S99ERROR), as defined in the z/OS: *MVS Programming: Authorized Assembler Services Guide, SA22-7608*.

16 INVREQ

RESP2 values:

- 4 Unsupported language.
- 8 Unsupported function.
- 40 Subsystem interface already enabled.

Note: Errors 1024 and over are internal, and should not occur. If one of these error codes is returned, contact your IBM support center.

80 NOSPOOL

RESP2 values:

- 4 No subsystem present.
- 8 Interface being disabled; CICS is quiescing.
- 12 Interface has been stopped.

42 NOSTG

occurs in any of the following situations:

- A GETMAIN has failed within the JES interface subtask (DFHPSPSS).
RESP2 gives the GETMAIN register 15 return code.

13 NOTFND

RESP2 values:

- 1024 Input or output function has been corrupted, and SPOOLCLOSE could not complete.

19 NOTOPEN

RESP2 values:

- 8 Data set has not been opened.

86 STRELEERR

occurs in any of the following situations:


- A FREEMAIN has failed within the JES interface subtask (DFHPSPSS).
RESP2 gives the FREEMAIN register 15 return code.

Restriction: You must specify the RESP or NOHANDLE option on the **EXEC CICS SPOOLCLOSE** command.

SPOOLOPEN INPUT

Open a spool report.

SPOOLOPEN INPUT

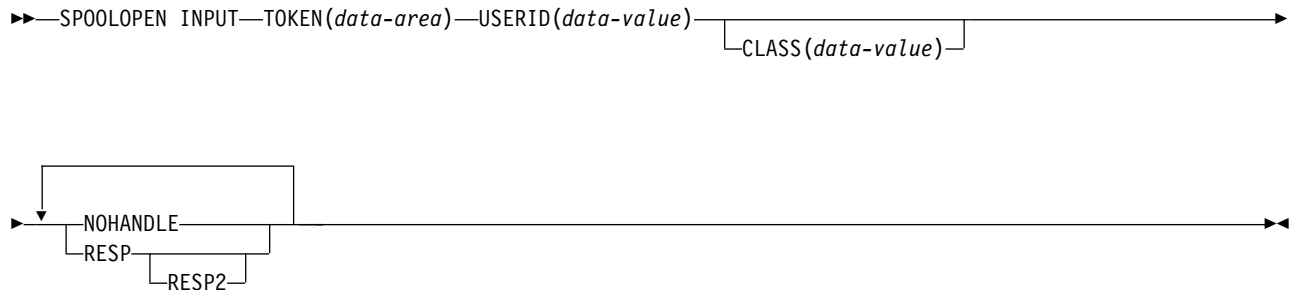

Conditions: ALLOCERR, ILOGIC, INVREQ, NOSPOOL, NOSTG, NOTAUTH, NOTFND, NOTOPEN, OPENERR, SPOLBUSY, SPOLERR, STRELERR

Description

The SPOOLOPEN INPUT command opens a spool report for input from the system spooler to CICS.

It prepares to get (read) an existing spool data set directly using external writer name (USERID) and specified class.

Another task could have allocated a spool file for input. In this case, you should retry after a suitable time interval.

When this command has been successfully executed, you should read the report and proceed to CLOSE as soon as possible, in order to permit other users to use the JES single thread. If SPOOLCLOSE is not issued before transaction end or SYNCPOINT, CICS performs an implicit SPOOLCLOSE KEEP, and writes a message to CSMT to alert the system programmer to the possible unnecessary retention of resources. You should not SPOOLOPEN a data set using this command until you are prepared to process it completely.

This command, if successful, returns a token, which is used later to identify the report in SPOOLREAD and SPOOLCLOSE commands.

Options

CLASS(*data-value*)

specifies a 1-character class designation. The CLASS operand can be used as a selection parameter for input reports. If it is omitted, the first report for the specified USERID is obtained, regardless of its class.

TOKEN(*data-area*)

specifies the 8-character CICS-allocated token used to identify a report.

USERID(*data-value*)

specifies the 8-character user identifier. It must begin with the same 4 characters as the CICS generic applid, so that CICS can check that users are not attempting to access data sets not intended for their CICS system.

Conditions

Note: There are no default actions.

85 ALLOCERR

occurs in any of the following situations:

- Dynamic allocation has rejected a request to allocate an input data set.
RESP2 gives the dynamic allocation response code that denotes this error.
The first two characters are the information reason code (S99INFO), and the second two are the error reason code (S99ERROR), as defined in the z/OS: *MVS Programming: Authorized Assembler Services Guide*, SA22-7608.

21 ILLOGIC

RESP2 values:

- 3 Invalid CLASS value specified.

16 INVREQ

RESP2 values:

- 4 Unsupported language.
- 8 Unsupported function.
- 16 USERID missing.
- 36 INPUT|OUTPUT missing.
- 40 Subsystem interface already enabled.

Note: Errors 1024 and over are internal, and should not occur. If one of these error codes is returned, contact your IBM Support Center.

80 NOSPOOL

RESP2 values:

- 4 No subsystem present.
- 8 Interface being disabled; CICS is quiescing.
- 12 Interface has been stopped.

42 NOSTG

occurs in any of the following situations:

- A GETMAIN has failed within the JES interface subtask (DFHPSPSS).
RESP2 gives the GETMAIN register 15 return code.

70 NOTAUTH

occurs in any of the following situations:

- An application has issued a SPOOLOPEN INPUT command with an unauthorized USERID. For the USERID to be authorized, its first four characters must match the first four characters of the current CICS applid id.

13 NOTFND

RESP2 values:

- 4 No data sets could be located for retrieval for the specified external writer name; or the data set exists, but it is in HELD status.

Can also be returned if the CICS region USERID does not have ALTER access to the appropriate PROFILE in the JESSPOOL class. See the *CICS RACF Security Guide* for more information about RACF authorization of JES.

1024 Input or output function has been corrupted, and SPOOLCLOSE could not complete.

19 NOTOPEN

RESP2 values:

8 Data set has not been opened or a task which has not issued the SPOOLOPEN for a spool data set has attempted to access it.

1024 Subtask OPEN macro failure.

87 OPENERR

RESP2 values:

4 A VSAM SHOWCB macro failed to return the lengths of the VSAM control blocks used to access the JES spool file.

Also occurs (RESP2 not set) in any of the following situations:

- An internal error occurred during SPOOLOPEN processing that has forced the request to fail.

88 SPOLBUSY

RESP2 values:

4 Interface already in use by another task.

8 Interface already in use by current task.

Also occurs (RESP2 not set) in any of the following situations:

- The JES/input single thread within the JES interface was not available.

89 SPOLERR

occurs in any of the following situations:

- The subsystem interface macro (IEFSSREQ) has failed. No input data set name was selected.

RESP2 gives the 'IEFSSREQ' response code.

86 STRELERR

occurs in any of the following situations:

- A FREEMAIN has failed within the JES interface subtask (DFHPSPSS).


RESP2 gives the FREEMAIN register 15 return code.

Restriction: You must specify the RESP or NOHANDLE option on the **EXEC CICS SPOOLOPEN** command.

SPOOLOPEN OUTPUT

Open a spool report for output.

SPOOLOPEN OUTPUT

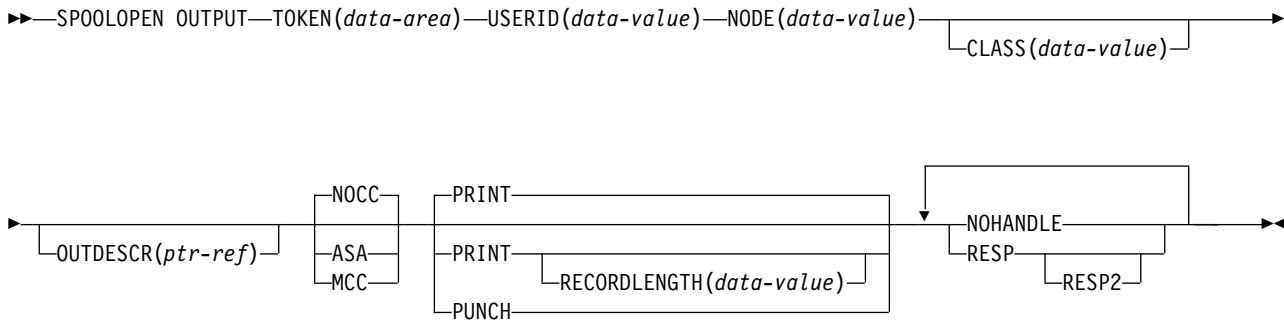

Conditions: ALLOCERR, ILLOGIC, INVREQ, LENGERR, NODEIDERR, NOSPOOL, NOSTG, NOTFND, NOTOPEN, OPENERR, OUTDESCERR, SPOLBUSY, STRELERR

Description

The SPOOLOPEN OUTPUT command opens a spool report for output from CICS to the system spooler and defines its characteristics.

It results in a dynamic allocation of the output file using the nodeid to specify the remote destination and the userid to specify the remote user. As this is a multithread output request, requesters of this service could interleave. This SPOOLOPEN OUTPUT command enables users to acquire the token for a report that it expects to create (write). This token is used to identify the report in later SPOOLWRITE and SPOOLCLOSE commands.

When printing on a local device, use the NOCC|ASA|MCC options to control output formatting. If you do not specify a format, the default value of NOCC is used. NODE and USERID can be used to write the data set directly to the local spool file only if specified with a value of '*'.

If you do not issue SPOOLCLOSE before the end of the transaction, CICS performs an implicit SPOOLCLOSE DELETE and writes a message to CSMT to alert you to the possible unnecessary retention of resources.

Note: If you retrieve a formatted data set, the system spooler could have changed the data set format. For example, the system spooler could have converted an MCC format data set to ASA format during data set creation. This does not affect the final printed output.

Options

ASA

specifies that the report has each record prefixed with an ASA carriage-control character, and this character must be used by the operating system to control formatting when the report is printed.

CLASS(data-value)

specifies a 1-character class designation. If it is omitted, class A is assumed.

MCC

specifies that the report has each record prefixed with an IBM machine command code carriage-control character, and this character must be used by the operating system to control formatting when the report is printed.

NOCC

specifies that the report has no internal formatting controls. When the report is printed, the operating system prefixes each record with a carriage-control character that causes page skipping according to the default operating system lines-per-page value.

NODE(*data-value*)

specifies the 8-character identifier of a destination node that the system spooler uses to route the file. It is a sender field. If you want to specify the local spool file and to enable the OUTDESCR operand to override the NODE and USERID operands, code NODE('*') and also USERID('*'). (Do not use NODE('*') with any other userid.) Otherwise, code the actual NODE, which is the name of the operating system (for example, MVS, VM) as that system is known to VTAM in the MVS system in which your CICS is executing. NODE(LOCAL) is also a valid specification.

Validity checking is performed for NODE. Checks are made for blanks (X'40'), and nulls (X'00').

OUTDESCR(*ptr-ref*)

(MVS/SP—JES2 Version 3, or JES3 Version 4.2.1 only, or a later upward-compatible release) specifies a pointer variable to be set to the address of a field that contains the address of a string of parameters to the OUTPUT statement of JCL. This is called double indirect addressing. The user must set up the pointer, the address field, and the string. This means that the OUTDESCR option cannot be used from within CECI. The format of the string is:

```
Offset Length Contents
0 4 Length (n) of following text string
4 n OUTPUT statement parameters
```

The parameters use the same keywords and values as the OUTPUT statement but the syntax varies slightly. The following is the format of the OUTDESCR parameter string:

```
keyword1(value1) [keyword2(value2)]
[keyword3(value3,value4)] ...
```

This corresponds to the following OUTPUT statement parameter string:

```
keyword1=value1 [keyword2=value2]
[keyword3=(value3,value4)] ...
```

For details of valid keywords and values, see the *z/OS TSO/E System Programming Command Reference*.

The OUTDESCR operand:

- Can override the NODE and USERID operands only if they are specified with a value of '*'.
- Cannot override the CLASS operand, even if it is omitted and defaults to class A.

Use this operand to set additional attributes for the spool data set.

PRINT

allows large records (maximum 32 760 bytes) to be written to the spool. This is

the default setting. This is included for compatibility with the spool support provided with CICS Transaction Server for z/OS.

PUNCH

must be specified if the CLASS parameter for the output data set implies punch, and the data set is destined for a VM/RSCS node. This ensures that the record length indicator is set to 80, which is a requirement of VM/RSCS for punch files.

RECORDLENGTH(*data-value*)

specifies, as a halfword binary variable, the maximum length of record to write to a print data set. The default value is 32 760.

TOKEN(*data-area*)

specifies the 8-character CICS-allocated token used to identify a report.

USERID(*data-value*)

specifies the 8-character identifier of the destination userid that processes the report. The report carries this identifier, which is used to select the report at its destination. It is a sender field and must be declared with a length of 8 characters.

If you want to specify the local spool file and to enable the OUTDESCR operand to override the NODE and USERID operands, code USERID('*') and also NODE('*'). Otherwise, code the actual USERID. The meaning of USERID varies with the operating system. In VM, it is a particular user; in MVS, it might be a JES external writer or another JES destination, a TSO user, or another job executing on that system. One such destination is the JES internal reader, which normally has the reserved name INTRDR. If you code an actual USERID, do not use NODE('*'); code the actual NODE instead.

The USERID parameter is equivalent to the WRITER parameter in JES.

Validity checking is performed for USERID. Checks are made for blanks (X'40'), and nulls (X'00').

Sending the internal reader buffer directly to JES: Instead of waiting for the buffer in your address space to fill up, send the contents of the internal reader buffer directly to JES by coding as your last record:

`/*EOF`

This control statement delimits the job in the data set, and makes it eligible for immediate processing.

For more information about using the internal reader, and about other /* control statements, see the *z/OS MVS JCL User's Guide*.

Restriction: You must specify the RESP or NOHANDLE option on the **EXEC CICS SPOOLOPEN** command.

Conditions

Note: There are no default actions.

85 ALLOCERR

occurs in any of the following situations:

- Dynamic allocation has rejected a request to allocate an input data set. RESP2 gives the dynamic allocation response code that denotes this error. The first two characters are the information reason code (S99INFO), and the second two are the error reason code (S99ERROR), as defined in the *z/OS MVS Programming: Assembler Services Guide*.

21 ILLOGIC

occurs in any of the following situations:

- Invalid CLASS value specified.

16 INVREQ

RESP2 values:

- 4 Unsupported language.
- 8 Unsupported function.
- 16 USERID missing.
- 20 NODE missing.
- 36 INPUT|OUTPUT missing.
- 40 Subsystem interface already enabled.

Note: Errors 1024 and over are internal, and should not occur. If one of these error codes is returned, contact your IBM support center.

- 44 Error in the OUTDESCR string.
- 48 OUTDESCR specified but function not available (wrong level of CICS or JES).
- 52 OUTDESCR specified but bad pointer found on keyword or in OUTDESCR condition.

22 LENGERR

occurs in any of the following situations:

- RECORDLENGTH not in the range 0 through 32760. RESP2 shows the incorrect value.

90 NODEIDERR

occurs in any of the following situations:

- JES cannot identify the NODE/USERID combination specified on SPOOL OPEN OUTPUT.

RESP2 gives the dynamic allocation response code that denotes this error. The first two characters are the information reason code (S99INFO), and the second two are the error reason code (S99ERROR), as defined in the *z/OS MVS Programming: Assembler Services Guide*.

80 NOSPOOL

RESP2 values:

- 4 No subsystem present.
- 8 Interface being disabled; CICS is quiescing.
- 12 Interface has been stopped.

42 NOSTG

occurs in any of the following situations:

- A GETMAIN has failed within the JES interface subtask (DFHPSPSS). RESP2 gives the GETMAIN register 15 return code.
- Insufficient storage was available to copy and modify the OUTDESCR argument string.

13 NOTFND

RESP2 values:

|
|

- 4 No data sets could be located for retrieval for the specified external writer name.

19 NOTOPEN

RESP2 values:

- 8 Data set has not been opened.
1024 Subtask OPEN macro failure.

87 OPENERR

RESP2 values:

- 4 A VSAM SHOWCB macro failed to return the lengths of the VSAM control blocks used to access the JES spool file.

Also occurs (RESP2 not set) in any of the following situations:

- An internal error occurred during SPOOLOPEN processing that has forced the request to fail.

96 OUTDESCRERR

occurs in any of the following situations:

- The macro OUTADD or OUTDEL (invoked as a result of the OUTDESCR specification) failed.

RESP2 gives the reason code from the OUTADD or OUTDEL macro. See the *z/OS MVS Programming: Assembler Services Guide* for descriptions of codes.

88 SPOLBUSY

RESP2 values:

- 4 Interface already in use by another task.
8 Interface already in use by current task.

Also occurs in the following situation:

- The JES/input single thread within the JES interface was not available.

86 STRELEERR


occurs in the following situation:

- A FREEMAIN has failed within the JES interface subtask (DFHPSPSS).
RESP2 gives the FREEMAIN register 15 return code.

SPOOLREAD

The SPOOLREAD command obtains the next record from the system spooler.

SPOOLREAD

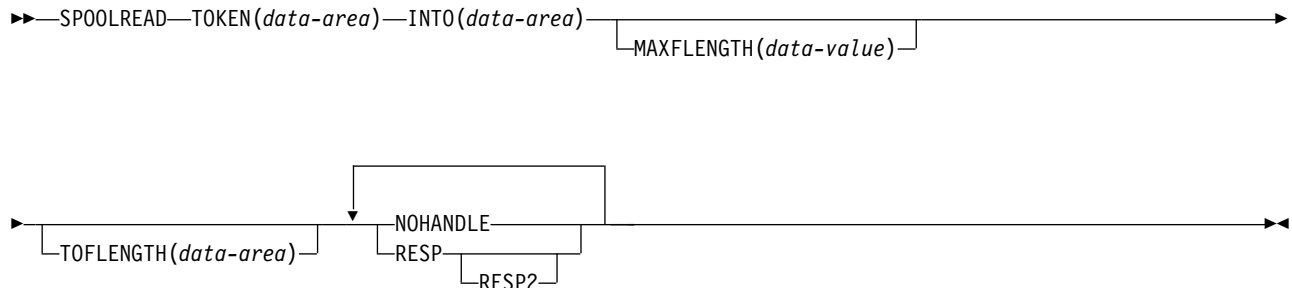

Conditions: ALLOCERR, ENDFILE, ILLOGIC, INVREQ, LENGERR, NOSPOOL, NOSTG, NOTFND, NOTOPEN, SPOLBUSY, SPOLERR, STRELERR

Options

INTO(data-area)

specifies the data area for the variable-length data. It is a receiver field.

MAXLENGTH(data-value)

specifies, as a fullword binary variable, the maximum length of data transferred. This is set by the user on input. The limit of **length** is 32 760 bytes. This is the maximum size of the CICS buffer used to read a record.

TOFLENGTH(data-area)

specifies, as a fullword binary variable, the length of the data that is transferred. This is set by CICS on input. It is optional and, if it is omitted, you are not notified of the actual length of the data received.

TOKEN(data-area)

specifies the 8-character CICS-allocated token used to identify a report.

Restriction: You must specify the RESP or NOHANDLE option on the **EXEC CICS SPOOLREAD** command.

Conditions

Note: There are no default actions.

85 ALLOCERR

occurs in any of the following situations:

- Dynamic allocation has rejected a request to allocate an input data set.

RESP2 gives the dynamic allocation response code that denotes this error.

The first two characters are the information reason code (S99INFO), and the second two are the error reason code (S99ERROR), as defined in the z/OS:

MVS Programming: Authorized Assembler Services Guide, SA22-7608.

20 ENDFILE

occurs in any of the following situations:

- All data for the current spool file being read has been retrieved. You should proceed to issue a SPOOLCLOSE command as soon as possible, to release the lock on the JES single thread, and to terminate current SYSOUT data set processing.

21 ILLOGIC

RESP2 values:

- 3 Invalid CLASS value specified.

16 INVREQ

RESP2 values:

- 4 Unsupported language.
- 8 Unsupported function.
- 12 Read attempt after end of file.
- 24 INTO missing.
- 40 Subsystem interface already enabled.

Note: Errors 1024 and over are internal, and should not occur. If one of these error codes is returned, contact your IBM support center.

22 LENGERR

occurs in any of the following situations:

- You provided insufficient buffer space to read your record, or you requested more than the maximum allowable buffer size of 32 760 bytes (the size of a CICS buffer used to read a record). If the buffer space is too small, it receives as much data as possible. The amount of data truncated is then placed in the RESP2 field. If the TOFLENGTH operand is specified, the actual length of the record is placed here.

Note: In the event of a length error due to insufficient buffer space, the next record is not read until the error has been corrected and the current record reread.

RESP2 indicates the amount of data truncated, or shows zero if the MAXFLENGTH field is greater than the maximum allowable buffer size 32 760 bytes.

80 NOSPOOL

RESP2 values:

- 4 No subsystem present.
- 8 Interface being disabled; CICS is quiescing.
- 12 Interface has been stopped.

42 NOSTG

occurs in any of the following situations:

- A GETMAIN has failed within the JES interface subtask (DFHPSPSS).
RESP2 gives the GETMAIN register 15 return code.

13 NOTFND

RESP2 values:

- 4 No data sets could be located for retrieval for the specified external writer name.

19 NOTOPEN

RESP2 values:

- 8 Data set has not been opened.
- 12 Attempt to read an output file.
- 1024 Subtask OPEN macro failure.

88 SPOLBUSY

RESP2 values:

- 4 Interface already in use by another task.
- 8 Interface already in use by current task.

Also occurs (RESP2 not set) in any of the following situations:

- The JES/input single thread within the JES interface was not available.

89 SPOLERR

occurs in any of the following situations:

- The subsystem interface macro (IEFSSREQ) has failed. No input data set name was selected.

RESP2 gives the 'IEFSSREQ' response code.

86 STRELERR

occurs in any of the following situations:


- A FREEMAIN has failed within the JES interface subtask (DFHPSPSS).

RESP2 gives the FREEMAIN register 15 return code.

SPOOLWRITE

The SPOOLWRITE command writes data to a spool report.

SPOOLWRITE

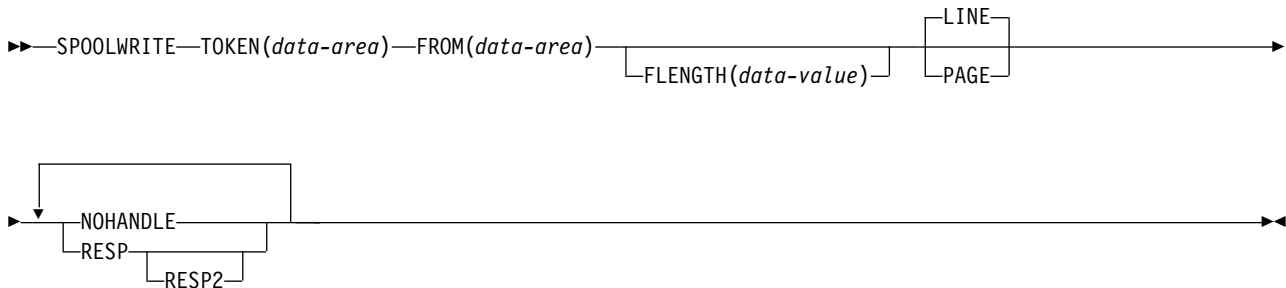

Conditions: ALLOCERR, INVREQ, LENGERR, NOSPOOL, NOSTG, NOTOPEN, SPOLBUSY, SPOLERR, STRELERR

Options

FLENGTH(data-value)

specifies the fullword binary variable that is to be set to the length of the data that is transferred. This is set by the user on output. It is optional and, if it is omitted, CICS uses the length of the data area.

FROM(data-area)

specifies the data area from which to take the variable length data. The data itself is not altered in any way by CICS. FROM is a sender field.

LINE|PAGE

specifies the format of the data to be sent. The default action is LINE.

The PAGE option must be used to correctly format information for the advanced function printer (AFP) page printing devices. If a customer is creating MIXED mode type data, that is LINE records and X'5A' (AFPDS or MODCA) pagemode records, the LINE or PAGE operand must match the type record being written to spool.

TOKEN(data-area)

specifies the 8-character CICS-allocated token used to identify a report. It is a receiver on SPOOLOPEN and a sender on all other commands.

Restriction: You must specify the RESP or NOHANDLE option on the **EXEC CICS SPOOLWRITE** command.

Conditions

Note: There are no default actions.

85 ALLOCERR

occurs in any of the following situations:

- Dynamic allocation has rejected a request to allocate an input data set.

RESP2 gives the dynamic allocation response code that denotes this error.

The first two characters are the information reason code (S99INFO), and the second two are the error reason code (S99ERROR), as defined in the z/OS:

MVS Programming: Authorized Assembler Services Guide, SA22-7608.

16 INVREQ

RESP2 values:

- 4 Unsupported language.
- 8 Unsupported function.
- 28 FROM missing.
- 40 Subsystem interface already enabled.

Note: Errors 1024 and over are internal, and should not occur. If one of these error codes is returned, contact your IBM support center.

22 LENGERR

occurs in any of the following situations:

- The value specified in the FLENGTH parameter on a SPOOLWRITE command is not in the valid range 1 to RECORDLENGTH value specified or defaulted at the SPOOLOPEN data set. If the buffer space is too small, it receives as much data as possible.

RESP2 contains the difference between FLENGTH and RECORDLENGTH, or zero if FLENGTH is negative or greater than 32760.

80 NOSPOOL

RESP2 values:

- 4 No subsystem present.
- 8 Interface being disabled; CICS is quiescing.
- 12 Interface has been stopped.

42 NOSTG

occurs in any of the following situations:

- A GETMAIN has failed within the JES interface subtask (DFHPSRSS).
- RESP2 gives the GETMAIN register 15 return code.

19 NOTOPEN

RESP2 values:

- 8 Spool report has not been opened.
- 16 Attempt to write an input file.
- 1024 Subtask OPEN macro failure.

88 SPOLBUSY

RESP2 values:

- 4 Interface already in use by another task.
- 8 Interface already in use by current task.

Also occurs (RESP2 not set) in the following situation:

- The JES/input single thread within the JES interface was not available.

89 SPOLERR

occurs in the following situation:

- The subsystem interface macro (IEFSSREQ) has failed. No input data set name was selected.

RESP2 gives the 'IEFSSREQ' response code.

86 STRELERR

occurs in the following situation:

- A FREEMAIN has failed within the JES interface subtask (DFHPSPSS).
RESP2 gives the FREEMAIN register 15 return code.


START

Start a task at a specified time.

See also:

- START ATTACH in Reference -> Application development
- START BREXIT in Reference -> Application development
- START CHANNEL in Reference -> Application development

START

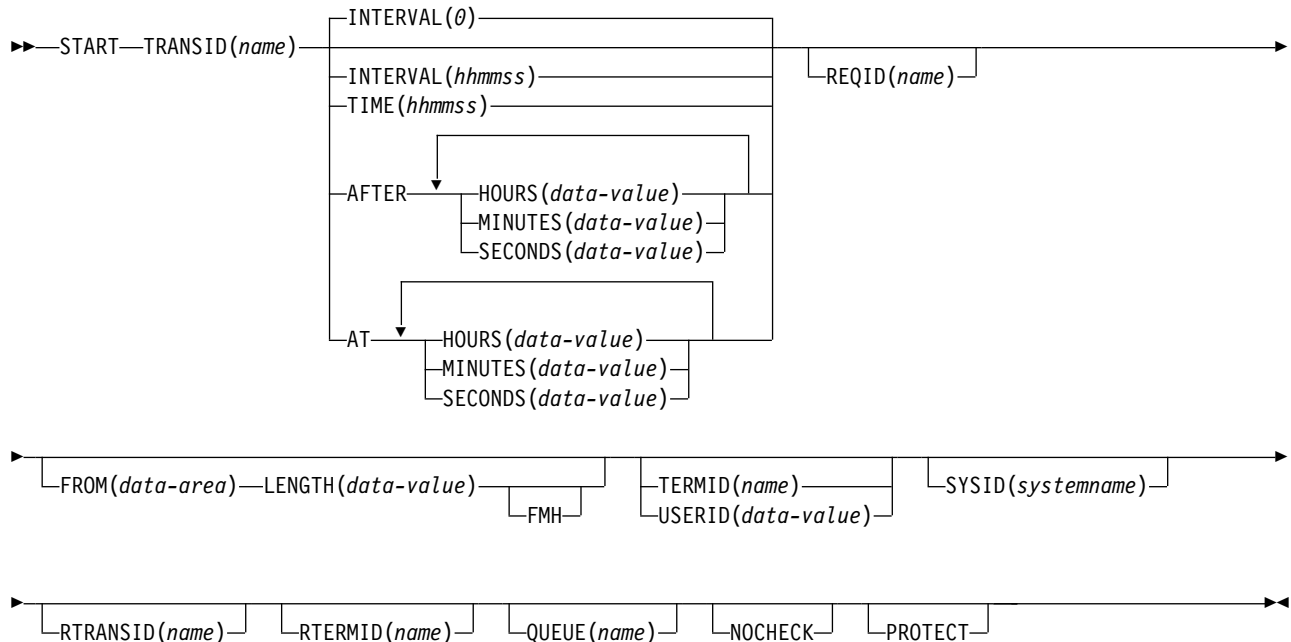

Conditions: INVREQ, IOERR, ISCINVREQ, LENGERR, NOTAUTH, RESUNAVAIL, SYSIDERR, TERMIDERR, TRANSIDERR, USERIDERR

Note: For dynamic transaction routing: If a START is later canceled by another task, or if the started transaction uses RETRIEVE WAIT, intertransaction affinities might be created that adversely affect the use of dynamic transaction routing. For more information, see Affinity in Developing applications.

Description

START starts a task, on a local or remote system, at a specified time. The time is specified by INTERVAL, AFTER, AT, or TIME. See the section about expiration times in Interval control in Developing applications.

The starting task can pass data to the started task. The starting task can also specify a terminal to be used by the started task as its principal facility.

The default is INTERVAL(0), but for C the default is AFTER HOURS(0) MINUTES(0) SECONDS(0).

CEDF is an exception to the **START** command and is not valid as a **TRANSID** name. Therefore, do not attempt to start **CEDF** in this way.

Important: There is a 6-hours rule, if the **START** gets triggered at any time within 6 hours after the time specified on the **START**, it executes immediately. This happens regardless of whether the previous 6 hours includes a midnight. To illustrate here are some examples:

- **EXEC CICS START TIME(123000)** This command, issued at 05:00 or 07:00 on Monday, expires at 12:30 on the same day.
- **EXEC CICS START TIME(020000)** This command, issued at 05:00 or 07:00 on Monday expires immediately because the specified time is within the preceding 6 hours.

For more information, see Expiration times in Developing applications.

You can use the **RTRANSID**, **RTERMID**, and **QUEUE** options to pass further data to the started task. These options can contain arbitrary data values with meanings that depend on what is specified in the started and starting tasks. One possible way of using them is in the following situation. One task can start a second task, passing it a transaction name and a terminal name to be used when the second task starts a third task. The first task can also pass the name of a queue to be accessed by the second task.

If you are using an **IPIC** connection, the maximum length for the **FROM** data area is 32,500 bytes. This limit allows for the 32,500 byte **FROM** data area and space for headers.

START with **TERMID** specified does not propagate the origin data record (**ODR**), so tasks are always started at a new point of origin.

The following constraints must be satisfied before the transaction to be run can be started:

- The specified interval must have elapsed or the specified expiration time must be reached. For more information, see Interval control in Developing applications. Specify the **INTERVAL** or **AFTER** options when a transaction is to be run on a remote system, to avoid complications when the local, and remote systems are in different time zones.
- If you specify the **TERMID** option, the named terminal must exist and be available. If the named terminal does not exist when the time interval expires, the **START** is discarded.
- If you specify the **PROTECT** option, the starting task must take a successful sync point. This option, coupled to extensions to system tables, reduces the exposure to lost or duplicated data caused by failure of a starting task.
- If the transaction to be run is on a remote system, the format of the data must be declared to be the same as the data at the local system. Use the **RDO** options **DATASTREAM** and **RECORDFORMAT**. For **CICS** to **CICS**, these options are always the default values. For **CICS**-to-**IMS**/**VS**, make sure that you specify the correct values.

Running a **START** command that names a transaction in the local system cancels any outstanding **POST** commands run by the starting task.

You can queue **START** commands by specifying the **LOCALQ** option on the **RDO TRANSACTION** resource definition, as described in **TRANSACTION** attributes in Reference -> System definition.

Passing data by interval control

If data is to be passed by interval control (by using the FROM option), it is queued on a temporary storage queue. Use the REQID option to specify the name of the temporary storage queue to be used. This identifier might be recoverable (in temporary storage terms) or unrecoverable. For more information on how to define recoverable temporary storage queues, see TSMODEL resources in Reference -> System definition.

If you also specify the PROTECT option, you must define the temporary storage queue identified by the REQID option as recoverable. If you do not specify the PROTECT option, do not define the temporary storage queue as recoverable. Unpredictable results can occur if you do not follow these rules. See in the *CICS Recovery and Restart Guide*.

If you specify the FROM and not the REQID option, a default 'DF' prefix temporary storage queue is used. The same rules apply as previously listed; specify the PROTECT option only if you define the 'DF' prefix temporary storage queues as recoverable.

A START command with REQID, issued from a task that was itself initiated by a START with the same REQID, returns an AEIQ abend (IOERR condition) if the FROM data for the task has not been read by a RETRIEVE.

You also receive this error if more than one START command with the same REQID is issued by a task or tasks in the same CICS system. CICS TS regions always reject with an IOERR any START commands that specify a duplicate REQID.

Started tasks without data run without a facility address. Started tasks with data run with a facility address of an ICE until the data is retrieved.

If an ICRX is used, it is saved across restarts. If the start request is subsequently cancelled, the ICRX is deleted.

Error checking and performance considerations

The NOCHECK option specifies that no response (to running of the START command) is expected by the starting transaction. For START commands that name tasks to be started on a local system, error conditions are returned; error conditions are not returned for tasks to be started on a remote system. The NOCHECK option allows CICS to improve performance when the START command must be shipped to a remote system; it is also a prerequisite if the shipping of the START command is queued pending the establishing of links to the remote system.

Starting tasks without terminals

If the task to be started is not associated with a terminal, each START command starts a separate task, regardless of whether data is passed to the started task. The following examples show how to start a specified task, not associated with a terminal, in one hour:

```

EXEC CICS START
      TRANSID('TRNL')
      INTERVAL(10000)
      REQID('NONGL')
:
EXEC CICS START
      TRANSID('TRNL')
      AFTER HOURS(1)
      REQID('NONGL')
:

```

Starting tasks with terminals but without data

Only one task is started if several START commands, each specifying the same transaction and terminal, expire at the same time or before the terminal is available.

The following examples show how to request initiation of a task associated with a terminal. Because no request identifier is specified in these examples, CICS assigns one and returns it to the application program in the EIBREQID field of the EXEC interface block.

```

EXEC CICS START
      TRANSID('TRN1')
      TIME(185000)
      TERMID('STA5')
:
EXEC CICS START
      TRANSID('TRN1')
      AT HOURS(18) MINUTES(50)
      TERMID('STA5')
:

```

Starting tasks with terminals and data

Data is passed to a started task if one or more of the FROM, RTRANSID, RTERMID, and QUEUE options is specified. Such data is accessed by the started task by using a RETRIEVE command.

It is possible to pass many data records to a new task by issuing several START commands, each specifying the same transaction, and terminal.

Running of the first START command ultimately causes the new task to be started and allows it to retrieve the data specified on the command. The new task is also able to retrieve data specified on subsequent START commands that expire before the new task is ended. If the transaction has been defined as restartable (by defining the transaction as using the RDO option RESTART(YES)) and such data has not been retrieved before the new task is ended, another new task is started and can retrieve the outstanding data.

If the transaction abends and has not been defined as restartable, no new task is initiated and the data is discarded.

The following examples show how to start a task associated with a terminal and to pass data to it:


```

EXEC CICS START
      TRANSID('TRN2')
      TIME(173000)
      TERMID('STA3')
      REQID(DATAREC)
      FROM(DATAFLD)
      LENGTH(100)
:
EXEC CICS START
      TRANSID('TRN2')
      AT HOURS(17) MINUTES(30)
      TERMID('STA3')
      REQID(DATAREC)
      FROM(DATAFLD)
      LENGTH(100)
:

```

When you use the C language, use the AFTER/AT HOURS, MINUTES, and SECONDS options because C does not provide a packed decimal data type. You can use INTERVAL or TIME, but if the value specified is *not* an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format.

Dynamically routed transactions started by START commands

Some transactions started by a subset of START commands can be dynamically routed to a remote region. For general information about dynamic transaction routing, and specific information about which transactions started by START commands are eligible for dynamic routing, see Routing transactions invoked by START commands in Getting started.

Note: You cannot use identity propagation with a START command that is shipped to a remote region across a LU61 or LU62 connection. For this type of connection, the ICRX will not be shipped and the identity information is lost. Identity propagation is also not available for delayed dynamically routed START commands.

START failures without exception conditions

In the following circumstances, a START command runs without error, but the started task never takes place:

- When the transaction or its initial program is unavailable at the time CICS attempts to create the task.
- When the START specifies a terminal and an expiration time, and the terminal is not defined (and cannot be located by the XICTENF or XALTENF exits) at expiration time.
- When the START specifies a terminal that is not defined (and cannot be located by the XICTENF or XALTENF exits) at the time CICS attempts to create the task.

These exposures result from the delay between the running of the START command and the time of task creation. Even when the START is immediate, CICS can delay creating the task, either because the required terminal is not free or because of other system constraints.

You can use INQUIRE commands to ensure that the transaction and program are enabled at the time of the START command, but either might become unavailable before task creation.

You get a **TERMIDERR** condition if the requested terminal does not exist at the time of the **START**, but if it is deleted later, as occurs if the user logs off, your **START** request is discarded with the terminal definition.

Application context propagation

Application context propagation is a process that passes application context data from a task that issues a **START** command to a task that runs the started transaction. The data is used for monitoring and measuring application resource usage. Both the initial and current application contexts are passed between applications. Application context data *is not* propagated with the following **START** commands:

- A local **EXEC CICS START** command generated from a transient data (TD) trigger.
- A local asynchronous **EXEC CICS START** command received from an event processing (EP) adapter.
- An **EXEC CICS START** command that specifies a **TERMID** or a **USERID** parameter value.

For more information, see Application context.

Options

AFTER

Specifies the interval of time that is to elapse before the new task is started.

Enter the time under **AFTER** and **AT** in two ways:

1. A combination of at least two of **HOURS**(0 - 99), **MINUTES**(0 - 59), and **SECONDS**(0 - 59). **HOURS**(1) **SECONDS**(3) means one hour and three seconds (the minutes default to zero).
2. As one of **HOURS**(0 - 99), **MINUTES**(0 - 5999), or **SECONDS**(0 - 359999). **HOURS**(1) means one hour. **MINUTES**(62) means one hour and two minutes. **SECONDS**(3723) means one hour, two minutes, and three seconds.

AT Specifies the time at which the new task is to be started. For the ways to enter the time, see the **AFTER** option.

FMH

Specifies that the user data to be passed to the started task contains function management headers. **FMH** is not valid for **LUTYPE2** or **LUTYPE3** terminals.

FROM(*data-area*)

Specifies the data to be stored for a task that is to be started at some future time.

HOURS(*data-value*)

Specifies a fullword binary value in the range 0 - 99. **HOURS** is a suboption of the **AFTER** and **AT** options. For its use and meaning, see the **AFTER** option.

INTERVAL(*hhmmss*)

Specifies the expiration time as an interval of time that is to elapse from the time at which the **START** command is issued. The *mm* and *ss* are each in the range 0 - 59. The time specified is added to the current clock time by **CICS** when the command is run, to calculate the expiration time.

LENGTH(*data-value*)

Specifies a halfword binary data value that is the length of the data to be stored for the new task. See “**LENGTH** options in **CICS** commands” on page 11 for guidance on limits when setting the **LENGTH** option.

MINUTES(*data-value*)

Specifies as a fullword binary value the number of minutes for use with AFTER or AT. The value must be in the range 0 through 59 if HOURS or SECONDS is also specified, or in the range 0 through 5999 otherwise. MINUTES is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

NOCHECK

Specifies that, for a remote system, CICS improves performance of the START command by providing less error checking and slightly less function. For more information, see the section about improving the performance of intersystem START requests in the *CICS Intercommunication Guide*.

PROTECT

Specifies that the new task is not started until the starting task has taken a sync point. If the starting task abends before the sync point is taken, the request to start the new task is canceled. If the REQID option is also specified, the request identifier must be a name defined as recoverable to temporary storage. If the started transaction is remote, PROTECT specifies that it must not be scheduled until the local transaction has successfully completed a sync point. For more information about the PROTECT option with remote transactions, see the *CICS Intercommunication Guide*.

QUEUE(*name*)

Specifies a name (1 - 8 characters) that is passed to the started task. If this name represents a temporary storage queue, the queue must be local to the started task. The contents of the queue are not passed.

If you are also specifying REQID, make sure that the name of the REQID and the name of the QUEUE are not the same.

REQID(*name*)

Specifies a name (1 - 8 characters), which must be unique, to identify a command. You can use this option when another task is to be provided with the capability of canceling an unexpired command.

If you omit this option, CICS generates a unique request identifier in the EIBREQID field of the EXEC interface block, unless you specify the NOCHECK option, in which case field EIBREQID is set to nulls and cannot be used later to cancel the START command.

If you include any of the data options (FROM, RTERMID, RTRANSID, or QUEUE), the data is stored in a TS queue by using the REQID name specified (or CICS generated) as the identifier. The queue record thus identified must be local to the CICS system where the START command is processed. The START command is processed on the system identified by the SYSID option or, if the SYSID option is omitted, on the system associated with the TRANSID option.

RTERMID(*name*)

Specifies a value (1 - 4 characters), for example a terminal name, that can be retrieved when the transaction, specified in the TRANSID option in the START command, is started.

When retrieved, the value can be used in the TERMID option of a subsequent START command.

RTRANSID(*name*)

Specifies a value (1 - 4 characters), for example a transaction name, that can be retrieved when the transaction, specified in the TRANSID option in the START command, is started.

When retrieved, the value can be used in the TRANSID option of a subsequent START command.

SECONDS(*data-value*)

Specifies a fullword binary value in the range 0 - 59, when HOURS or MINUTES are also specified, or 0 - 359999 when SECONDS is the only option specified. SECONDS is a suboption of the AFTER and AT options. For its use and meaning, see the AFTER option.

SYSID(*systemname*)

Specifies the name of the system to which the request is directed.

TERMID(*name*)

Specifies the symbolic identifier (1 - 4 alphanumeric characters) of the principal facility associated with a transaction to be started as a result of a START command. This principal facility can be either a terminal (the usual case) or an APPC session. Where an APPC session is specified, the connection (or modeset) name is used instead of a terminal identifier. This option is required when the transaction to be started must communicate with a terminal; it should be omitted otherwise.

Define the terminal identifier as either a local or a remote terminal on the system in which the START command is run when the start of the transaction takes effect.

The TERMID option is used in previous hop data that is collected. For more information about using the TERMID option with previous hop data, see Previous hop data characteristics in Getting started.

Do not use the TERMID option if you are using identity propagation.

TIME(*hhmmss*)

Specifies the time when a new task is started.

When using the C language, use the AFTER/AT HOURS, MINUTES, and SECONDS options because C does not provide a packed decimal data type. You can use TIME, but if the value specified is *not* an integer constant, the application is responsible for ensuring that the value passed to CICS is in packed decimal format.

TRANSID(*name*)

Specifies the symbolic identifier (1 - 4 characters) of the transaction to be run by a task started as the result of a START command.

If you specify SYSID and name a remote system, the transaction is assumed to be on that system whether the transaction is defined as remote. Otherwise, the transaction resource definition is used to find out whether the transaction is on a local or a remote system.

The TRANSID option is used in previous hop data that is collected. For more information, see Previous hop data characteristics in Getting started.

USERID(*data-value*)

Specifies the user ID under whose authority the started transaction is to run, if the started transaction is not associated with a terminal (that is, when TERMID is not specified). This user ID is referred to as *userid1*.

If you omit both TERMID and USERID, CICS uses instead the user ID under which the transaction that issues the START command is running. This user ID is referred to as *userid2*.

By using either *userid1* or *userid2*, CICS ensures that a started transaction always runs under a valid user ID, which must be authorized to all the resources referenced by the started transaction.

CICS performs a surrogate security check against *userid2* to verify that this user is authorized to *userid1*. If *userid2* is not authorized, CICS returns a NOTAUTH condition.

If you are using identity propagation, and your task has a distributed user ID associated with its security context, this information is not propagated to tasks that are started with the USERID option.

Conditions

16 INVREQ

RESP2 values:

- 4 The value specified in HOURS, for AFTER or AT options, or the *hh* value specified for INTERVAL, is out of range.
- 5 The value specified in MINUTES, for AFTER or AT options, or the *mm* value specified for INTERVAL, is out of range.
- 6 The value specified in SECONDS, for AFTER or AT options, or the *ss* value specified for INTERVAL, is out of range.
- 17 The transaction that has been started by the START operation is not shutdown-enabled, and the CICS region is in the process of shutting down.
- 18 A USERID is specified and the CICS external security manager interface is not initialized.
- 200 The START command was issued by a distributed program link (DPL) server program and used the TERMID option, the value of which matched the ID of the intersystem session. Where TERMID is equal to EIBTRMID (that is, where the issuing task's principal facility is a session rather than a terminal), START TERMID is not in the permitted subset of commands available to DPL server programs.

INVREQ also occurs (RESP2 not set) in any of the following situations:

- The START command is not valid for processing by CICS.
- Values specified in the INTERVAL option are out of range.

Default action: end the task abnormally.

17 IOERR

Occurs in any of the following situations:

- An input/output error occurred during a START operation.
- A START operation attempts to write to a temporary storage queue when the DFHTEMP data set is full.
- A START operation uses a REQID name that exists. This condition occurs only when the FROM option is also used.

Default action: end the task abnormally.

54 ISCVREQ

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: end the task abnormally.

22 LENGERR

Occurs if LENGTH is not greater than zero.

Default action: end the task abnormally.

70 NOTAUTH

RESP2 values:

7 A resource security check fails on TRANSID (*name*).

9 A surrogate user security check fails on USERID (*name*).

The security access capabilities of the transaction that issued the command do not allow the command to be performed with the value specified in the USERID option. The security access capabilities of the transaction have been established by the external security manager according to user security, and whether link security or the execution diagnostic facility (EDF) have been in use.

Default action: end the task abnormally.

121 RESUNAVAIL

RESP2 values:

121 A resource required by the transaction to be started is unavailable on the target region. The RESUNAVAIL condition applies only to dynamically-routed, non-terminal-related EXEC CICS START requests.

RESUNAVAIL is returned on the EXEC CICS START command run by the mirror in the target region, if an XICERES global user exit program indicates that a required resource is unavailable on the target region. It is not returned to the application.

Default action: reinvoke the distributed routing program for route selection failure.

53 SYSIDERR

Occurs when the SYSID option specifies a name that is neither the local system nor a remote system (made known to CICS by defining a CONNECTION). SYSIDERR also occurs when the link to the remote system is known but unavailable.

The following error is indicated by a RESP2 value:

1 The dynamic routing program rejected the START request.

Default action: end the task abnormally.

11 TERMIDERR

Occurs if the terminal identifier in a START command is not defined to CICS. This condition can be produced if you specify the name of a connection that is not an ISC or MRO connection.

Default action: end the task abnormally.

28 TRANSIDERR

Occurs if the transaction identifier specified in a START command is not defined to CICS.

Default action: end the task abnormally.

69 USERIDERR

RESP2 values:

8 The specified USERID is not known to the external security manager.

10 The external security manager is in a state such that CICS cannot determine whether a specified USERID is valid.

19 The specified USERID is revoked.

Default action: end the task abnormally.


START ATTACH

Start a task immediately.

See also:

- “START” on page 671
- “START BREXIT” on page 684
- “START CHANNEL” on page 687

START ATTACH



Conditions: INVREQ, LENGERR, NOTAUTH, TRANSIDERR

Description

START ATTACH starts a non-terminal task immediately in the local CICS region.

The attached task has a STARTCODE of U and cannot be canceled, so EIBREQID is set to nulls.

ATTACH allows a START issued in a PLTPI program to take effect before initialization completes.

The starting task can pass data to the started task by using the FROM option.

START ATTACH does not propagate the origin data record (ODR), so tasks are always started at a new point of origin

Starting tasks with data

If data is to be passed, it is not written to a temporary storage queue; only its address is passed.

The attached task retrieves data in the normal way. The task that issued the START must ensure that the data is valid when it is retrieved, either by synchronizing its execution with the attached task, or by placing the data in shared storage.

Each **START ATTACH** command results in a separate task started, optionally with data passed to the started task. The following example shows how to start a specified task, and pass data to it:

```
EXEC CICS START ATTACH
        TRANSID('TRNL')
        FROM(DATAFLD)
        LENGTH(100)
        :
```

Options

FROM(data-area)

Specifies the data to be passed to a started task.

LENGTH(*data-value*)

Specifies a halfword binary data value that is the length of the data to be passed to a started task.

TRANSID(*name*)

Specifies the symbolic identifier (1–4 characters) of the transaction to be started by a task started as the result of a START ATTACH command.

The TRANSID option is used in previous hop data that is collected. For more information, see Previous hop data characteristics in Getting started.

Conditions**16 INVREQ**

RESP2 values:

11 An attempt was made to route a START ATTACH request.

12 A START ATTACH request failed.

Default action: terminate the task abnormally.

22 LENGERR

Occurs if LENGTH is not greater than zero.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

7 A resource security check fails on TRANSID (name).

Default action: terminate the task abnormally.

28 TRANSIDERR

Occurs if the transaction identifier specified in a START command is not defined to CICS.

RESP2 values:

11 The specified transaction is defined as remote.

Default action: terminate the task abnormally.


START BREXIT

Start task in the 3270 bridge environment and associate it with the named bridge exit.

See also:

- “START” on page 671
- “START ATTACH” on page 682
- “START CHANNEL” on page 687

START BREXIT

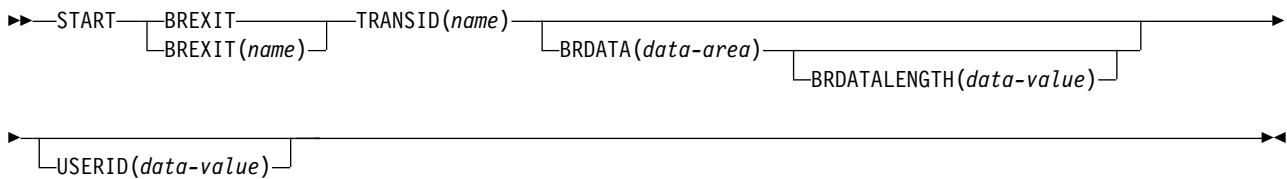

Conditions: INVREQ, LENGERR, NOTAUTH, PGMIDERR, TRANSIDERR, USERIDERR

Description

START BREXIT starts a task immediately in the local CICS region, and initializes the specified transaction (TRANSID) and bridge exit (BREXIT). In the 3270 bridge environment, all 3270 terminal requests issued by the transaction specified by TRANSID, are intercepted and passed to the user-replaceable program (the bridge exit) specified by BREXIT.

The bridge exit (BREXIT) emulates the 3270 interface by passing the terminal requests to a client application that might be executing inside or outside of CICS.

See Introduction to the 3270 bridge in Developing applications for more information about the 3270 bridge and its interfaces.

The attached task cannot be canceled; its STARTCODE is defined by the bridge exit.

Options

BREXIT(name)

Specifies the name (1-8 characters) of the bridge exit to be associated with the started task. If no name is specified, the value of BREXIT on the TRANSACTION resource definition for TRANSID is used.

BRDATA(data-area)

Specifies the data to be passed to the bridge exit specified by BREXIT when the task is started.

BRDATALENGTH(data-value)

Specifies a fullword binary data value that is the length of the BRDATA to be passed to the bridge exit specified by BREXIT when the task is started.

TRANSID(name)

Specifies the symbolic identifier (1–4 characters) of the transaction to be executed by a task started as the result of a START BREXIT command. The

transaction is started in the 3270 bridge environment, and executes in association with the bridge exit specified in BREXIT.

The TRANSID option is used in previous hop data that is collected. See Association data in Getting started for more information about using the TRANSID option with previous hop data.

USERID(*data-value*)

Specifies the user ID under whose authority the started transaction is to run.

Conditions

16 INVREQ

RESP2 values:

- 11 An attempt was made to route a START BREXIT request.
- 12 A START BREXIT request has failed.
- 18 A USERID option is specified and the CICS external security manager interface is not initialized.

Default action: terminate the task abnormally.

22 LENGERR

Occurs if BRDATALENGTH is not greater than zero.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 7 A resource security check fails on TRANSID (name).
- 9 A surrogate user security check fails on USERID (name). The security access capabilities of the transaction that issued the command do not allow the command to be performed with the value specified in the USERID option.

Default action: terminate the task abnormally.

27 PGMIDERR

Occurs if no name is supplied by the BREXIT option and the transaction definition for TRANSID does not provide a default BREXIT name.

Default action: terminate the task abnormally.

28 TRANSIDERR

Occurs if the TRANSID specified in a START BREXIT command has not been defined to CICS.

RESP2 values:

- 11 The specified transaction is defined as remote.

Default action: terminate the task abnormally.

69 USERIDERR

RESP2 values:

- 8 The specified user ID is not known to the external security manager.
- 10 The external security manager is in a state such that CICS cannot determine whether a specified user ID is valid.

Default action: terminate the task abnormally.

Passing data to the bridge exit

Data can be passed to the bridge exit by using the BRDATA and BRDATALENGTH options.

The following example shows how to start a specified task, in the 3270 bridge environment and pass data to its bridge exit:

```
EXEC CICS START BREXIT('DFH0CBRE')  
      TRANSID('TRNL')  
      BRDATA(BRSD)  
      BRDATALENGTH(72)  
      :
```


START CHANNEL

Start a task, passing it a channel.

See also:

- “START” on page 671
- “START ATTACH” on page 682
- “START BREXIT” on page 684

START CHANNEL



Conditions: CHANNELERR, INVREQ, ISCINVREQ, NOTAUTH, RESUNAVAIL, SYSIDERR, TERMIDERR, TRANSIDERR, USERIDERR

Description

START CHANNEL starts a task on a local or remote system, passing it a channel.

Typically, the starting task uses the channel to pass data to the started task (although in some circumstances the channel can be empty; see the description of the CHANNEL option). The starting task can also specify a terminal to be used by the started task as its principal facility.

For example, the started task can do the following:

1. Use an **ASSIGN CHANNEL** command to discover the name of the channel that has been passed to it.
2. Use **STARTBROWSE CONTAINER CHANNEL** and **GETNEXT CONTAINER** commands to browse the containers in the channel.
3. Use **GET CONTAINER CHANNEL** or **GET64 CONTAINER** commands to access the data in the containers.

The following constraints must be satisfied before the transaction to be run can be started:

- If you specify the TERMID option, the named terminal must exist and be available. If the named terminal does not exist, the START is discarded.
- START CHANNEL does not support IMS; that is, you cannot use START CHANNEL to start a transaction on a remote IMS system.

Each START CHANNEL command results in a separate task being started.

START with TERMID specified does not propagate the origin data record (ODR), so tasks are always started at a new point of origin.

Dynamically routed transactions started by START commands

Some transactions started by a subset of START commands can be dynamically routed to a remote region. For general information about dynamic transaction routing, and specific information about which transactions started by START

commands are eligible for dynamic routing, see Routing transactions invoked by START commands in Getting started.

START failures without exception conditions

In the following circumstances, a START command runs without error, but the started task never takes place:

- When the transaction or its initial program is unavailable at the time CICS attempts to create the task.
- When the START specifies a terminal that is not defined (and cannot be located by the XICTENF or XALTENF exits) at the time CICS attempts to create the task.
- You get a TERMIDERR condition if the requested terminal does not exist at the time of the START. However, if the terminal becomes unavailable later, as occurs if the user logs off, your START request is discarded, and no TERMIDERR occurs.

These exposures result from the delay between running the START command and the time of task creation. Even on a START CHANNEL request, when the START is always immediate, CICS can delay creating the task, either because the required terminal is not free or because of other system constraints.

You can use INQUIRE commands to ensure that the transaction and program are enabled at the time of the START command, but either can become unavailable before task creation.

Options

CHANNEL (*name*)

Specifies the name (1 - 16 characters) of a channel that is to be made available to the started task. The acceptable characters are A-Z a-z 0-9 \$ @ # ./- _ % & ? ! : | " ' = ~ , ; < > . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel.

Channel names are always in EBCDIC. The set of allowed characters for channel names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if channels are to be shipped between regions, it is advisable to restrict the characters used to name them to A-Z a-z 0-9 & : = , ; < > . - and _.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers.

The program that issues the START command can do one of the following:

- Create the channel before issuing the START command, by using one or more **PUT CONTAINER CHANNEL** or **PUT64 CONTAINER** commands.
- Specify its current channel, by name.
- Name a channel that does not currently exist. A new empty channel is created.

The started task is given a *copy* of the channel's containers (and the data that they contain). The copy is made when the START command is issued.

Note: All EXEC CICS START requests that specify a channel cannot be deferred by specifying **INTERVAL**, **AT**, **FOR** or **UNTIL** as this is not supported.

SYSID(*systemname*)

Specifies the name of the system to which the request is directed.

TERMID(*name*)

Specifies the symbolic identifier (1 - 4 alphanumeric characters) of the principal facility associated with a transaction to be started as a result of a START command. This principal facility can be either a terminal (the usual case) or an APPC session. Where an APPC session is specified, the connection (or modeset) name is used instead of a terminal identifier. This option is required when the transaction to be started must communicate with a terminal; it should be omitted otherwise.

You must define the terminal identifier as either a local or a remote terminal on the system in which the START command is run.

The TERMID option is used in previous hop data that is collected. For more information, see Previous hop data characteristics in Getting started.

Do not use the TERMID option if you are using identity propagation.

TRANSID(*name*)

Specifies the symbolic identifier (1 - 4 characters) of the transaction to be run by a task started as the result of a START command.

If you specify the SYSID, and name a remote system, the transaction is assumed to be on that system irrespective of whether the transaction is defined as remote. Otherwise, the transaction definition is used to find out whether the transaction is on a local or a remote system.

The TRANSID option is used in previous hop data that is collected. For more information, see Previous hop data characteristics in Getting started.

USERID(*data-value*)

Specifies the user ID under whose authority the started transaction is to run, if the started transaction is not associated with a terminal (that is, when TERMID is not specified). This user ID is referred to as *userid1*.

If you omit both TERMID and USERID, CICS uses instead the user ID under which the transaction that issues the START command is running. This user ID is referred to as *userid2*.

By using either *userid1* or *userid2* CICS ensures that a started transaction always runs under a valid user ID, which must be authorized to all the resources referenced by the started transaction.

CICS performs a surrogate security check against *userid2* to verify that this user is authorized to *userid1*. If *userid2* is not authorized, CICS returns a NOTAUTH condition. The surrogate check is not done here if USERID is omitted.

Do not use the USERID option if you are using identity propagation.

Conditions

122 CHANNELERR

RESP2 values:

- 1 The channel specified on the CHANNEL option contains an incorrect character or combination of characters.

16 INVREQ

RESP2 values:

- 9 The options specified on the command are incompatible.
- 17 The STARTed transaction is not shutdown-enabled, and the CICS region is in the process of shutting down.
- 18 A USERID is specified and the CICS external security manager interface is not initialized.
- 200 The START command was issued by a distributed program link (DPL) server program and used the TERMID option, the value of which matched the ID of the intersystem session. Where TERMID is equal to EIBTRMID (that is, where the issuing task's principal facility is a session rather than a terminal), START TERMID is not in the permitted subset of commands available to DPL server programs.

INVREQ also occurs (RESP2 not set) if the START command is not valid for processing by CICS.

Default action: end the task abnormally.

54 ISCVNREQ

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: end the task abnormally.

70 NOTAUTH

RESP2 values:

- 7 A resource security check fails on TRANSID (name).
 - 9 A surrogate user security check fails on USERID (name).
- The security access capabilities of the transaction that issued the command do not allow the command to be performed with the value specified in the USERID option. The security access capabilities of the transaction have been established by the external security manager according to user security, and whether link security or the execution diagnostic facility (EDF) have been in use.

Default action: end the task abnormally.

121 RESUNAVAIL

RESP2 values:

- 121 A resource required by the transaction to be started is unavailable on the target region. The RESUNAVAIL condition applies only to *dynamically-routed, non-terminal-related* EXEC CICS START requests.
- RESUNAVAIL is returned on the EXEC CICS START command *run by the mirror in the target region*, if an XICERES global user exit program indicates that a required resource is unavailable on the target region. It is not returned to the application.

Default action: reinvoke the distributed routing program for route selection failure.

53 SYSIDERR

Occurs in all of the following cases:

- The SYSID option specifies a name that is neither the local system nor a remote system (made known to CICS by defining a CONNECTION).
- The link to the remote system is known but unavailable.

In all the previous cases, the nature of the error is indicated by the second byte of the EIBRCODE.

The following errors are indicated by RESP2 values:

- 1 The dynamic routing program rejected the START request.
- 2 The CHANNEL option was used and the START request was shipped or routed to a remote system which does not support it. (MRO connections only).

 Default action: end the task abnormally.
- 20 The CHANNEL option is specified and the START request is to be shipped over an LUTYPE61 connection. START CHANNEL requests cannot be shipped over LUTYPE61 connections.

11 TERMIDERR

The terminal identifier in a START command is not defined to CICS.

Default action: end the task abnormally.

28 TRANSIDERR

The transaction identifier specified in a START command is not defined to CICS.

Default action: end the task abnormally.

69 USERIDERR

RESP2 values:


- 8 The specified USERID is not known to the external security manager.
- 10 The external security manager is in a state such that CICS cannot determine whether a specified USERID is valid.

Default action: end the task abnormally.

STARTBR

Start browse of a file.

STARTBR

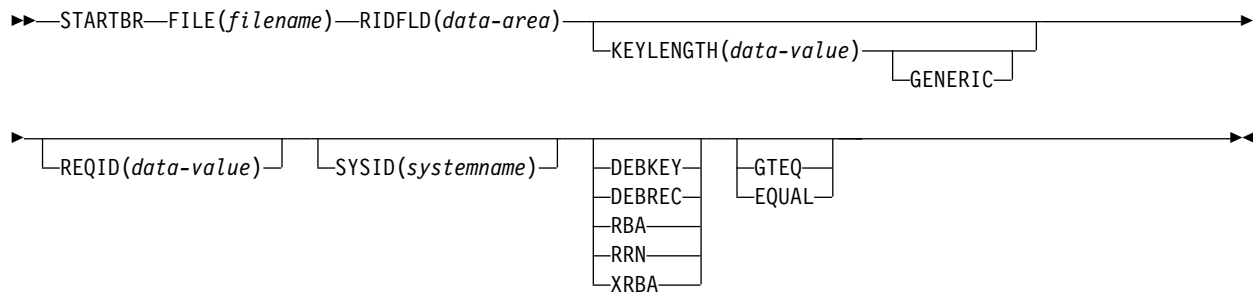

Conditions: DISABLED, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, LOADING, NOTAUTH, NOTFND, NOTOPEN, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

STARTBR specifies the record in a file, or in a data table, on a local or a remote system, where you want the browse to start. No records are read until a READNEXT command (or, for VSAM and tables, a READPREV command) is executed.

The following browse operations are possible. A direct browse is a browse of the base data set by using the primary key.

- A direct browse of a key sequenced data set (KSDS or data-table) by record key.
- A direct browse of an entry sequenced data set (ESDS) by relative byte address (RBA).
- A direct browse of a relative record data set (RRDS) by relative record number (RRN).
- A browse of a key sequenced data set (KSDS) using an alternate index path.
- A browse of an entry sequenced data set (ESDS) using an alternate index path. In this case, an ESDS is browsed by key in the same way as a KSDS. Some of the options that are not valid for a direct ESDS browse are valid for an alternate index browse.
- A browse of a KSDS by RBA.

The options specified on the STARTBR command define the characteristics that apply throughout the subsequent browse operation. Specifically, if GENERIC or GTEQ are specified, they are used not only when determining the starting point of the browse, but also whenever the value of RIDFLD is changed before issuing a READNEXT command.

If you specify the RBA option, it applies to every READNEXT or READPREV command in the browse, and causes CICS to return the relative byte address of each retrieved record.

None of these options can be changed during a browse, except by means of the RESETBR command.

If a STARTBR request specifies the precise key at which the browse is to start (that is, it specifies a full key and the EQUAL keyword) the record returned on the following READNEXT (or READPREV) may not be the same as the record specified by the STARTBR for a file opened in VSAM NSR or RLS mode. This can occur because the initial record specified on the STARTBR command can be deleted by another transaction in between the STARTBR completing and a READNEXT or READPREV being issued. In VSAM LSR mode, the initial record cannot be deleted between the STARTBR and the READNEXT.

A browse can end by using the ENDBR, SYNCPOINT, or SYNCPOINT ROLLBACK commands. Also an implicit sync point at the end of task ends the browse.

Options

DEBKEY

(blocked BDAM) specifies that deblocking is to occur by key. If neither DEBREC nor DEBKEY is specified, deblocking does not occur.

DEBREC

(blocked BDAM) specifies that deblocking is to occur by relative record (relative to zero). If neither DEBREC nor DEBKEY is specified, deblocking does not occur.

EQUAL

(VSAM and data table) specifies that the search is satisfied only by a record having the same key (complete or generic) as that specified in the RIDFLD option.

This option is the default field for a direct ESDS browse.

FILE(*filename*)

specifies the name of the file to be accessed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

GENERIC

(VSAM KSDS, path or data table) specifies that the search key is a generic key whose length is specified in the KEYLENGTH option. The search for a record is satisfied when a record is found that has the same starting characters (generic key) as those specified.

GTEQ

(VSAM or data table) specifies that, if the search for a record that has the same

key (complete or generic) as that specified in the RIDFLD option is unsuccessful, the first record that has a greater key satisfies the search.

This option is the default for directly browsing through a KSDS or an RRDS. It is not valid for directly browsing an ESDS, although it is valid for browsing through an ESDS using a path.

KEYLENGTH(*data-value*)

specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case KEYLENGTH is not valid.

This option must be specified if GENERIC is specified, and it can be specified whenever a key is specified. If the length specified is different from the length defined for the data set and the operation is not generic, the INVREQ condition occurs.

The INVREQ condition also occurs if a STARTBR command specifies GENERIC, and the KEYLENGTH value is not less than that specified in the VSAM definition.

If KEYLENGTH(0) is used with the object of positioning on the first record in the data set, the GTEQ option must also be specified. If EQUAL is specified either explicitly or by default with KEYLENGTH(0), the results of the STARTBR is unpredictable.

For remote files, the KEYLENGTH value can be specified in the FILE definition. If KEYLENGTH is not defined there, and is not specified in the application program, and the key is longer than 4 characters, the default value is 4.

RBA

(VSAM KSDS or ESDS base data sets, or CICS-maintained data tables only, not paths) specifies that the record identification field specified in the RIDFLD option contains a relative byte address. Use this option only when browsing an ESDS or KSDS base and using relative byte addresses instead of keys to identify the records.

You cannot use RBA for:

- User-maintained data tables
- Coupling facility data tables
- Any KSDS file opened in RLS access mode
- KSDS files that use extended addressing

Also, you are recommended not to use RBA for ESDS files that hold more than 4GB. (Use XRBA instead.)

REQID(*data-value*)

specifies as a halfword binary value a unique request identifier for a browse, used to control multiple browse operations on the same or different data sets. If this option is not specified, a default value of zero is assumed.

RIDFLD(*data-area*)

specifies the record identification field. The contents can be a key, a relative byte address, or relative record number (for VSAM data sets), or a block reference, physical key, and deblocking argument (for BDAM data sets). For a relative byte address or a relative record number, the format of this field must be fullword binary. For a relative byte address, the RIDFLD value can be greater than or equal to zero. For a relative record number, the RIDFLD value can be greater than or equal to 1.

See the *CICS Application Programming Guide* for more information about defining the record identification field.

For VSAM, a full record id of X'FF's indicates that the browse is to be positioned at the end of the data set in preparation for a backwards browse using READPREV commands.

RRN

(VSAM RRDS) specifies that the record identification field specified in the RIDFLD option contains a relative record number. This option should only be used with files referencing relative record data sets.

SYSID(systemname)

specifies the name of the system to which the request is directed.

If you specify SYSID, and omit both RBA and RRN, you must also specify KEYLENGTH.

XRBA

specifies that the record identification field specified in the RIDFLD option contains an extended relative byte address. This option should be used when browsing records in an ESDS extended addressing data set.

If you specify XRBA on a STARTBR command, all other commands within the same browse must also specify XRBA.

KSDS data sets cannot be accessed by XRBA.

Conditions

84 DISABLED

RESP2 values:

- 50** A file is disabled. A file may be disabled because:
- It was initially defined as disabled and has not since been enabled.
 - It has been disabled by a SET FILE or a CEMT SET FILE command.

Default action: terminate the task abnormally.

12 FILENOTFOUND

RESP2 values:

- 1** A file name referred to in the FILE option is not defined to CICS, and SYSID has not been specified.

Default action: terminate the task abnormally.

21 ILLOGIC

RESP2 values: (VSAM)

- 110** A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 20** Browse operations are not allowed according to the resource definition.
- 25** The KEYLENGTH and GENERIC options are specified, and the length

defined for the data set to which this file refers in the KEYLENGTH option is greater than or equal to the length of a full key.

- 26 The KEYLENGTH option is specified (but the GENERIC option is not specified), and the specified length does not equal the length defined for the data set to which this file refers.
- 33 An attempt is made to start a browse with a REQID already in use for another browse.
- 42 The KEYLENGTH and GENERIC options are specified, and the length specified in the KEYLENGTH option is less than zero.
- 44 The specified file is a user-maintained or coupling facility data table and the command does not conform to the format of STARTBR for such a data table (for example, RBA is specified).
- 51 A STARTBR command to a KSDS file that is being accessed in RLS mode specifies the RBA keyword. RLS mode does not support RBA access to KSDS files.
- 59 XRBA was specified, but the data set is not an extended ESDS.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120 There is an I/O error during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition.
- For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.
- For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

54 ISCINVREQ

RESP2 values:

- 70 The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

94 LOADING

RESP2 values:

- 104 The request cannot be satisfied because it is issued against a data table that is still being loaded. The condition can be raised for one of the following reasons:
- The STARTBR specifies a record that has not yet been loaded into a coupling facility data table. Records can be read while a CFDT is loading only if the requested key is within the range of those records already loaded.
- The LOADING response can also be returned for a coupling facility data table that has failed during loading. For more information about what happens if the load for a coupling facility data table fails, see the description of the XD TLC global user exit in the *CICS Customization Guide*.

- The READ specifies the GENERIC or GTEQ options for a user-maintained data table. While a UMT is being loaded, you can issue start browse requests with precise keys only.

If your application programs encounter the LOADING condition persistently or too frequently, check that this is not caused by conflicting file definitions that reference the same data set.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 101** A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

13 NOTFND

RESP2 values:

- 80** An attempt to position on a record based on the search argument provided is unsuccessful.
- 81** XRBA was specified, and the value of RIDFLD was greater than 4 GB, but the data set is not an extended addressing ESDS.

NOTFND can also occur if a generic STARTBR with KEYLENGTH(0) specifies the EQUAL option.

Default action: terminate the task abnormally.

19 NOTOPEN

RESP2 values:

- 60** NOTOPEN (RESP2 60) is returned for one of the following reasons:
- The requested file is CLOSED and UNENABLED. The CLOSED, UNENABLED state is reached after a CLOSE request has been received against an OPEN ENABLED file and the file is no longer in use. You can also make CLOSED, UNENABLED the initial state, by specifying STATUS(UNENABLED) and OPENTIME(FIRSTREF) on the FILE resource definition. (For BDAM files, you use the FILSTAT parameter of the DFHFCT TYPE=FILE macro.)
 - The requested file is OPEN and in use by other transactions, but a CLOSE request against the file has been received.
 - A STARTBR command is issued against a data set that is quiesced, or is being quiesced, as a result of a SET DSNNAME QUIESCED or IMMQUIESCED command.
 - The requested file is CLOSED and ENABLED, so CICS has tried to open the file as part of executing the request. This file open has failed for some reason. You should examine the console for messages that explain why the file open has been unsuccessful.

This condition does not occur if the request is made to a CLOSED, DISABLED file. In this case, the DISABLED condition occurs.

Default action: terminate the task abnormally.

53 SYSIDERR

RESP2 values:

- 130** The SYSID option specifies a name that is neither the local system nor a remote system that is defined by a CONNECTION or IPCONN definition. SYSIDERR also occurs when the link to the remote system is

known but unavailable. In the case of an IPCONN, SYSIDERR occurs if the link is known but either the local or remote systems do not support file control commands that are function shipped using IP interconnectivity.


- 131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132 The start browse is operating on a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

STARTBROWSE ACTIVITY

Start a browse of the child activities of a BTS activity, or of the descendant activities of a process.

STARTBROWSE ACTIVITY



Conditions: ACTIVITYERR, NOTAUTH, PROCESSERR

Description

STARTBROWSE ACTIVITY initializes a browse token which can be used to identify either:

- Each child activity of a specified BTS parent activity
- Each descendant activity of a specified BTS process.

If you specify the ACTIVITYID option, the children (but not the grandchildren nor other descendants) of the specified activity can be browsed. This option takes as its argument an activity identifier. This identifier may, for example, have been returned on a previous GETNEXT ACTIVITY command. If it was, the command starts a browse of child activities one level down the activity tree.

If you specify the PROCESS and PROCESSTYPE options, all the descendant activities of the specified process can be browsed. This type of browse is known as a **flat browse**. A flat browse is one which can return every descendant activity exactly once. A parent activity is always returned before its children. The value returned in the LEVEL option of a GETNEXT ACTIVITY command indicates the depth at which the activity lies in the process's activity-tree, with the root activity having a level of zero.

If you specify neither the ACTIVITYID nor the PROCESS and PROCESSTYPE options, the children of the current activity can be browsed.

Options

ACTIVITYID(*data-value*)

specifies the identifier (1–52 characters) of the activity whose child activities are to be browsed.

Typically, the activity identifier specified on this option has been returned on a previous GETNEXT ACTIVITY command (or, in the case of a root activity, on a GETNEXT PROCESS command). ACTIVITYID allows you to start a browse of child activities one level down the activity tree.

If you omit both this and the PROCESS option, the children of the current activity are browsed.

BROWSETOKEN(*data-area*)

specifies a fullword binary data area, into which CICS will place the browse token.

PROCESS(data-value)

specifies the name (1–36 characters) of the process whose descendant activities are to be browsed.

PROCESSTYPE(data-value)

specifies the process-type (1–8 characters) of the process named on the PROCESS option.

Conditions**109 ACTIVITYERR**

RESP2 values:

- 1 The activity indicated by the ACTIVITYID option could not be found.
- 2 Because neither the ACTIVITYID nor the PROCESS options were specified, a browse of the children of the current activity was implied—but there is no current activity associated with the request.
- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.
- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to access the file whose data set contains the records to be browsed.

108 PROCESSERR


RESP2 values:

- 3 The process specified on the PROCESS option could not be found.
- 4 The process-type specified on the PROCESSTYPE option could not be found.

STARTBROWSE CONTAINER

Start a browse of the containers associated with a channel, or with a BTS activity or process.

STARTBROWSE CONTAINER



Conditions: ACTIVITYERR, CHANNELERR, IOERR, NOTAUTH, PROCESSERR

This command is threadsafe.

Description

STARTBROWSE CONTAINER initializes a browse token which can be used to identify the name of each data-container associated with a specified channel, or with a BTS activity or process.

Note: The browse token should be used only by the program that issues the STARTBROWSE command.

If you specify none of the ACTIVITYID, PROCESS, or CHANNEL options, CICS examines the context (channel or BTS) of the request. If a current channel exists, its containers are browsed. If a current activity exists, its containers are browsed. If neither exists, an ACTIVITYERR 2 is raised: see the description of the ACTIVITYERR condition, below.

Options

ACTIVITYID(data-value)

specifies the identifier (1–52 characters) of the activity whose containers are to be browsed.

Typically, the identifier specified on this option has been returned on a previous GETNEXT ACTIVITY command.

BROWSETOKEN(data-area)

specifies a fullword binary data area, into which CICS will place the browse token.

CHANNEL(data-value)

specifies the name (1–16 characters) of the channel whose containers are to be browsed. This must be the name of either the current channel or of a channel created by the program that issues the STARTBROWSE CONTAINER command. You can specify the channel name DFHTRANSACTION to use the transaction channel.

If this option is not specified, and the current context is channel, the current channel's containers are browsed.

The order in which containers are returned is undefined.

PROCESS(data-value)

specifies the name (1–36 characters) of the process whose containers are to be browsed.

Note: The containers associated with a process (*process containers*) are globally available throughout the process. They are not the same as the root activity's containers.

PROCESSTYPE(data-value)

specifies the process-type (1–8 characters) of the process named on the PROCESS option.

Conditions**109 ACTIVITYERR**

RESP2 values:

- 1 The activity indicated by the ACTIVITYID option could not be found.
- 2 None of the ACTIVITYID, PROCESS, or CHANNEL options were specified and there is no current channel and no current activity associated with the request.
- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

122 CHANNELERR

RESP2 values:

- 2 The channel specified on the CHANNEL option could not be found.

17 IOERR

RESP2 values:

- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101 The user associated with the issuing task is not authorized to access this resource in the way requested.

108 PROCESSERR

RESP2 values:

- 3 The process specified on the PROCESS option could not be found.
- 4 The process-type specified on the PROCESSTYPE option could not be found.
- 13 The request timed out. It may be that another task using this process-record has been prevented from ending.

STARTBROWSE EVENT

Start a browse of events known to a BTS activity.

STARTBROWSE EVENT



Conditions: ACTIVITYERR, INVREQ, IOERR, NOTAUTH

Description

STARTBROWSE EVENT initializes a browse token which can be used to identify each event (including each sub-event and system event) that is within the scope of a specified BTS activity. If you do not specify an activity, events within the scope of the current activity are browsed.

A browse started by STARTBROWSE EVENT returns:

- Atomic events. An atomic event returned on this command may or may not be included in the predicate of a composite event—that is, it may or may not be a sub-event.
- Composite events.
- System events.

Options

ACTIVITYID(*data-value*)

specifies the identifier (1–52 characters) of the activity whose events are to be browsed.

If you omit this option, events known to the current activity are browsed.

BROWSETOKEN(*data-area*)

specifies a fullword binary data area, into which CICS will place the browse token.

Conditions

109 ACTIVITYERR

RESP2 values:

- 1 The activity identifier specified on the ACTIVITYID option does not relate to any activity that is within the scope of this task.
- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

16 INVREQ

RESP2 values:

- 1 There is no current activity within the scope of this task.

17 IOERR

RESP2 values:

- 30 An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101** The user associated with the issuing task is not authorized to access this resource in the way requested.

STARTBROWSE PROCESS

Start a browse of all processes of a specified type within the CICS business transaction services system.

STARTBROWSE PROCESS

►►—STARTBROWSE—PROCESS—PROCESSTYPE(*data-value*)—BROWSETOKEN(*data-area*)—►►

Conditions: IOERR, NOTAUTH, PROCESSERR

Description

STARTBROWSE PROCESS initializes a browse token which can be used to identify each process of a specified type within the CICS business transaction services system.

When you add a process to the BTS system, you use the PROCESSTYPE option of the DEFINE PROCESS command to categorize it. You specify the name of a PROCESSTYPE resource definition, which in turn names a CICS file definition that maps to a physical VSAM data set (the repository) on which details of the process and its constituent activities will be stored. (Records for multiple process-types can be stored on the same repository data set.)

The STARTBROWSE PROCESS command enables you to start a browse of processes of a specified type.

Options

BROWSETOKEN(*data-area*)

specifies a fullword binary data area, into which CICS will place the browse token.

PROCESSTYPE(*data-value*)

specifies the process-type (1–8 characters) of the processes to be browsed.

Conditions

17 IOERR

RESP2 values:

- 29** The repository file is unavailable.
- 30** An input/output error has occurred on the repository file.

70 NOTAUTH

RESP2 values:

- 101** The user associated with the issuing task is not authorized to access this resource in the way requested.

108 PROCESSERR

RESP2 values:

- 1** No processes of this process-type could be found.
- 4** The process-type specified on the PROCESSTYPE option could not be found.

- 13 The request timed out. It may be that another task using this process-record has been prevented from ending.

SUSPEND

Suspend a task.

SUSPEND

►►—SUSPEND—◄◄

This command is threadsafe.


Description

SUSPEND relinquishes control to a task of higher or equal dispatching priority. Control is returned to the task issuing the command as soon as no other task of a higher or equal priority is ready to be processed.

SUSPEND (BTS)

Suspend a BTS process or activity.

SUSPEND (BTS)



Conditions: ACTIVITYBUSY, ACTIVITYERR, INVREQ, IOERR, LOCKED, PROCESSERR

Description

SUSPEND (BTS) prevents a BTS process or activity being reattached when events in its event pool are fired.

The only process a program can suspend is the one that it has acquired in the current unit of work.

The only activities a program can suspend are as follows:

- If it is running as the activation of an activity, its own child activities. It can suspend several of its child activities within the same unit of work.
- The activity it has acquired, by means of an ACQUIRE ACTIVITYID command, in the current unit of work.

To resume a suspended process or activity, a RESUME command must be issued.

Options

ACQACTIVITY

specifies that the activity to be suspended is the one that the current unit of work has acquired by means of an ACQUIRE ACTIVITYID command.

ACQPROCESS

specifies that the process that is currently acquired by the requestor is to be suspended.

ACTIVITY(data-value)

specifies the name (1–16 characters) of the child activity to be suspended.

Conditions

107 ACTIVITYBUSY

RESP2 values:

- 19 The request timed out. It may be that another task using this activity-record has been prevented from ending.

109 ACTIVITYERR

RESP2 values:

- 8 The activity named on the ACTIVITY option could not be found.

16 INVREQ

RESP2 values:

- 4 The ACTIVITY option was used to name a child activity, but the command was issued outside the scope of a currently-active activity.
- 14 The activity is in COMPLETE or CANCELLING mode, and therefore cannot be suspended.
- 15 The ACQPROCESS option was used, but the unit of work that issued the request has not acquired a process.
- 24 The ACQACTIVITY option was used, but the unit of work that issued the request has not acquired an activity.

17 IOERR

RESP2 values:

- 29 The repository file is unavailable.
- 30 An input/output error has occurred on the repository file.

100 LOCKED

The request cannot be performed because a retained lock exists against the relevant record on the repository file.

108 PROCESSERR

RESP2 values:

- 5 The process could not be found.

SYNCPOINT

Establish a syncpoint.

SYNCPOINT

►►—SYNCPOINT—◄◄

Conditions: INVREQ, ROLLEDBACK

This command is threadsafe.

Note: The Recovery Manager processes this command on an open TCB wherever possible to minimize TCB switching. Syncpoint processing can take place on an open TCB for all resource types declared as threadsafe that were accessed in the unit of work. If resource types not declared as threadsafe were accessed in the unit of work, the Recovery Manager switches to the QR TCB for those resource types. A CICS resource type declares itself to the Recovery Manager as threadsafe if the EXEC CICS commands relating to the resource type are threadsafe.

Description

SYNCPOINT divides a task (usually a long-running one) into smaller units of work. It specifies that all changes to recoverable resources made by the task since its last syncpoint are to be committed.

Note: A failure occurring during the commit phase (phase 2) of syncpoint processing does not return an error condition and the transaction is not abnormally terminated. Subsequent units of work in the transaction are allowed to continue normally. See the Unit of work recovery and abend processing in the *CICS Recovery and Restart Guide* for further information.

Conditions

16 INVREQ

RESP2 values:

200 SYNCPOINT was in a program that is linked to from a remote system that has not specified the SYNCONRETURN option, or if it has been linked to locally and is defined with EXECUTIONSET=DPLSUBSET.

Default action: terminate the task abnormally.

82 ROLLEDBACK

occurs when a SYNCPOINT command is driven into rollback by a remote system that is unable to commit the syncpoint. All changes made to recoverable resources in the current unit of work are backed out.

Default action: terminate the task abnormally.

SYNCPPOINT ROLLBACK

Back out to last syncpoint.

SYNCPPOINT ROLLBACK

►►—SYNCPPOINT—ROLLBACK—◄◄

Condition: INVREQ

This command is threadsafe.

Note: The Recovery Manager processes this command on an open TCB wherever possible to minimize TCB switching. Syncpoint processing can take place on an open TCB for all resource types declared as threadsafe that were accessed in the unit of work. If resource types not declared as threadsafe were accessed in the unit of work, the Recovery Manager switches to the QR TCB for those resource types. A CICS resource type declares itself to the Recovery Manager as threadsafe if the EXEC CICS commands relating to the resource type are threadsafe.

Options

ROLLBACK

specifies that all changes to recoverable resources made by the task since its last syncpoint are to be backed out.

This option can be used, for example, to tidy up in a HANDLE ABEND routine, or to revoke database changes after the application program finds irrecoverable errors in its input data.

If the unit of work updates remote recoverable resources using an MRO or APPC session, the ROLLBACK option is propagated to the back-end transaction.

When a distributed transaction processing conversation is in use, the remote application program has the EIB fields EIBSYNRB, EIBERR, and EIBERRCD set. For the conversation to continue, the remote application program should execute a SYNCPPOINT ROLLBACK command.

When the mirror transaction is involved in the unit of work using an MRO or APPC session, the mirror honors the rollback request, revokes changes, and then terminates normally.

This option is not supported across LUTYPE6.1 z/OS Communications Server sessions to the mirror or back-end transactions. In these cases, the front-end transactions could be abended to cause the back-end transactions to back out.

Note: A failure occurring during the backout phase (phase 2) of syncpoint processing does not return an error condition and the transaction is not abnormally terminated. Subsequent units of work in the transaction are allowed to continue normally. See Unit of work recovery and abend processing in the *CICS Recovery and Restart Guide* for further information.

Note: A deferred EXEC CICS SEND request is cancelled during a **SYNCPPOINT ROLLBACK** command.

Conditions

16 INVREQ

RESP2 values:

- 200 SYNCPOINT ROLLBACK was in a program that is linked to from a remote system that has not specified the SYNCONRETURN option, or if it has been linked to locally and is defined with EXECUTIONSET=DPLSUBSET

Default action: terminate the task abnormally.

TEST EVENT

Test whether a BTS event has fired.

TEST EVENT

►►—TEST—EVENT(*data-value*)—FIRESTATUS(*cvda*)—————►◄

Conditions: EVENTERR, INVREQ

Description

TEST EVENT tests whether a named BTS event has occurred (fired).

Options

EVENT(*data-value*)

specifies the name (1–16 characters) of the event to test for completion.

FIRESTATUS(*cvda*)

FIRESTATUS returns the fire status of the event. CVDA values are:

FIRED

The event has fired.

NOTFIRED

The event has not fired.

Conditions

111 EVENTERR

RESP2 values:

4 The event specified on the EVENT option is not recognized by BTS.

16 INVREQ

RESP2 values:

1 The command was issued outside the scope of an activity.

TRANSFORM DATATOXML

Use the **TRANSFORM DATATOXML** command to convert application data to XML.

TRANSFORM DATATOXML

```
►►—TRANSFORM DATATOXML—CHANNEL(data-value)—DATCONTAINER(data-value)—————►
►
└─ELEMNAME(data-area)—ELEMNAMELEN(data-area)┐ └─ELEMNS(data-area)—ELEMNSLEN(data-area)┐
►
└─TYPENAME(data-area)—TYPENAMELEN(data-area)—TYPENS(data-area)—TYPENSLEN(data-area)┐
►
└─XMLCONTAINER(data-value)┐—XMLTRANSFORM(name)—————►►
```

Conditions: NOTFND, LENGERR, CHANNELERR, CONTAINERERR, INVREQ

This command is threadsafe.

Description

The **TRANSFORM DATATOXML** command transforms application data to XML using mappings that are defined in the XML binding. The XMLTRANSFORM resource defines where the XML binding and the XML schema are located.

Options

CHANNEL(*data-value*)

Specify the name of the channel used to pass the containers holding the XMLCONTAINER and DATCONTAINER data. The name of the channel must be 16 characters in length. If the channel name is less than 16 characters, you must pad the data value with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

DATCONTAINER(*data-value*)

Specify the name of the container that contains the application data for conversion. This container must be present on the channel. The name of the container must be 16 characters in length. If the container name is less than 16 characters, you must pad the data value with trailing blanks.

CICS reads from this container in BIT mode.

ELEMNAME(*data-area*)

Specify the name of an XML element. CICS returns the local name of the XML element that CICS generates.

ELEMNAMELEN(*data-area*)

Specify the fullword binary length of the XML element in the ELEMNAME option. The maximum value of ELEMNAMELEN is 255.

ELEMNS(*data-area*)

Specify the namespace URI of the XML element that is returned in the ELEMNAME option.

ELEMNSLEN(*data-area*)

Specify the fullword binary length of the namespace in the ELEMNS option. The maximum value of ELEMNSLEN is 255.

TYPENAME(*data-area*)

Specify the xsi:type of the XML element that is returned in the ELEMNAME option.

TYPENAMELEN(*data-area*)

Specify the fullword binary length of the xsi:type that is returned in the TYPENAME option.

TYPENS(*data-area*)

Specify the namespace of the xsi:type attribute of the XML element that is returned in the ELEMNAME option.

TYPENSLEN(*data-area*)

Specify the fullword binary length of the namespace for the xsi:type attribute that is returned in the TYPENS option.

XMLCONTAINER(*data-value*)

Specify the name of the container that will contain the output XML once the command completes. The name of the container must be 16 characters in length. If the container name is less than 16 characters, you must pad the data value with trailing blanks.

You do not need to create the target container before issuing the command. The container is created and populated as part of the command itself. If the container does exist, and has been defined as a data type of BIT, it is deleted and redefined as type CHAR as part of the command.

XMLTRANSFORM(*data-value*)

Specify the name of the XMLTRANSFORM resource that CICS uses to transform the data to XML. The resource defines the XML binding and the XML schema. The name of the XMLTRANSFORM resource must be 32 characters. If the resource name is less than 32 characters, you must pad the value with blanks.

Conditions

13 NOTFND

RESP2 values:

- 1 The XMLTRANSFORM was not found.

122 CHANNELERR

RESP2 values:

- 1 The channel specified by the **CHANNEL** parameter is incorrect.
- 2 The channel specified by the **CHANNEL** parameter was not found.

110 CONTAINERERR

RESP2 values:

- 1 The container specified by the **XMLCONTAINER** parameter was not found.
- 2 The container specified by the **NSCONTAINER** parameter was not found.
- 3 The container specified by the **DATCONTAINER** parameter was not found.

22 LENGERR

RESP2 values:

- 1 The data in the container specified by the **DATCONTAINER** parameter is too short for the specified transformation type.
- 2 The **ELEMNAME** buffer is too small.

- 3 The **ELEMNS** buffer is too small.
- 4 The **TYPENAME** buffer is too small.
- 5 The **TYPENS** buffer is too small.
- 6 The **ELEMNAMELEN** value exceeds the maximum value of 255.
- 7 The **ELEMNSLEN** value exceeds the maximum value of 255.

16 INVREQ


RESP2 values:

- 1 The XMLTRANSFORM resource is not enabled.
- 2 The **XMLCONTAINER** container is empty.
- 3 The XML input data is invalid. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 4 The XML input data cannot be converted. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 5 The application data is invalid. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 6 The application data cannot be converted. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 8 The application data container is not populated in BIT mode
- 9 The XMLTRANSFORM does not support the requested XML element.
- 10 The XMLTRANSFORM does not support the requested XML type.
- 11 There was a problem linking to a vendor-supplied transformer program.
- 13 The **CHANNEL** parameter was not supplied and is required.
- 14 The **ELEMNAME** parameter was not supplied and is required.
- 15 The **ELEMNS** parameter was not supplied and is required.
- 16 The **DATCONTAINER** parameter was not set and is required.
- 17 There is a runtime validation failure.
- 18 There is a container datatype error.
- 101 The user is not authorized to use the XMLTRANSFORM.

TRANSFORM XMLTODATA

Use the **TRANSFORM XMLTODATA** command to convert XML to application data.

TRANSFORM XMLTODATA

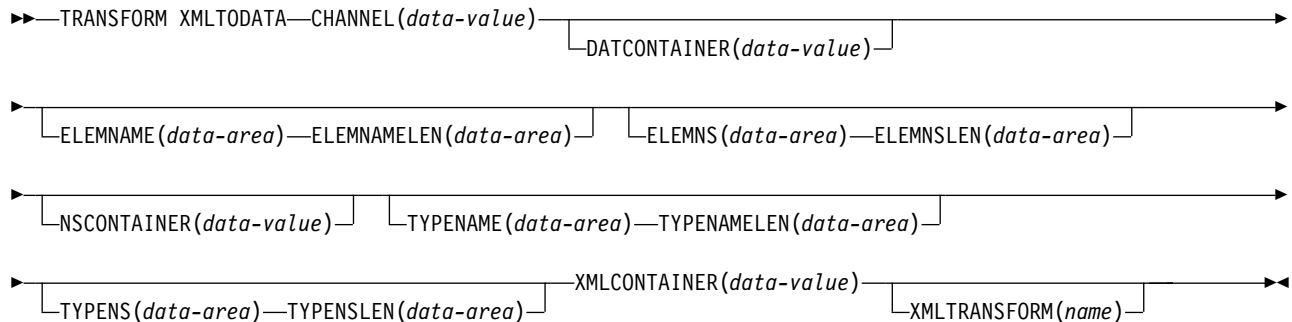

Conditions: CHANNELERR, CONTAINERERR, INVREQ, LENGERR, NOTFND,

This command is threadsafe.

Description

The **TRANSFORM XMLTODATA** command can either transform XML to application data or query XML to return information about the XML elements to the application program. The XMLTRANSFORM resource defines the location of the XML binding and schema for transforming the XML to application data. If you do not specify an XMLTRANSFORM resource on the command, CICS queries the XML instead.

Options

CHANNEL(*data-value*)

Specify the 16-byte name of the channel used to pass the containers holding the XMLCONTAINER and DATCONTAINER data. The name of the channel must be 16 characters in length. If the channel name is less than 16 characters, you must pad the data value with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

DATCONTAINER(*data-value*)

Specify the 16-byte name of the output container that CICS populates with the converted data. The name of the container must be 16 characters in length. If the container name is less than 16 characters, you must pad the data value with trailing blanks.

CICS populates this container in BIT mode.

ELEMNAME(*data-area*)

Specify an input value to return the name of an XML element. CICS populates the ELEMNAME option with the local name of the first XML element that it finds in the XMLCONTAINER container. The application must also specify an input value for the ELEMNAMELEN option that indicates the maximum length of the data area.

ELEMNAMELEN(*data-area*)

Specify an input value to return the fullword binary length of the XML

element in the ELEMNAME option. CICS updates the value of the ELEMNAMELEN option to indicate the real length of the element name that it finds.

ELEMNS(*data-area*)

Specify an input value to return the namespace URI of the XML element to which the ELEMNAME option refers. CICS populates this parameter with the namespace URI of the first XML element that it finds in the XMLCONTAINER container. The application must also specify an input value for the ELEMNSLEN option that indicates the maximum length of the data area.

ELEMNSLEN(*data-area*)

Specify an input value to return the length of the ELEMNS option. CICS updates the value of the ELEMNSLEN option to indicate the real length of the namespace URI.

NSCONTAINER(*data-value*)

Specify the 16-byte name of the container that contains a list of XML namespace declarations that are in scope. These XML namespace declarations can be referenced in the body of the XMLCONTAINER container. The container must be populated in CHAR mode.

TYPENAME(*data-area*)

Specify an input value to return the `xsi:type` of the XML element referred to by the ELEMNAME option. This parameter is populated by CICS with the local name of the `xsi:type` attribute of the first XML tag that is found in the XMLCONTAINER container. If the first XML tag does not have an `xsi:type` attribute, this parameter remains empty. If the application supplies a value for the TYPENAME option, this value overrides any element and type information in the supplied XML and CICS attempts the transformation using the type name supplied by this application (together with the associated TYPENS option).

TYPENAMELEN(*data-area*)

Specify an input value to return the length of the TYPENAME option.

TYPENS(*data-area*)

Specify an input value to return the namespace of the `xsi:type` attribute of the XML element to which the ELEMNAME option refers. This parameter is populated by CICS with the namespace of the `xsi:type` attribute of the first XML element that is found in the XMLCONTAINER container.

TYPENSLEN(*data-area*)

Specify an input value to return the length of the TYPENS option.

XMLCONTAINER(*data-value*)

Specify the 16-byte name of the input container that contains the XML to be converted. This container must already exist and be populated in CHAR mode. If it is populated in BIT mode, CICS tries to determine the data encoding.

XMLTRANSFORM(*name*)

Specify the 32-byte name of the XMLTRANSFORM resource that CICS uses to transform the data to XML. The resource defines the XML binding and the XML schema. The name of the XMLTRANSFORM resource must be 32 characters. If the resource name is less than 32 characters, you must pad the value with blanks.

If you do not specify the XMLTRANSFORM option, no data transformation occurs. Instead, the application queries the XML. CICS returns the XML element and type information in the ELEMNAME, ELEMNS, TYPENAME, and TYPENS options.

Conditions

13 NOTFND

RESP2 values:

- 1 The XMLTRANSFORM was not found.

122 CHANNELERR

RESP2 values:

- 1 The channel specified by the **CHANNEL** parameter is incorrect.
- 2 The channel specified by the **CHANNEL** parameter was not found.

110 CONTAINERERR

RESP2 values:

- 1 The container specified by the **XMLCONTAINER** parameter was not found.
- 2 The container specified by the **NSCONTAINER** parameter was not found.
- 3 The container specified by the **DATCONTAINER** parameter was not found.

22 LENGERR

RESP2 values:

- 1 The data in the container specified by the **DATCONTAINER** parameter is too short for the specified transformation type.
- 2 The **ELEMNAME** buffer is too small.
- 3 The **ELEMNS** buffer is too small.
- 4 The **TYPENAME** buffer is too small.
- 5 The **TYPENS** buffer is too small.

16 INVREQ

RESP2 values:

- 1 The XMLTRANSFORM resource is not enabled.
- 2 The **XMLCONTAINER** container is empty.
- 3 The XML input data is incorrect. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 4 The XML input data cannot be converted. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 5 The application data is incorrect. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 6 The application data cannot be converted. For more information, see the error message in the DFH-XML-ERRORMSG container.
- 7 Either the XML container or the NAMESPACE container is not CHAR mode.
- 9 The XMLTRANSFORM does not support the requested XML element.
- 10 The XMLTRANSFORM does not support the requested XML type.

- 11 There was a problem linking to a vendor-supplied transformer program.
- 13 The **CHANNEL** parameter was not supplied and is required.
- 14 The **ELEMNAME** parameter was not supplied and is required.
- 15 The **ELEMNS** parameter was not supplied and is required.
- 16 The **DATCONTAINER** parameter was not set and is required.
- 17 There is a runtime validation failure.
- 18 There is a container datatype error.
- 101 The user is not authorized to use the XMLTRANSFORM.

UNLOCK

Release exclusive control.

UNLOCK

►►—UNLOCK—FILE(*filename*)—┐
 └TOKEN(*data-area*)—┐
 └SYSID(*systemname*)—┐

Conditions: DISABLED, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, NOTAUTH, NOTOPEN, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

Description

UNLOCK releases the exclusive control established in response to a read command with the UPDATE option. You use it if you retrieve a record for update, and then decide that you do not want to update the record after all. However, for a recoverable file (other than one that refers to a coupling facility data table), the resource remains locked until either a SYNCPOINT command is executed or the task is terminated. The record can be in a data set, or in a CICS or user-maintained data table, on a local or a remote system.

If the UNLOCK command refers to a record in a recoverable coupling facility data table the record lock is released immediately provided that the task has not made any previous change to the same record (or added it as a new record) within the current unit of work. If changes have been made to the record, or it is a new record added to the table, it remains locked until either a SYNCPOINT command is executed or the task is terminated.

If an UNLOCK command does not have a token, an attempt is made to match it to either a read with the UPDATE option that also does not have a token, or to a WRITE MASSINSERT operation. If neither of these is found, no action is taken and a NORMAL response is returned.

Use this command to terminate a VSAM WRITE MASSINSERT operation against a VSAM file.

Releasing locks when updating in browse

The UNLOCK command does not release locks held against records locked in response to READNEXT or READPREV commands that specify the update option.

It only invalidates the TOKEN value so that it cannot be used to complete an update.

Options

FILE(*filename*)

specifies the name of the file to be released.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

SYSID(*systemname*)

specifies the name of the system to which the request is directed.

TOKEN(*data-area*)

specifies as a fullword binary value a unique request identifier for an UNLOCK, used to associate it with a previous READ, READNEXT, or READPREV command that specified the UPDATE option.

If you specify UNLOCK with the TOKEN returned on a READNEXT UPDATE or READPREV UPDATE command for a file accessed in RLS mode, the UNLOCK command invalidates the TOKEN value so that it cannot be used to complete an update. It does not release the record lock.

TOKEN can be function shipped. However, if a request specifying TOKEN is function shipped to a CICS region that does not support this keyword, the request fails.

Conditions

84 DISABLED

RESP2 values:

50 A file is disabled because it was initially defined as disabled and has not since been enabled.

A file is disabled by an EXEC CICS SET FILE or a CEMT SET FILE command.

This condition cannot occur when the UNLOCK follows a successful read for update or a VSAM WRITE MASSINSERT.

Default action: terminate the task abnormally.

12 FILENOTFOUND

RESP2 values:

1 A file name referred to in the FILE option is not defined to CICS and SYSID has not been specified.

Default action: terminate the task abnormally.

21 ILLOGIC

RESP2 values: (VSAM and CICS-maintained data tables)

110 A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

16 INVREQ

RESP2 values:

- 47 An unlock includes a token whose value cannot be matched against any token in use for an existing READ with the UPDATE option.
- 48 An attempt is made to function-ship a request that includes a TOKEN keyword.

Default action: terminate the task abnormally.

17 IOERR

RESP2 values:

- 120 There is an I/O error during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition.

For VSAM files, IOERR usually indicates a hardware error. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

54 ISCINVREQ

RESP2 values:

- 70 The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 101 A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

19 NOTOPEN

RESP2 values:

- 60 NOTOPEN (RESP2 60) is returned for one of the following reasons:
 - The requested file is CLOSED and UNENABLED. The CLOSED, UNENABLED state is reached after a CLOSE request has been received against an OPEN ENABLED file and the file is no longer in use. You can also make CLOSED, UNENABLED the initial state, by specifying STATUS(UNENABLED) and OPENTIME(FIRSTREF) on the FILE resource definition. (For BDAM files, you use the FILSTAT parameter of the DFHFCT TYPE=FILE macro.)
 - The requested file is OPEN and in use by other transactions, but a CLOSE request against the file has been received.
 - An UNLOCK command is issued against a data set that is quiesced, or is being quiesced, as a result of a SET DSNAME QUIESCED or IMMQUIESCED command.
 - The requested file is CLOSED and ENABLED, so CICS has tried to open the file as part of executing the request. This file open has failed for some reason. You should examine the console for messages that explain why the file open has been unsuccessful.

This condition does not occur if the request is made to a CLOSED, DISABLED file. In this case, the DISABLED condition occurs.

It also cannot occur when the UNLOCK follows a successful READ for update or a WRITE MASSINSERT operation.

Default action: terminate the task abnormally.

53 SYSIDERR

RESP2 values:


- 130 The SYSID option specifies a name that is neither the local CICS region nor a remote system defined to CICS by a CONNECTION definition. SYSIDERR also occurs when the link to the remote system is closed.
- 131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132 The UNLOCK is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the Defining and starting a coupling facility data table server region in the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

UPDATE COUNTER and UPDATE DCOUNTER

Update the current value of a named counter. Use COUNTER for fullword signed counters and DCOUNTER for doubleword unsigned counters.


UPDATE COUNTER

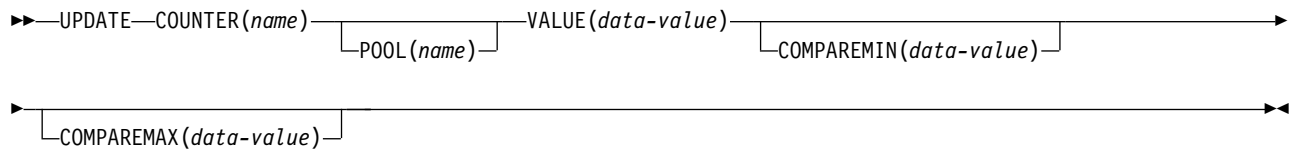

Conditions: INVREQ, SUPPRESSED

This command is threadsafe.

UPDATE DCOUNTER

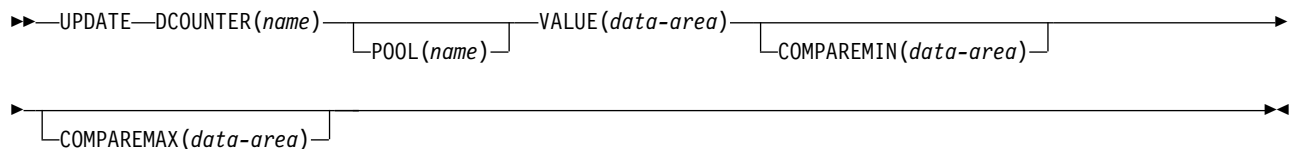

Conditions: INVREQ, SUPPRESSED

This command is threadsafe.

Description

These counter commands set a new current value for the named counter.

You can use the COMPAREMAX and COMPAREMIN options to set a new current value only if it falls within a specified range, or is above or below a specified value.

For information about specifying fullword and doubleword variables on these named counter commands, see “CICS command argument values” on page 4.

Options

COMPAREMAX(data-value)

Specifies, as a fullword signed binary value (or doubleword unsigned binary value for DCOUNTER), a value to compare with the current value of the named counter, and makes the result of the UPDATE command conditional on the comparison:

- If the current value to assign is less than, or equal to, the value specified for the COMPAREMAX parameter, the current value is reset and the response is normal.
- If the current value is greater than the specified value, CICS returns an exception condition.

Normally, the COMPAREMAX value is greater than the COMPAREMIN value and the current value must satisfy both comparisons (that is, it must be between the two values or equal to one of them).

You can specify a COMPAREMAX value that is less than the COMPAREMIN value. In this situation, the current value is considered to be in range if it satisfies either the COMPAREMIN or the COMPAREMAX comparison.

COMPAREMIN(*data-value*)

Specifies, as a fullword signed binary value (or doubleword unsigned binary value for DCOUNTER), a value to compare with the current value of the named counter, and makes the result of the UPDATE command conditional on the comparison:

- If the current value to assign is equal to, or greater than, the value specified for the COMPAREMIN parameter, the current value is reset and the response is normal.
- If the current value is less than the specified value, CICS returns an exception condition.

Note: You can specify a COMPAREMIN value that is greater than the COMPAREMAX value. See the COMPAREMAX parameter for the effect of this.

COUNTER(*name*)

Specifies the name of the named counter for which the current number is to be reset to the value specified on the value parameter. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

DCOUNTER(*name*)

Specifies the name of the named counter for which the current number is to be reset to the value specified on the value parameter. The name can be up to 16 alphanumeric characters. If *name* is a variable that contains a name that is less than 16 characters, the name must be padded with trailing blanks.

POOL(*poolname*)

Specifies the name of the pool in which the named counter resides.

Valid characters for the pool selector string are A through Z, 0 through 9, \$ @ # and _ (underscore). If *name* is a variable that contains a name that is less than 8 characters, the name must be padded with trailing blanks.

This parameter is optional. If you omit the name of the pool, a pool selector value of 8 blanks is assumed.

If there is no matching entry in the DFHNCOPT options table, CICS uses the name specified on the NCPLDFT system initialization parameter, which specifies the default named counter pool.

For information about generating a named counter options table using the DFHNCO macro, see the *CICS Application Programming Guide*.

VALUE(*data-value*)

Specifies the new number to set as the current value for the named counter, using a fullword signed binary value for COUNTER and a doubleword unsigned value for DCOUNTER.

Conditions

16 INVREQ

RESP2 values:

- 201 Named counter not found.
- 301 The server has reported an error code that is not understood by the named counter interface. Generally, this is not possible unless the interface load module, DFHNCIF, is at a lower maintenance or release level than the server itself.
- 303 An unexpected error, such as structure failure or loss of connectivity, has occurred on a macro used to access the coupling facility. Further information is in message DFHNC0441 in the application job log.
- 304 The pool selection parameter specified in the program cannot be resolved to a valid server name using the current options table.
- 305 The interface cannot establish a connection to the server for the selected named counter pool. Further information is in an AXM services message (AXMSC $nnnn$) in the application job log.
- 306 An abend occurred during server processing of a request. Further information is in a message in the application job log and the server job log.
- 308 The DFHNCOPT options table module, required to resolve a pool name, cannot be loaded.
- 309 During processing of the options table, the named counter interface encountered an unknown entry format. Either the options table is not correctly generated, or the DFHNCIF interface load module is not at the same release level as the options table.
- 310 An options table entry that matches the given pool name specified a user exit program, but the user exit program is not link-edited with the options table and cannot be loaded.
- 311 A response from the named counter server to the client region interface module, DFHNCIF, indicates that a system-managed rebuild is in progress but the EXEC CICS interface does not recognize the condition. This means that the CICS region is at CICS TS 2.1 or earlier.
- 403 The POOL parameter contains invalid characters or embedded spaces.
- 404 The COUNTER parameter contains invalid characters or embedded spaces.
- 406 The VALUE parameter is invalid. You cannot set the current value to less than the minimum value, or greater than the maximum value plus 1.

Default action: terminate the task abnormally.

72 SUPPRESSED

RESP2 values:


- 103 One of the following:
- The current value of the named counter is not within the range specified by the COMPAREMAX and COMPAREMIN parameters, when both are specified
 - The current value of the named counter is greater than the COMPAREMAX parameter or less than the COMPAREMIN parameter, when only one option is specified.

Default action: terminate the task abnormally.

VERIFY PASSWORD

Verify that a password matches the password recorded by an external security manager.

VERIFY PASSWORD

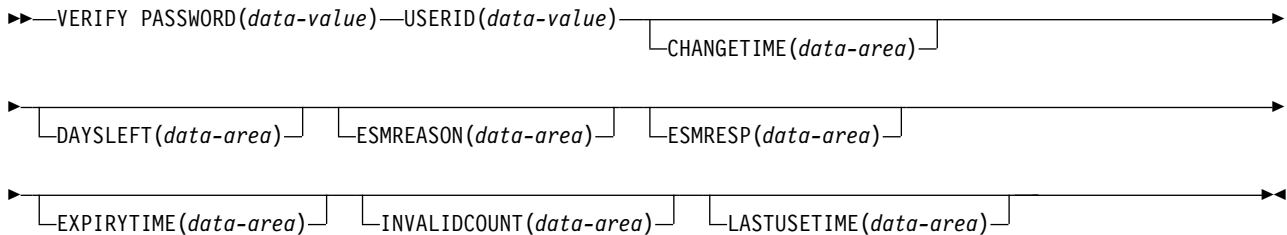

Conditions: INVREQ, NOTAUTH, USERIDERR

This command is threadsafe.

Description

Use the **VERIFY PASSWORD** command to check that a password matches the password recorded by an external security manager for a user ID. The command returns the values recorded by the external security manager for the password. This process is called password verification. If your system uses password phrases in addition to or instead of standard passwords, use the **VERIFY PHRASE** command instead of the **VERIFY PASSWORD** command.

Attention: To ensure that passwords are not revealed in system or transaction dumps, clear the password or password phrase fields on the EXEC CICS commands that have a password or password phrase option as soon as possible after use.

If a **VERIFY PASSWORD** request is successful, do not infer that the user ID could also be used to sign on in the CICS region with the **EXEC CICS SIGNON** command. For example, a password verification request cannot identify the following problems:

- The user ID's connections to groups have been revoked.
- The user ID is not authorized to access the CICS address space (identified by the APPLID).
- The user ID is not authorized to use the terminal at which the user is signing on (identified by the TERMINAL class).

If you supply an incorrect password on the **VERIFY PASSWORD** request, the invalid attempt count is increased for the user ID. If you supply multiple incorrect passwords on successive **VERIFY PASSWORD** requests, the user ID may be revoked by the external security manager. CICS issues message DFHXS1201 when you supply an incorrect password on a **VERIFY PASSWORD** request. When you supply a correct password following one or more invalid attempts, CICS issues message DFHXS1206, which includes a count of the invalid attempts.

Unlike the **EXEC CICS SIGNON** command, the **VERIFY PASSWORD** command does not depend upon the principal facility, therefore it can be issued in non-terminal environments such as web applications. The **VERIFY PASSWORD** command normally uses the **RACROUTE REQUEST=EXTRACT** macro to verify a user's password with the external security manager. If the attempt to verify the password in that way fails, CICS then uses the **RACROUTE REQUEST=VERIFYX** macro to make a full verification request. The **EXEC CICS SIGNON** command always uses the **RACROUTE REQUEST=VERIFY** macro to make its full verification request.

The **RACROUTE REQUEST=EXTRACT** macro does not make RACF record the login as the last access for the user ID, or write user statistics for the user ID. User IDs that are only used with login processes involving password verification can therefore appear to be unused, and could be revoked.

If you specify the system initialization parameter **SECVFYFREQ=USRDELAY** for the CICS region, CICS enforces a full verification request at least once a day for each user ID that is used to log on to the CICS region. The full verification request using the **RACROUTE REQUEST=VERIFYX** macro makes RACF record the date and time of last access for the user ID, and write user statistics. The behavior of your applications is the same whether or not you specify the **SECVFYFREQ** system initialization parameter. CICS checks the user ID at user login and replaces the password verification request with a full verification request when necessary.

Because the full verification request has a higher processor cost and response time than password verification, you might notice a slight performance impact when you specify the **SECVFYFREQ** system initialization parameter. The extent of the performance impact depends on your setting for the **USRDELAY** system initialization parameter for the CICS region. When you specify **SECVFYFREQ**, CICS makes a full verification request for a user ID when the user logs on after the **USRDELAY** interval has expired. CICS also applies a maximum limit of one day between full verification requests at user login. If your **USRDELAY** parameter is set to less than 1440 minutes (1 day), a full verification request takes place at user login more frequently than once a day.

Note: In the **CHANGETIME**, **LASTUSETIME**, and **EXPIRYTIME** options, the time value returned is in the same format as the **ASKTIME** command, that is, in **ABSTIME** units. For more information about the **ABSTIME** format, see **ASKTIME** in Reference -> Application development. The data can be reformatted as a date and time, in a format specified by the caller, by using the **FORMATTIME** command.

Options

CHANGETIME(*data-area*)

Returns the date and time the password was last changed, in **ABSTIME** units.

When the external security manager is RACF, the time is shown as midnight.

DAYSLEFT(*data-area*)

Returns the number of days from now until the password expires, in a halfword binary field. If the password is non-expiring, -1 is returned.

ESMREASON(*data-area*)

Returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the external security manager is RACF, this field is the RACF reason code.

The external security manager does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values returned by this command in addition to checking the ESMRESP and ESMREASON values.

ESMRESP(*data-area*)

Returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the external security manager is RACF, this field is the RACF return code.

The external security manager does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values returned by this command in addition to checking the ESMRESP and ESMREASON values.

EXPIRYTIME(*data-area*)

Returns the date and time the password will expire, in ABSTIME units.

When the external security manager is RACF, the time is shown as midnight.

INVALIDCOUNT(*data-area*)

Returns the number of times, in a halfword binary field, that an invalid password was entered for this user.

LASTUSETIME(*data-area*)

Returns the data and time this user ID was last accessed, in ABSTIME units.

PASSWORD(*data-value*)

Specifies the password, 8 characters, that you want the external security manager to check for the specified user ID. The other data is not returned if the password is not valid.

USERID(*data-value*)

Specifies the user ID, 8 characters, of the user whose password is to be checked.

Conditions

16 INVREQ

RESP2 values:

- 13 There is an unknown return code in ESMRESP from the external security manager.
- 18 The CICS external security manager interface is not initialized.
- 29 The external security manager is not responding.
- 32 The user ID field contains a blank character in an invalid position.

Default action: terminate the task abnormally.

70 NOTAUTH

RESP2 values:

- 2 The supplied password is wrong. If the external security manager is RACF, the revoke count maintained by RACF is incremented.
- 3 A new password is required.
- 19 The user ID is revoked.
- 20 The user's connection to their default group has been revoked.

Default action: terminate the task abnormally.

69 USERIDERR

RESP2 values:


8 The user ID is not known to the external security manager.

Default action: terminate the task abnormally.

VERIFY PHRASE

Verify that a password or password phrase matches the password or password phrase recorded by an external security manager.

VERIFY PHRASE

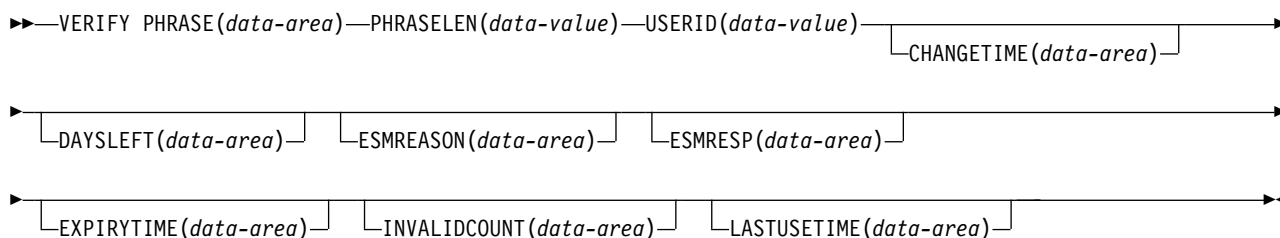

Conditions: INVREQ, LENGERR, NOTAUTH, USERIDERR

This command is threadsafe.

Description

Use the **VERIFY PHRASE** command to check that a password or password phrase matches the password or password phrase recorded by an external security manager for a user ID. The command returns the values recorded by the external security manager for the password or password phrase. This process is called password verification.

Attention: To ensure that passwords are not revealed in system or transaction dumps, clear the password or password phrase fields on the EXEC CICS commands that have a password or password phrase option as soon as possible after use.

A user ID can have both a standard password and a password phrase. If the length of the phrase as specified by PHRASELEN is between 1 and 8 characters, it is treated as a standard password and the external security manager checks that the PHRASE value matches the password recorded by the external security manager for the user ID. If the length is between 9 and 100 characters, it is treated as a password phrase and the external security manager checks that the PHRASE value matches the password phrase recorded for the user ID.

Although the expiry interval is the same for passwords and password phrases, because they are changed independently, there are separate values for the CHANGETIME and DAYSLEFT options. The values returned for these two parameters depend on whether a valid password or a password phrase is used in the **VERIFY PHRASE** command.

If a **VERIFY PHRASE** request is successful, do not infer that the user ID could also be used to sign on in the CICS region with the **EXEC CICS SIGNON** command. For example, a password verification request cannot identify the following problems:

- The user ID's connections to groups have been revoked.

- The user ID is not authorized to access the CICS address space (identified by the APPLID).
- The user ID is not authorized to use the terminal at which the user is signing on (identified by the TERMINAL class).

Unlike the **EXEC CICS SIGNON** command, the **VERIFY PHRASE** command does not depend upon the principal facility, therefore it can be issued in non-terminal environments such as web applications. The **VERIFY PHRASE** command normally uses the RACROUTE REQUEST=EXTRACT macro to verify a user's password with the external security manager. If the attempt to verify the password in that way fails, CICS then uses the RACROUTE REQUEST=VERIFYX macro to make a full verification request. The **EXEC CICS SIGNON** command always uses the RACROUTE REQUEST=VERIFY macro to make its full verification request.

The RACROUTE REQUEST=EXTRACT macro does not make RACF record the login as the last access for the user ID, or write user statistics for the user ID. User IDs that are only used with login processes involving password verification can therefore appear to be unused, and could be revoked.

If you specify the system initialization parameter **SECVFYFREQ=USRDELAY** for the CICS region, CICS enforces a full verification request at least once a day for each user ID that is used to log on to the CICS region. The full verification request using the RACROUTE REQUEST=VERIFYX macro makes RACF record the date and time of last access for the user ID, and write user statistics. The behavior of your applications is the same whether or not you specify the **SECVFYFREQ** system initialization parameter. CICS checks the user ID at user login and replaces the password verification request with a full verification request when necessary.

Because the full verification request has a higher processor cost and response time than password verification, you might notice a slight performance impact when you specify the **SECVFYFREQ** system initialization parameter. The extent of the performance impact depends on your setting for the **USRDELAY** system initialization parameter for the CICS region. When you specify **SECVFYFREQ**, CICS makes a full verification request for a user ID when the user logs on after the **USRDELAY** interval has expired. CICS also applies a maximum limit of one day between full verification requests at user login. If your **USRDELAY** parameter is set to less than 1440 minutes (1 day), a full verification request takes place at user login more frequently than once a day.

Note: In the **CHANGETIME**, **LASTUSETIME**, and **EXPIRYTIME** options, the time value returned is in the same format as the **ASKTIME** command, that is, in **ABSTIME** units. For more information about the **ABSTIME** format, see **ASKTIME** in Reference -> Application development. The data can be reformatted as a date and time, in a format specified by the caller, by using the **FORMATTIME** command.

Options

CHANGETIME(*data-area*)

Returns the date and time the password or password phrase was last changed, in **ABSTIME** units.

When the external security manager is RACF, the time is shown as midnight.

DAYSLEFT(*data-area*)

Returns the number of days from now until the password or password phrase expires, in a halfword binary field. If the password or password phrase does

not expire, a value of -1 is returned. If a user has a password or password phrase that does not expire, DAYSLEFT has no meaning and is shown as -1.

ESMREASON(*data-area*)

Returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the external security manager is RACF, this field is the RACF reason code.

The external security manager does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values returned by this command in addition to checking the ESMRESP and ESMREASON values.

ESMRESP(*data-area*)

Returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the external security manager is RACF, this field is the RACF return code.

The external security manager does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values returned by this command in addition to checking the ESMRESP and ESMREASON values.

EXPIRYTIME(*data-area*)

Returns the date and time the password will expire, in ABSTIME units.

When the external security manager is RACF, the time is shown as midnight. If a user has a password or password phrase that does not expire, EXPIRYTIME has no meaning and is shown as -1.

INVALIDCOUNT(*data-area*)

Returns the number of times, in a halfword binary field, that an invalid password or password phrase was entered for this user.

LASTUSETIME(*data-area*)

Returns the data and time this user ID was last accessed, in ABSTIME units.

PHRASE(*data-area*)

Specifies a 1- to 8-character password or a 9- to 100-byte password phrase required by the ESM. The other data is not returned if the phrase is not valid.

PHRASELEN(*data-value*)

Specifies the length of the password or password phrase as a fullword binary value.

USERID(*data-value*)

Specifies the user ID associated with the password or password phrase that to be checked.

Conditions

16 INVREQ

RESP2 values:

- 13 The external security manager has issued an unknown return code in ESMRESP.
- 18 The CICS external security manager interface is not initialized.
- 29 The external security manager is not responding.
- 32 The USERID field contains a blank character in an invalid position.

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values:

1 PHRASELEN was out-of-range.

70 NOTAUTH

RESP2 values:

2 The supplied password or password phrase is wrong. If the external security manager is RACF , the revoke count maintained by RACF is incremented.

3 A new password or password phrase is required.

19 The user ID is revoked.

20 The user's connection to their default group has been revoked.

Default action: terminate the task abnormally.

69 USERIDERR

RESP2 values:


8 The user ID is not known to the external security manager.

Default action: terminate the task abnormally.

VERIFY TOKEN

Verify that a Kerberos token is valid, as determined by an external security manager, and optionally allow the caller to extract the RACF user ID that is associated with the principal in the Kerberos token.

VERIFY TOKEN

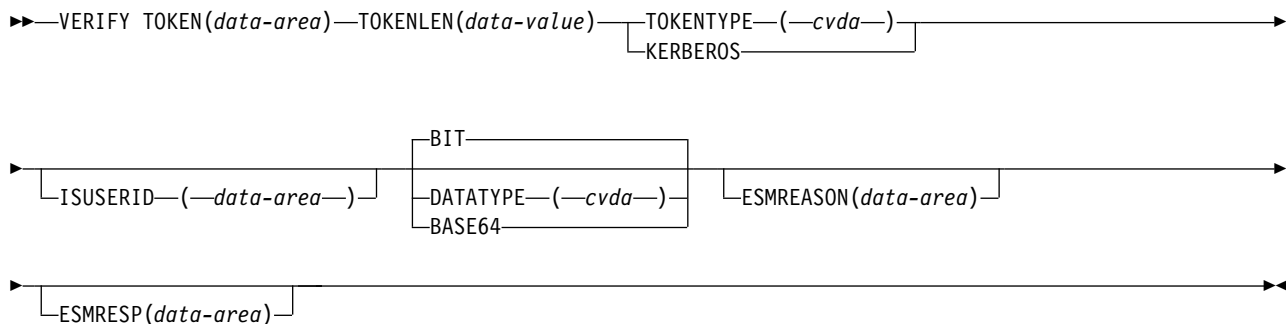

Conditions: INVREQ, LENGERR, NOTAUTH

This command is threadsafe.

Description

Use the **VERIFY TOKEN** command to verify that a Kerberos token is valid, as determined by an external security manager. The command optionally returns the user ID of a Kerberos principal that is associated with the token.

The **VERIFY TOKEN** command uses the z/OS Security Server to verify that the token is a valid Kerberos token and that it can be used by the CICS region. If **ISUSERID** is specified, the user ID of the Kerberos principal for the token is obtained.

The **VERIFY TOKEN** command does not depend upon the principal facility. Therefore, it can be issued in non-terminal environments, for example to provide authentication for web services.

If the external security manager is RACF, the CICS region in which the command is run must be authorized by RACF so that the Kerberos principal for the token can be obtained. For more information, see *Configuring RACF for Kerberos*. This RACF authorization is required whether or not **ISUSERID** is specified.

For more information about a security failure of this command, see the error messages that are written to destination CSCS.

Options

DATATYPE

Specifies the type of data in the token. CVDA values are as follows:

BIT Bit data. This is the default value.

BASE64

Base64 encoded character data. The acceptable characters are A-Z a-z 0-9 + / =

If your character data is not in a US EBCDIC compatible character CCSID you must convert it. You can use the CONTAINER API to do the conversion.

ESMREASON(*data-area*)

Returns the reason code, in a fullword binary field, that CICS receives from the external security manager.

If the external security manager is RACF, this field is the RACF reason code.

The external security manager does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values that are returned by this command in addition to checking the ESMRESP and ESMREASON values.

ESMRESP(*data-area*)

Returns the response code, in a fullword binary field, that CICS receives from the external security manager.

If the external security manager is RACF, this field is the RACF return code.

The external security manager does not always return response and reason codes to CICS. Make sure that you check the EIBRESP and EIBRESP2 values that are returned by this command in addition to checking the ESMRESP and ESMREASON values.

ISUSERID(*data-area*)

Returns an 8-byte user ID of a Kerberos principal that is associated with the token.

TOKEN(*data-area*)

A token that has been obtained from a Security Token Service (STS).

TOKENLEN(*data-value*)

The length of the token as a fullword binary value.

TOKENTYPE(*cvda*)

Indicates the type of token.

KERBEROS

The token is a Kerberos token.

Conditions

16 INVREQ

RESP2 values are as follows:

- 13 The external security manager has issued an unknown return code in **ESMRESP**.
- 18 The CICS external security manager interface is not initialized.
- 29 The external security manager is not responding.
- 31 A CVDA value other than KERBEROS was specified for **TOKENTYPE**.
- 32 A CVDA value other than BASE64 or BIT was specified for **DATATYPE**.
- 36 A data-type of BASE64 was specified, but **TOKEN** does not contain BASE64 data.
- 40 The key distribution center is not started or is terminating.

41 The key distribution center is not responding.

47

The external security manager does not have a user ID defined for the Kerberos principal that is associated with the token.

50

The data specified in **TOKEN** is not a Kerberos token

Default action: terminate the task abnormally.

22 LENGERR

RESP2 values are as follows:

45 The length of the Kerberos token exceeds the maximum value of 65535.

70 NOTAUTH

RESP2 values are as follows:

20

The external security manager does not authorize the request to verify the token. See the error messages written to destination CSCS.

42 A Kerberos request cannot be completed because the associated ticket has expired.

43 The authenticator has expired.

Default action: terminate the task abnormally.

WAIT CONVID (APPC)

Ensure that accumulated data is transmitted on an APPC mapped conversation.

WAIT CONVID (APPC)

►►—WAIT CONVID(*name*)—┐
 └STATE(*cvda*)┘

Conditions: INVREQ, NOTALLOC

Description

WAIT CONVID allows an application program to ensure that any accumulated application data and control indicators from a SEND command, or the results of a CONNECT PROCESS command, are transmitted to the partner transaction.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

STATE(*cvda*)

gets the state of the current conversation. The *cvda* values returned by CICS are:

- ALLOCATED
- CONFFREE
- CONFRECEIVE
- CONFSEND
- FREE
- PENDFREE
- PENDRECEIVE
- RECEIVE
- ROLLBACK
- SEND
- SYNCFREE
- SYNCRECEIVE
- SYNCSEND

Conditions

16 INVREQ

RESP2 values:

200 Command not supported for distributed program link when it refers to the principal facility.

also occurs (RESP2 not set) if the command is used on a conversation that is not using the EXEC CICS interface or that is not a mapped conversation.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the CONVID value does not relate to a conversation that is owned by the application.

Default action: terminate the task abnormally.

WAIT EVENT

Wait for an event to occur.

WAIT EVENT

►►—WAIT EVENT—ECADDR(*ptr-value*)—NAME(*name*)—►►

Condition: INVREQ

Note for dynamic transaction routing: Using this command could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

WAIT EVENT synchronizes a task with the completion of an event initiated by the same task or by another task. The event would normally be the posting, at the expiration time, of a timer-event control area provided in response to a POST command, as described in “POST” on page 419. The WAIT EVENT command provides a method of directly relinquishing control to some other task until the event being waited on is completed.

CICS includes the addresses of all ECBs passed by WAIT EVENT commands of current tasks in the ECBLIST passed by CICS to the WAIT facility when it runs out of work.

A given ECB may not be waited on by more than one task at the same time. If this rule is not followed and the ECBLIST passed by CICS on the MVS WAIT contains duplicate ECB addresses, MVS abends CICS.

Make sure that asynchronous cross memory post (posting completion of an event in an address space other than the user's own) is not used more frequently than necessary. Large numbers of cross memory posts can consume excessive amounts of system resources.

Options

ECADDR(*ptr-value*)

specifies the address of the timer-event control area that must be posted before task activity can be resumed.

NAME(*name*)

specifies the symbolic name, 1–8 alphanumeric characters, that is returned in SUSPENDVALUE or HVALUE, when a task issues WAIT EVENT and is the subject of an INQUIRE TASK command or a CEMT INQ TASK.

Conditions

16 INVREQ

RESP2 values:

- 2 The ECB address is a null pointer, (X'00000000') or (X'FF000000').

- 3 The specified event control area address is above the 16MB line for programs executing in 24-bit mode.
- 4 The event control area address is not aligned on a fullword boundary.
- 6 The timer-event control area specified on a WAIT EVENT is in user-key task-lifetime storage, and is inaccessible to another transaction. This condition can only occur if the storage for the timer-event control area is obtained other than by a POST command, and is for posting as an ECB by some other task on completion of an event.

Note: CICS obtains storage for a timer-event control area in response to a POST command (and which can be used in conjunction with the WAIT EVENT command) from a shared subpool in user-key storage. This ensures that timer-event control areas are in shared storage and, when referenced by a subsequent WAIT EVENT command, do not fail with an INVREQ.

Default action: terminate the task abnormally.

Examples


The following example shows you how to suspend the processing of a task until the specified event control area is posted:

```
EXEC CICS WAIT EVENT ECADDR(PVALUE)
```

WAIT EXTERNAL

Synchronize events.

WAIT EXTERNAL



Condition: INVREQ

This command is threadsafe.

Note for dynamic transaction routing: Using this command could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

WAIT EXTERNAL waits for events that post MVS-format ECBs. The command causes the issuing task to be suspended until one of the ECBs has been posted, that is until one of the events has occurred. The task can wait on one or more ECBs. If it waits on more than one, it is dispatchable as soon as one of the ECBs is posted. You must ensure that each ECB is cleared (set to binary zeros) no later than the earliest time it could be posted. CICS cannot do this for you. If you wait on an ECB that has been previously posted and not subsequently cleared, your task is not suspended and continues to run as though the WAIT EXTERNAL had not been issued.

CICS uses extended ECBs and the MVS POST exit mechanism for ECBs passed by WAIT EXTERNAL; therefore do not use WAIT EXTERNAL unless you are sure that the ECBs are not posted by any method other than the MVS POST service or the standard 'optimized post' logic using a compare-and-swap (CS) instruction. Note that the standard 'optimized post' logic is only applicable when the ECB is not waiting, that is when the wait bit X'80' is not on.

If a WAIT EXTERNAL ECB is hand posted, for example by another task moving a value into the ECB, unpredictable errors occur. If there is any possibility of hand posting, use the WAITCICS command. Use WAIT EXTERNAL whenever possible, because it usually has less overhead.

A given ECB must not be waited on by more than one task at the same time. If this rule is not followed, the second task to wait on the ECB gets an INVREQ condition.

Make sure that asynchronous cross memory post (posting completion of an event in an address space other than the user's own) is not used more frequently than necessary. Large numbers of cross memory posts can consume excessive amounts of system resources.

Options

ECBLIST(*ptr-value*)

is a pointer to a list of addresses of MVS-format ECBs representing events. Both the ECBLIST and the ECBs can be above the 16MB line, that is they can be 31-bit addresses. Each ECB must be fullword aligned. Null (X'00000000' and X'FF000000') ECB addresses are ignored.

NAME(*name*)

specifies the symbolic name, 1–8 alphanumeric characters, that is returned in SUSPENDVALUE or HVALUE, when a task issues WAIT EXTERNAL and is the subject of an INQ TASK command or a CEMT INQ TASK.

NUMEVENTS(*data-value*)

is the number of such events, corresponding to the number of addresses in the ECBLIST. The field is fullword binary. When NUMEVENTS is specified as 1, ECBLIST must still be an address that points to a list containing just one ECB address.

PURGEABILITY(*cvda*)

determines the outcome of:

- An attempt to perform a deadlock timeout
- A SET TASK PURGE | FORCEPURGE command
- A CEMT SET TASK PURGE | FORCEPURGE

on the issuing task while it is waiting. The values passed to CICS are PURGEABLE (the default value), or NOTPURGEABLE. The outcome is:

| Function | PURGEABLE | NOTPURGEABLE |
|-----------------------------------------------------------------|------------|--------------|
| DTIMOUT expired | Abend AEXY | No effect |
| CEMT SET TASK PURGE EXEC CICS SET TASK PURGE | Abend AEXY | No effect |
| CEMT SET TASK FORCEPURGE EXEC CICS SET TASK FORCEPURGE | Abend AEXY | Abend AEXY |

See the *CICS Recovery and Restart Guide* for information about DTIMOUT and SET TASK PURGE | FORCEPURGE.

Conditions

16 INVREQ

RESP2 values: CVDA values are:

- 1 An ECB is not valid, for example the ECB is not fullword aligned.
- 2 The ECB address is a null pointer, (X'00000000') or (X'FF000000').
- 3 NUMEVENTS is not a positive number.
- 4 PURGEABILITY is specified with an incorrect CVDA.
- 5 No valid ECBs have been found in the list, because either the ECBLIST address is not valid or all the ECB addresses are not valid.

The ECBs specified are in read-only storage.

Default action: terminate the task abnormally.

Examples

The following figure shows how to use the ECBLIST parameter to point to a list of ECB addresses that in turn point to individual ECBs. Note that the ECBLIST variable is a pointer pointing to the first address of the list.

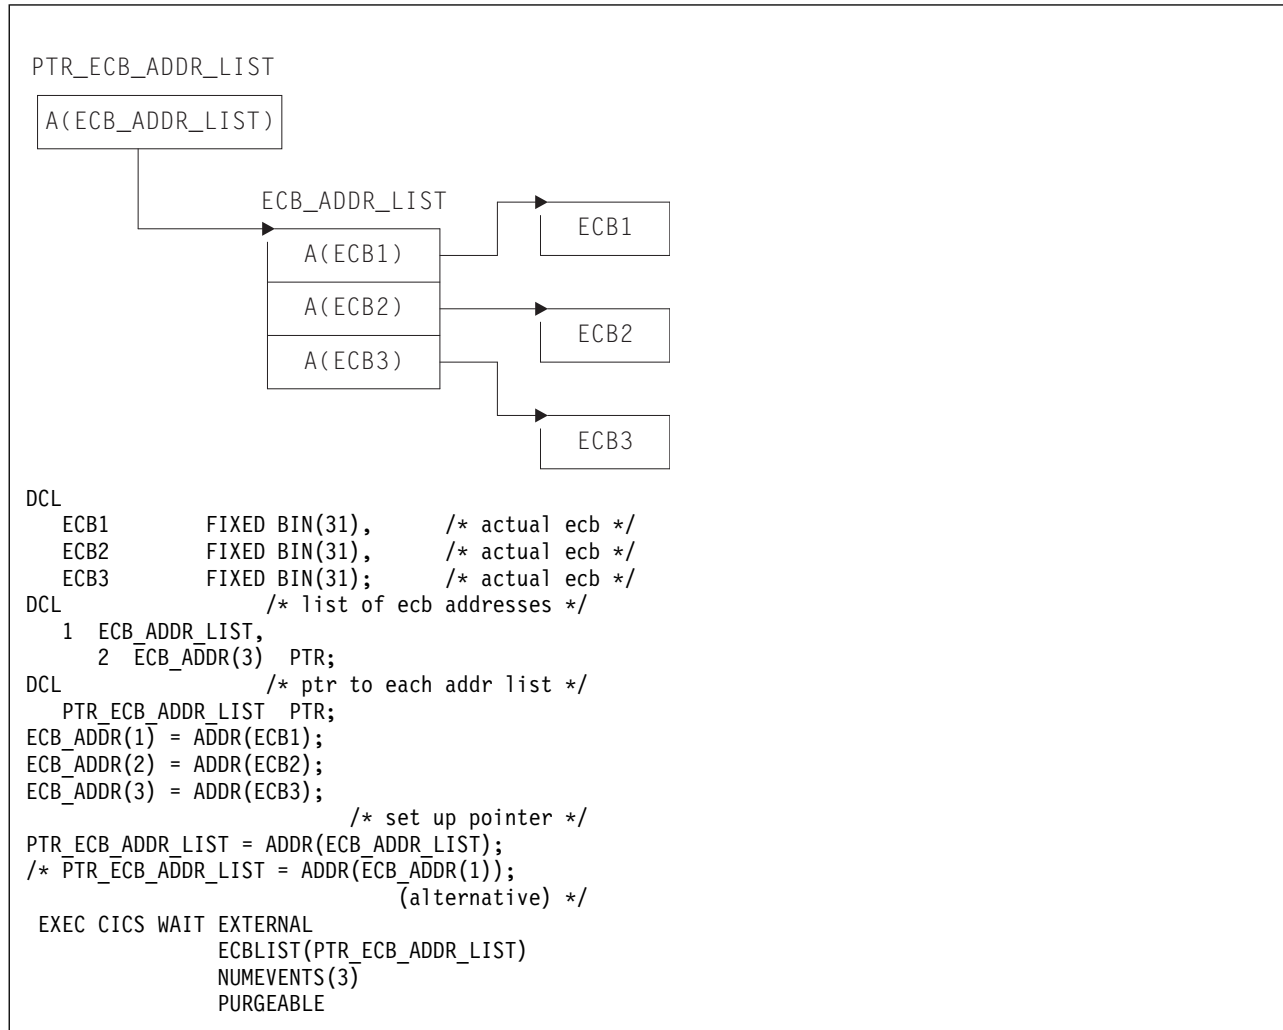


Figure 3. ECBLIST option, EXEC CICS WAIT EXTERNAL

WAIT JOURNALNAME

Synchronize the task with journal output being written to a system logger log stream.

WAIT JOURNALNAME

►►—WAIT JOURNALNAME(*data-value*)—┐
 └REQID(*data-value*)┘◄◄

Conditions: IOERR, JIDERR, NOTOPEN

This command is threadsafe.

Description

WAIT JOURNALNAME synchronizes the task with the output of one or more journal records that have been created but whose output has been deferred; that is, with asynchronous journal output requests.

The journal records may already be written out from the journal buffer area to the corresponding system logger log stream, or the system logger output operation may be in progress. If the log stream output operation has already been completed, control returns immediately to the requesting task; if not, the requesting task waits until the operation has been completed.

If the requesting program has made a succession of successful asynchronous output requests to the same journal, it is necessary to synchronize on only the last of these requests to ensure that all of the journal records have been output to the system logger log stream. This may be done either by issuing a stand-alone WAIT JOURNALNAME command, or by making the last output command itself synchronous (by specifying the WAIT option in the WRITE JOURNALNAME command).

Options

JOURNALNAME(*data-value*)

specifies a 1– to 8– character journal name identifying the journal on which the task is to wait for synchronization. The name must be a journal name known to CICS.

To issue the wait against the CICS system log, specify DFHLOG as the journal name.

To issue the wait against journals defined using the journal numbering convention, as in file resource definitions, specify the name as DFHJ*nn*, where *nn* is the journal number in the range 1 to 99.

Note: Specifying DFHJ01 on this command refers to a user journal, *not* the system log.

REQID(data-value)

specifies, in a fullword binary variable, the token that refers to a journal record that has been created but possibly not yet written out. The token is returned by CICS from a previous WRITE JOURNALNAME command issued by this task.

If you do not specify REQID, the task is synchronized with the output of the current buffer for the journal specified by JOURNALNAME.

Conditions**17 IOERR**

a journal record was not output because of an irrecoverable error condition returned by the system logger or by SMF.

Default action: If the log is the system log, CICS either quiesces or abends. If it is a general log, the task is terminated abnormally.

43 JIDERR

occurs in either of the following situations:

- The specified journal name is not known in the CICS region.
- The specified journal name refers to a DASD-only log stream to which a CICS region in another MVS image is currently connected.

Default action: terminate the task abnormally.

19 NOTOPEN

occurs in any of the following situations:

- The command cannot be satisfied because the user explicitly disabled the specified journal.
- A wait request is issued against a journal that has not previously been written to.
- This journal was defined using a model that maps it into the logstream used by the system log for this system. This error is not detected when trying to connect to the logstream. A definition for the journal will be installed and set to failed.

Default action: terminate the task abnormally.

Examples

The following example shows how to request synchronization with the output of journal records written to a user journal named 'ACCOUNTS'

```
EXEC CICS WAIT JOURNALNAME('ACCOUNTS')  
      REQID(RECTOKEN)
```

WAIT JOURNALNUM

Synchronize with journal output.

This command is supported for compatibility with earlier releases of CICS. It is superseded by the WAIT JOURNALNAME command, which you are recommended to use instead.

The syntax is the same as for WAIT JOURNALNAME except that JOURNALNUM specifies a numeric instead of a character value. The numeric value, nn, is in the range 01-99 and corresponds to journal name DFHJnn.

This command is threadsafe.

WAIT SIGNAL

Suspend task on a logical unit.

WAIT SIGNAL

►►—WAIT SIGNAL—◄◄

Conditions: NOTALLOC, SIGNAL, TERMERR

Description

WAIT SIGNAL, for a principal facility only, suspends a task until a SIGNAL condition occurs. Some logical units can interrupt the normal flow of data to the application program by a SIGNAL data-flow control command to CICS, signaling an attention, that in turn causes the SIGNAL condition to occur.

The HANDLE CONDITION SIGNAL command causes a branch to a user routine when an attention is received.

The logical units for which you can code a WAIT SIGNAL command are:

- LUTYPE4
- LUTYPE6.1
- 3600 (3601)
- 3767 interactive
- 3770 batch
- 3790 full-function

Conditions

61 NOTALLOC

occurs if the principal facility of the task is not a terminal.

Default action: terminate the task abnormally.

24 SIGNAL

occurs when the data-flow control command has been received from the principal facility.

EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs for a terminal-related error.

A CANCEL TASK request by a user node error program (NEP) may cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program (CSNE) handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

WAIT TERMINAL

Ensure terminal operation has completed.

WAIT TERMINAL



Conditions: EOC, INVREQ, NOTALLOC, SIGNAL, TERMERR

Description

WAIT TERMINAL ensures that terminal operation has completed.

Options

CONVID(*name*)

identifies the conversation to which the command relates. The 4-character name identifies either the token returned by a previously executed ALLOCATE command in EIBRSRCE in the EIB, or the token representing the principal session (returned by a previously executed ASSIGN command).

SESSION(*name*)

specifies the symbolic identifier (1–4 characters) of a session TCTTE. This option specifies the alternate facility to be used. If both this option and CONVID are omitted, the principal facility for the task is used.

Conditions

06 EOC

occurs when a request/response unit (RU) is received with end-of-chain-indicator set. Field EIBEOC also indicates this condition.

Default action: ignore the condition.

16 INVREQ

RESP2 values:

200 A distributed program link server application specified the function-shipping session (its principal facility) on the CONVID option.

Default action: terminate the task abnormally.

61 NOTALLOC

occurs if the facility specified in the command is not owned by the application.

Default action: terminate the task abnormally.

24 SIGNAL

occurs when an inbound SIGNAL data-flow control command is received from a logical unit or session. EIBSIG is always set when an inbound signal is received.

Default action: ignore the condition.

81 TERMERR

occurs for a terminal-related error.


A CANCEL TASK request by a user node error program (NEP) can cause this condition if the task has an outstanding terminal control request active when the node abnormal condition program handles the session error.

Default action: terminate the task abnormally with abend code ATNI.

WAITCICS

Synchronize events.

WAITCICS



Condition: INVREQ

Note for dynamic transaction routing: Using this command could create inter-transaction affinities that adversely affect the use of dynamic transaction routing. See the *CICS Application Programming Guide* for more information about transaction affinities.

Description

WAITCICS waits for events that post MVS-format ECBs. The command causes the issuing task to be suspended until one of the ECBs has been posted, that is until one of the events has occurred. The task can wait on one or more ECBs. If it waits on more than one, it is dispatchable as soon as one of the ECBs is posted. You must ensure that each ECB is cleared, set to binary zeros, no later than the earliest time it could be posted. CICS cannot do this for you. If you wait on an ECB that has been previously posted and not subsequently cleared, your task is not suspended and continues to run as though the WAITCICS had not been issued.

CICS includes the addresses of all ECBs passed by WAITCICS commands of current tasks in the ECBLIST passed by CICS to the MVS WAIT facility when it runs out of work. Such ECBs can be posted using the MVS POST facility or by hand posting. Hand posting could, for example, be done by moving an appropriate value into the ECB. If hand posting is definitely not going to be used, it is preferable to use WAIT EXTERNAL.

A given ECB may not be waited on by more than one task at the same time. If this rule is not followed and the ECBLIST passed by CICS on the MVS WAIT contains duplicate ECB addresses, MVS abends CICS.

Options

ECBLIST(ptr-value)

is a pointer to a list of addresses of MVS-format ECBs representing events. Both the ECBLIST and the ECBs can be above the 16MB line, that is they can be 31-bit addresses. Each ECB must be fullword aligned. Null (X'00000000' and X'FF000000') ECB addresses are ignored.

NAME(name)

specifies the symbolic name, 1–8 alphanumeric characters, as the reason for the wait. The value you specify is returned in the SUSPENDVALUE or HVALUE option respectively of the EXEC CICS INQ TASK or CEMT INQ TASK commands.

NUMEVENTS(data-value)

is the number of such events, corresponding to the number of addresses in the

ECBLIST. The field is fullword binary. When NUMEVENTS is specified as one, ECBLIST must still be an address that points to a list containing just one ECB address.

PURGEABILITY(*cvda*)

causes the issuing task to be suspended until one of the ECBs has been posted; that is, until one of the events has occurred. The values passed to CICS are PURGEABLE (the default value), or NOTPURGEABLE. The field is fullword binary. If while this task is waiting another function attempts to purge it, the result is as follows:

| Function | PURGEABLE | NOTPURGEABLE |
|-----------------------------------------------------------------|------------|--------------|
| DTIMOUT expired | Abend AEXY | No effect |
| CEMT SET TASK PURGE EXEC CICS SET TASK PURGE | Abend AEXY | No effect |
| CEMT SET TASK FORCEPURGE EXEC CICS SET TASK FORCEPURGE | Abend AEXY | Abend AEXY |

See the *CICS Recovery and Restart Guide* for information about DTIMOUT and the *CICS System Programming Reference* for information about SET TASK PURGE | FORCEPURGE.

Conditions

16 INVREQ

RESP2 values:

- 1 An ECB is not valid, for example the ECB is not fullword aligned.
- 3 NUMEVENTS is not a positive number.
- 4 PURGEABILITY is specified with an incorrect CVDA.
- 5 No valid ECBs have been found in the list, because either the ECBLIST address is not valid, or all the ECB addresses are not valid.

The ECBs specified are in read-only storage.

Default action: terminate the task abnormally.

Examples

The following figure shows how to use the ECBLIST parameter to point to a list of ECB addresses that in turn point to individual ECBs. Note that the ECBLIST variable is a pointer pointing to the first address of the list.

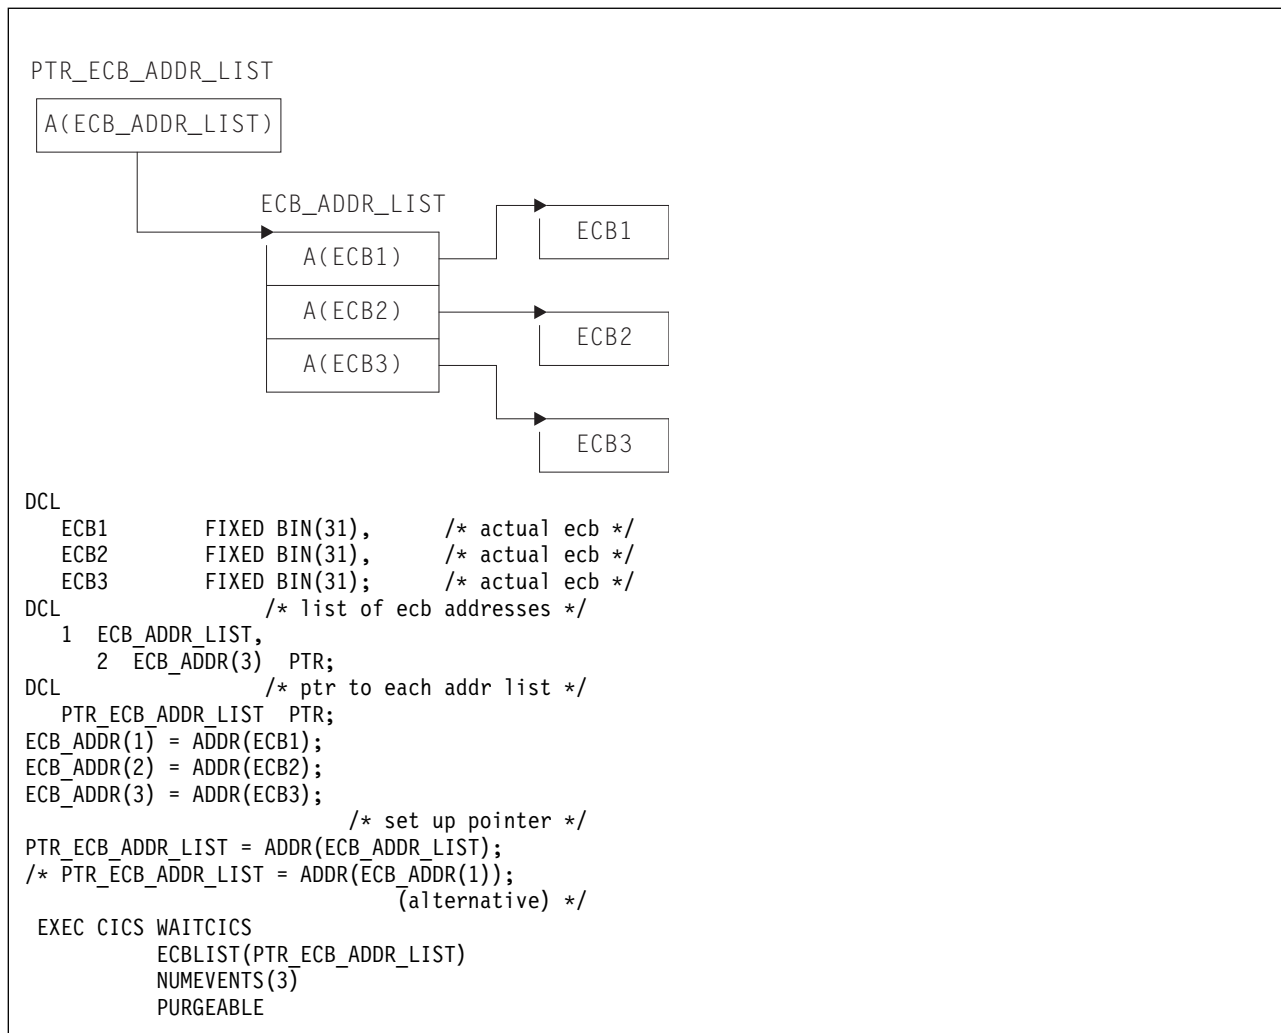


Figure 4. ECBLIST option, EXEC CICS WAITCICS

WEB CLOSE

Completes the application's use of a connection to a server for CICS as an HTTP client.

WEB CLOSE

►►—WEB—CLOSE—SESSTOKEN(*data-value*)—◄◄

Conditions: NOTOPEN

This command is threadsafe.

Description

WEB CLOSE notifies CICS that the application program has finished using a client HTTP connection to a server. The session token represents the application's use of the connection. After the application issues the WEB CLOSE command, the specified session token is no longer valid for use. The session token is required to

receive a response from the server and to read the HTTP headers for the response, so the WEB CLOSE command should not be issued until all interaction with the server and with the response that it sends is complete.

When the application program finishes using a client HTTP connection, CICS might or might not close the connection:

- If the connection is still open when you issue the WEB CLOSE command, and it was opened using a URIMAP resource that specified connection pooling, CICS does not close the connection. CICS checks the state of the connection and places it in a pool for reuse.
- If the connection is not suitable for connection pooling when you issue the WEB CLOSE command, because the server or your application program has previously made a request to close the connection, or it was not opened using a suitable URIMAP resource, or it is not in a good state, CICS closes the connection and does not place it in a pool.
- If you do not issue the WEB CLOSE command, CICS closes the connection at end of task. The closed connection cannot be placed in a pool. To enable connection pooling, your application must issue the WEB CLOSE command.

When you issue the WEB CLOSE command, CICS does not request the server to close the connection. If you are not using connection pooling, and CICS will close the connection after the application program has finished, it is good practice to request the server to close the connection by specifying the CLOSESTATUS(CLOSE) option on the final WEB SEND or WEB CONVERSE command. When this option is specified, CICS writes a Connection: close header on the request, or, for a server at HTTP/1.0 level, omits the Connection: Keep-Alive header. The information in the headers means that the server can close its connection immediately after sending the final response, rather than waiting for any further requests before timing out. If you are using connection pooling, do not specify the CLOSESTATUS(CLOSE) option, because closed connections cannot be pooled.

The connection might be closed at the request of the server before the WEB CLOSE command is issued. If you need to test whether the server has requested closure of the connection, use the WEB READ HTTPHEADER command to look for the Connection: close header in the last message from the server.

If the server does request closure of the connection, the data relating to that connection is still kept available within CICS until the WEB CLOSE command is issued. The available data includes the most recent message received from the server, and the parameters used to open the connection (such as the scheme and the host name of the server). When a server has closed the connection, the application program cannot perform the following tasks:

- Send further requests on that connection, using the WEB SEND or WEB CONVERSE commands.
- Write HTTP headers, using the WEB WRITE HTTPHEADER command.

However, the application program can still perform the following tasks:

- Receive a response, using the WEB RECEIVE command.
- Examine HTTP headers, using the WEB READ HTTPHEADER and HTTP header browsing commands.
- Extract connection information, using the WEB EXTRACT command.

When the WEB CLOSE command is issued, the data associated with the application's use of the connection is cleared.

Options

SESSTOKEN(*data-value*)

Specifies the session token, an 8-byte binary value that uniquely identifies an application's use of a client HTTP connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client.

When you issue the WEB CLOSE command for the connection identified by the session token, CICS clears the data associated with the application's use of the connection, and makes the session token invalid for further use by the application program. Session tokens in the *CICS Internet Guide* explains the use of the session token.

Conditions

19 NOTOPEN

RESP2 values are:

- 27** Invalid session token.
- 144** One or more of the Web command parameters is invalid.


WEB CONVERSE

Send an HTTP request by CICS as an HTTP client, and receive a response from the server, using a single command. WEB CONVERSE is an alternative to the WEB SEND and WEB RECEIVE commands for CICS as an HTTP client.


WEB CONVERSE




Body

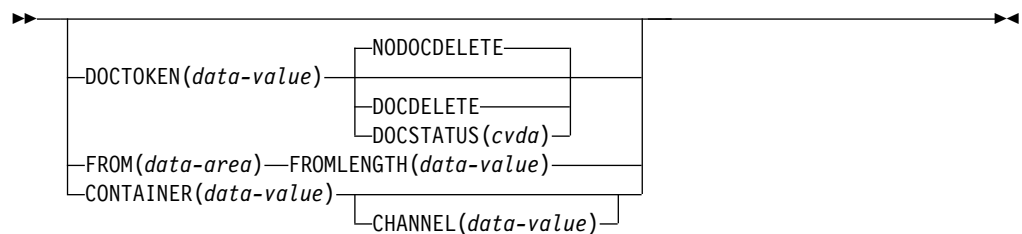

Credentials

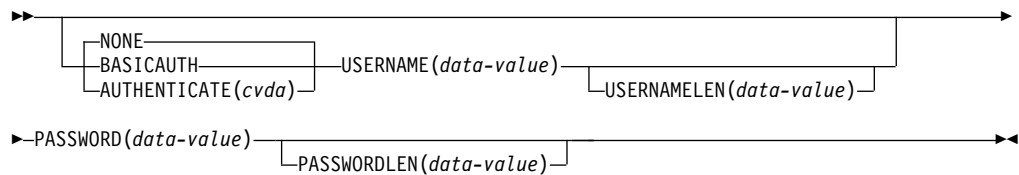

Translation

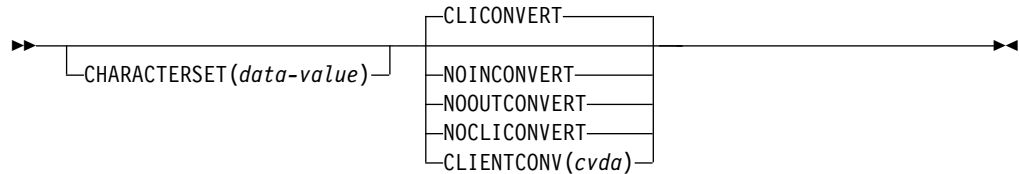

Conditions: CHANNELERR, CONTAINERERR, IOERR, INVREQ, LENGERR, NOTAUTH, NOTFND, NOTOPEN, TIMEDOUT, TOKENERR

This command is threadsafe.

Description

WEB CONVERSE enables an application program to compose and send an HTTP client request, and receive a response from the server. A session token must be included on this command. For guidance on the correct use of the WEB CONVERSE command, see Making HTTP requests through CICS as an HTTP client in the *CICS Internet Guide*.

- **The HTTP client request** is made using a connection that has been opened using the WEB OPEN command. The WEB CONVERSE command can be used in place of the WEB SEND command to compose and send the request.
- **The response from the server** is received by CICS Web support and passed to the application. The WEB CONVERSE command can be used in place of the WEB RECEIVE command to make the application program wait for and receive the HTTP response. The headers for the HTTP response can be examined separately using the WEB READ HTTPHEADER command or the HTTP header browsing commands.

Note: The RTIMOUT value specified for the transaction that starts the user application indicates the time that the application is prepared to wait to receive the incoming message. (RTIMOUT is specified on the transaction profile definition). When the period specified by RTIMOUT expires, CICS returns a TIMEDOUT response to the application. An RTIMOUT value of zero means that the application is prepared to wait indefinitely. The default setting for RTIMOUT on transaction profile definitions is zero, so it is important to check and change that setting for applications that are making HTTP client requests.

The request can also time out when sending a message to the server. In this case, the deadlock timeout interval specified in the DTIMOUT attribute of the TRANSACTION definition applies, and CICS returns a TIMEDOUT response to the application.

The WEB CONVERSE command does not support chunked transfer-coding for the request, because this requires a sequence of send actions, and the WEB CONVERSE command provides a single send action. If you want to send a

chunked message, use the WEB SEND command to send it, and the WEB RECEIVE command to receive it. If the server sends a chunked response, this can be received using the WEB CONVERSE command.

The WEB CONVERSE command cannot be used after the connection to the server has been closed. If you need to test whether the server has requested termination of the connection, use the WEB READ HTTPHEADER command to look for the Connection: close header in the last message from the server.

The WEB CONVERSE command performs a single send action and a single receive action, and it is designed to be used in place of a WEB SEND command and a WEB RECEIVE command. You may use WEB SEND and WEB RECEIVE commands, and WEB CONVERSE commands, in relation to the same connection (that is, with the same SESSTOKEN). However, if you are pipelining requests (that is, sending a sequence of requests without waiting for a response), you must not follow a WEB SEND command with a WEB CONVERSE command. CICS checks at program run time that each WEB SEND command has a subsequent WEB RECEIVE command before any WEB CONVERSE command is issued. For example, if you use the WEB SEND command three times to issue a pipelined sequence of requests, you must use the WEB RECEIVE command three times to receive the responses for those requests, before you can use the WEB CONVERSE command.

Options for sending the HTTP client request

ACTION(*cvda*)

This option is used to specify how the message should be sent out. The CVDA value is as follows:

EXPECT

Makes CICS send an Expect header along with the request line and headers for the request, and await a 100-Continue response before sending the message body to the server. If a response other than 100-Continue is received, CICS informs the application program and cancels the send. If no response is received after a period of waiting, CICS sends the message body anyway.

The Expect header is not supported by servers below HTTP/1.1. If CICS does not yet know the HTTP version of the server, CICS makes an additional request before sending your request, in order to determine the HTTP version of the server. If the Expect header would not be suitable, CICS sends your request without it.

This option must only be used if your request has a message body.

AUTHENTICATE(*cvda*)

This option allows you to specify user authentication details (credentials), to control access to restricted data. CVDA values are as follows:

NONE

Specifies that there are no restrictions on accessing this data, therefore no credentials are required. This is the default value for AUTHENTICATE.

BASICAUTH

Specifies that HTTP Basic Authentication credentials are required for this session. These details can be supplied within the command or by using the XWBAUTH global user exit.

CHANNEL(*data-value*)

Specifies the name of the channel to which the container belongs. The name of the channel can consist of up to 16 alphanumeric characters, including appropriate punctuation. Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

If the CONTAINER option is specified, CHANNEL is optional.

If the CHANNEL option is not specified, CICS assumes the current channel.

CHARACTERSET(*data-value*)

Specifies a character set into which CICS translates the entity body of the item sent by the command before sending. The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation. CICS does not support all the character sets named by IANA. HTML coded character sets in the *CICS Internet Guide* lists the IANA character sets that are supported by CICS for code page conversion.

To allow code page conversion of the entity body, the CLIENTCONV option must be set (or allowed to default) to CLICONVERT. If the NOCLICONVERT option is specified, code page conversion will not take place. If conversion is requested and CHARACTERSET is not specified, ISO-8859-1 is used as the default character set.

CLOSESTATUS(*cvda*)

Specifies whether or not a Connection header with the "close" connection option (Connection: close) should be included on the request. The default is that the header is not included. CVDA values are as follows:

CLOSE

Makes CICS write a Connection: close header for this request. The header notifies the server that the connection should be closed after the server has sent its response to the request. (For a server at HTTP/1.0 level, CICS achieves the same effect by omitting the Connection: Keep-Alive header.) Do not specify this option if you implemented connection pooling in the URIMAP resource for this connection, because a closed connection cannot be pooled for reuse. Only specify this option if this is your final request to the server and you are not using connection pooling.

NOCLOSE

Means that the Connection: close header is not used for this request. If the server is identified as HTTP/1.0, CICS sends a Connection header with the "Keep-Alive" connection option (Connection: Keep-Alive), to notify that a persistent connection is intended.

CONTAINER(*data-value*)

Specifies the name of the container where the HTTP body is held, before it is sent to the server. The name of the container can consist of up to 16 alphanumeric characters, including appropriate punctuation. Leading and embedded blanks are not permitted. If the name is shorter than 16 characters, it is padded with trailing blanks.

DOCSTATUS(*cvda*)

Indicates whether the document should be deleted or not deleted during processing of the WEB CONVERSE command. CVDA values are as follows:

DOCDELETE

CICS deletes the document after the document contents are saved for

sending. Storage allocated for the document is released immediately. If you make subsequent requests for the document, these generate a TOKENERR response.

NODOCDELETE

CICS does not delete the document during processing of the **WEB CONVERSE** command. This is the default value for DOCSTATUS.

DOCTOKEN(data-value)

Specifies the 16-byte binary token of a document to be sent as the message body. The document must be created using the CICS Document interface, using the **EXEC CICS DOCUMENT CREATE, INSERT, and SET** commands. The FROM option provides an alternative way to create a message body.

FROM(data-area)

Specifies a buffer of data which holds the message body. The message body is built by the application program. When you specify the FROM option, use the FROMLENGTH option to specify the length of the buffer of data. The DOCTOKEN option provides an alternative way to create the message body.

There is no set maximum limit for the size of the data area, but its size is limited in practice by storage considerations. Producing an entity body for an HTTP message in the *CICS Internet Guide* has more information about storage considerations.

FROMLENGTH(data-area)

Specifies the length, as a fullword binary value, of the buffer of data supplied on the FROM option (the message body). It is important to state this value correctly, because an incorrect data length can cause problems for the recipient of the message.

MEDIATYPE(data-area)

Specifies the data content of any message body provided, for example text/xml. You must specify a 56-byte area for MEDIATYPE. The media type is up to 56 alphanumeric characters, including appropriate punctuation, but not spaces. For more information on media types, see IANA media types and character sets in the *CICS Internet Guide*. CICS checks that the format of the media type is correct, but does not check the validity of the media type against the data content. CICS uses this information to produce the Content-Type header for the message.

For requests that require a body, you must specify the MEDIATYPE option. There is no default. However, if the required Content-Type header needs to contain spaces or more than 56 characters, the application can provide it using the **WEB WRITE HTTPHEADER** command. In this case, do not specify the MEDIATYPE option.

The supplied media type is used to determine whether code page conversion is required under the following circumstances:

- If you are sending a message from a buffer, using the FROM option, and the CLIENTCONV and CHARACTERSET options are not specified.
- If you are sending a message from a document, using the DOCTOKEN option, and the CLIENTCONV and CHARACTERSET options are not specified.
- If you are sending a message from a named container, using the CONTAINER option, and either CLICONVERT is specified, or the CLIENTCONV and CHARACTERSET options are not specified.

If the supplied media type is text, the message is converted. If the supplied media type is nontext, the message is not converted.

The MEDIATYPE option is used for both the sending and receiving functions of the WEB CONVERSE command. If it is specified with a value, the value is used to construct the Content-Type header in the request, and the same field is used to receive the media type of the response that is returned by the server. If it is specified without a value, it is used only to receive the media type of the response.

METHOD(*cvda*)

Specifies the HTTP method for the request.

The GET, HEAD, POST, PUT, TRACE, OPTIONS, and DELETE methods are supported by this command. However, some HTTP servers, particularly HTTP/1.0 servers, might not implement all of these methods.

HTTP method reference for CICS Web support in the *CICS Internet Guide* has more information about the correct use of methods, including the HTTP versions that apply to each.

CICS bars the sending of a message body for methods where it is inappropriate, and requires it for methods where it is appropriate. CVDA values are as follows:

GET Obtain a resource from the server. A request body is not allowed.

HEAD

Obtain the HTTP headers, but not the response body, for a resource. A request body is not allowed.

POST Send data to a server. A request body is required.

PUT Create or modify a resource on the server. A request body is required.

TRACE

Trace the route of your request to the server. A request body is not allowed.

OPTIONS

Obtain information about the server. A request body is allowed, but there is no defined purpose for the body. If you do use a request body, then you must specify a media type.

DELETE

Delete a resource on the server. A request body is not allowed.

PASSWORD(*data-value*)

Specifies the password associated with the user ID or logon name that is allowed access to this data. The PASSWORD option is required only if the USERNAME option is used. If the specified password is over 8 characters long, it is treated as a password phrase when it is sent to z/OS systems.

PASSWORDLEN(*data-value*)

Specifies the buffer length supplied for the PASSWORD option as a fullword binary variable.

PATH(*data-area*)

Specifies the path information for the specific resource within the server that the application needs to access.

If the URIMAP option was used to specify an existing URIMAP definition on the WEB OPEN command for this connection, the path specified in that URIMAP definition is the default path for the WEB SEND command. In these circumstances, if you do not specify path information on the WEB SEND

command, the path from the URIMAP definition is used. If you specify a different path from that given in the URIMAP definition, this overrides the path from the URIMAP definition.

If the URIMAP option was not used on the WEB OPEN command, there is no default path, and you must provide path information. Path information can be extracted from a known URL using the WEB PARSE URL command.

As an alternative to using the PATH option to provide the path information, you can use the URIMAP option on the WEB CONVERSE command to specify a URIMAP definition from which the path information is taken directly.

PATHLENGTH(*data-value*)

Specifies the length of the path, as a fullword binary value. If you are providing path information using the PATH option, you need to specify the PATHLENGTH option. Path length information is returned if you use the WEB PARSE URL command to parse a URL.

QUERYSTRING(*data-area*)

Specifies a query string that is to be supplied to the server as part of the request. You do not need to include a question mark (?) at the beginning of the query string; if you do not include it, CICS supplies it for you automatically when constructing the request. If you include escaped characters in the query string, CICS passes them to the server in their escaped format.

QUERYSTLEN(*data-value*)

Specifies the length of the query string supplied on the QUERYSTRING option, as a fullword binary value.

SESTOKEN(*data-value*)

Specifies the session token, an 8-byte binary value that uniquely identifies this connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

URIMAP(*data-value*)

Specifies the name (up to 8 characters, in mixed case) of a URIMAP definition that provides the path information for the specific resource within the server that the application needs to access. The URIMAP definition must be for CICS as an HTTP client (with USAGE(CLIENT) specified). Its HOST attribute must be the same as the HOST attribute of the URIMAP definition that was specified on the WEB OPEN command for this connection, or the same as the host name specified in the HOST option on the WEB OPEN command for this connection. A URIMAP definition specified on the WEB CONVERSE command applies only to this request.

If the URIMAP option is specified, do not specify the PATH or PATHLENGTH options.

USERNAME(*data-value*)

Specifies the user ID or logon name that is allowed access to this data. If the USERNAME is specified, you also need to use the PASSWORD option.

USERNAMELEN(*data-value*)

Specifies the buffer length supplied for the USERNAME option as a fullword binary variable.

Options for receiving the server's response

BODYCHARSET(*data-area*)

Specifies the character set of the HTTP response body.

The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation.

If the HTTP body is received into an application buffer, the character set returned is as follows:

- If the INTO or SET option is specified, and the HTTP body is converted, CICS returns the character set of the HTTP body before conversion.
- If the INTO or SET option is specified, and the HTTP body is not converted, CICS returns the character set specified in the Content-Type header. If character set information is not available, blanks are returned.

If the HTTP body is received into a named container, the character set returned is as follows:

- If the container is a CHAR container, CICS returns the character set of the encoded data.
- If the container is a BIT container, CICS returns blanks.

If the value returned is more than 40 bytes, the data is truncated. If the value returned is less than 40 bytes, the data is padded to the right with blanks.

INTO(*data-area*)

Specifies the buffer that is to contain the data being received.

MAXLENGTH(*data-value*)

Specifies the maximum amount, as a fullword binary value, of data that CICS is to pass to the application. The MAXLENGTH option applies whether the INTO or the SET option is specified for receiving data. If the data has been sent using chunked transfer-coding, CICS assembles the chunks into a single message before passing it to the application, so the MAXLENGTH option applies to the total length of the chunked message, rather than to each individual chunk. The data is measured after any code page conversion has taken place.

If the length of data exceeds the value specified and the NOTTRUNCATE option is not specified, the data is truncated to that value, and the remainder of the data is discarded.

If the length of data exceeds the value specified and the NOTTRUNCATE option is specified, CICS retains the remaining data and can use it to satisfy subsequent RECEIVE commands.

MEDIATYPE(*data-area*)

Specifies a 56-character data area to receive the media type (that is, the type of data content) for the body, for example text/xml. See IANA media types and character sets in the *CICS Internet Guide* for more information about media types.

The MEDIATYPE option is used for both the sending and receiving functions of the WEB CONVERSE command. If it is specified with a value, the value is used to construct the Content-Type header in the request, and the same field is used to receive the media type of the response that is returned by the server. If it is specified without a value, it is used only to receive the media type of the response.

NOTTRUNCATE

Specifies that when the data available exceeds the length requested on the MAXLENGTH option, the remaining data is not to be discarded immediately but is to be retained for retrieval by subsequent RECEIVE commands. (If no further RECEIVE commands are issued, the data is discarded during transaction termination.)

A single RECEIVE command using the SET option and without the MAXLENGTH option receives all the remaining data, whatever its length. Alternatively, you can use a series of RECEIVE commands with the NOTRUNCATE option to receive the remaining data in appropriate chunks. Keep issuing the RECEIVE command until you are no longer getting a LENGERR response. Bear in mind that if you receive less than the length requested on the MAXLENGTH option, this does not necessarily indicate the end of the data; this could happen if CICS needs to avoid returning a partial character at the end of the data.

SET(*ptr-ref*)

Specifies a pointer reference that is to be set to the address of data received. The pointer reference is valid until the next RECEIVE command or the end of task.

STATUSCODE(*data-area*)

Specifies a data area to receive the HTTP status code sent by the server. The code is a binary halfword value. Examples are 200 (normal) or 404 (not found). Receiving the status code is optional, but you should always receive and check the status code in the following circumstances:

- If you intend to make an identical request to the server, now or during a future connection.
- If you intend to make further requests to the server using this connection.
- If your application is carrying out any further processing that depends on the information you receive in the response.

HTTP status code reference for CICS Web support in the *CICS Internet Guide* has basic guidance on appropriate actions for an application to take in response to the status codes for HTTP/1.1.

STATUSLEN(*data-value*)

Specifies, as a fullword binary value, the length of the data area to receive any text returned by the server to describe the status code (the STATUSTEXT option). The text is known as a reason phrase. Most reason phrases recommended for HTTP are short, but a data-area length of 256 characters is suggested here, in case the server replaces the recommended reason phrase with more detailed information.

STATUSTEXT(*data-area*)

Specifies a data area to receive any text returned by the server to describe the status code. The text is known as a reason phrase. Examples are "OK" (accompanying a 200 status code), or "Bad Request" (accompanying a 400 status code). The STATUSLEN option gives the length allowed for the text.

TOCHANNEL(*data-value*)

Specifies the name of the channel that the container belongs to. The name of the channel can consist of up to 16 alphanumeric characters, including appropriate punctuation. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and _ . Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel.

If you plan to ship your channels between CICS regions, bear in mind that you should restrict your characters to standard alphanumeric characters (A-Z 0-9 & : = , ; <> . - _) to ensure they are represented in the same way by all EBCDIC code pages.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers.

If the TOCHANNEL option is not specified, then CICS assumes the current channel.

TOCONTAINER(*data-value*)

Specifies the name of the container where the data is placed. The name of the container can consist of up to 16 alphanumeric characters, including appropriate punctuation. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; > . - and _ . Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks.

If you plan to ship your containers between CICS regions, bear in mind that you should restrict your characters to standard alphanumeric characters (A-Z 0-9 & : = , ; <> . - _) to ensure they are represented in the same way by all EBCDIC code pages.

Do not use container names starting with "DFH", unless requested to do so by CICS.

TOLENGTH(*data-area*)

Specifies a fullword binary variable that is set to the amount of data that CICS has returned to the application. Note that this might be slightly less than the limit that you set using the MAXLENGTH option, especially if a double-byte or multi-byte character set is involved, because CICS does not return a partial character at the end of the data.

- If the NOTRUNCATE option is not specified, any further data present in the message is discarded. A LENGERR response with a RESP2 value of 57 is returned if further data was present.
- If the NOTRUNCATE option is specified, any additional data is retained. A LENGERR response with a RESP2 value of 36 is returned if additional data is available. The description for the NOTRUNCATE option tells you what to do in this case.

This option is the equivalent of the LENGTH option on the WEB RECEIVE command.

If you are using the TOCONTAINER option, do not specify the TOLENGTH option.

Options for converting items sent and received

CLIENTCONV(*cvda*)

Specifies whether or not CICS translates the entity body of the HTTP request before sending, and translates the entity body of the server's response. The default is that the entity body is converted both when the request is sent out, and when the response is received (CLICONVERT).

If you are receiving data into a named container (specified by the TOCONTAINER option), conversion does not take place.

- For the request body, you can use the CHARACTERSET option on this command to specify a character set that is suitable for the server. If conversion is requested (or happens as the default) but you do not specify a character set, the default is that CICS converts the entity body to the ISO-8859-1 character set.

- For the response body, you do not need to specify the character set used by the server. CICS identifies this by examining the Content-Type header of the message. If the header does not provide this information, or if the named character set is not supported by CICS for code page conversion, the ISO-8859-1 character set is used.
- For the application's code page, the default code page for the local CICS region (as specified in the LOCALCCSID system initialization parameter) is used, or an alternative EBCDIC code page that you specified on the WEB OPEN COMMAND.

CVDA values are as follows:

CLICONVERT

CICS converts the entity body of the request into the character set that you identify for the server, and converts the entity body of the response into a code page suitable for the application.

If the TOCONTAINER option is specified, conversion does not take place when the HTTP response is received. Instead, the media type of the HTTP response header determines whether the HTTP body is stored in a BIT or CHAR container. If the media type is a text media type, the body is stored in a CHAR container. If the media type is a non-text media type, the body is stored in a BIT container. If the HTTP response does not contain media type information, the default of text media type is assumed.

NOINCONVERT

CICS converts the entity body of the request into the character set that you identify for the server. However, CICS does not convert the entity body of the response, and it is passed to the application in the character set used by the server.

If the TOCONTAINER option is specified, conversion does not take place when the HTTP response is received. Instead, the media type of the HTTP response header determines whether the HTTP body is stored in a BIT or CHAR container. If the media type is a text media type, the body is stored in a CHAR container. If the media type is a non-text media type, the body is stored in a BIT container. If the HTTP response does not contain media type information, the default of text media type is assumed.

NOOUTCONVERT

CICS does not convert the entity body of the request, and it is sent to the server in the code page used by the application. However, CICS does convert the entity body of the response into a code page suitable for the application.

If the TOCONTAINER option is specified, conversion does not take place when the HTTP response is received. Instead, the media type of the HTTP response header determines whether the HTTP body is stored in a BIT or CHAR container. If the media type is a text media type, the body is stored in a CHAR container. If the media type is a non-text media type, the body is stored in a BIT container. If the HTTP response does not contain media type information, the default of text media type is assumed.

NOCLICONVERT

CICS does not convert the entity body of the request, and it is sent to the server in the code page used by the application. CICS does not

convert the entity body of the response, and it is passed to the application in the character set used by the server.

If the TOCONTAINER option is specified, conversion does not take place when the HTTP response is received. Instead, the media type of the HTTP response header determines whether the HTTP body is stored in a BIT or CHAR container. If the media type is a text media type, the body is stored in a CHAR container. If the media type is a non-text media type, the body is stored in a BIT container. If the HTTP response does not contain media type information, the default of text media type is assumed.

Conditions

122 CHANNELERR

RESP2 values are:

- 1 The name specified by the TOCHANNEL option contains an illegal character or combination of characters.
- 2 The channel specified on the CHANNEL option could not be found.

110 CONTAINERERR

RESP2 values are:

- 1 The name specified by the TOCONTAINER option contains an illegal character or combination of characters.
- 2 The container specified by the CONTAINER option could not be found.

19 NOTOPEN

RESP2 values are:

- 27 Invalid session token.

16 INVREQ

RESP2 values are:

- 10 Invalid response header.
- 11 Action code invalid.
- 13 Close status invalid.
- 15 Code page conversion failure.
- 17 Expect-100 request was rejected by the server.
- 22 Invalid chunk size.
- 32 Media type invalid.
- 33 Method does not support a body.
- 34 Method requires a body.
- 41 The connection has been closed.
- 43 The DOCSTATUS value specified is invalid.
- 45 The character set specified is invalid.
- 46 The CLIENTCONV option is invalid.
- 49 The format of the path option is invalid.
- 54 The HTTP method is not valid.

- 63 URIMAP object disabled.
- 64 Host in URIMAP definition does not match host specified when this session was opened.
- 67 The content of the response does not conform to HTTP format. The error is generated because there is a syntax problem.
- 74 The connection has been closed (CICS sent a Connection: close header to the server, or the server may have timed out due to inactivity on this connection).
- 76 MEDIATYPE option required.
- 79 Pipelining is in progress. WEB CONVERSE command cannot be used.
- 80 CHARACTERSET cannot be specified with NOSRVCONVERT.
- 142 AUTHENTICATE is invalid. The CVDA is not NONE or BASICAUTH.
- 144 One or more of the Web command parameters is invalid.
- 145 Either CHANNEL was not specified with CONTAINER, or TOCHANNEL was not specified with TOCONTAINER (and there is no current channel).
- 146 The named container is a read-only container.
- 147 Internal conversion error.
- 150 Conversion requested, but data to be sent is in a DATATYPE BIT container.

22 LENGERR

RESP2 values are:

- 5 The PATHLENGTH option value was not greater than zero.
- 8 The QUERYSTRLEN option value was not greater than zero.
- 16 Invalid MAXLENGTH.
- 36 Partial response body returned. Use additional RECEIVES to obtain remainder.
- 50 The FROMLENGTH option value was not greater than zero.
- 57 The response body exceeds the length specified, and the remainder of the body has been discarded.
- 58 The status text exceeds the length specified.
- 59 The STATUSLEN option value was not greater than zero.
- 139 USERNAMELEN is not positive.
- 140 PASSWORDLEN is not positive.

13 NOTFND

RESP2 values are:

- 61 The URIMAP object specified was not found.

112 TOKENERR

RESP2 values are:

- 47 The document token specified is invalid or the document has been deleted.

17 IOERR

RESP2 values are:

42 Socket error.

124 TIMEDOUT

RESP2 values are:

62 Timeout on socket receive.

156 Timeout on socket send.

70 NOTAUTH

RESP2 values are:

100 Path barred by security exit.

110 XWBAUTH error. The XWBAUTH global user exit has issued a UERCERR return code because the XWBAUTH exit is required but cannot return a valid response.

This error code is issued when the following are true: BASICAUTH is specified; USERNAME, PASSWORD, or both are omitted; XWBAUTH is inactive or returns a response of UERCERR.

WEB ENDBROWSE FORMFIELD

Signal the end of a formfield browse in an HTML form.

WEB ENDBROWSE FORMFIELD

►►—WEB—ENDBROWSE—FORMFIELD—◄◄

Conditions: INVREQ

This command is threadsafe.

Description

WEB ENDBROWSE FORMFIELD terminates the browse of a set of name-value pairs in an HTML form. The form is part of the body of an HTTP request being processed by the current CICS task. No information is returned on the ENDBROWSE.

Conditions

16 INVREQ


RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 4 The command is being issued before a WEB STARTBROWSE command is issued.

WEB ENDBROWSE HTTPHEADER

Signal the end of an HTTP header browse.

WEB ENDBROWSE HTTPHEADER



Conditions: INVREQ, NOTOPEN

This command is threadsafe.

Description

WEB ENDBROWSE HTTPHEADER terminates the browse. No information is returned on the ENDBROWSE. The SESSTOKEN option is required if the HTTP header information is part of a response sent to CICS as an HTTP client.

Options

SESSTOKEN(data-value)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

Conditions

16 INVREQ

RESP2 values are:

- 1** The command is being issued in a non-CICS Web support application.
- 3** The command is being issued for a non-HTTP request.
- 4** The command is being issued before a WEB STARTBROWSE command is issued.

19 NOTOPEN

RESP2 value is:

- 27** Invalid session token.

WEB ENDBROWSE QUERYPARM

Finish browsing query string data in a URL.

WEB ENDBROWSE QUERYPARM

►►—WEB—ENDBROWSE—QUERYPARM—◄◄

Conditions: INVREQ

This command is threadsafe.

Description

WEB ENDBROWSE QUERYPARM terminates the browse of a set of keyword parameters, consisting of name and value pairs, from a query string in a URL. No information is returned on the ENDBROWSE.

Conditions

16 INVREQ


RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 4 The command is being issued before a WEB STARTBROWSE command is issued.

WEB EXTRACT

Obtain information about an HTTP request that has been made to CICS as an HTTP server or about a connection between an Internet server and CICS as an HTTP client. This command is a synonym of `EXTRACT WEB`.


WEB EXTRACT (CICS as an HTTP server)

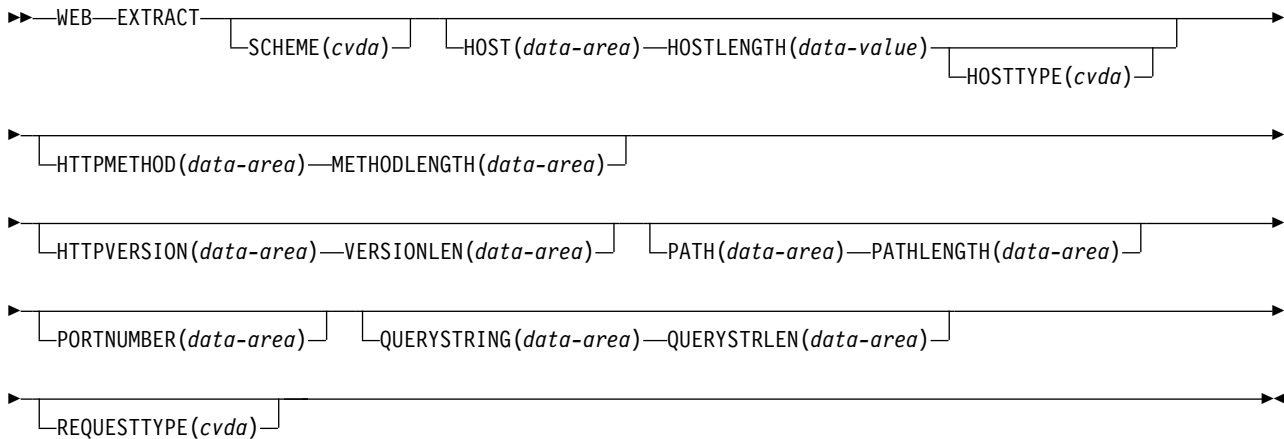

Conditions: INVREQ, IOERR, LENGERR, NOTFND, NOTOPEN, TIMEDOUT

This command is threadsafe.

WEB EXTRACT (CICS as an HTTP client)

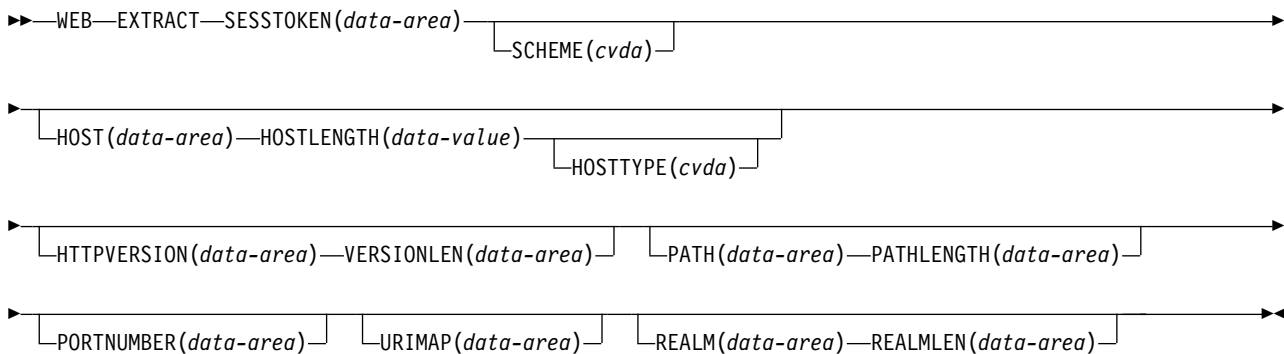

Conditions: INVREQ, IOERR, LENGERR, NOTFND, NOTOPEN, TIMEDOUT

This command is threadsafe.

Description

For CICS as an HTTP server, `WEB EXTRACT` enables an application to obtain information about the most recent HTTP request that has been made to CICS by a Web client and assigned to the application for handling.

For CICS as an HTTP client, when the SESSTOKEN option is specified, the command enables an application to obtain information about a connection that it has opened with a server. The information returned to the application comprises global information about the connection, such as the host name of the server and its HTTP version. Information about specific requests made by the application, and responses made by the server, is not available using this command. The WEB RECEIVE command is used to receive information from a server response.

Options

HOST(*data-area*)

For CICS as an HTTP server, HOST specifies a buffer to contain the host component of the URL, as specified either in the Host header field for the request or in the request line (if an absolute URI was used for the request). The port number is presented separately using the PORTNUMBER option.

For CICS as an HTTP client, with the SESSTOKEN option, HOST specifies a buffer to contain the host name of the server in the connection identified by the SESSTOKEN option. The port number is presented separately using the PORTNUMBER option.

An IPv4 or IPv6 address can represent the host name. IPv4 addresses are returned as native IPv4 dotted decimal addresses; for example, 1.2.3.4. IPv6 addresses are returned as native IPv6 colon hexadecimal addresses; for example, ::a:b:c:d

For information on IP addresses, see IP addresses in Product overview.

HOSTLENGTH(*data-area*)

Specifies the length of the buffer supplied on the HOST option, as a fullword binary variable, and is set to the length of the data returned to the application. 116 characters is an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

HOSTTYPE(*cvda*)

Returns the address format of the HOST option. CVDA values are as follows:

HOSTNAME

The HOST option contains a character host name. The IP address that corresponds to the host name is looked up in the domain name server.

IPV4 The address is a dotted decimal IPv4 address.

IPV6 The address is a colon hexadecimal IPv6 address.

NOTAPPLIC

An incorrect host address was returned (HOST=0.0.0.0).

HTTPMETHOD(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the HTTP method string on the request line of the message.

This option is not relevant for CICS as an HTTP client.

HTTPVERSION(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the HTTP version for the Web client, as stated on its request.

For CICS as an HTTP client (with the SESSTOKEN option), this option specifies a buffer to contain the HTTP version of the server in the connection

identified by the SESSTOKEN option. If CICS does not already know the HTTP version of the server, CICS makes a request to the server with the OPTIONS method to find out this information.

1.1 indicates HTTP/1.1, and 1.0 indicates HTTP/1.0 or lower.

METHODLENGTH(*data-area*)

Specifies the length of the buffer supplied on the HTTPMETHOD option, as a fullword binary variable, and is set to the actual length of the data returned to the application. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

PATH(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the path specified in the request line of the message.

For CICS as an HTTP client (with the SESSTOKEN option), this option specifies a buffer to contain the default path that applies to requests made using the connection. If a URIMAP definition was specified on the WEB OPEN command for the connection, the default path is the path specified in the URIMAP definition. Otherwise, the default path is a single forward slash.

PATHLENGTH(*data-area*)

Specifies the length of the buffer supplied on the PATH option, as a fullword binary variable, and is set to the length of the data returned to the application. 256 characters is an appropriate size to specify for this data-area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

PORTNUMBER(*data-area*)

For CICS as an HTTP server, this option returns a data area containing the port number specified in the request line of the message.

For CICS as an HTTP client (with the SESSTOKEN option), this option returns a data containing the port number used to access the server in the connection specified by the SESSTOKEN option.

The value returned in the data area is a fullword binary value.

Well-known port numbers for a service are normally omitted from the URL. If the port number is not present in the URL, the command identifies and returns it based on the scheme. For HTTP, the well-known port number is 80, and, for HTTPS, the well-known port number is 443. If a port number is returned that is not the default for the scheme, you must specify the port number explicitly to gain access to the URL; for example, if you are using this information in a WEB OPEN command.

QUERYSTRING(*data-area*)

For CICS as an HTTP server, this option specifies a buffer to contain the query string on the request line of the message. The query string is the value or values encoded after the question mark (?) delimiting the end of the path. The query string is returned in its escaped form.

This option is not relevant for CICS as an HTTP client.

QUERYSTLEN(*data-area*)

Specifies the length of the buffer supplied on the QUERY option, as a fullword binary variable, and is set to the length of the data returned to the application (the query string). 256 characters is an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

REALM(*data-area*)

Specifies, for CICS as an HTTP client, the realm or security environment that contains the data that you are requesting. If you are issuing a command in response to an HTTP 401 message, REALM is the realm value in the most recently received WWW-Authenticate header.

REALMLEN(*data-area*)

Specifies, for CICS as an HTTP client, the buffer length supplied for the REALM option, as a fullword binary variable. If you are issuing a command in response to an HTTP 401 message, REALMLEN is the length of the realm name in the most recently received WWW-Authenticate header.

REQUESTTYPE(*cvda*)

For CICS as an HTTP server, this option specifies the type of request received. This option is not relevant for CICS as an HTTP client. CVDA values are as follows:

HTTPYES

Indicates an HTTP request.

HTTPNO

Indicates a non-HTTP request.

SCHEME(*cvda*)

For both CICS as an HTTP server, and CICS as an HTTP client (with the SESSTOKEN option), this option returns the scheme used for the connection between CICS and the Web client or server. CVDA values are as follows:

HTTP Is the HTTP protocol, without SSL.

HTTPS

Is the HTTPS protocol, which is HTTP with SSL.

SESSTOKEN(*data-value*)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token. For the command, information is returned about the specified connection.

This option is not relevant for CICS as an HTTP server.

URIMAP(*data-area*)

For CICS as an HTTP client (with the SESSTOKEN option), this option returns the 8-character name (in mixed case) of any URIMAP definition that was specified on the WEB OPEN command to open the connection specified by the SESSTOKEN option. The INQUIRE URIMAP command can be used to find information about the attributes of this URIMAP definition.

This option is not relevant for CICS as an HTTP server.

VERSIONLEN(*data-area*)

Specifies the length of the buffer supplied on the HTTPVERSION option, as a fullword binary variable, and is set to the length of the data returned to the application.

Conditions**16 INVREQ**

RESP2 values:


- 1 The command is being issued in a non-CICS Web support application.

- 3 The command is being issued for a non-HTTP request. This command is set only if one or more of HTTPMETHOD, HTTPVERSION, or PATH is specified and the request is a non-HTTP request).
- 41 The connection has closed. This is a WEB EXTRACT (Client) error only. The server may have timed out due to inactivity on this connection.
- 67 The content of the response does not conform to HTTP format. The error is generated because there is a syntax problem. This error is for WEB EXTRACT (Client) only.
- 71 A chunked transfer-coding error has occurred. This error is for WEB EXTRACT (Client) only.
- 144 One or more of the Web command parameters is invalid. This error is for WEB EXTRACT (Client) only.
- 17 IOERR**
RESP2 values:
 - 42 Socket error.
- 22 LENGERR**
RESP2 values:
 - 4 The method exceeds the length specified (METHODLENGTH option).
 - 5 The PATHLENGTH option value was not greater than zero.
 - 6 The HTTP version exceeds the length specified (VERSIONLEN option).
 - 7 The VERSIONLEN option value was not greater than zero.
 - 8 The query string exceeds the length specified (QUERYSTRLEN option).
 - 21 The HOSTLENGTH option value was not greater than zero.
 - 29 The host name exceeds the length specified (HOSTLENGTH option).
 - 30 The path exceeds the length specified (PATHLENGTH option).
 - 141 REALMLLEN is not positive, or is not large enough to contain the realm value returned in the HTTP 401 response.
- 13 NOTFND**
RESP2 values:
 - 155 Request line information not found.
- 19 NOTOPEN**
RESP2 values:
 - 27 Session token not valid.
- 124 TIMEDOUT**
RESP2 values:
 - 62 Timeout on socket receive.


WEB OPEN

Open a connection to a server for CICS as an HTTP client.

WEB OPEN

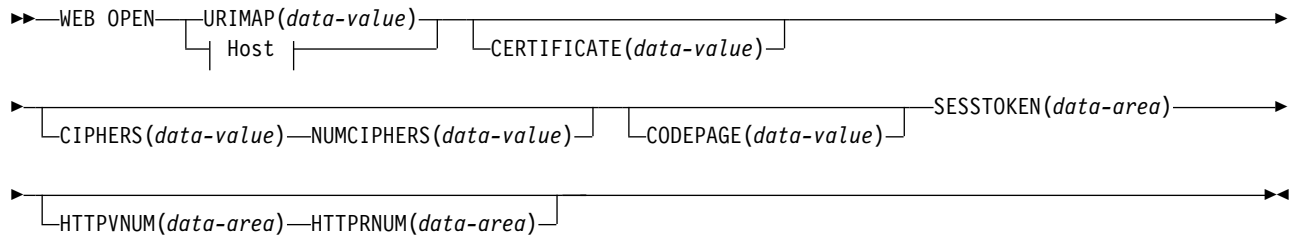

Host:



Conditions: IOERR, INVREQ, LENGERR, NOTFND, NOTAUTH, TIMEDOUT

This command is threadsafe.

Description

WEB OPEN enables an application program, through CICS Web support, to open a connection with a specified host on an HTTP server on the Internet. When the connection is open, the application program can make HTTP client requests to the server and receive responses from it.

When you open the connection, you can specify a URIMAP resource that contains the information about the URL for the connection. You can specify this information directly on the WEB OPEN command instead of using a URIMAP resource. However, using a URIMAP resource has the following advantages:

- System administrators can manage any changes to the endpoint of the connection, so you do not need to recompile your applications if the URL for your request changes.
- If you are using SSL, you can specify an SSL client certificate or cipher suite codes in the URIMAP resource, so that system administrators can manage any changes to these certificates and codes.
- You can choose to make CICS keep the connections that were opened with the URIMAP resource open after use, and place them in a pool for reuse by another application or another instance of the same application. Connection pooling is only available when you specify a URIMAP resource that has the SOCKETCLOSE attribute set. For more information about the performance benefits of connection pooling, see *Connection pooling for HTTP client performance in Improving performance*.

For information about creating a URIMAP resource for a client request, see the topic "Creating a URIMAP definition for an HTTP request by CICS as an HTTP client" in the *CICS Internet Guide*.

The WEB OPEN command drives the XWBOPEN user exit, which can make the connection to the server go through a proxy server, if required.

Note: If the connection request does not complete within the deadlock timeout interval (specified in the DTIMOUT attribute of the TRANSACTION definition for the transaction that starts the user application), CICS returns a TIMEDOUT response to the application. Setting DTIMOUT to NO, or allowing it to default to NO, means that the application is prepared to wait indefinitely.

Options

CERTIFICATE(*data-value*)

Specifies the label of the X.509 certificate that is to be used as the SSL client certificate during the SSL handshake. Certificate labels can consist of up to 32 alphanumeric characters. This option is relevant only when the HTTPS option is specified. If HTTPS is specified, but the CERTIFICATE option is omitted, the default certificate defined in the key ring for the CICS region user ID is used. The certificate must be stored in a key ring in the external security manager's database. For more information, see the *CICS RACF Security Guide*.

CIPHERS(*data-value*)

Specifies a string of up to 56 hexadecimal digits that is interpreted as a list of up to 28 2-digit cipher suite codes. The cipher suite codes are used when SSL is active for the connection, so this option is relevant only when the HTTPS option is specified. They indicate the method of encryption to be used for this connection.

Use the NUMCIPHERS option to specify the number of cipher suite codes in your list. The codes that are available depend on what level of encryption has been specified by the ENCRYPTION system initialization parameter. If you specify any cipher codes that are not in the default list for the active encryption level, they are ignored. For more information on cipher suites, see the *CICS RACF Security Guide*.

You can specify the URIMAP option to use this information directly from an existing URIMAP definition, in which case the CIPHERS option is not required. You can still specify the CIPHERS option, and the setting in the URIMAP definition is overridden by any codes that you specify for this option.

Note: EXEC CICS WEB OPEN does not support the use of an SSL cipher suite specification file in the CIPHERS option.

If you omit the CIPHERS option and the URIMAP option, but SSL is active for the connection, the default cipher list for the encryption level for the running system is used.

CODEPAGE(*data-value*)

Specifies a code page that is suitable for the application program. The code page name can be up to 8 alphanumeric characters. The default is the default code page for the local CICS region, as specified in the LOCALCCSID system initialization parameter. The code page applies for the duration of this connection. When the server returns a response to an HTTP request, if conversion is requested (which is the default), CICS converts the request body into this code page before passing it to the application.

The standard CICS form of this code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS also accepts any

decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

HOST(*data-value*)

Specifies the host name on the server to which you want to connect. You can extract this information from a known URL using the WEB PARSE URL command, or from an existing URIMAP definition using the WEB EXTRACT URIMAP command. You can specify the URIMAP option to use this information directly from an existing URIMAP definition, in which case the HOST option is not required. Client HTTP connections can only be pooled for reuse when you specify the URIMAP option; using the HOST option does not enable connection pooling, even if you extract the information from a URIMAP definition.

A character host name, IPv4 address, or IPv6 address can represent the host name. If you specify an IPv6 address (or a host name that resolves to an IPv6 address), ensure that you are operating in a dual-mode (IPv4 and IPv6) environment and that the client or server that you are communicating with is also operating in a dual-mode (IPv4 and IPv6) environment.

For more information on IPv6, see Understanding IPv6 and CICS in Product overview.

You can specify IPv4 and IPv6 addresses in a number of formats. For information on IP addresses, see IP addresses in Product overview.

If you require a port number, you must not include the port number as part of the HOST option. Use the PORTNUMBER option instead.

HOSTLENGTH(*data-value*)

Specifies as a fullword binary value, the length of the host name. This information is returned if you use the WEB PARSE URL command to parse a URL, or it can be extracted from an existing URIMAP definition using the WEB EXTRACT URIMAP command. You can specify the URIMAP option to use this information directly from an existing URIMAP definition, in which case the HOSTLENGTH option is not required.

HTTPRNUM(*data-area*)

Returns the release number for the HTTP version of the server, as a halfword binary value. (HTTPVNUM returns the version number.) For example, if the server is at HTTP/1.0 level, HTTPRNUM returns 0.

HTTPVNUM(*data-area*)

Returns the version number for the HTTP version of the server, as a halfword binary value. (HTTPRNUM returns the release number.) For example, if the server is at HTTP/1.0 level, HTTPVNUM returns 1.

If you specify the HTTPVNUM and HTTPRNUM options, CICS obtains the HTTP version information when it opens the connection to the server. If the server does not provide HTTP version information in response to this request, or the version is lower than 1.0, CICS assumes that it is at HTTP/1.0 level.

Specify these options if it is essential for you to check the HTTP version information to confirm whether a planned action by your application, before or during its first request, will succeed. Actions dependent on the HTTP version include:

- Writing HTTP headers that request an action which might not be carried out correctly by a server below HTTP/1.1 level
- Using HTTP methods that might be unsuitable for servers below HTTP/1.1 level

- Using chunked transfer-coding
- Sending a pipelined sequence of requests

The additional HTTP request made by CICS to obtain the HTTP version information has an impact on performance, so do not specify these options if it is not necessary at this stage. When the first response has been received from the server, you can obtain this information using the WEB EXTRACT command.

NUMCIPHERS(*data-value*)

Specifies, as a halfword binary value, the number of cipher suite codes that you specified for the CIPHERS option.

PORTNUMBER(*data-value*)

Specifies the port number, as a fullword binary value. You specify the port number only if it is *not* the default for the specified scheme. For HTTP, the default port number is 80, and for HTTPS, the default port number is 443. Port number information can be extracted from a known URL using the WEB PARSE URL command, or from an existing URIMAP definition using the WEB EXTRACT URIMAP command. You can specify the URIMAP option to use this information directly from an existing URIMAP definition, in which case the PORTNUMBER option is not required. Client HTTP connections can only be pooled for reuse when you specify the URIMAP option; using the PORTNUMBER option does not enable connection pooling, even if you extract the information from a URIMAP definition.

SCHEME(*cvda*)

Specifies the scheme that is to be used for the connection to the server, which can be with or without SSL. CVDA values are as follows:

HTTP The HTTP protocol, without SSL.

HTTPS

The HTTPS protocol, which is HTTP with SSL. If HTTPS is used, the CICS address space must be enabled for SSL.

This information can be extracted from a known URL using the WEB PARSE URL command, or from an existing URIMAP definition using the WEB EXTRACT URIMAP command. You can specify the URIMAP option to use this information directly from an existing URIMAP definition, in which case the SCHEME option is not required. Client HTTP connections can be pooled for reuse only when you specify the URIMAP option; using the SCHEME option does not enable connection pooling, even if you extract the information from a URIMAP definition.

SESTOKEN(*data-area*)

Returns the session token, an 8-byte binary value that uniquely identifies this application's use of the connection between CICS and the server. The session token must be used on all CICS WEB commands that relate to this connection. See the *CICS Internet Guide* for information about use of the session token.

URIMAP(*data-value*)

Specifies the name, up to 8 characters in mixed case, of a URIMAP definition that provides the following information:

- The scheme that is to be used for the connection to the server.
- The host name on the server to which you want to connect.
- A port number, if required.

- A path component for the URI, representing the resource on the server that you want to access. This path becomes the default path for WEB SEND or WEB CONVERSE commands relating to this connection, but it can be overridden by specifying another path on the WEB SEND or WEB CONVERSE command.
- The expiry period for pooled connections that are opened using the URIMAP resource. Connection pooling is enabled when you specify an expiry period in the URIMAP definition using the SOCKETCLOSE attribute, and name the URIMAP resource on the WEB OPEN command.
- The label of the X.509 certificate that is to be used as the SSL client certificate, if required.
- The cipher suite codes that can be used for the connection.

If the URIMAP option is specified, do not specify the CERTIFICATE, HOST, HOSTLENGTH, PORTNUMBER, PORTLENGTH, or SCHEME options. The CIPHERS and NUMCIPHERS options can be omitted or specified in the command; if specified, they override these settings in the URIMAP definition.

Note: **EXEC CICS WEB OPEN** does not support the use of an SSL cipher suite specification file in the CIPHERS option.

The URIMAP definition must be for CICS as an HTTP client, with USAGE(CLIENT) specified.

Conditions

17 IOERR

RESP2 values:

- 38 Proxy error.
- 42 Socket error. One possible cause of this response is that the system initialization parameter **TCPIP** is set to NO, or defaulted to NO, for this CICS region.

16 INVREQ

RESP2 values:

- 14 Code page incorrect.
- 22 Incorrect chunk received during the initial HTTP request using the OPTIONS method.
- 23 Incorrect client certificate.
- 40 Scheme incorrect.
- 41 Server closed the connection during the initial HTTP request using the OPTIONS method.
- 48 The format of the host option is incorrect.
- 63 URIMAP object is not available.
- 66 An error occurred in processing for the XWBOPEN exit.
- 67 The content of the response does not conform to HTTP format. The error is generated because there is a syntax problem.
- 96 SSL not supported.
- 137 All requested cipher codes have been rejected.
- 138 The port number is greater than 65535.

144 One or more of the Web command parameters is incorrect.

22 LENGERR

RESP2 values:

21 Incorrect host length.

13 NOTFND

RESP2 values:

20 Host name is not resolved by name server or the format of the host option is incorrect.

39 Unknown proxy.

61 The URIMAP object specified was not found.

70 NOTAUTH

RESP2 values:

100 Host name barred by security exit.

124 TIMEDOUT


RESP2 values:

62 Timeout on socket receive.

WEB PARSE URL

Break down a URL string into its component parts.

WEB PARSE URL

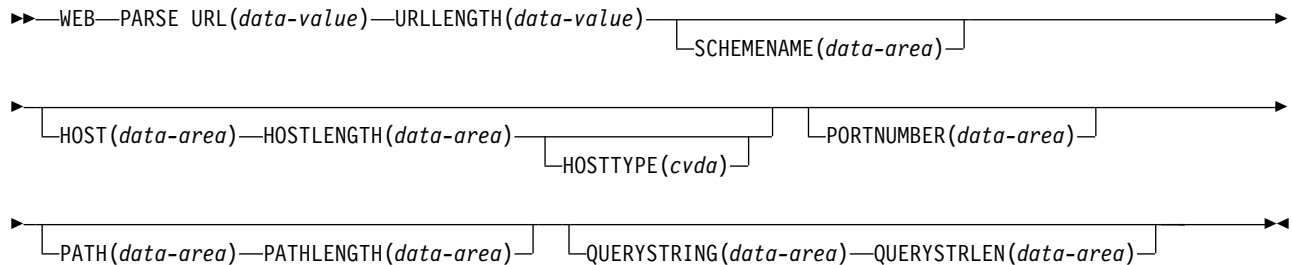

Conditions: INVREQ, LENGERR

This command is threadsafe.

Description

With `WEB PARSE URL`, you can break down a URL string into its component parts: scheme, host, port, path, and query string. The components of a URL in the *CICS Internet Guide* explains these components. You can use this process to examine the construction of the URL and to separate the components. The returned information can be used in the `WEB OPEN` command to open a client connection to the host named in the URL.

Any escape sequences found in the URL are checked for validity. An escape sequence consists of the percent character (%) followed by two hexadecimal characters. Valid hexadecimal characters are the digits 0 to 9 and the letters A to F.

Note that where the string input to the `WEB PARSE URL` command has been delimited in the correct way for a URL, the command does not detect incorrect content, such as a host name that does not represent an existing host on the Internet, or a character that is not permitted in a URL.

Options

HOST(data-area)

Returns the host component of the URL. This value can be either a character host name or a numeric IP address. If a port number is specified explicitly in the URL, the port number is returned separately as the `PORTNUMBER` option.

An IPv4 or IPv6 address can represent the host name. IPv6 addresses are returned as native IPv6 colon hexadecimal addresses, for example, `::a:b:c:d`. If you specify an IPv6 address in a URL, for example, `http://[::a:b:c:d]:80`, `HOST` returns the address without brackets.

Use the characters `X'BA'` and `X'BB'` (code page 37) to represent square brackets when you specify IPv6 addresses.

For information on IP addresses, see *IP addresses in Product overview*.

HOSTLENGTH(data-area)

Specifies the length of the buffer supplied on the `HOST` option, as a fullword

binary variable, and is set to the length of the data returned to the application (the host name). 116 characters is suggested as an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

HOSTTYPE(*cvda*)

Returns the address format of the HOST option. CVDA values are as follows:

HOSTNAME

The HOST option contains a character host name. The IP address that corresponds to the host name is looked up in the domain name server.

IPV4 The address is a dotted decimal IPv4 address.

IPV6 The address is a colon hexadecimal IPv6 address.

PATH(*data-area*)

Returns the path component of the URL.

PATHLENGTH(*data-area*)

Specifies the length of the buffer supplied on the PATH option, as a fullword binary variable, and is set to the actual length of the data returned to the application (the path component of the URL). 256 characters is suggested as an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

PORTNUMBER(*data-area*)

Returns as a fullword binary data area, the port number that is specified in, or appropriate for, the URL. Port numbers are sometimes specified explicitly in a URL, following the host name. However, well-known port numbers for a service are normally omitted from a URL. If the port number is not present in the URL, the WEB PARSE URL command identifies and returns it based on the scheme. For HTTP, the well-known port number is 80, and, for HTTPS, the well-known port number is 443. If a port number is returned that is not the default for the scheme, you must specify the port number explicitly to gain access to the URL, for example, if you are using this information in a WEB OPEN command.

QUERYSTRING(*data-area*)

Returns the query string from the URL. The query string is the value or values encoded after the question mark (?) delimiting the end of the path. The query string is returned in its escaped form.

QUERYSTRLEN(*data-area*)

Specifies the length of the buffer supplied on the QUERYSTRING option, as a fullword binary variable, and is set to the length of the data returned to the application (the query string). 256 characters is suggested as an appropriate size to specify for this data area. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

SCHEMENAME(*data-area*)

Returns the scheme component of the URL, as a 16-character data area. Only the HTTP and HTTPS schemes (the HTTP protocol with and without SSL) are supported by CICS and can be used in a WEB OPEN command.

The scheme name is always returned in uppercase.

URL(*data-value*)

Specifies the complete URL string.

URLLENGTH(*data-value*)

Specifies the length of the buffer containing the URL string, as a fullword binary value.

Conditions**16 INVREQ**

RESP2 values:

- 28 Incorrect URL.
- 65 Bad escape sequence.

22 LENGERR


RESP2 values:

- 8 Length of query string returned is greater than QUERYSTRLEN.
- 29 Length of host name returned is greater than HOSTLENGTH.
- 30 Length of path returned is greater than PATHLENGTH.

WEB READ FORMFIELD

Retrieve the value of a field from an HTML form.

WEB READ FORMFIELD

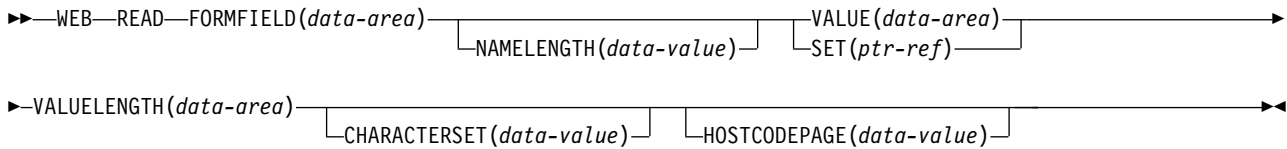

Conditions: INVREQ, LENGERR, NOTFND

This command is threadsafe.

Description

WEB READ FORMFIELD retrieves the value of a specific field from an HTML form. The name of the form field is given in the FORMFIELD parameter. The form data is sent as part of an HTTP request being processed by the current CICS task.

The Web client sends form data in a query string when the GET method is used, and in the entity body when the POST method is used. CICS can extract the data from either of these locations.

The form data is returned in its unescaped form (see Escaped and unescaped data in the *CICS Internet Guide* for an explanation of this).

If the data that is received represents a file, the uploaded file does *not* undergo code page conversion.

CICS only reads form data when CICS is the HTTP server. The facility is not available when CICS is an HTTP client.

Options

CHARACTERSET(name)

specifies the 40-character name of the character set that is required for encoding the form data. This option should match the forms encoding determined by the corresponding HTML form (see How the client encoding is determined in the *CICS Internet Guide* for more information). CICS does not support all the character sets named by IANA. HTML coded character sets in the *CICS Internet Guide* lists the IANA character sets that are supported by CICS for code page conversion.

CLNTCODEPAGE(name)

This option is supported for upgrade purposes only. CHARACTERSET replaces it. The action taken by CICS is the same for both keywords.

FORMFIELD(data-area)

specifies the name of the form field to extract. It is a string of text containing the name of the requested field. The string of text supplied is not case sensitive.

HOSTCODEPAGE(*data-value*)

specifies the 8-character name of the CICS (host) code page required by the application program, into which the form data is to be converted. This code page is normally an EBCDIC code page.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS now also accepts any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

If the code page is not specified, the data is returned in the EBCDIC code page specified by the LOCALCCSID system initialization parameter (which applies to the local CICS region, and has a default of 037), provided that the specified code page is supported by the CICS web interface. The code page is supported if it is one of a list of EBCDIC code pages that are recognized by CICS as being sufficiently standard to allow successful parsing of the web headers (this includes all SBCS CECP and Euro code pages). Otherwise, CICS returns the data in the default EBCDIC code page 037 instead.

NAMELENGTH(*data-value*)

specifies the length, as a fullword binary value, of the form field name.

SET(*ptr-ref*)

specifies a pointer reference that is to be set to the address of data received. The pointer reference is valid until the end of the task.

VALUE(*data-area*)

specifies the buffer to contain the value of the named form field. CICS unescapes any escaped characters before placing them in the buffer.

VALUELENGTH(*data-area*)

specifies the length, as a fullword binary value, of the form field value. The actual length of the value is returned in this data area. If you specify the VALUE option, VALUELENGTH specifies the maximum length of the data that the program accepts. If the value exceeds the length of the buffer, it is truncated. If the length of the form field value is less than the size of the buffer, the form field value is placed in the leftmost byte positions.

Conditions**16 INVREQ**

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 11 The client code page cannot be found.
- 12 The host code page cannot be found.
- 13 No forms data has been supplied in the HTTP request.
- 14 The code page combination for client and server is invalid.
- 17 Invalid forms data was found in the input message.

22 LENGERR

RESP2 values are:

- 1 The length in NAMELENGTH or VALUELENGTH is less than or equal to zero.

- 4 The form field name has been truncated during a read operation because the receiving buffer is too small.
- 5 The form field value has been truncated during a read operation because the receiving buffer is too small.
- 153 The form type is unknown.
- 154 A boundary string was expected in the forms data, but was not found.

13 NOTFND


RESP2 values are:

- 1 The form field with the given name cannot be found.

WEB READ HTTPHEADER

Extract HTTP header information.

WEB READ HTTPHEADER



Conditions: INVREQ, LENGERR, NOTFND, NOTOPEN

This command is threadsafe.

Description

WEB_READ_HTTPHEADER enables an application to extract HTTP header information from a message. When CICS is an HTTP server, the message is a request from a Web client. When CICS is an HTTP client, the message is a response from a server, and the SESSTOKEN option is specified.

For CICS as an HTTP server, you can use the WEB READ HTTPHEADER command either before, or after, you use the WEB RECEIVE command to receive the body of the message. For CICS as an HTTP client, you must first receive the message using the WEB RECEIVE command, and then you can read the headers using the WEB READ HTTPHEADER command.

HTTP header reference for CICS Web support in the *CICS Internet Guide* lists HTTP/1.1 headers that you are likely to receive, and gives guidance for the actions that you might take in response to them.

The HTTP header browsing commands (WEB STARTBROWSE HTTPHEADER, WEB READNEXT HTTPHEADER, WEB ENDBROWSE HTTPHEADER) can be used to browse through all the HTTP header information for a message.

Options

HTTPHEADER(*data-area*)

specifies the name of the HTTP header to be extracted.

NAMELENGTH(*data-value*)

specifies the length, as a fullword binary value, of the HTTP header name.

SESSTOKEN(*data-value*)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

VALUE(*data-area*)

specifies the buffer to contain the value of the HTTP header being extracted.

VALUELENGTH(*data-area*)

specifies the length of the buffer supplied on the VALUE option, as a fullword

binary variable, and is set to the actual length of the data returned to the application. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

Conditions

16 INVREQ

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 43 No HTTP headers found.

22 LENGERR

RESP2 values are:

- 1 The length in VALUELENGTH is not greater than zero (CICS as an HTTP server).
- 2 The header value has been truncated because the receiving buffer is too small (CICS as an HTTP server).
- 35 The length in NAMELENGTH is not greater than zero (CICS as an HTTP client).
- 52 The header value has been truncated because the receiving buffer is too small (CICS as an HTTP client).
- 55 The length in VALUELENGTH is not greater than zero (CICS as an HTTP client).

13 NOTFND

RESP2 value is:

- 1 The header with the given name could not be found.

19 NOTOPEN


RESP2 value is:

- 27 Invalid session token.

WEB READ QUERYPARM

Read name and value pairs from a query string in a URL.

WEB READ QUERYPARM

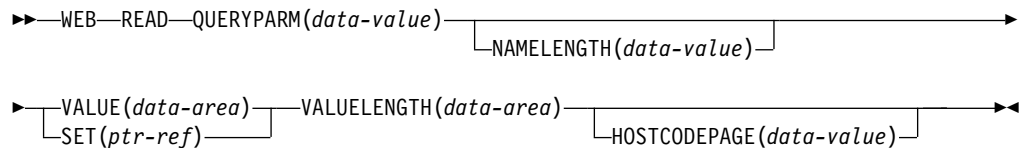

Conditions: INVREQ, LENGERR, NOTFND

This command is threadsafe.

Description

The `WEB READ QUERYPARM` command reads a keyword parameter, consisting of a name and value pair, from a query string in a URL, and returns it in a specified code page. Escaped characters in the query string data are unescaped into the code page.

The `WEB READ QUERYPARM` command processes query string data for all HTTP methods, including GET, POST, PUT, and DELETE. You can continue to use the existing `WEB READ FORMFIELD` command for forms (messages with the media types `application/x-www-form-urlencoded` or `multipart/form-data`). Although the `WEB READ FORMFIELD` command can read name and value pairs from a query string, it does so only when the HTTP method is GET, because it assumes that the message is an HTML form.

You can use the query string browsing commands (`WEB STARTBROWSE QUERYPARM`, `WEB READNEXT QUERYPARM`, and `WEB ENDBROWSE QUERYPARM`) to browse through all the query parameters in a URL.

CICS only reads query string data when CICS is the HTTP server. The facility is not available when CICS is an HTTP client.

Options

QUERYPARM(data-value)

Specifies the name of the query parameter to extract. Specify a string of text containing the name of the requested parameter. The string of text supplied is not case-sensitive. If you specify the `HOSTCODEPAGE` option, you must supply the name of the query parameter in the code page that you specify for that option.

HOSTCODEPAGE(data-value)

Specifies the 8-character name of the CICS (host) code page required by the application program. This code page is normally an EBCDIC code page. CICS converts the value of the query parameter into this code page before returning it as the `VALUE` option.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS also accepts any

decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

If the code page is not specified, the data is returned in the EBCDIC code page specified by the LOCALCCSID system initialization parameter (which applies to the local CICS region, and has a default of 037), provided that the specified code page is supported by the CICS web interface. The code page is supported if it is one of a list of EBCDIC code pages that are recognized by CICS as being sufficiently standard to allow successful parsing of the web headers (this includes all SBCS CECP and Euro code pages). Otherwise, CICS returns the data in the default EBCDIC code page 037 instead.

NAMELENGTH(*data-value*)

Specifies the length, as a fullword binary value, of the query parameter name.

SET(*ptr-ref*)

Specifies a pointer reference that is to be set to the address of data received.

VALUE(*data-area*)

Specifies the buffer to contain the value of the named query parameter. CICS unescapes any escaped characters before placing them in the buffer.

VALUELENGTH(*data-area*)

Specifies the length, as a fullword binary value, of the query parameter value. The real length of the value is returned in this data area. If you specify the VALUE option, VALUELENGTH specifies the maximum length of the data that the program accepts. If the value exceeds the length of the buffer, the value is truncated. If the length of the query parameter value is less than the size of the buffer, the query parameter value is placed in the leftmost byte positions.

Conditions

16 INVREQ

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 12 The host code page cannot be found.
- 13 No keyword parameters were supplied in the HTTP request.
- 14 The code page combination for client and server is invalid.
- 17 Invalid keyword parameters found in the HTTP request.

22 LENGERR

RESP2 values are:

- 1 The length in NAMELENGTH or VALUELENGTH is less than or equal to zero.
- 5 The keyword parameter value has been truncated during a read operation because the receiving buffer is too small.

13 NOTFND

RESP2 value is:

- 1 The keyword parameter with the given name could not be found.

WEB READNEXT FORMFIELD

Retrieve next name-value pair in an HTML form.

WEB READNEXT FORMFIELD

►►—WEB—READNEXT—FORMFIELD(*data-area*)—NAMELENGTH(*data-area*)—VALUE(*data-area*)—————►
►—VALUELENGTH(*data-area*)—————►◄◄

Conditions: ENDFILE, INVREQ, LENGERR

This command is threadsafe.

Description

WEB READNEXT FORMFIELD retrieves the next name-value pair in an HTML form.

The data is returned in its unescaped form (see Escaped and unescaped data in the *CICS Internet Guide* for an explanation of this).

Options

FORMFIELD(*data-area*)

specifies the buffer to contain the name of the form field being retrieved. The case of the name is as it is stored in the form.

NAMELENGTH(*data-area*)

specifies the length, as a fullword binary value, of the form field name. The actual length of the name is returned in this data area. If the length of the form field name is less than the size of the buffer, the form field name is placed in the leftmost byte positions.

VALUE(*data-area*)

specifies the buffer to contain the value corresponding to the name returned in the FORMFIELD data area. CICS unescapes any escaped characters before placing them in the buffer.

VALUELENGTH(*data-area*)

specifies the length, as a fullword binary value, of the form field value. The actual length of the value is returned in this data area. If the value exceeds the buffer length, it is truncated. If the length of the form field value is less than the size of the buffer, the form field value is placed in the leftmost byte positions.

Conditions

20 ENDFILE

The end of the list of name-value pairs has been reached.

16 INVREQ

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.

- 3 The command is being issued for a non-HTTP request.
- 4 The command is being issued before a WEB STARTBROWSE
FORMFIELD has been issued.
- 6 A form field has been found that is not in the format NAME:VALUE.
- 153 The form type is unknown.
- 154 A boundary string was expected in the forms data, but was not found.

22 LENGERR


RESP2 values are:

- 1 NAMELENGTH or VALUELENGTH is less than or equal to zero.
- 4 The form field name has been truncated during a browse operation
because the receiving buffer is too small.
- 5 The form field value has been truncated because the receiving buffer is
too small.

WEB READNEXT HTTPHEADER

Retrieve next HTTP header.

WEB READNEXT HTTPHEADER



Conditions: ENDFILE, INVREQ, LENGERR, NOTOPEN

This command is threadsafe.

Description

WEB READNEXT HTTPHEADER retrieves the next HTTP header in the list of headers. The SESSTOKEN option is required if the HTTP header information is part of a response sent to CICS as an HTTP client.

Options

HTTPHEADER(*data-area*)

specifies the buffer to contain the name of the HTTP header being extracted.

NAMELENGTH(*data-area*)

specifies the length of the buffer supplied on the HTTPHEADER option, as a fullword binary data area, and is set to the actual length of the data returned to the application. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

SESSTOKEN(*data-value*)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

VALUE(*data-area*)

specifies the buffer to contain the value of the HTTP header being extracted.

VALUELENGTH(*data-area*)

specifies the length of the buffer supplied on the VALUE option, as a fullword binary data area, and is set to the actual length of the data returned to the application. If the data exceeds the buffer length, a LENGERR condition is raised and the data is truncated.

Conditions

20 ENDFILE

The end of the list of HTTP headers has been reached.

16 INVREQ

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.

- 4 The command is being issued before a WEB STARTBROWSE has been issued.
- 6 A header has been found which is not in the format NAME:VALUE.

22 LENGERR

RESP2 values are:

- 1 The length in NAMELENGTH or VALUELENGTH is less than or equal to zero (CICS as an HTTP server).
- 4 The header name has been truncated because the receiving buffer is too small (CICS as an HTTP server).
- 5 The header value has been truncated because the receiving buffer is too small (CICS as an HTTP server).
- 35 The length in NAMELENGTH is less than or equal to zero (CICS as an HTTP client).
- 51 The header name has been truncated because the receiving buffer is too small (CICS as an HTTP client).
- 52 The header value has been truncated because the receiving buffer is too small (CICS as an HTTP client).
- 55 The length in VALUELENGTH is less than or equal to zero (CICS as an HTTP client).

19 NOTOPEN

RESP2 value is:

- 27 Invalid session token.

WEB READNEXT QUERYPARM

Retrieve next name and value pair in query string data in a URL.

WEB READNEXT QUERYPARM

►►—WEB—READNEXT—QUERYPARM(*data-area*)—NAMELENGTH(*data-area*)—————→
►—VALUE(*data-area*)—VALUELENGTH(*data-area*)—————→◄◄

Conditions: ENDFILE, INVREQ, LENGERR

This command is threadsafe.

Description

WEB READNEXT QUERYPARM retrieves the next keyword parameter (name and value pair) in a query string in a URL.

The data is returned in its unescaped form (see Escaped and unescaped data in the *CICS Internet Guide* for an explanation of this).

Options

QUERYPARM(*data-area*)

Specifies the buffer to contain the name of the keyword parameter being retrieved. The case of the name is as it is stored in the keyword parameter.

NAMELENGTH(*data-area*)

Specifies the length, as a fullword binary value, of the keyword parameter name. The actual length of the name is returned in this data area. If the length of the keyword parameter name is less than the size of the buffer, the keyword parameter name is placed in the leftmost byte positions.

VALUE(*data-area*)

Specifies the buffer to contain the value corresponding to the name returned in the QUERYPARM data area. CICS unescapes any escaped characters before placing them in the buffer.

VALUELENGTH(*data-area*)

Specifies the length, as a fullword binary value, of the keyword parameter value. The actual length of the value is returned in this data area. If the value exceeds the buffer length, it is truncated. If the length of the keyword parameter value is less than the size of the buffer, the keyword parameter value is placed in the leftmost byte positions.

Conditions

20 ENDFILE

The end of the list of keyword parameters has been reached.

16 INVREQ

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 4 The command is being issued before a WEB STARTBROWSE has been issued.

- 6 A keyword parameter has been found which is not in the format NAME=VALUE.

22 LENGERR


RESP2 values are:

- 1 NAMELENGTH or VALUELENGTH is less than or equal to zero.
- 4 The keyword parameter name has been truncated during a browse operation because the receiving buffer is too small.
- 5 The keyword parameter value has been truncated because the receiving buffer is too small.


WEB RECEIVE (Server)

Receive an HTTP request, or a non-HTTP message.

WEB RECEIVE (CICS as an HTTP server using buffers)

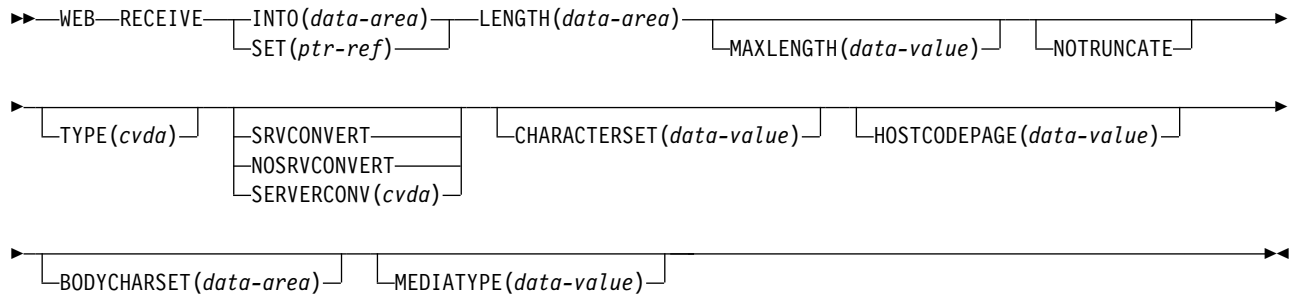

WEB RECEIVE (CICS as an HTTP server using containers)

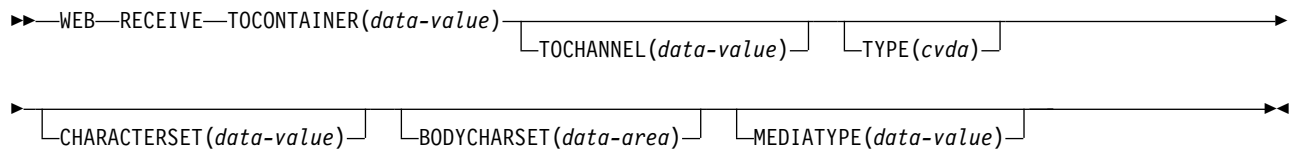

Conditions: CHANNELERR, CONTAINERERR, INVREQ, LENGERR, NOTFND

This command is threadsafe.

Description

WEB RECEIVE receives the body of an HTTP request, or all the data for a non-HTTP message, into an application-supplied buffer, or set buffer. Alternatively, an HTTP request can be stored in a named container. The headers for an HTTP request can be examined separately using the **WEB HTTPHEADER** commands. The item received by the **WEB RECEIVE** command can be:

- The body of an HTTP request that a Web client has made to CICS as an HTTP server. For guidance on the correct use of the **WEB RECEIVE** command for this purpose, see *Writing Web-aware application programs for CICS as an HTTP server* in the *CICS Internet Guide*.
- A non-HTTP message handled by CICS Web support facilities, with the user-defined (USER) protocol on the **TCPIP SERVICE** definition. For guidance on non-HTTP messages, see *CICS Web support and non-HTTP requests* in the *CICS Internet Guide*.
- A request from another application that has used the CICS business logic interface to contact the application program directly, rather than going through the CICS HTTP listener. For guidance on the CICS business logic interface, see *The CICS business logic interface* in the *CICS Internet Guide*.

The data is returned in its escaped form.

When receiving the HTTP body into an application buffer (using either the **INTO** or **SET** options), **WEB RECEIVE** allows you to specify the type of code page conversion used for incoming data received by the CICS application program. If

you omit all of the code page conversion options (SERVERCONV, CLNTCODEPAGE, CHARACTERSET, HOSTCODEPAGE), no code page conversion takes place.

Code page conversion is not permitted when receiving an HTTP body into a named container. If the named container was created by the user application before the **WEB RECEIVE** command was issued, the container is deleted and re-created. The HTTP request Content-Type header media type information determines whether the named container is re-created as a BIT or CHAR container (unless the CHARACTERSET option is specified, in which case CICS assumes that the data stored in the container is encoded in the CHARACTERSET code page). If the media type is:

- a text media type, a CHAR container is created.
- a non-text media type, a BIT container is created.

If the HTTP request does not contain media type information, the default of text media type is assumed.

If a CHAR container is created, the IANA-registered name of the Coded Character Set Identifier (CCSID) for the data's current code page is retrieved from the HTTP request Content-Type header charset. If this information is not provided or not supported by CICS, the default of ISO-8859-1 is assumed.

The charset can be overridden by using the CHARACTERSET option. If CHARACTERSET is specified, a CHAR container is created.

Options LENGTH, MAXLENGTH, NOTRUNCATE, SERVERCONV and HOSTCODEPAGE are not permitted when receiving an HTTP body into a named container.

Containers cannot be used to receive messages that are sent over a user protocol socket.

Options

BODYCHARSET (*data-area*)

Specifies the character set of the HTTP request body.

The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation.

If the HTTP body is received into an application buffer, the character set returned is as follows:

- If the INTO or SET option is specified, and the HTTP body is converted, CICS returns the character set of the HTTP body before conversion.
- If the INTO or SET option is specified, and the HTTP body is not converted, CICS returns the character set specified in the Content-Type header. If character set information is not available, blanks are returned.

If the HTTP body is received into a named container, the character set returned is as follows:

- If the container is a CHAR container, CICS returns the character set of the encoded data.
- If the container is a BIT container, CICS returns blanks.

If the value returned is more than 40 bytes, the data is truncated. If the value returned is less than 40 bytes, the data is padded to the right with blanks.

CHARACTERSET(*data-value*)

Specifies the character set that was used by the Web client for the entity body of the received item. The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation. CICS does not support all the character sets named by IANA. HTML coded character sets in the *CICS Internet Guide* lists the IANA character sets that are supported by CICS for code page conversion.

If the HTTP request body is stored in a buffer and the CHARACTERSET option is specified, the SRVCONVERT option is assumed, so code page conversion of the entity body takes place. CICS can identify the character set for the message body, when receiving data into a buffer (using either the INTO or SET options), if you specify SRVCONVERT or HOSTCODEPAGE, or both options (without specifying CHARACTERSET). The description for the SERVERCONV option tells you what happens in this case.

If the HTTP request body is stored in a container and the CHARACTERSET option is specified, CICS assumes that the data stored in the container is encoded in that code page. CHARACTERSET overrides the Content-Type charset of the received data, and sets the CCSID of the container to the specified CHARACTERSET. This means that when the GET CONTAINER command is issued with that container, the data is converted from the CCSID that was set by the CHARACTERSET parameter on the WEB RECEIVE command, to any code page requested by the user.

CLNTCODEPAGE(*data-value*)

This option is supported for upgrade purposes only. CHARACTERSET replaces it. The action taken by CICS is the same for both keywords.

HOSTCODEPAGE(*data-value*)

Specifies the 8-character name of the CICS (host) code page used by the application program, into which the entity body of the received item should be converted from the character set in which it was received from the Web client.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS also accepts any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

If you are receiving data into a buffer (and either the INTO or SET option is specified), then the HOSTCODEPAGE option is specified and SRVCONVERT is assumed, so code page conversion of the entity body takes place. Specifying either SRVCONVERT, or CHARACTERSET, or both, and omitting HOSTCODEPAGE, lets CICS determine the host code page.

The default if this option is not specified is the default code page for the local CICS region, as specified in the LOCALCCSID system initialization parameter.

If you are using the TOCONTAINER option, do not specify the HOSTCODEPAGE option.

INTO(*data-area*)

Specifies the buffer that is to contain the data being received. If the INTO parameter is specified, then MAXLENGTH must also be specified, with a value greater than zero (otherwise an INVREQ error with RESP2 16 is returned to the application).

LENGTH(*data-area*)

Specifies a fullword binary variable that is set to the amount of data that CICS

has returned to the application. Note that this might be slightly less than the limit that you set using the MAXLENGTH option, especially if a double-byte or multi-byte character set is involved, because CICS does not return a partial character at the end of the data.

- If the NOTRUNCATE option **is not** specified, any further data present in the message has now been discarded. A LENGERR response with a RESP2 value of 57 is returned if further data was present.
- If the NOTRUNCATE option **is** specified, any additional data is retained. A LENGERR response with a RESP2 value of 36 is returned if additional data is available. The description for the NOTRUNCATE option tells you what to do in this case.

If you are using an application buffer to store your HTTP body, the LENGTH option must be specified when the INTO or SET options are used. If you are using a named container to store your HTTP body (and therefore specify the TOCONTAINER option), do not use the LENGTH option.

MAXLENGTH(*data-value*)

Specifies the maximum amount, as a fullword binary value, of data that CICS is to pass to the application. The MAXLENGTH option applies whether the INTO or the SET option is specified for receiving data. If the data has been sent using chunked transfer-coding, CICS assembles the chunks into a single message before passing it to the application, so the MAXLENGTH option applies to the total length of the chunked message, rather than to each individual chunk. The data is measured after any code page conversion has taken place. If the length of data exceeds the value specified and the NOTRUNCATE option **is not** specified, the data is truncated to that value, and the remainder of the data is discarded. If the length of data exceeds the value specified and the NOTRUNCATE option **is** specified, CICS retains the remaining data and can use it to satisfy subsequent RECEIVE commands.

If you are using the TOCONTAINER option, do not specify the MAXLENGTH option.

MEDIATYPE (*data-area*)

Specifies the data content of any message body provided, for example text/xml. You must specify a 56-byte area for MEDIATYPE. The media type is up to 56 alphanumeric characters, including appropriate punctuation. For more information on media types, see IANA media types and character sets in the *CICS Internet Guide*.

NOTRUNCATE

Specifies that when the data available exceeds the length requested on the MAXLENGTH option, the remaining data is not to be discarded immediately but is to be retained for retrieval by subsequent RECEIVE commands. (If no further RECEIVE commands are issued, the data is discarded during transaction termination.)

A single RECEIVE command using the SET option and without the MAXLENGTH option receives all the remaining data, whatever its length. Alternatively, you can use a series of RECEIVE commands with the NOTRUNCATE option to receive the remaining data in appropriate chunks. Keep issuing the RECEIVE command until you are no longer getting a LENGERR response. If you receive less than the length requested on the MAXLENGTH option, this does not necessarily indicate the end of the data; this could happen if CICS needs to avoid returning a partial character at the end of the data.

If you are using the TOCONTAINER option, do not specify the NOTRUNCATE option. The entire HTTP body is stored in the named container by the first **WEB RECEIVE** command.

SERVERCONV(*cvda*)

Specifies whether or not CICS translates the entity body of the item received, from the character set used by the Web client, to a code page suitable for the application. You can use the CHARACTERSET and HOSTCODEPAGE options on this command to specify the character set and code page that are used. If you specify either of these options, code page conversion (SRVCONVERT) is assumed. Alternatively, you can omit either or both of these options, specify SRVCONVERT and let CICS determine a suitable character set and code page.

If you are using the TOCONTAINER option, do not specify the SERVERCONV option.

SRVCONVERT

CICS converts the entity body of the message, before it is passed to the application.

When you specify SRVCONVERT without CHARACTERSET, CICS identifies the character set as follows:

1. If the Web client's request has a Content-Type header naming a character set supported by CICS, that character set is used.
2. If the Web client's request has no Content-Type header or the named character set is unsupported, the ISO-8859-1 character set is used.
3. For non-HTTP messages (sent using the USER protocol), the ISO-8859-1 character set is used.

When you specify SRVCONVERT without HOSTCODEPAGE, CICS determines the host code page as the default code page for the local CICS region, as specified in the LOCALCCSID system initialization parameter.

If you specify SRVCONVERT alone, note that for code page conversion to take place, the media type for the message must specify a type of data content that can be identified as text according to the IANA definitions. For messages where no media type is given but SRVCONVERT is specified, code page conversion also takes place. If a non-text media type is present, CICS does not convert the message body. However, for compatibility with Web-aware applications coded in earlier releases, if you specify either of the CHARACTERSET or HOSTCODEPAGE options or omit the SERVERCONV option, the media type for the message does not influence code page conversion.

NOSRVCONVERT

CICS does not convert the entity body of the item, and it is passed to the application in the character set used by the Web client. If you specify NOSRVCONVERT, you cannot specify the CHARACTERSET or HOSTCODEPAGE options.

SET(*ptr-ref*)

Specifies a pointer reference that is to be set to the address of data received. The pointer reference is valid until the next receive command or the end of task.

TOCHANNEL(*data-value*)

Specifies the name of the channel that the container belongs to. The name of the channel can consist of up to 16 alphanumeric characters, including

appropriate punctuation. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and _ . Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel.

If you plan to ship your channels between CICS regions, bear in mind that you should restrict your characters to standard alphanumeric characters (A-Z 0-9 & : = , ; < > . - _) to ensure they are represented in the same way by all EBCDIC code pages.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers.

If the TOCHANNEL option is not specified, then CICS assumes the current channel.

TOCONTAINER(*data-value*)

Specifies the name of the container where the data is placed. The name of the container can consist of up to 16 alphanumeric characters, including appropriate punctuation. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and _ . Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks.

If you plan to ship your containers between CICS regions, bear in mind that you should restrict your characters to standard alphanumeric characters (A-Z 0-9 & : = , ; < > . - _) to ensure they are represented in the same way by all EBCDIC code pages.

Do not use container names starting with "DFH", unless requested to do so by CICS.

The TOCONTAINER option can only be specified on the first **WEB RECEIVE** command.

TYPE(*cvda*)

Returns the type of request received. CVDA values are:

HTTPYES

indicates an HTTP request.

HTTPNO

indicates a non-HTTP request.

In CICS Transaction Server for z/OS, Version 3, HTTP requests and non-HTTP requests use different protocols, which are specified on TCIPSERVICE definitions, and must therefore use different ports. Non-HTTP requests use the user-defined (USER) protocol. You might use the TYPE option to distinguish between the request types if you specify the same user-written application program for responding to both HTTP and non-HTTP requests.

Conditions

122 CHANNELERR

RESP2 values are:

- 1 The name specified by the TOCHANNEL option contains an illegal character or combination of characters.

110 CONTAINERERR

RESP2 values are:

- 1 The name specified by the TOCONTAINER option contains an illegal character or combination of characters.

16 INVREQ

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 14 Invalid code page combination.
- 46 The SERVERCONV option is invalid.
- 80 CHARACTERSET cannot be specified with NOSRVCONVERT.
- 81 HOSTCODEPAGE cannot be specified with NOSRVCONVERT.
- 84 Body incomplete.
- 145 Channel was not specified, and there is no current channel.
- 146 The named container is a read-only container.
- 147 Internal conversion error.
- 148 User protocol is not supported for containers.
- 149 The TOCONTAINER option can only be specified on the first WEB RECEIVE command.

22 LENGERR

RESP2 values are:

- 16 The MAXLENGTH option value was less than or equal to zero.
- 36 Partial response body returned. Use additional RECEIVES to obtain remainder.
- 57 The response body exceeds the length specified, and the remainder of the body has been discarded.

13 NOTFND


RESP2 values are:

- 7 Code page not found.
- 82 Client code page (character set) not found.
- 83 Host code page (for server) not found.


WEB RECEIVE (Client)

Receive an HTTP response for CICS as an HTTP client.

WEB RECEIVE (CICS as an HTTP client using buffers)

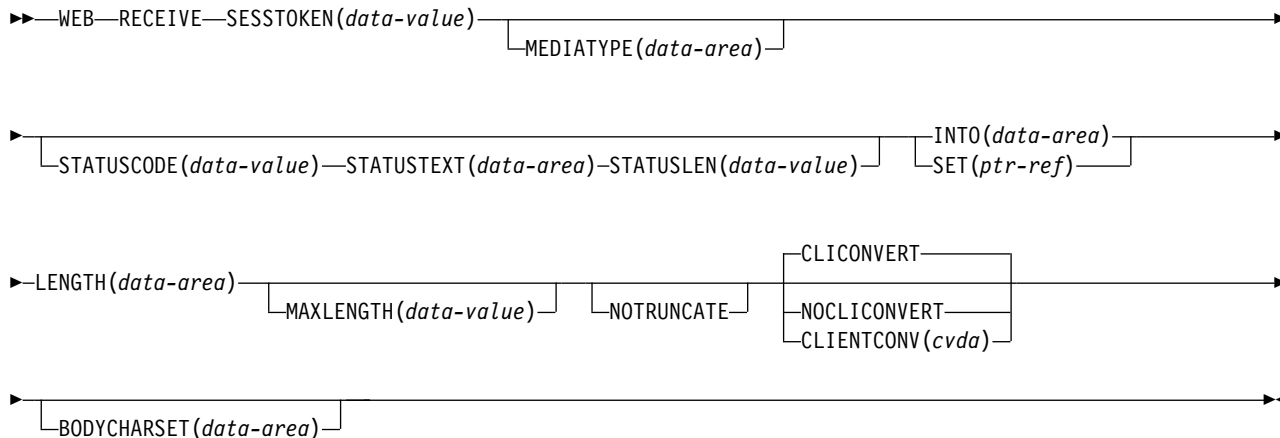

WEB RECEIVE (CICS as an HTTP client using containers)

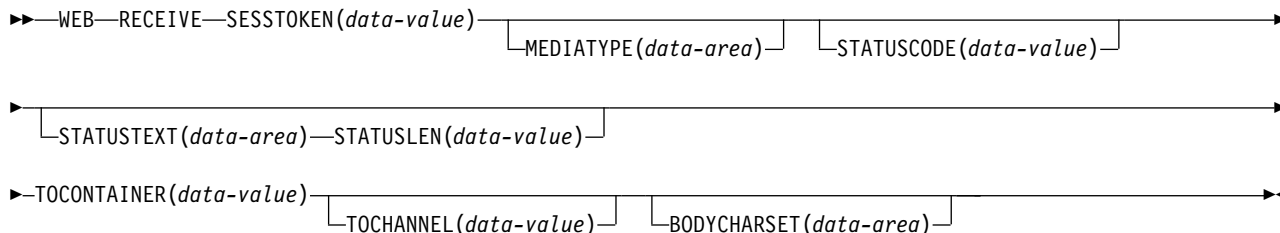

Conditions: CHANNELERR, CONTAINERERR, INVREQ, LENGERR, NOTOPEN, IOERR, TIMEDOUT

This command is threadsafe.

Description

WEB RECEIVE for CICS as an HTTP client receives the body of an HTTP response that a server has made. The headers for the HTTP response can be examined separately using the **WEB READ HTTPHEADER** command or the HTTP header browsing commands. A session token must be included on this command. For guidance on the correct use of the **WEB RECEIVE** command for CICS as an HTTP client, see HTTP client requests from a CICS application in the *CICS Internet Guide*.

When receiving the HTTP body into an application buffer (using either the **INTO** or **SET** options), **WEB RECEIVE** allows you to specify the type of code page conversion used for incoming data received by the CICS application program. If you omit all of the code page conversion options (**SERVERCONV**, **CLNTCODEPAGE**, **CHARACTERSET**, **HOSTCODEPAGE**), no code page conversion takes place.

Code page conversion is not permitted when receiving an HTTP body into a named container. If the named container was created by the user application before the **WEB RECEIVE** command was issued, the container is deleted and re-created. The HTTP request Content-Type header media type information determines whether the named container is re-created as a BIT or CHAR container (unless the CHARACTERSET option is specified, in which case CICS assumes that the data stored in the container is encoded in the CHARACTERSET code page). If the media type is:

- a text media type, a CHAR container is created.
- a non-text media type, a BIT container is created.

If the HTTP request does not contain media type information, the default of text media type is assumed.

If a CHAR container is created, the IANA-registered name of the Coded Character Set Identifier (CCSID) for the data's current code page is retrieved from the HTTP request Content-Type header charset. If this information is not provided or not supported by CICS, the default of ISO-8859-1 is assumed.

Options LENGTH, MAXLENGTH, NOTRUNCATE and CLIENTCONV are not permitted when receiving an HTTP body into a named container.

Note: The RTIMOUT value specified for the transaction that starts the user application indicates the time that the application is prepared to wait to receive the incoming message. (RTIMOUT is specified on the transaction profile definition). When the period specified by RTIMOUT expires, CICS returns a TIMEDOUT response to the application. An RTIMOUT value of zero means that the application is prepared to wait indefinitely. The default setting for RTIMOUT on transaction profile definitions is zero, so it is important to check and change that setting for applications that are making HTTP client requests.

Options

BODYCHARSET (*data-area*)

specifies the character set of the HTTP response body.

The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation.

If the HTTP body is received into an application buffer, the character set returned is as follows:

- If the INTO or SET option is specified, and the HTTP body is converted, CICS returns the character set of the HTTP body before conversion.
- If the INTO or SET option is specified, and the HTTP body is not converted, CICS returns the character set specified in the Content-Type header. If character set information is not available, blanks are returned.

If the HTTP body is received into a named container, the character set returned is as follows:

- If the container is a CHAR container, CICS returns the character set of the encoded data.
- If the container is a BIT container, CICS returns blanks.

If the value returned is more than 40 bytes, the data is truncated. If the value returned is less than 40 bytes, the data is padded to the right with blanks.

CLIENTCONV (*cvda*)

If you are receiving data into a buffer (and either the INTO or SET option is

specified), this option specifies whether or not CICS translates the entity body of the response from the character set used by the server, to a code page suitable for the application. The default is that the entity body is converted.

CLICONVERT

CICS converts the entity body of the response from the character set used by the server, into the code page that you identify for the application.

NOCLICONVERT

CICS does not convert the entity body of the response, and it is passed to the application in the character set used by the server.

You do not need to specify a character set or application code page on the WEB RECEIVE command for CICS as an HTTP client. If code page conversion is required, CICS identifies the character set used by the server by examining the Content-Type header of the message. If the header does not provide this information, or if the named character set is not supported by CICS for code page conversion, the ISO-8859-1 character set is used. For the application's code page, the default code page for the local CICS region (as specified in the LOCALCCSID system initialization parameter) is used, or an alternative EBCDIC code page that you specified on the WEB OPEN command.

There are certain considerations for code page conversion to take place when using buffers (with either the INTO or SET option specified). If you are receiving data into a buffer, and CHARACTERSET and CLICONVERT are not specified, the media type for the message must specify text as the data content type (according to the IANA definitions) for code page conversion to take place. For messages where no media type is given, but CLICONVERT is specified, code page conversion also takes place. If a non-text media type is present, CICS does not convert the message body.

If you are using the TOCONTAINER option, do not specify the CLIENTCONV option.

INTO(*data-area*)

specifies the buffer that is to contain the data being received. If the INTO parameter is specified, then MAXLENGTH must also be specified, with a value greater than zero (otherwise an INVREQ error with RESP2 16 is returned to the application).

LENGTH(*data-area*)

specifies a fullword binary variable which is set to the amount of data that CICS has returned to the application. Note that this might be slightly less than the limit that you set using the MAXLENGTH option, especially if a double-byte or multi-byte character set is involved, because CICS does not return a partial character at the end of the data.

- If the NOTRUNCATE option **is not** specified, any further data present in the message has now been discarded. A LENGERR response with a RESP2 value of 57 is returned if further data was present.
- If the NOTRUNCATE option **is** specified, any additional data is retained. A LENGERR response with a RESP2 value of 36 is returned if additional data is available. The description for the NOTRUNCATE option tells you what to do in this case.

If you are using an application buffer to store your HTTP body, the LENGTH option must be specified when the INTO or SET options are used. If you are using a named container to store your HTTP body (and therefore specify the TOCONTAINER option), do not use the LENGTH option.

MAXLENGTH(*data-value*)

specifies the maximum amount, as a fullword binary value, of data that CICS is to pass to the application. The MAXLENGTH option applies whether the INTO or the SET option is specified for receiving data. If the data has been sent using chunked transfer-coding, CICS assembles the chunks into a single message before passing it to the application, so the MAXLENGTH option applies to the total length of the chunked message, rather than to each individual chunk. The data is measured after any code page conversion has taken place.

If the length of data exceeds the value specified and the NOTRUNCATE option **is not** specified, the data is truncated to that value, and the remainder of the data is discarded.

If the length of data exceeds the value specified and the NOTRUNCATE option **is** specified, CICS retains the remaining data and can use it to satisfy subsequent RECEIVE commands.

If you are using the TOCONTAINER option, do not specify the MAXLENGTH option.

MEDIATYPE(*data-area*)

specifies the data content of any message body provided, for example text/xml. You must specify a 56-byte area for MEDIATYPE. The media type is up to 56 alphanumeric characters, including appropriate punctuation. For more information on media types, see IANA media types and character sets in the *CICS Internet Guide*.

NOTRUNCATE

specifies that when the data available exceeds the length requested on the MAXLENGTH option, the remaining data is not to be discarded immediately but is to be retained for retrieval by subsequent RECEIVE commands. (If no further RECEIVE commands are issued, the data is discarded during transaction termination.)

A single RECEIVE command using the SET option and without the MAXLENGTH option receives all the remaining data, whatever its length. Alternatively, you can use a series of RECEIVE commands with the NOTRUNCATE option to receive the remaining data in appropriate chunks. Keep issuing the RECEIVE command until you are no longer getting a LENGERR response. If you receive less than the length requested on the MAXLENGTH option, this does not necessarily indicate the end of the data; this could happen if CICS needs to avoid returning a partial character at the end of the data.

If you are using the TOCONTAINER option, do not specify the NOTRUNCATE option. The entire HTTP body is stored in the named container by the first **WEB RECEIVE** command.

SET(*ptr-ref*)

specifies a pointer reference that is to be set to the address of data received. The pointer reference is valid until the next receive command or the end of task.

SESTOKEN(*data-value*)

specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

STATUSCODE(*data-value*)

specifies a data-area to receive the HTTP status code sent by the server. The code is a binary halfword value. Examples are 200 (normal) or 404 (not found). Receiving the status code is optional, but you should always receive and check the status code in the following circumstances:

- If you intend to make an identical request to the server, now or during a future connection.
- If you intend to make further requests to the server using this connection.
- If your application is carrying out any further processing that depends on the information you receive in the response.

HTTP status code reference for CICS Web support in the *CICS Internet Guide* has basic guidance on appropriate actions for an application to take in response to the status codes for HTTP/1.1.

STATUSTEXT(*data-area*)

specifies a data-area to receive any text returned by the server to describe the status code. The text is known as a reason phrase. Examples are "OK" (accompanying a 200 status code), or "Bad Request" (accompanying a 400 status code). The STATUSLEN option gives the length allowed for the text.

STATUSLEN(*data-value*)

specifies, as a fullword binary value, the length of the data-area to receive any text returned by the server to describe the status code (the STATUSTEXT option). The text is known as a reason phrase. Most reason phrases recommended for HTTP are short, but a data-area length of 256 characters is suggested here, in case the server replaces the recommended reason phrase with more detailed information.

TOCHANNEL(*data-value*)

Specifies the name of the channel that the container belongs to. The name of the channel can consist of up to 16 alphanumeric characters, including appropriate punctuation. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and _ . Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see The scope of a channel.

If you plan to ship your channels between CICS regions, bear in mind that you should restrict your characters to standard alphanumeric characters (A-Z 0-9 & : = , ; < > . - _) to ensure they are represented in the same way by all EBCDIC code pages.

You can specify the channel name DFHTRANSACTION to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the transaction. For more information, see Channels and containers.

If the TOCHANNEL option is not specified, then CICS assumes the current channel.

TOCONTAINER(*data-value*)

Specifies the name of the container where the data is placed. The name of the container can consist of up to 16 alphanumeric characters, including appropriate punctuation. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and _ . Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks.

If you plan to ship your containers between CICS regions, bear in mind that you should restrict your characters to standard alphanumeric characters (A-Z 0-9 & : = , ; <> . - _) to ensure they are represented in the same way by all EBCDIC code pages.

Do not use container names starting with "DFH", unless requested to do so by CICS.

The TOCONTAINER option can only be specified on the first **WEB RECEIVE** command.

Conditions

122 CHANNELERR

RESP2 values are:

- 1 The name specified by the TOCHANNEL option contains an illegal character or combination of characters.

110 CONTAINERERR

RESP2 values are:

- 1 The name specified by the TOCONTAINER option contains an illegal character or combination of characters.

19 NOTOPEN

RESP2 values are:

- 27 Invalid session token.

16 INVREQ

RESP2 values are:

- 10 Invalid response header.
- 15 Code page conversion failure.
- 16 An INTO and MAXLENGTH error has occurred, as a result of one of the following:
 - Both parameters, INTO and MAXLENGTH, are not specified.
 - Parameters INTO and MAXLENGTH are both specified, but MAXLENGTH is less than or equal to zero.
- 22 Invalid chunk received.
- 41 The connection has been closed. The server may have timed out due to inactivity on this connection.
- 46 The CLIENTCONV option is invalid.
- 67 The content of the response does not conform to HTTP format. The error is generated because there is a syntax problem.
- 68 Message send with chunked transfer-coding is in progress.
- 71 Chunked transfer-coding error.
- 144 One or more of the Web command parameters is invalid.
- 145 Channel was not specified, and there is no current channel.
- 146 The named container is a read-only container.
- 147 Internal conversion error.
- 149 The TOCONTAINER option can only be specified on the first WEB RECEIVE command.

22 LENGERR

RESP2 values are:

- 16** Invalid MAXLENGTH.
- 36** Partial response body returned. Use additional RECEIVES to obtain remainder.
- 57** The response body exceeds the length specified, and the remainder of the body has been discarded.
- 58** The status text exceeds the length specified and has been truncated.
- 59** The STATUSLEN option value was not greater than zero.

17 IOERR

RESP2 values are:

- 42** Socket error.

124 TIMEDOUT

RESP2 values are:

- 62** Timeout on socket receive.

WEB RETRIEVE

Retrieve the DOCTOKEN for a CICS document that was sent using a WEB SEND command.

WEB RETRIEVE

►►—WEB—RETRIEVE—DOCTOKEN(*data-area*)—————►►

Conditions: INVREQ, NOTFND

This command is threadsafe.

The WEB RETRIEVE command allows an application to retrieve the binary token for a document that was sent. For the WEB RETRIEVE command to be able to retrieve the document token, the previous WEB SEND command must specify the ACTION(EVENTUAL) option, so that the SEND command is pending when the application completes. This is because if the ACTION(EVENTUAL) option is used, the Web domain keeps a copy of the information for a document after it is sent. Note that the document that is retrieved is the document that was sent, and it does not include any changes that might have occurred up to the time when the RETRIEVE command is issued.

A valid sequence of events for issuing the WEB RETRIEVE command is as follows:

```
EXEC CICS WEB SEND
        ACTION(EVENTUAL)
EXEC CICS WEB SEND
        ACTION(EVENTUAL)
EXEC CICS WEB RETRIEVE
        DOCTOKEN(MYDOC)
```

The DOCTOKEN for the second WEB SEND command is retrieved successfully.

If the WEB SEND command specified the option DOCSTATUS(DOCDELETE), the WEB RETRIEVE command cannot retrieve the document, and a NOTFND response with a RESP2 value of 1 is returned.

If the WEB SEND command specified the option ACTION(IMMEDIATE), the WEB RETRIEVE command cannot retrieve the document, and a NOTFND response with a RESP2 value of 1 is returned. WEB SEND client processing does not support ACTION(EVENTUAL), so the WEB RETRIEVE command is not valid for use with WEB SEND (Client) commands.

Options

DOCTOKEN(*data-area*)

specifies a buffer that contains the 16-byte binary token of the document to be retrieved.

Conditions

16 INVREQ

RESP2 values:

- 1 The command is issued in a non-CICS Web support application.
- 2 A WEB SEND command has not been issued..

13 NOTFND


RESP2 values:

- 1 Document is not available as the last WEB SEND specified DOCSTATUS(DOCDELETE) or the last WEB SEND was not a SEND for a document with ACTION(EVENTUAL).

WEB SEND (Server)

Send an HTTP response, or a non-HTTP message.

WEB SEND

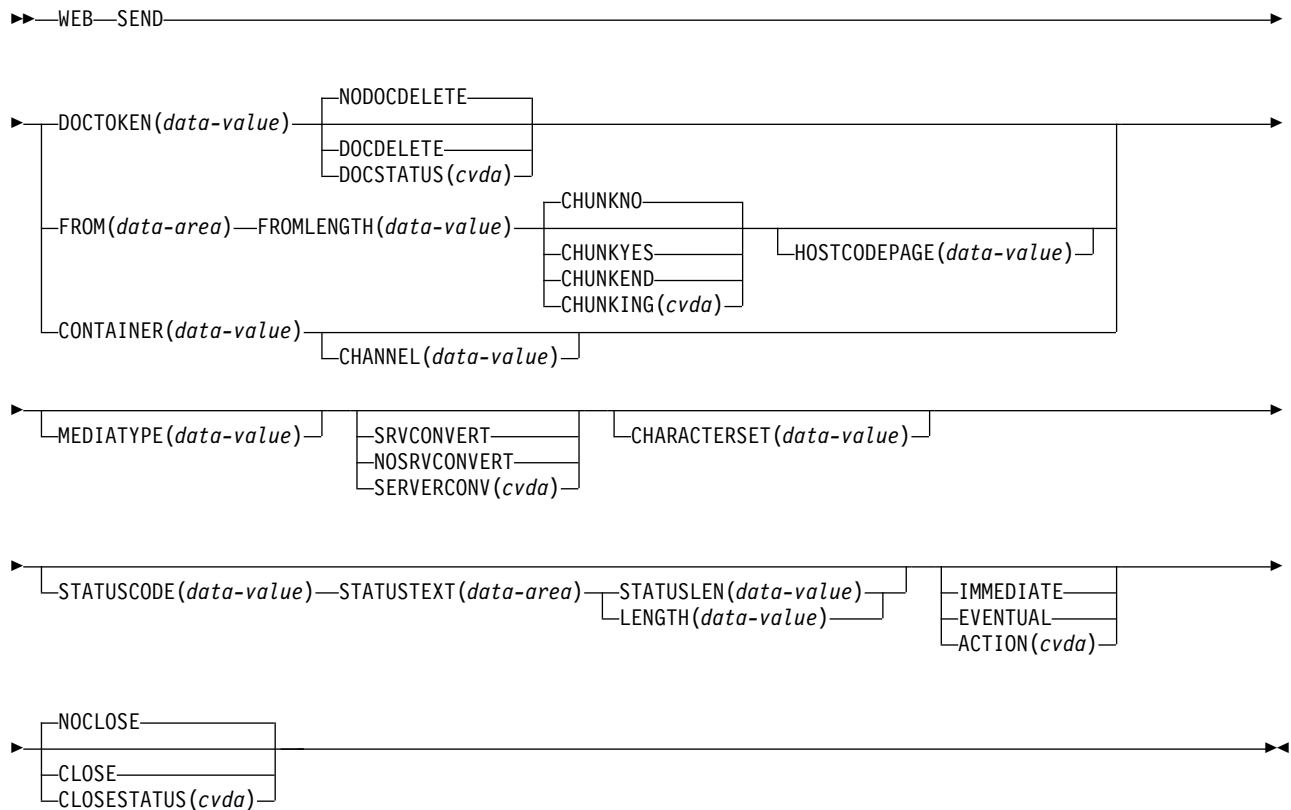

Conditions: CHANNELERR, CONTAINERERR, IOERR, INVREQ, LENGERR, NOTFND

This command is threadsafe.

Description

When the CICS application is in the server role, the **WEB SEND** command specifies a response to be sent using CICS Web support or the CICS business logic interface. Here are the possible responses:

- A response to an HTTP request that was made by a Web client, to CICS as an HTTP server. For guidance on the correct use of the **WEB SEND** command for this purpose, see *Writing Web-aware application programs for CICS as an HTTP server* in the *CICS Internet Guide*.
- A non-HTTP message handled by CICS Web support facilities, with the user-defined (USER) protocol on the TCPIPSERVICE definition. For guidance on non-HTTP messages, see *CICS Web support and non-HTTP requests* in the *CICS Internet Guide*.
- A response to a request from another application that has used the CICS business logic interface to contact the program directly, rather than going through the CICS HTTP listener. For guidance on the CICS business logic interface, see *The CICS business logic interface* in the *CICS Internet Guide*.

One response only can be sent during a task. This can be a standard response using one WEB SEND command, or a chunked response using a sequence of WEB SEND commands.

If you attempt to send a second response during the same task, the result depends on whether the IMMEDIATE option or the EVENTUAL option was specified on the WEB SEND command for the first response.

- If the IMMEDIATE option was used for the first response, an error is returned when you attempt the second response.
- If the EVENTUAL option was used for the first response, the second response overwrites the components of the previous response (status line, HTTP headers and message body). The first response is lost, and the second response is sent.

Each time a request from a Web client is received, CICS starts a new task to process the request.

Options

ACTION(*cvda*)

Specifies how the message should be sent out. The CVDA values that apply for CICS as an HTTP server are:

IMMEDIATE

sends the response immediately to the Web client. If CHUNKING is specified, the IMMEDIATE option is assumed.

EVENTUAL

sends the response to the Web client at end of task. If CHUNKING is specified, the EVENTUAL option is ignored. For message sends that do not use chunked transfer-coding, EVENTUAL is the default.

CHANNEL(*data-value*)

Specifies the name of the channel to which the container belongs. The name of the channel can consist of up to 16 alphanumeric characters, including appropriate punctuation. Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

If the CONTAINER option is specified, CHANNEL is optional.

If the CHANNEL option is not specified, CICS assumes the current channel.

CHARACTERSET(*data-value*)

Specifies a character set into which CICS translates the entity body of the item sent by the command before sending. The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation. CICS does not support all the character sets named by IANA. HTML coded character sets in the *CICS Internet Guide* lists the IANA character sets that are supported by CICS for code page conversion.

When the CHARACTERSET option is specified, SRVCONVERT is assumed, so code page conversion of the entity body takes place. As an alternative to selecting the character set yourself, specifying either SRVCONVERT, or HOSTCODEPAGE (if allowed), or both, and omitting CHARACTERSET, lets CICS determine a suitable character set for the message body. The description for the SERVERCONV option tells you what happens in this case.

If you omit all of the code page conversion options, no code page conversion takes place.

CHUNKING(*cvda*)

is used for controlling the message send when the message is being sent in chunks (known as chunked transfer-coding). The default when the option is not specified is that chunked transfer-coding is not in use. Chunked transfer-coding is only acceptable to HTTP/1.1 clients, and it cannot be used with HTTP/1.0 clients or non-HTTP messages.

The content of a chunked message can be divided into chunks in whatever way is most convenient for the application program. The body of a chunked message cannot be formed directly from CICS documents, so the DOCTOKEN option cannot be used.

Use a separate WEB SEND command with the CHUNKYES option for each chunk of the message. Use the FROM option to specify the chunk of data, and the FROMLENGTH option to specify the length of the chunk. Other options for the message, such as the CLOSESTATUS option, can be specified on the first WEB SEND command of the sequence (which sends the first chunk), but do not specify them on subsequent commands (which send the second and subsequent chunks).

When you have sent the last chunk of the data, specify a further WEB SEND command with the CHUNKEND option and no FROM or FROMLENGTH option. CICS then sends an empty chunk to the recipient to complete the chunked message.

If one of the WEB SEND commands fails during the sequence, an error response is returned, and subsequent sends will also fail. The application should handle this situation appropriately. If all of the chunks are sent successfully but the application does not issue the final WEB SEND command with the CHUNKEND option, the transaction is abended with abend code AWBP. An incomplete chunked message should be ignored and discarded by the recipient.

Using chunked transfer-encoding to send an HTTP request or response in the *CICS Internet Guide* has a full description of the procedure for chunked transfer-coding, which should be followed in order for your chunked message to be acceptable to the recipient. CVDA values are:

CHUNKNO

Chunked transfer-coding is not used for the message. This is the default if the CHUNKING option is not specified.

CHUNKYES

Chunked transfer-coding is in progress. The data specified by the FROM option represents a chunk of the message.

CHUNKEND

Chunked transfer-coding is complete. No data is specified for this send. CICS sends an empty chunk to the recipient to complete the chunked message.

If you are using the CONTAINER option, do not specify the CHUNKING option. A chunked response cannot be sent from a container.

CLNTCODEPAGE(*data-value*)

This option is supported for upgrade purposes only. CHARACTERSET replaces it. The action taken by CICS is the same for both keywords.

CLOSESTATUS(*cvda*)

Specifies whether or not CICS closes the connection after sending the message. The default is that the connection is not closed. The CVDA values are:

CLOSE

CICS writes a Connection header with the "close" connection option (Connection: close) for this response, and closes the connection with the Web client after sending the response. The header notifies the Web client of the closure. (For a Web client at HTTP/1.0 level, CICS achieves the same effect by omitting the Connection: Keep-Alive header.)

If chunked transfer-coding is in use, the CLOSE option can be specified on the first chunk of the message, to inform the Web client that the connection is closed after the chunked message is complete.

NOCLOSE

means that the Connection: close header is not used for this response, and the connection is kept open. If the Web client is identified as HTTP/1.0 and has sent a Connection header with the "Keep-Alive" connection option (Connection: Keep-Alive), CICS sends the same header, to notify that a persistent connection will be maintained.

CONTAINER(*data-value*)

Specifies the name of the container where the HTTP body is held, before it is sent to the server. The name of the container can consist of up to 16 alphanumeric characters, including appropriate punctuation. Leading and embedded blanks are not permitted. If the name is shorter than 16 characters, it is padded with trailing blanks.

DOCSTATUS(*cvda*)

indicates whether the document should be deleted or not deleted during processing of the WEB SEND command. The CVDA values are:

DOCDELETE

CICS deletes the document after the document contents are saved for sending. Storage allocated for the document is released immediately. If you make subsequent requests for the document, these generate a NOTFND response.

NODOCDELETE

CICS does not delete the document during processing of the WEB SEND command. This is the default value for DOCSTATUS.

DOCTOKEN(*data-value*)

Specifies the 16-byte binary token of a document to be sent as the message body. The document is created using the CICS Document interface using the **EXEC CICS DOCUMENT CREATE**, **INSERT**, and **SET** commands. The FROM option provides an alternative way to create a message body.

The body of a chunked message cannot be formed from CICS documents, so the DOCTOKEN option cannot be used for chunked transfer-coding.

FROM(*data-area*)

Specifies a buffer of data which holds the complete message body, or a chunk of the message body. The message body is built by the application program. When you specify the FROM option, use the FROMLENGTH option to specify the length of the buffer of data. The DOCTOKEN option provides an alternative way to create the message body, but that option cannot be used for the body of a chunked message.

There is no set maximum limit for the size of the data-area, but its size is limited in practice by storage considerations. Producing an entity body for an HTTP message in the *CICS Internet Guide* has more information about these.

FROMLENGTH(*data-value*)

Specifies the length, as a fullword binary value, of the buffer of data supplied on the FROM option. It is important to state this value correctly, because an incorrect data length can cause problems for the recipient of the message.

HOSTCODEPAGE(*data-value*)

Specifies the 8-character name of the CICS (host) code page that was used by the application program for the entity body of the response.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS now also accepts any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

When the HOSTCODEPAGE option is specified, SRVCONVERT is assumed, so code page conversion of the entity body takes place. Specifying either SRVCONVERT, or CHARACTERSET, or both, and omitting HOSTCODEPAGE, lets CICS identify the host code page.

If a CICS document is used to form the response body (DOCTOKEN option), do not specify the HOSTCODEPAGE option, because CICS identifies the host code page from the CICS document domain's record of the host code pages for the document.

If a buffer of data is used to form the response body (FROM option), you may need to specify HOSTCODEPAGE. The default if this option is not present is the default code page for the local CICS region, as set in the LOCALCCSID system initialization parameter. If you require code page conversion but your application has used a different code page, use HOSTCODEPAGE to specify it.

If you omit all of the code page conversion options, no code page conversion takes place.

If you are using the CONTAINER option, do not specify the HOSTCODEPAGE option.

LENGTH(*data-value*)

This option is supported for upgrade purposes only. STATUSLEN replaces it.

MEDIATYPE(*data-value*)

Specifies the data content of any message body provided, for example text/xml. You must specify a 56-byte area for MEDIATYPE. The media type is up to 56 alphanumeric characters, including appropriate punctuation, but not spaces. For more information on media types, see IANA media type character sets in the *CICS Internet Guide*. CICS checks that the format of the media type is correct, but does not check the validity of the media type against the data content. CICS does not provide a default. In some circumstances, the media type that you specify affects whether or not code page conversion is carried out; see the description of the SERVERCONV option for more information.

SERVERCONV(*cvda*)

Specifies whether or not CICS translates the entity body of the item sent by the command before sending, from the code page used by the application, to a character set suitable for the recipient. You can use the CHARACTERSET and HOSTCODEPAGE options on this command to specify the character set and code page that are used. If you specify either of these options, code page conversion (SRVCONVERT) is assumed. Alternatively, you can omit either or both of these options, specify SRVCONVERT and let CICS determine a suitable character set and code page.

SRVCONVERT

CICS converts the entity body of the message.

When you specify SRVCONVERT without CHARACTERSET, CICS determines a suitable character set as follows:

1. If the Web client's request has a Content-Type header naming a character set supported by CICS, that character set is used.
2. If the Web client's request has no Content-Type header or the named character set is unsupported, the ISO-8859-1 character set is used.
3. For non-HTTP messages (sent using the USER protocol), the ISO-8859-1 character set is used.

When you specify SRVCONVERT without HOSTCODEPAGE, CICS identifies the host code page as follows:

- If the FROM option is used, CICS identifies the host code page as the default code page for the local CICS region, as specified in the LOCALCCSID system initialization parameter.
- If the DOCTOKEN option is used, CICS identifies the host code page from the CICS document domain's record of the host code pages for the document.
- If the CONTAINER option is used, CICS identifies the host code page as the code page that was used for data encoding, when the HTTP body was stored in the container.

If you specify SRVCONVERT alone, note that for code page conversion to take place, the MEDIATYPE option must specify a type of data content that can be identified as text according to the IANA definitions. For non-text media types, CICS does not convert the message body, and an INVREQ RESP2 code is issued. However, for compatibility with Web-aware applications coded in earlier releases, if you specify either of the CHARACTERSET or HOSTCODEPAGE options or omit the SERVERCONV option, the MEDIATYPE option does not influence code page conversion.

BIT containers contain non-text media, and therefore do not support code page conversion. As a result, if you code either the SRVCONVERT or CHARACTERSET options with a BIT container, an INVREQ RESP2 error is produced.

NOSRVCONVERT

CICS does not convert the entity body of the HTTP request, and it is sent to the server in the code page used by the application. If you specify NOSRVCONVERT, you cannot specify the CHARACTERSET or HOSTCODEPAGE options.

Note: If you omit all of the code page conversion options (SERVERCONV, CLNTCODEPAGE, CHARACTERSET, HOSTCODEPAGE), no code page conversion takes place.

STATUSCODE(*data-value*)

Specifies a standard HTTP status code determined by the application program, which is to be inserted on the status line of the HTTP response. The code is a halfword binary value. Examples are 200 (normal response) or 404 (not found). If this option is not specified, CICS supplies a default of 200.

HTTP status code reference for CICS Web support in the *CICS Internet Guide* has information about the use of status codes for CICS Web support. For status

codes 204, 205, and 304, a message body is not allowed, and CICS returns an error response to the command if you attempt to include one. Other than that, CICS does not check that your use of the status code is appropriate.

STATUSLEN(*data-value*)

Specifies the length, as a fullword binary value, of the string supplied on the STATUSTEXT option.

STATUSTEXT(*data-area*)

Specifies a data-area containing human-readable text to describe the reason for the status code. The text is known as a reason phrase. Examples are "OK" (accompanying a 200 status code), or "Bad Request" (accompanying a 400® status code). The HTTP/1.1 specification (RFC 2616) defines a recommended reason phrase for each status code, but you do not have to use these.

Conditions

122 CHANNELERR

RESP2 values are:

- 2 The channel specified by the CHANNEL option could not be found.

110 CONTAINERERR

RESP2 values are:

- 2 The container specified by the CONTAINER option could not be found.

16 INVREQ

RESP2 values are:


- 1 The command is being issued in a non-CICS Web support application.
- 11 Action code invalid.
- 13 Close status invalid.
- 14 Invalid code page combination.
- 32 Media type invalid.
- 41 The connection has been closed.
- 46 The SERVERCONV option is invalid.
- 72 Status code does not support a message body.
- 75 Invalid send sequence.
- 77 Chunk incomplete.
- 80 CHARACTERSET cannot be specified with NOSRVCONVERT.
- 81 HOSTCODEPAGE cannot be specified with NOSRVCONVERT.
- 85 Chunking cannot be used with non-HTTP messages.
- 86 Chunking cannot be used with HTTP/1.0 clients.
- 87 Status code not allowed.
- 88 Host code page not allowed.
- 89 Previous send over this connection failed. No further sends permitted.
- 90 STATUSCODE and STATUSTEXT options not allowed for second or subsequent chunks.


- 91 CHARACTERSET and CLNTCODEPAGE options not allowed for second or subsequent chunks.
- 92 HOSTCODEPAGE option not allowed for second or subsequent chunks.
- 93 MEDIATYPE option not allowed for second or subsequent chunks.
- 94 CLOSESTATUS option not allowed for second or subsequent chunks.
- 95 SERVERCONV option not allowed for second or subsequent chunks.
- 120 The CHUNKING option is invalid.
- 121 FROMLENGTH option required.
- 122 FROM option required.
- 123 No message body specified. Use FROM, DOCTOKEN or CHUNKEND.
- 124 CHUNKING option not specified, FROMLENGTH option required.
- 125 CHUNKNO specified, FROM option required.
- 126 CHUNKNO specified, FROMLENGTH option required.
- 127 CHUNKYES specified, FROM option required.
- 128 CHUNKYES specified, FROMLENGTH option required.
- 129 FROM option not allowed with CHUNKEND.
- 130 FROMLENGTH option not allowed with CHUNKEND.
- 131 FROMLENGTH option specified as zero.
- 143 The DOCSTATUS value specified is invalid.
- 145 Channel was not specified, and there is no current channel.
- 147 Internal conversion error.
- 148 User protocol is not supported for containers.
- 150 Conversion requested, but data to be sent is in a DATATYPE BIT container.
- 151 Chunking is invalid during Web error processing.
- 152 ACTION(EVENTUAL) is invalid during Web error processing.
- 17 IOERR**
RESP2 values are:
 - 42 Socket error.
- 22 LENGERR**
RESP2 values are:
 - 50 The FROMLENGTH option value was not greater than zero.
- 13 NOTFND**
RESP2 values are:
 - 1 The document has not been created, or has been deleted, or the name is incorrectly specified.
 - 7 Client code page (character set) not found.
 - 83 Host code page (for server) not found.

WEB SEND (Client)


Send an HTTP request by CICS as an HTTP client, using CICS Web support.

WEB SEND (CICS as an HTTP client)

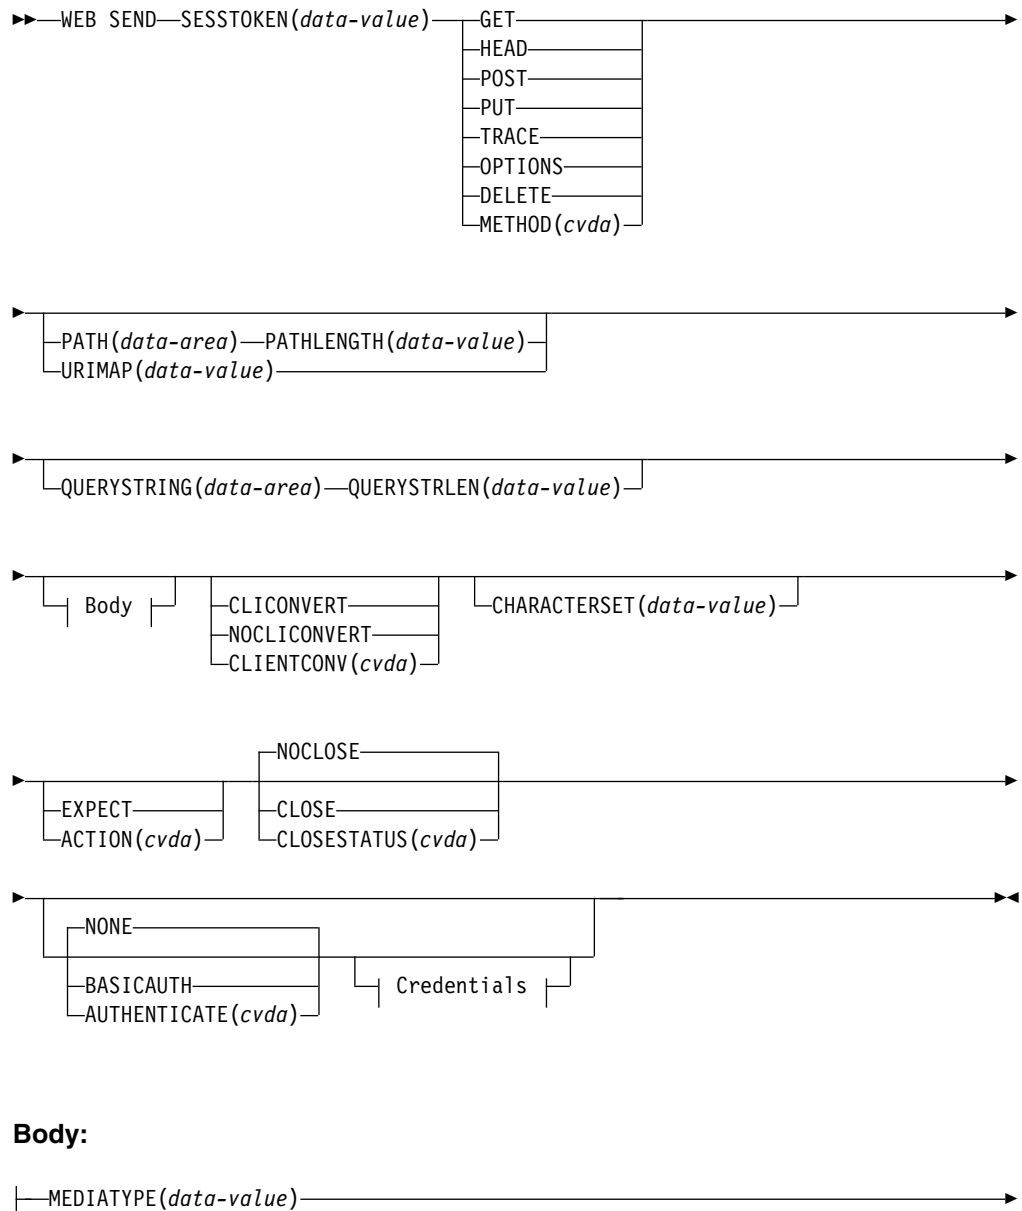

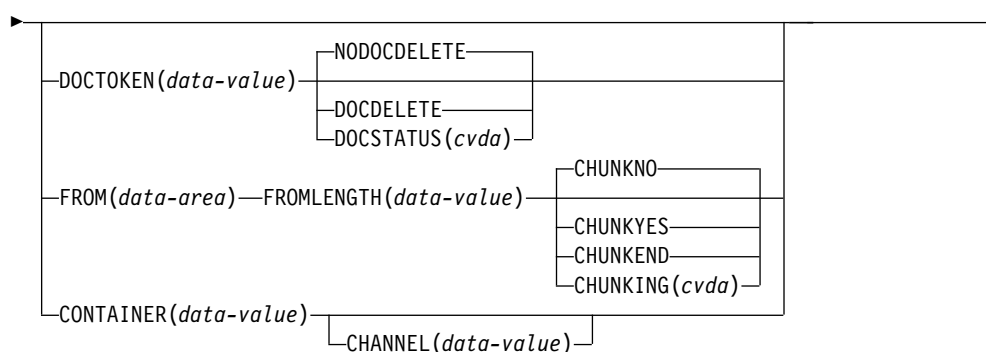

Credentials:

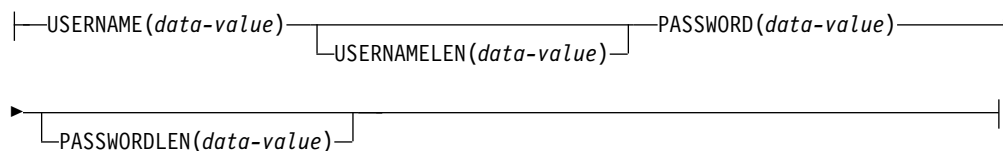

Conditions: CHANNELERR, CONTAINERERR, INVREQ, IOERR, LENGERR, NOTAUTH, NOTFND, NOTOPEN, TIMEDOUT, TOKENERR

This command is threadsafe.

Description

WEB SEND for CICS as an HTTP client is used to make an HTTP request to a server. A session token must be included on this command. For guidance on the correct use of the WEB SEND command for CICS as an HTTP client, see HTTP client requests from a CICS application in the *CICS Internet Guide*.

For CICS as an HTTP client, the WEB SEND command cannot be used after the connection to the server has been closed. You might encounter this situation if either the application program or the server sends a Connection: close header on a message. If you need to test whether the server has requested termination of the connection, use the WEB READ HTTPHEADER command to look for the Connection: close header in the last message from the server.

For CICS as an HTTP client, the CONVERSE command can be used as an alternative to issuing a WEB SEND command followed by a WEB RECEIVE command. However, note that the WEB CONVERSE command does not support chunked transfer-coding, because it requires a sequence of send actions, and the WEB CONVERSE command provides a single send action.

The request can time out when sending a message to the server. In this case, the deadlock time out interval specified in the DTIMOUT attribute of the TRANSACTION definition applies, and CICS returns a TIMEDOUT response to the application.

Options

ACTION(cvda)

Specifies how the message will be sent out. This CVDA value applies for CICS as an HTTP client:

EXPECT

Makes CICS send an Expect header with the request line and headers for the request and await a 100-Continue response before sending the message body to the server. If a response other than 100-Continue is received, CICS informs the application program and cancels the send. If no response is received after a period of waiting, CICS sends the message body.

The Expect header is not supported by servers below HTTP/1.1. If CICS does not yet know the HTTP version of the server, CICS makes an additional request before sending your request, to determine the HTTP version of the server. If the Expect header is not suitable, CICS sends your request without it.

This option must be used only if your request has a message body.

AUTHENTICATE(*cvda*)

Specifies user authentication details, to control access to restricted data. The CVDA values that apply for CICS as an HTTP client are as follows:

NONE

Specifies that there are no restrictions on accessing this data, therefore no credentials are required. This is the default value for AUTHENTICATE.

BASICAUTH

Specifies that HTTP Basic Authentication credentials are required for this session. These details can be supplied within the command or by using the XWBAUTH global user exit.

CHANNEL(*data-value*)

Specifies the name of the channel to which the container belongs. The name of the channel can consist of up to 16 alphanumeric characters, including appropriate punctuation. Leading and embedded blanks are not permitted. If the name is less than 16 characters, it is padded with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

If the CONTAINER option is specified, CHANNEL is optional.

If the CHANNEL option is not specified, CICS assumes the current channel.

CHARACTERSET(*data-value*)

Specifies the character set into which CICS translates the entity body of the request before sending. The name of the character set can consist of up to 40 alphanumeric characters, including appropriate punctuation. CICS does not support all the character sets named by IANA. HTML coded character sets in the *CICS Internet Guide* lists the IANA character sets that are supported by CICS for code page conversion.

For conversion of the entity body to take place, the CLIENTCONV option must be specified as (or allowed to default to) CLICONVERT. Specifying NOCLICONVERT suppresses conversion of the entity body. If conversion is requested, ISO-8859-1 is used as the default if the CHARACTERSET attribute is not specified.

CHUNKING(*cvda*)

Is used for controlling the message send when the message is being sent in chunks (known as chunked transfer-coding). The default when the option is not specified is that chunked transfer-coding is not in use.

The content of a chunked message can be divided into chunks to suit the application program. The body of a chunked message cannot be formed directly from CICS documents, so the DOCTOKEN option cannot be used.

Use a separate WEB SEND command with CHUNKYES for each chunk of the message. Use the FROM option to specify the chunk of data, and the FROMLENGTH option to specify the length of the chunk. Other options for the message, such as the CLOSESTATUS option, can be specified on the first WEB SEND command of the sequence (which sends the first chunk), but do not specify them on subsequent commands (which send the second and subsequent chunks).

When you have sent the last chunk of the data, specify a further WEB SEND command with CHUNKEND, but not the FROM and FROMLENGTH options. CICS then sends an empty chunk to the recipient to end the chunked message.

If your application program is informed of an error at any point in the chunking process, use the WEB CLOSE command to stop the process and close the connection. The recipient of the chunked message will not receive the final empty chunk, and so ignores and discards the data that you have sent so far.

Using chunked transfer-coding to send an HTTP request or response in the *CICS Internet Guide* has a full description of the procedure for chunked transfer-coding, which must be followed for your chunked message to be acceptable to the recipient. CVDA values are as follows:

CHUNKNO

Chunked transfer-coding is not used for the message. CHUNKNO is the default if the CHUNKING option is not specified.

CHUNKYES

Chunked transfer-coding is in progress. The data specified by the FROM option represents a chunk of the message.

CHUNKEND

Chunked transfer-coding is complete. No data is specified for this send. CICS sends an empty chunk to the recipient to complete the chunked message.

Notes:

1. The method (METHOD option) must be compatible with chunked transfer-coding.
2. When you have begun sending the parts of a chunked message, the application program cannot send any different messages or receive any items until the final empty chunk is sent and the chunked message is complete.

If you are using the CONTAINER option, do not specify the CHUNKING option. A chunked response cannot be sent from a container.

CLOSESTATUS (*cvda*)

Specifies whether a Connection header with the "close" connection option (Connection: close) will be included on the message. The default is that the header is not included. The CVDA values are as follows:

CLOSE

Makes CICS write a Connection: close header for this request. The header notifies the server that the connection will be closed after the server has sent its response to the request. (For a server at HTTP/1.0 level, CICS achieves the same effect by omitting the Connection:

Keep-Alive header.) Do not specify this option if you have implemented connection pooling in the URIMAP resource for this connection, because a closed connection cannot be pooled for reuse. Only specify this option if this is your final request to the server and you are not using connection pooling.

When you specify the CLOSE option on a WEB SEND command, no further messages can be sent to the server until a new connection is made. The exception is where chunked transfer-coding is in use, when you can specify the CLOSE option on the first chunk of the message, to inform the server that the connection will be closed after the chunked message is complete and a response has been sent.

NOCLOSE

Means that the Connection: close header is not used for this request. If the server is identified as HTTP/1.0, CICS sends a Connection header with the Keep-Alive connection option (Connection: Keep-Alive), to notify that a persistent connection is required.

CLIENTCONV(*cvda*)

Specifies whether CICS translates the entity body of the HTTP request before sending, from the code page used by the application, to a character set suitable for the recipient. If this option is omitted, the default is that any entity body is converted, unless a nontext media type is specified. CVDA values are as follows:

CLICONVERT

CICS converts the entity body of the HTTP request from the code page used by the application, into the character set that you identify for the server. You can use the CHARACTERSET option on this command to specify the character set that is used. If conversion is requested but you do not specify a character set, the default is that CICS converts the entity body to the ISO-8859-1 character set. (The code page used by the application was identified on the WEB OPEN command for the connection.)

For non-text media types, CICS only converts the message body under the following circumstances:

- The message body is sent from a buffer, using the FROM option, and either the CLICONVERT or CHARACTERSET options, or both, are specified.
- The message body is sent from a document, using the DOCTOKEN option.
- The message body is sent from a container and the CHARACTERSET option is specified.

BIT containers contain nontext media, and therefore do not support code page conversion. As a result, if you code either the CLICONVERT or CHARACTERSET options with a BIT container, an INVREQ RESP2 error is produced.

NOCLICONVERT

CICS does not convert the entity body of the HTTP request, and it is sent to the server in the code page used by the application, as identified on the WEB OPEN command for the connection.

CONTAINER(*data-value*)

Specifies the name of the container where the HTTP body is held, before it is sent to the server. The name of the container can consist of up to 16

alphanumeric characters, including appropriate punctuation. Leading and embedded blanks are not permitted. If the name is shorter than 16 characters, it is padded with trailing blanks.

DOCSTATUS(*cvda*)

Indicates whether the document will be deleted or not deleted during processing of the WEB SEND command. The CVDA values are as follows:

DOCDELETE

CICS deletes the document after the document contents are saved for sending. Storage allocated for the document is released immediately. If you make subsequent requests for the document, the requests generate a TOKENERR response.

NODOCDELETE

CICS does not delete the document during processing of the WEB SEND command. This value is the default for DOCSTATUS.

DOCTOKEN(*data-value*)

Specifies the 16-byte binary token of a document to be sent as the message body. You create the document using the CICS Document interface (EXEC CICS DOCUMENT CREATE, INSERT, and SET commands). You do not have to retrieve the document before sending it. The FROM option provides an alternative way to create a message body.

The body of a chunked message cannot be formed from CICS documents, so the DOCTOKEN option cannot be used for chunked transfer-coding.

FROM(*data-area*)

Specifies a buffer of data, which holds the message body. The message body is built by the application program. When you specify the FROM option, use the FROMLENGTH option to specify the length of the buffer of data. The DOCTOKEN and CONTAINER options provide an alternative way to create the message body, but the DOCTOKEN option cannot be used for the body of a chunked message.

The size of the data-area has no set maximum limit, but its size is limited in practice by storage considerations. Producing an entity body for an HTTP message in the *CICS Internet Guide* has more information about storage considerations.

FROMLENGTH(*data-value*)

Specifies the length, as a fullword binary value, of the buffer of data supplied on the FROM option (the message body). You must state this value correctly, because an incorrect data length can cause problems for the recipient of the message.

MEDIATYPE(*data-value*)

Specifies the data content of any message body provided, for example text/xml. You must specify a 56-byte area for MEDIATYPE. The media type is up to 56 alphanumeric characters, including appropriate punctuation, but not spaces. For more information on media types, see IANA media types and character sets in the *CICS Internet Guide*. CICS checks that the format of the media type is correct, but does not check the validity of the media type against the data content. CICS uses this information to produce the Content-Type header for the message.

For requests that require a body, you must specify the MEDIATYPE option. There is no default. However, if the required Content-Type header must

contain spaces or more than 56 characters, the application can provide it using the WEB WRITE HTTPHEADER command. In this case, do not specify the MEDIATYPE option.

The supplied media type is used to determine whether code page conversion is required under the following circumstances:

- If you are sending a message from a buffer, using the FROM option, and the CLIENTCONV and CHARACTERSET options are not specified.
- If you are sending a message from a document, using the DOCTOKEN option, and the CLIENTCONV and CHARACTERSET options are not specified.
- If you are sending a message from a named container, using the CONTAINER option, and either CLICONVERT is specified, or the CLIENTCONV and CHARACTERSET options are not specified.

If the supplied media type is text, the message is converted. If the supplied media type is nontext, the message is not converted.

METHOD(*cvda*)

Specifies the HTTP method for the request.

The GET, HEAD, POST, PUT, TRACE, OPTIONS, and DELETE methods are supported by this command. However, some HTTP servers, particularly HTTP/1.0 servers, might not implement all of these methods.

HTTP method reference for CICS Web support in the *CICS Internet Guide* has more information about the correct use of methods, including the HTTP versions that apply to each.

CICS prevents the sending of a message body for methods for which it is inappropriate, and requires it for methods where it is appropriate. Chunked transfer-coding is not relevant for methods that do not have a request body. CVDA values are as follows:

GET Obtain a resource from the server. A request body is not allowed.

HEAD

Obtain the HTTP headers, but not the response body, for a resource. A request body is not allowed.

POST Send data to a server. A request body is required.

PUT Create or modify a resource on the server. A request body is required.

TRACE

Trace the route of your request to the server. A request body is not allowed.

OPTIONS

Obtain information about the server. A request body is allowed, but the body has no defined purpose. If you do use a request body, then you must specify a media type.

DELETE

Delete a resource on the server. A request body is not allowed.

PASSWORD(*data-value*)

Specifies the password associated with the user ID or logon name that is allowed access to this data. The PASSWORD option is required only if the USERNAME option is used.

If you specify USERNAME and PASSWORD in the **WEB SEND** command and you also specify AUTHENTICATE in the URIMAP resource, the WEB SEND

values are used. If the specified password is over 8 characters long, it is treated as a password phrase when sent to z/OS systems.

PASSWORDLEN(*data-value*)

Specifies the buffer length supplied for the PASSWORD option as a fullword binary variable.

PATH(*data-area*)

Specifies the path information for the specific resource in the server that the application needs to access.

If the URIMAP option was used to specify an existing URIMAP definition on the WEB OPEN command for this connection, the path specified in that URIMAP definition is the default path for the WEB SEND command. In these circumstances, if you do not specify path information on the WEB SEND command, the path from the URIMAP definition is used. If you specify a different path from that given in the URIMAP definition, that path overrides the path from the URIMAP definition.

If the URIMAP option was not used on the WEB OPEN command, there is no default path, and you must provide path information. You can extract path information from a known URL using the WEB PARSE URL command.

As an alternative to using the PATH option to provide the path information, you can use the URIMAP option on the WEB SEND command to specify a URIMAP definition from which the path information is taken directly.

PATHLENGTH(*data-value*)

Specifies the length of the path, as a fullword binary value. If you are providing path information using the PATH option, you must specify the PATHLENGTH option. Path length information is returned if you use the WEB PARSE URL command to parse a URL.

QUERYSTRING(*data-area*)

Specifies a query string that is to be supplied to the server as part of the request. You do not have to include a question mark (?) at the beginning of the query string; if you do not include it, CICS supplies it for you automatically when constructing the request. If you include escaped characters in the query string, CICS passes them to the server in their escaped format.

QUERYSTLEN(*data-value*)

Specifies the length of the query string supplied on the QUERYSTRING option, as a fullword binary value.

SESTOKEN(*data-value*)

Specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

URIMAP(*data-value*)

Specifies the name, up to 8 characters, in mixed case, of a URIMAP definition that provides the path information for the specific resource in the server that the application will access. The URIMAP definition must be for CICS as an HTTP client, with USAGE(CLIENT) specified. Its HOST attribute must be the same as the HOST attribute of the URIMAP definition that was specified on the WEB OPEN command for this connection, or the same as the host name specified in the HOST option on the WEB OPEN command for this connection. A URIMAP definition specified on the WEB SEND command applies only to this request.

If the URIMAP option is specified, do not specify the PATH or PATHLENGTH options.

USERNAME(*data-value*)

Specifies the user ID or logon name that is allowed access to this data. If the USERNAME is specified, you must also use the PASSWORD option.

If you specify USERNAME and PASSWORD in the **WEB SEND** command and you also specify AUTHENTICATE in the URIMAP resource, the WEB SEND values are used.

USERMALEN(*data-value*)

Specifies the buffer length supplied for the USERNAME option as a fullword binary variable.

Conditions

122 CHANNELERR

RESP2 values are:

- 2 The channel specified by the CHANNEL option was not found.

110 CONTAINERERR

RESP2 values are:

- 2 The container specified by the CONTAINER option was not found.

16 INVREQ

RESP2 values are:

- 11 Action code invalid.
- 12 URIMAP and PATH are both specified. Only one is allowed. Or, the URIMAP option is not allowed for second or subsequent chunks.
- 13 Close status invalid.
- 15 Code page conversion failure.
- 17 Expect-100 request was rejected by the server.
- 22 Invalid chunk size.
- 32 Media type invalid.
- 33 Method does not support a body.
- 34 Method requires a body.
- 43 The DOCSTATUS value specified is invalid.
- 45 The character set specified is invalid.
- 46 The CLIENTCONV option is invalid.
- 49 The format of the path option is invalid.
- 54 The HTTP method is not valid.
- 63 URIMAP object disabled.
- 64 Host in URIMAP definition does not match the host specified when this session was opened.
- 69 Chunked transfer-coding not supported with this HTTP version.
- 71 Chunked transfer-coding error.

- 74 The connection has been closed. The server might have timed out because of inactivity on this connection.
 - 76 MEDIATYPE option required.
 - 79 Pipelining is in progress. Expect header cannot be sent.
 - 80 CHARACTERSET cannot be specified with NOCLICONVERT.
 - 120 The CHUNKING option is invalid.
 - 121 FROMLENGTH option required.
 - 122 FROM option required.
 - 123 No message body specified. Use FROM, DOCTOKEN, or CHUNKEND.
 - 124 CHUNKING option not specified, FROMLENGTH option required.
 - 125 CHUNKNO specified, FROM option required.
 - 126 CHUNKNO specified, FROMLENGTH option required.
 - 127 CHUNKYES specified, FROM option required.
 - 128 CHUNKYES specified, FROMLENGTH option required.
 - 129 FROM option not allowed with CHUNKEND.
 - 130 FROMLENGTH option not allowed with CHUNKEND.
 - 131 FROMLENGTH option specified as zero.
 - 132 METHOD option not allowed for second or subsequent chunks.
 - 133 MEDIATYPE option not allowed for second or subsequent chunks.
 - 135 PATH option not allowed for second or subsequent chunks.
 - 136 METHOD option required.
 - 142 AUTHENTICATE is invalid. The CVDA is not NONE or BASICAUTH.
 - 144 One or more of the Web command parameters is invalid.
 - 145 Channel was not specified, and there is no current channel.
 - 147 Internal conversion error.
 - 150 Conversion requested, but the data to be sent is in a DATATYPE BIT container.
- 17 IOERR**
RESP2 values are:
- 42 Socket error.
- 22 LENGERR**
RESP2 values are:
- 5 The PATHLENGTH option value was not greater than zero.
 - 8 The QUERYSTRLEN option value was not greater than zero.
 - 50 The FROMLENGTH option value was not greater than zero.
 - 139 USERNAMELEN is negative or is greater than 256.
 - 140 PASSWORDLEN is negative or is greater than 256.

70 NOTAUTH

RESP2 values are:

100 Path barred by security exit.

110 XWBAUTH error. The XWBAUTH global user exit has issued a UERCERR return code because the XWBAUTH exit is required but cannot return a valid response.

This error code is issued when the following are true: BASICAUTH is specified; USERNAME, PASSWORD, or both are omitted; XWBAUTH is inactive or returns a response of UERCERR.

13 NOTFND

RESP2 values are:

61 The URIMAP object specified was not found.

19 NOTOPEN

RESP2 values are:

27 Invalid session token.

124 TIMEDOUT

156 Timeout on socket send.

112 TOKENERR


RESP2 values are:

47 The document token specified is invalid or the document has been deleted.

WEB STARTBROWSE FORMFIELD

Signal start of HTML form field browse.

WEB STARTBROWSE FORMFIELD

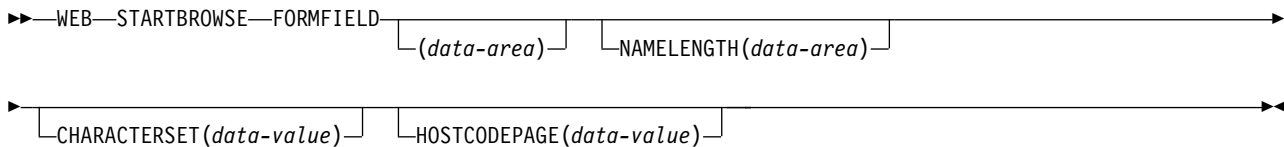

Conditions: INVREQ, LENGERR, NOTFND

This command is threadsafe.

Description

WEB STARTBROWSE FORMFIELD signals the start of a browse of a set of name and value pairs in an HTML form that is part of the body of an HTTP request being processed by the current CICS task.

Options

CHARACTERSET(name)

specifies the 40-character name of the character set that is required for encoding the form data. This option should match the forms encoding determined by the corresponding HTML form (see *How the client encoding is determined* in the *CICS Internet Guide* for more information). CICS does not support all the character sets named by IANA. HTML coded character sets in the *CICS Internet Guide* lists the IANA character sets that are supported by CICS for code page conversion.

CLNTCODEPAGE(name)

This option is supported for upgrade purposes only. CHARACTERSET replaces it. The action taken by CICS is the same for both keywords.

FORMFIELD(data-area)

is the keyword that initiates the STARTBROWSE FORMFIELD command. You can optionally specify the name of the form field at which browsing is to start, by specifying this in a data-area, followed by the NAMELENGTH option, for example,

```
WEB STARTBROWSE FORMFIELD(name) NAMELENGTH(len)
```

The name is a string of text containing the name of the requested field. If a name is not specified, browsing starts at the first name and value pair in the HTML form.

HOSTCODEPAGE(name)

specifies the 8-character name of the CICS (host) code page required by the application program, into which the form data is to be converted. This code page is normally an EBCDIC code page.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS now also accepts

any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

If the code page is not specified, the data is returned in the EBCDIC code page specified by the LOCALCCSID system initialization parameter (which applies to the local CICS region, and has a default of 037), provided that the specified code page is supported by the CICS web interface. The code page is supported if it is one of a list of EBCDIC code pages that are recognized by CICS as being sufficiently standard to allow successful parsing of the web headers (this includes all SBCS CECP and Euro code pages). Otherwise, CICS returns the data in the default EBCDIC code page 037 instead.

NAMELENGTH(data-value)

specifies the length, as a fullword binary value, of the form field name. This field must be specified if a name data-area is specified with the FORMFIELD option.

Conditions

21 ILLOGIC

RESP2 value is:

- 5 A browse of form fields is already in progress.

16 INVREQ

occurs for the following conditions. RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 11 The client code page cannot be found.
- 12 The host code page cannot be found.
- 13 No forms data has been supplied in the HTTP request.
- 14 The code page combination for client and server is invalid.
- 17 Invalid forms data was found in the input message.
- 153 The form type is unknown.
- 154 A boundary string was expected in the forms data, but was not found.

22 LENGERR

occurs for the following conditions. RESP2 values are:

- 1 NAMELENGTH or VALUELENGTH is less than or equal to zero.

13 NOTFND


occurs for the following conditions. RESP2 values are:

- 1 The form field name given in the FORMFIELD parameter could not be found.

WEB STARTBROWSE HTTPHEADER

Signal start of HTTP header browse.

WEB STARTBROWSE HTTPHEADER



Conditions: ILLOGIC, INVREQ, NOTFND, NOTOPEN

This command is threadsafe.

Description

WEB STARTBROWSE HTTPHEADER signals the start of a browse of the HTTP header information. The **SESTOKEN** option is required if the HTTP header information is part of a response sent to CICS as an HTTP client.

Options

SESSTOKEN(*data-value*)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. The *CICS Internet Guide* explains the use of the session token.

Conditions

21 ILLOGIC

RESP2 value is:

- 10 An HTTP header browse is already in progress.

16 INVREQ

RESP2 values are:

- ```

1 The command is being issued in a non-CICS Web support application.
3 The command is being issued for a non-HTTP request.
43 No HTTP headers found.

```

**13 NOTFND**

RESP2 value is:

- 1** Header not found.

**19 NOTOPEN**

RESP2 value is:


- 27 Invalid session token.

---

## WEB STARTBROWSE QUERYPARM

Start browsing query string data in a URL.

### WEB STARTBROWSE QUERYPARM

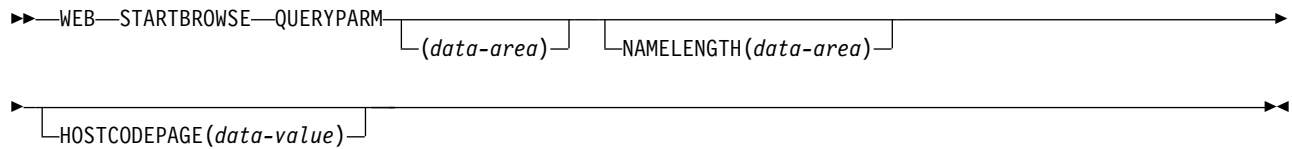

**Conditions:** ILLOGIC, INVREQ, LENGERR, NOTFND

This command is threadsafe.

### Description

WEB STARTBROWSE QUERYPARM signals the start of a browse of the keyword parameters, consisting of name and value pairs, from a query string in a URL.

For forms, you can also use the WEB STARTBROWSE FORMFIELD command. Forms are messages with the media types `application/x-www-form-urlencoded` or `multipart/form-data`.

### Options

#### QUERYPARM(*data-area*)

is the keyword that initiates the STARTBROWSE QUERYPARM command. You can optionally specify the name of the keyword parameter at which browsing is to start, by specifying this in a data-area, followed by the NAMELENGTH option, for example,

```
WEB STARTBROWSE QUERYPARM(name) NAMELENGTH(1en)
```

The name is a string of text containing the name of the requested keyword parameter. If a name is not specified, browsing starts at the first name and value pair in the query string.

#### HOSTCODEPAGE(*data-value*)

specifies the 8-character name of the CICS (host) code page required by the application program, into which the query string data is to be converted. This code page is normally an EBCDIC code page.

The standard CICS form of a host code page name consists of the code page number (or more generally CCSID) written using 3 to 5 decimal digits as necessary then padded with trailing spaces to 8 characters. For code page 37, which is fewer than 3 digits, the standard form is 037. CICS now also accepts any decimal number of up to 8 digits (padded with trailing spaces) in the range 1 to 65535 as a code page name, even if it is not in the standard form.

If the code page is not specified, the data is returned in the EBCDIC code page specified by the LOCALCCSID system initialization parameter (which applies to the local CICS region, and has a default of 037), provided that the specified code page is supported by the CICS web interface. The code page is supported if it is one of a list of EBCDIC code pages that are recognized by CICS as being sufficiently standard to allow successful parsing of the web headers (this

includes all SBCS CECP and Euro code pages). Otherwise, CICS returns the data in the default EBCDIC code page 037 instead.

**NAMELENGTH**(*data-value*)

specifies the length, as a fullword binary value, of the keyword parameter name. This field must be specified if a name data-area is specified with the QUERYPARM option.

**Conditions**

**21 ILLOGIC**

RESP2 value is:

- 5 A browse of keyword parameters is already in progress.

**16 INVREQ**

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 3 The command is being issued for a non-HTTP request.
- 12 The host code page cannot be found.
- 13 No keyword parameters found.
- 14 The code page combination for client and server is invalid.
- 17 Invalid keyword parameters found in the HTTP request.

**22 LENGERR**

RESP2 value is:

- 1 An invalid value for the NAMELEN parameter has been provided.

**13 NOTFND**

RESP2 value is:


- 1 Keyword parameter not found.

---

## WEB WRITE HTTPHEADER

Build HTTP header information.

### WEB WRITE HTTPHEADER

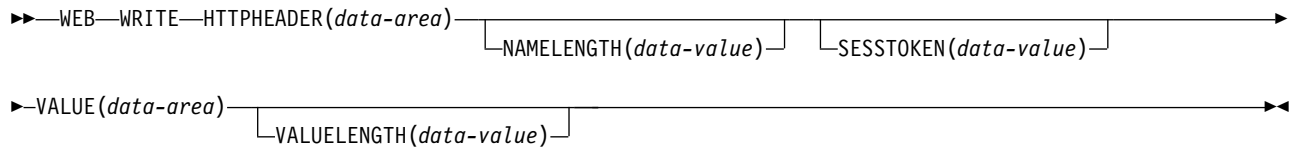

**Conditions:** INVREQ, LENGERR, NOTOPEN

This command is threadsafe.

### Description

**WEB WRITE HTTPHEADER** enables an application to add HTTP header information to a message. When CICS is an HTTP server, the message is a response to a Web client. When CICS is an HTTP client, the message is a request to a server, and the **SESSTOKEN** option is specified.

Some HTTP headers are created automatically by CICS if the message requires them, and the application does not need to write these headers. These are:

- ARM correlator
- Connection
- Content-Type (written by CICS, but can be supplied by a client application if a complex header is required)
- Content-Length
- Date
- Expect
- Host
- Server (automatic creation depends on system initialization parameter **HTTPSERVERHDR**. See The **HTTPSERVERHDR** system initialization parameter.)
- TE (written by CICS but further instances may be added)
- Transfer-Encoding
- User-Agent (automatic creation depends on system initialization parameter **HTTPUSRAGENTHDR**. See The **HTTPUSRAGENTHDR** system initialization parameter.)
- WWW-Authenticate

HTTP header reference for CICS Web support in the *CICS Internet Guide* describes the circumstances in which these headers are created. If the user application program writes a header that CICS also generates, CICS handles this depending on the situation:

- For CICS as an HTTP server, if the header is appropriate for a response, CICS does not overwrite it, but allows the application's version to be used.
- For CICS as an HTTP client, if the header is appropriate for a request, CICS does not allow the application to write it, and returns an error response to the **WEB WRITE HTTPHEADER** command. The exceptions are the TE header and the

Content-Type header. Application programs can add further instances of the TE header. They can also supply the Content-Type header, if the required header needs to contain spaces or more than 56 characters, and so cannot be specified on the MEDIATYPE option of the WEB SEND command.

- If the header is not normally appropriate for the type of message (request or response), CICS allows it, as is the case for all user-defined headers. This situation should not occur if your message is compliant with the HTTP specification to which you are working.
- If the **WEB WRITE HTTPHEADER** is used to write a server header then a server header will be provided, even if the CICS supplied server header is suppressed by the **HTTPSERVERHDR=NO** parameter.

The **WEB WRITE HTTPHEADER** command adds a single header, and you can repeat the command to add further headers. If you write a header that you have already written for the request or response, CICS adds the new header to the request or response in addition to the existing header.

The name and value of the headers you write, and the circumstances in which you choose to write them, should conform to the requirements of the HTTP specification to which you are working.

If you want to use a header to request an action that might not be carried out correctly by a server or client below HTTP/1.1 level, and you need to confirm whether the action will succeed, use the WEB EXTRACT command with the HTTPVERSION option to check the HTTP version of the server.

For CICS as an HTTP client, if you are writing a Trailer header (for use with a chunked message) on your first request to the server, and you did not specify the options HTTPVNUM and HTTPRNUM on the **WEB OPEN** command for the session, CICS makes a request with the OPTIONS method to check the HTTP version of the server. This additional request is only made for the Trailer header.

The **WEB WRITE HTTPHEADER** command cannot be used if the connection with the server or Web client has been closed by either party sending a Connection: close header on a request or response.

For guidance on the correct use of this command:

- When writing headers for an HTTP response sent by CICS as an HTTP server, see *Writing Web-aware application programs for CICS as an HTTP server* in the *CICS Internet Guide*.
- When writing headers for an HTTP request sent by CICS as an HTTP client, see *HTTP client requests from a CICS application* in the *CICS Internet Guide*.
- When using chunked transfer-coding to send an HTTP request or response, see *Using chunked transfer-coding to send an HTTP request or response* in the *CICS Internet Guide*. That topic explains the correct procedure for writing trailing headers for a chunked message.

## Options

### **HTTPHEADER**(*data-area*)

Specifies the name of the HTTP header to be added to the request or response. The name, which is a string of text, should conform to the standards in the HTTP specification to which you are working.

### **NAMELength**(*data-value*)

Specifies the length, as a fullword binary value, of the HTTP header name.



**SESTOKEN**(*data-value*)

For CICS as an HTTP client, this option is required. It specifies the session token, an 8-byte binary value that uniquely identifies a connection between CICS and a server. This value is returned by a WEB OPEN command for CICS as an HTTP client. Session tokens in the *CICS Internet Guide* explains the use of the session token.

**VALUE**(*data-area*)

Specifies the value of the named HTTP header. The value, which is a string of text, should conform to the standards in the HTTP specification to which you are working.

**VALUELENGTH**(*data-value*)

Specifies the length, as a fullword binary value, of the HTTP header value.

**Conditions****16 INVREQ**

RESP2 values are:

- 1 The command is being issued in a non-CICS Web support application.
- 6 Client did not send TE: trailers on request, so trailing headers cannot be used.
- 19 Header not allowed. Some request headers may only be generated by CICS.
- 44 Header not allowed as a trailing header (trailer).
- 69 Chunked transfer-coding not supported.
- 70 Trailer header has not been created, so trailing headers cannot be written.
- 71 Chunked transfer-coding error.
- 74 Previous send failed.
- 78 Too late to write trailing headers for this message.

**22 LENGERR**

RESP2 values are:

- 35 The length in NAMELENGTH is not greater than zero.
- 55 The length in VALUELENGTH is not greater than zero or greater than 32000.

**19 NOTOPEN**

RESP2 values are:

- 27 Invalid session token.

# WRITE

Write a record.

WRITE

▶▶—WRITE—FILE(*filename*)—

—MASSINSERT—

FROM(*data-area*)—RIDFLD(*data-area*)—▶▶

▶—

—KEYLENGTH(*data-value*)—

—SYSID(*systemname*)—LENGTH(*data-value*)—

—LENGTH(*data-value*)—

—RBA—

—RRN—

—XRBA—

—NOSUSPEND—▶▶

**Conditions:** DISABLED, DUPREC, FILENOTFOUND, ILLOGIC, INVREQ, IOERR, ISCINVREQ, LENGERR, LOADING, LOCKED, NOSPACE, NOTAUTH, NOTOPEN, RECORDBUSY, SUPPRESSED, SYSIDERR

This command is threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over an IPIC connection to a remote CICS region.
- Defined as either local VSAM or RLS.

This command is not threadsafe if the file to which it refers is:

- Defined as remote and the command is function shipped over a non-IPIC connection.
- Defined as a shared data table, coupling facility data table, or BDAM file.

## Description

WRITE writes a new record to a file on a local or a remote system.

When this command is used to write a record to a CICS-maintained data table, the update is made to both the source VSAM KSDS and the in-memory data table, unless the XDTAD user exit rejects the record from the table. The details of the command for a CICS-maintained table are the same as for a VSAM KSDS.

When this command is used to write a record to a user-maintained data table, the update is made to the in-memory data table (unless rejected by the XDTAD user exit).

When the command is used to write a record to a coupling facility data table, the update is made to the data table in the coupling facility (unless it is rejected by the XDTAD user exit).

|

|

|

|

|

If a write to a user-maintained table or coupling facility data table does not succeed because there is insufficient space, a NOSPACE response is returned to the command. CICS also issues message DFHFC0432 to alert system administrators to the situation.

For a VSAM ESDS or VSAM extended format, extended addressing ESDS, the record is always added at the end of the data set. CICS does not use the identification field specified in RIDFLD when calculating the relative byte address (RBA), or, for an extended addressing ESDS, the extended relative byte address

844 CICS TS for z/OS 5.3: Application Programming Reference

(XRBA), of the new record. However, the new RBA or XRBA is returned to the application in the record identification field specified in the RIDFLD option.

For a VSAM KSDS, the record is added in the location specified by the associated key; this location may be anywhere in the data set. For VSAM data sets, the key in the record and the key in the RIDFLD identification field must be the same.

For a VSAM ESDS or KSDS, records can be either fixed-length or variable-length. MASSINSERT operations must proceed with ascending keys, and must be terminated by an UNLOCK before any other request to the same data set.

## Options

### **FILE**(*filename*)

specifies the name of the file to be accessed.

If SYSID is specified, the data set to which this file refers is assumed to be on a remote system irrespective of whether the name is defined to CICS. Otherwise, the resource definition is used to find out whether the data set is on a local or a remote system.

### **FROM**(*data-area*)

specifies the record that is to be written to the data set referred to by this file.

### **KEYLENGTH**(*data-value*)

specifies the length (halfword binary) of the key that has been specified in the RIDFLD option, except when RBA or RRN is specified, in which case KEYLENGTH is not valid. You must code KEYLENGTH if you are also using SYSID (unless you are also using RBA or RRN). If the length specified is different from the length defined for the data set, the INVREQ condition occurs. The KEYLENGTH clause is required when the WRITE FILE is being function shipped, otherwise an INVREQ with RESP2=23 might occur.

### **LENGTH**(*data-value*)

specifies the length, as a halfword binary value, of the data area from which the record is written.

This option must be specified if SYSID is specified.

If the file is on a remote system and SYSID is *not* specified, the LENGTH parameter need not be set here but must be set in the file resource definition.

If the file is on a local system, the LENGTH option must be specified for variable-length records, but is optional for fixed-length records. It is, however, advisable to specify the length of fixed-length records because this causes CICS to check that the record being written is not longer than that defined for the data set.

If an incorrect length is specified for a WRITE to a file with fixed-length records, a record of the fixed length is written and the LENGERR condition is raised. If you supply too much data, the record is truncated. If you supply too little data, the record is padded with binary zeros.

### **MASSINSERT**

(VSAM) specifies that the WRITE command is part of a mass-insert operation, that is, a series of WRITES each specifying MASSINSERT.

See the *CICS Application Programming Guide* for information about using MASSINSERT on files opened in RLS access mode.

You cannot use MASSINSERT for user-maintained or coupling facility data tables.

**NOSUSPEND (RLS only)**

The request does not wait if VSAM is holding an active lock against the record, including records locked as the result of a DEADLOCK.

A task could wait when it issues a WRITE request if the key is for a record that is being modified, created, or deleted by another task, because VSAM always acquires the lock first.

**Note:** Requests that specify NOSUSPEND wait for at least 1 second before CICS returns the RECORDBUSY response.

**RBA**

(VSAM ESDS base data sets only) specifies that the record identification field specified in the RIDFLD option contains a relative byte address. Use this option only when writing to an ESDS base.

**RIDFLD(data-area)**

specifies the record identification field. The contents can be a key, a relative byte address, or relative record number (for VSAM data sets), or a block reference, a physical key, and a deblocking argument (for BDAM data sets). For a relative byte address or a relative record number, the format of this field must be fullword binary. If RBA or XRBA is specified, the RIDFLD is an output field that contains the relative byte address (greater than or equal to zero) of the record if the command is successful. This RBA value is calculated for you by CICS. If RRN is specified, RIDFLD contains the relative record number (greater than or equal to 1) of the record to be written.

See the *CICS Application Programming Guide* for more information about defining the record identification field.

When adding records to a keyed data set, the field must contain the complete key.

**RRN**

(VSAM RRDS) specifies that the record identification field specified in the RIDFLD option contains a relative record number.

**SYSID(systemname)**

specifies the name of the system to which the request is directed.

If you specify SYSID and omit RBA, XRBA, and RRN, you must also specify LENGTH and KEYLENGTH; they cannot be found in the resource definition.

LENGTH must either be specified explicitly or must be capable of being defaulted from the FROM option using the length attribute reference in assembler language, or STG and CSTG in PL/I. LENGTH must be specified explicitly in C.

**XRBA**

specifies that the record identification field specified in the RIDFLD option contains an extended relative byte address. Use this option when writing to an extended addressing ESDS data set.

**Conditions****84 DISABLED**

RESP2 values:

**50** A file was initially defined as disabled and has not since been enabled, or was disabled by a SET FILE or a CEMT SET FILE command.

Default action: terminate the task abnormally.

#### **14 DUPREC**

RESP2 values:

- 150** An attempt is made to add a record to a data set by referring to a file, or a path over a file (with the UNIQUEKEY attribute), in which the same key already exists.

This condition is also raised for a coupling facility data table that uses the contention model, even if another task has read the record with the same key for update. (For a coupling facility data table that uses the locking model, and for all other kinds of files, if another task has read the record for update, it is locked, and the WRITE request waits for the lock to be released, rather than returning a DUPREC response immediately.)

Default action: terminate the task abnormally.

#### **12 FILENOTFOUND**

RESP2 values:

- 1** A file name referred to in the FILE option is not defined to CICS.

Default action: terminate the task abnormally.

#### **21 ILLOGIC**

RESP2 values: (VSAM)

- 110** A VSAM error occurs that is not in one of the other CICS response categories.

See EIBRCODE in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

Default action: terminate the task abnormally.

#### **16 INVREQ**

RESP2 values:

- 20** Add operations are not allowed according to the resource definition.
- 23** When writing records containing embedded keys, the key in the record area (FROM option) and the key in RIDFLD do not match.
- 26** The KEYLENGTH option is specified, and the specified length does not equal the length defined for the data set that this file refers to.
- 38** A WRITE with the MASSINSERT option is issued against a BDAM file.
- 40** A BDAM key conversion error occurred.
- 44** The WRITE command does not conform to the format of WRITE for a user-maintained or coupling facility data table (for example, MASSINSERT or RBA is specified).
- 51** A WRITE command specifying the RBA keyword was issued against a KSDS file that is being accessed in RLS mode. RLS mode does not support relative byte address access to KSDS files.
- 55** NOSUSPEND is not allowed because the file is not a VSAM file that is accessed in RLS mode.
- 56** An attempt to update a recoverable coupling facility data table has failed because the current unit of work has already updated 1024 recoverable coupling facility data tables. You cannot update more than 1024 recoverable coupling facility data tables within a unit of work

59 XRBA was specified, but the data set is not an extended addressing ESDS.

Default action: terminate the task abnormally.

## 17 IOERR

RESP2 values:

120 There is an I/O error during the file control operation. An I/O error is any unusual event that is not covered by a CICS condition. Further information is available in the EXEC interface block; for details, see EIB fields in Reference -> Application development.

For VSAM files, IOERR usually indicates a hardware error.

For BDAM files, IOERR could mean that you are trying to write to a BDAM track address that is not defined for the data set.

For a coupling facility data table, an IOERR indicates a bad response returned from a coupling facility access.

Default action: terminate the task abnormally.

## 54 ISCINVREQ

RESP2 values:

70 The remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

## 22 LENGERR

RESP2 values:

12 The length specified for the write operation exceeds the maximum record size; the record is truncated.

10 The LENGTH option is not specified. LENGTH must be specified for a WRITE to a file with variable-length records or to a BDAM file with records of undefined format.

14 An incorrect length is specified for a WRITE to a file with fixed-length records. A record of the fixed length has been written. If you supplied too much data, the record is truncated. If you supplied too little data, the record is padded with binary zeros.

## 94 LOADING

RESP2 values:

104 The request cannot be satisfied because it is issued against a data table that is still being loaded. The condition can be raised for one of the following reasons:

- The WRITE specifies a record key that has out of range of the records so far loaded into a coupling facility data table. Records can be added while a CFDT is loading only if the specified key is within the range of those records already loaded.

The LOADING response can also be returned for a coupling facility data table that has failed during loading. For more information about what happens if the load for a coupling facility data table fails, see the description of the XD TLC global user exit in the *CICS Customization Guide*.

- A WRITE is issued to a user-maintained data table that is currently being loaded. A user-maintained data table cannot be modified during loading.

If your application programs encounter the LOADING condition persistently or too frequently, check that this is not caused by conflicting file definitions that reference the same data set.

Default action: terminate the task abnormally.

#### **100 LOCKED**

RESP2 values:

- 106** An attempt has been made to write a record, but a retained lock exists against the key of this record.

Default action: abend the task with code AEX8.

#### **18 NOSPACE**

RESP2 values:

- 100** No space is available on the direct access device for adding records to a data set.

- 102** The maximum number of table entries specified for the user-maintained table or coupling facility data table has already been reached.

This condition can also occur for a recoverable coupling facility data table when the table apparently contains fewer than the maximum number of records allowed if there are uncommitted updates outstanding.

- 103** CICS is unable to get sufficient storage in the CICS address space to create an in-memory table entry for the record being written.

- 108** There is insufficient space in the coupling facility data table pool to store the record.

Default action: terminate the task abnormally.

#### **70 NOTAUTH**

RESP2 values:

- 101** A resource security check has failed on FILE(filename).

Default action: terminate the task abnormally.

#### **19 NOTOPEN**

RESP2 values:

- 60** NOTOPEN (RESP2 60) is returned for one of the following reasons:
- The requested file is CLOSED and UNENABLED. The CLOSED, UNENABLED state is reached after a CLOSE request has been received against an OPEN ENABLED file and the file is no longer in use. You can also make CLOSED, UNENABLED the initial state, by specifying STATUS(UNENABLED) and OPENTIME(FIRSTREF) on the FILE resource definition. (For BDAM files, you use the FILSTAT parameter of the DFHFCT TYPE=FILE macro.)
  - The requested file is OPEN and in use by other transactions, but a CLOSE request against the file has been received.
  - A WRITE request is issued against a data set is quiesced, or is being quiesced, as a result of a SET DSNAME QUIESCED or IMMQUIESCED command.

- The requested file is CLOSED and ENABLED, so CICS has tried to open the file as part of executing the request. This file open has failed for some reason. You should examine the console for messages that explain why the file open has been unsuccessful.

This condition does not occur if the request is made to a CLOSED, DISABLED file. In this case, the DISABLED condition occurs.

Default action: terminate the task abnormally.

#### 101 RECORDBUSY

RESP2 values:

- 107 NOSUSPEND is specified on the request but VSAM holds an active lock against the record, which would cause the request to wait. See Retained and active locks for more information.

Default action: abend the task with code AEX9.

#### 72 SUPPRESSED

RESP2 values:

- 105 A user exit program that is invoked at the XDTAD exit point decides not to add the record to the user-maintained or coupling facility data table.

Default action: terminate the task abnormally.

#### 53 SYSIDERR

RESP2 values:

- 130 The SYSID option specifies a name that is neither the local CICS region nor a remote system defined to CICS by a CONNECTION definition. SYSIDERR also occurs when the link to the remote system is closed.
- 131 For a coupling facility data table, the connection to the coupling facility data table server has failed. This could be because the server itself has failed, or the server is available, but CICS has failed to connect to it.
- 132 The WRITE is issued against a coupling facility data table that no longer exists, probably because of a coupling facility failure, in which case the coupling facility data table server also fails. See the *CICS System Definition Guide* for information about restarting a coupling facility data table server and reloading a table.

Default action: terminate the task abnormally.

**Retained and active locks:** RECORDBUSY refers to active locks, and LOCKED refers to retained locks:

- READNEXT requests for records that have *retained* locks are always rejected with a LOCKED response.
- READNEXT requests for records that have *active* locks wait for the lock to be released, except when the NOSUSPEND keyword is specified, in which case CICS returns the RECORDBUSY response.

## Examples

Here is an example of a simple WRITE command:




```
EXEC CICS WRITE
 FROM(RECORD)
 LENGTH(DATLEN)
 FILE('MASTER')
 RIDFLD(KEYFLD)
```

# WRITE JOURNALNAME

Create a journal record

## WRITE JOURNALNAME

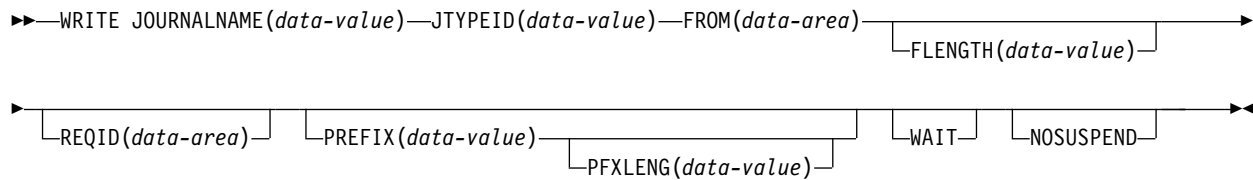

**Conditions:** INVREQ, IOERR, JIDERR, LENGERR, NOJBUFSP, NOTAUTH, NOTOPEN

This command is threadsafe.

## Description

WRITE JOURNALNAME writes a journal record from the specified data area to the system logger log stream that corresponds to the CICS journal name, or to SMF. The request can be for synchronous or asynchronous output; definitions of these terms, and information regarding the synchronization of journal output, are in the *CICS Application Programming Guide*.

## Options

### FLENGTH(data-value)

specifies, as a full word binary value, the length in bytes of the user data to be built into the journal record.

Note that the maximum total length of a journal record depends on a number of factors:

- There is a limit of 32KB minus 400 bytes if the journal is using SMF.
- The limit for journals that map to log streams is the value expressed in the MAXBUFSIZE attribute for the structure being used minus 400 bytes. This has to include the user data, the prefix data, and the 2-byte JTYPEID.

**Note:** Data longer than 32K bytes cannot be read by offline jobs using the SUBSYS=LOGR interface.

### FROM(data-area)

specifies the user data to be built into the journal record.

### JOURNALNAME(data-value)

specifies a 1- to 8-character journal name. The valid characters for a journal name are the upper-case letters A through Z, the numeric characters 0 through 9, and the special symbols \$ @ and #.

On first reference to this journal name, CICS must be able to map the journal name to a corresponding MVS system loggerlog stream, or MVS SMF data set. To do this, CICS searches the installed JOURNALMODEL definitions, looking for a matching journal name in a journal model. CICS looks for either a

specific match or a generic match. If a matching entry cannot be found, CICS attempts to use a default log stream name.

To write to the CICS system log, specify DFHLOG as the journal name.

**Note: The CICS system log should be used only for short-lived data required for recovery purposes.** You should not write user records for such things as audit trails to it.

To write to journals defined using the journal numbering convention (for example, to the auto journals defined in file resource definitions), specify the name as DFHJnn, where nn is the journal number in the range 1 to 99.

You cannot write to a forward recovery log that is known to CICS only by its 26-character log stream name (as derived directly from the VSAM ICF catalog) unless you write to a journal whose matching JOURNALMODEL is associated with the same log stream name.

Specifying DFHJ01 on this command refers to a user journal, *not* the system log.

**JTYPEID**(*data-value*)

specifies a 2-character identifier to be placed in the journal record to identify its origin.

**NOSUSPEND**

specifies that the application program is not to be suspended for the NOJBUFSP condition. The user record is ignored.

**PFXLENG**(*data-value*)

specifies the length (halfword binary value) in bytes of the user prefix data to be included in the journal record.

Note that the maximum total length of a journal record depends on a number of factors:

- There is a limit of 32KB minus 400 bytes if the journal is using SMF.
- The limit for journals that map to log streams is the value expressed in the MAXBUFSIZE attribute for the structure being used minus 400 bytes. This has to include the prefix data, the user data, and the 2-byte JTYPEID.

The minimum value is 0. See FLENGTH for the limits to the size of a journal record.

**Note:** Data longer than 32K bytes cannot be read by offline jobs using the SUBSYS=LOGR interface.

**PREFIX**(*data-value*)

specifies the user prefix data to be included in the journal record. A data area must be provided in COBOL programs.

**REQID**(*data-area*)

specifies a data area that identifies the journal record. The data area is a fullword binary variable. CICS sets the variable to a token that can be used for synchronization. REQID is only valid for asynchronous output (that is, the WAIT option is not specified).

**WAIT**

specifies that synchronous journal output is required. The requesting task waits until the record has been hardened.

## Conditions

### 16 INVREQ

the command is not valid for processing by CICS.

Default action: Terminate the task abnormally.

### 17 IOERR

a journal record has not been output because an irrecoverable error condition was returned by the system logger log stream or by SMF.

Default action: If the log is the system log, CICS either quiesces or abends CICS. If the log is a general log, the task is terminated abnormally.

### 43 JIDERR

CICS cannot connect to a log stream referenced by the specified journal name, for one of the following reasons:

- The log stream does not exist and cannot be created dynamically using default model definitions.
- The log stream is a DASD-only log stream to which a CICS region in another MVS image is currently connected.

Default action: terminate the task abnormally.

### 22 LENGERR

the aggregate length of the journal record, comprising the user data (FROM, JTYPE, and PREFIX data) and the CICS header data, is too great to fit the maximum block size allowed for the log stream.

Default action: terminate the task abnormally.

### 45 NOJBUFSP

the journal buffers are logically full (that is, the current buffer has insufficient space for this journal record, and I/O is in progress on the alternate buffer).

Default action: CICS suspends task activity until the journal request can be satisfied. CICS ensures that both buffers are written out to auxiliary storage, thus freeing them for new records. (You can override the default action by the NOSUSPEND option.)

### 70 NOTAUTH

a resource security check has failed on the JOURNALNAME(data-value).

Default action: terminate the task abnormally.

### 19 NOTOPEN

occurs in any of the following situations:

- The command cannot be executed because the specified journal has been explicitly disabled by the user.
- The request could not be satisfied because the specified journal was defined using a journal model that maps it onto the logstream that is being used as the system log for this CICS system. The error is detected when trying to connect to the logstream and results in a definition for the JOURNALNAME being installed and set to 'failed'.

Default action: terminate the task abnormally.

## Examples

The following example shows how to write synchronous journal output and wait for the output operation to be completed:

```
EXEC CICS WRITE
 JOURNALNAME('ACCTSJNL')
 JTYPEID('XX')
 FROM(KEYDATA)
 FLENGTH(40000)
 PREFIX(PROGNAME)
 PFLENGTH(6)
 WAIT
```

The following example shows how to write deferred (asynchronous) user recovery data to the CICS system log:

```
EXEC CICS WRITE
 JOURNALNAME('DFHLOG')
 JTYPEID('UR')
 FROM(COMDATA)
 FLENGTH(10)
 REQID(ENTRYID)
```

---

## WRITE JOURNALNUM

Create a journal record.

This command is supported for compatibility with earlier releases of CICS. It is superseded by the WRITE JOURNALNAME command, which you are recommended to use instead.


This command is threadsafe.

---

## WRITE OPERATOR

Write a message on the system console.

### WRITE OPERATOR

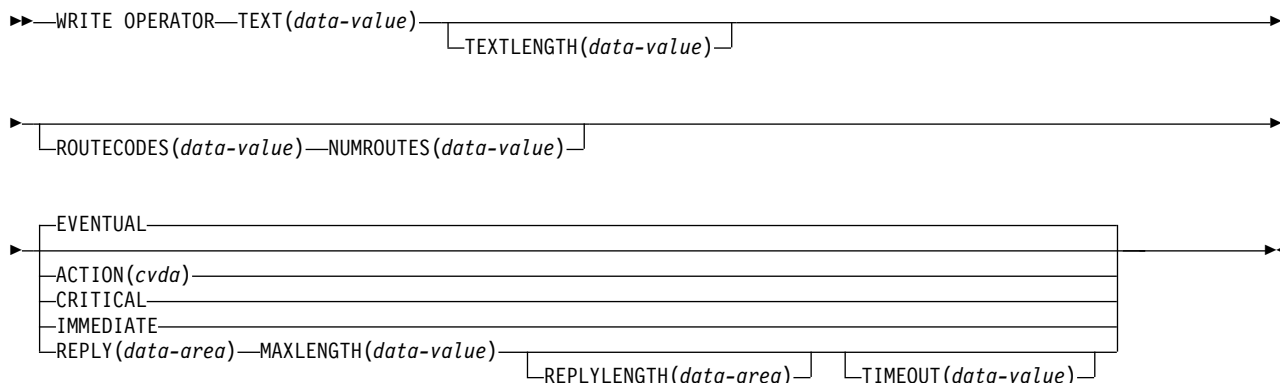

**Conditions:** EXPIRED, INVREQ, LENGERR

This command is threadsafe.

### Description

**WRITE OPERATOR** enables an application to write a message to one or more system consoles and, if required, wait for a reply. The command can specify route codes, which is of particular use to application packages that have to issue their own operator messages.

As a result of a change in the way CICS handles messages sent to the console, text lengths of greater than 113 characters are split into two lines. None of the variables below can be defined as PL/I variable character strings.

**Note:** If **ACTION** (or one of the equivalent CVDA values below) is specified, the message is retained until the console operator explicitly deletes it or CICS terminates.

The action code is identical with the descriptor code to be associated with the message. Only one of the descriptor codes 2, 3, or 11 may be specified for this parameter.

If **ACTION** is not specified, no descriptor code is associated with the message. The descriptor codes have the following meanings:

- 2** Immediate action
- 3** Eventual action
- 11** Critical eventual action.

The **CRITICAL** option is equivalent to a specification of **ACTION(11)**. The **EVENTUAL** option is equivalent to a specification of **ACTION(3)**. The **IMMEDIATE** option is equivalent to a specification of **ACTION(2)**.

Retained messages can be handled by the console operator in a variety of ways (see *z/OS MVS System Commands*). Refer to your system programmer for information about how this command affects the appearance of the console screen to the operator.

## Options

### **ACTION**(*cvda*)

Specifies an action code that is associated with this message. CVDA values are:

#### **CRITICAL**

Specifies that the message requires eventual action by the operator and has enough critical importance to remain on the console screen. The message remains on the screen until it is deleted by the operator.

#### **EVENTUAL**

Specifies that the operator should take action when there is time. The message is rolled off when other messages fill up the screen, but is still retained by the operating system until the operator explicitly deletes it.

#### **IMMEDIATE**

Specifies that the operator should take action immediately. The message remains on the console screen until it is deleted by the operator.

### **MAXLENGTH**(*data-value*)

Specifies a fullword binary field that contains the length of the reply area (in the range 1–119 bytes). You must specify MAXLENGTH if you specify REPLY.

### **NUMROUTES**(*data-value*)

Specifies a fullword binary field that defines the number of routing codes.

### **REPLY**(*data-area*)

Specifies a data area for receiving the operator's reply. If you specify this option, your application pauses until either a reply is received or the TIMEOUT period expires.

### **REPLYLENGTH**(*data-area*)

Specifies the actual length (fullword binary value) of the operator's reply.

### **ROUTECODES**(*data-value*)

Specifies a variable-length field. Each code is one byte and contains a binary number in the range 1–28. The default is a single code, set to 2. In COBOL programs only, you must use a data-area that contains the 1-byte values rather than a data-value.

### **TEXT**(*data-value*)

Specifies a data value containing the text to be sent.

If the data value begins with DFHnnnnn or DFHaannnn, the message is treated as a CICS message and is reformatted accordingly.

If you are using the COBOL2 translator option, you must use a data-area that contains the text to be sent to the operator, and not a data-value.

### **TEXTLENGTH**(*data-value*)

Specifies the length, as a fullword binary value, of the text. This option is required only for C and C++ programs.

- If the REPLY option is specified, the length is in the range 0–121 bytes.
- If the REPLY option is not specified, the length is in the range 0–690 bytes.



If the length of the text is greater than 113, CICS formats the message in a multiline write to operator (WTO); each line has 69 bytes with a maximum of ten lines.

The output is edited in such a way that each line is broken, if possible, at a space character. The next line starts with a non-space character. If there is no room to reformat the data within the overall limit of 690 bytes of ten lines of 69 bytes, the output is not reformatted.

**TIMEOUT** (*data-value*)

Specifies a fullword binary field that contains the maximum time (in seconds) that CICS waits for a reply before returning control to this transaction. This must be in the range 0–86 400 (24 hours). The system default value is specified by the **OPERTIM** system initialization parameter. You can only specify TIMEOUT if you have also specified REPLY.

**Conditions**

**31 EXPIRED**

RESP2 values:

7            TIMEOUT has occurred before the operator's reply was received.

Default action: return the exception condition to the application.

**16 INVREQ**

RESP2 values:

1            The TEXTLENGTH value is not valid.

2            The NUMROUTES value is not valid.

3            The ROUTECODES value is not valid.

4            The MAXLENGTH value is not valid.

5            The TIMEOUT value is not valid.

6            The ACTION value is not valid.

Default action: terminate the task abnormally.

**22 LENGERR**

RESP2 values:

8            The reply was longer than MAXLENGTH, and has been truncated.

Default action: terminate the task abnormally.

---

## WRITEQ TD

Write data to transient data queue.

### WRITEQ TD

►►—WRITEQ TD—QUEUE(*name*)—FROM(*data-area*)—┐┐LENGTH(*data-value*)┐┐SYSID(*systemname*)┐┐►►

**Conditions:** DISABLED, ERROR, INVREQ, IOERR, ISCINVREQ, LENGERR, LOCKED, NOSPACE, NOTAUTH, NOTOPEN, QIDERR, SYSIDERR

This command is threadsafe when it is used with a queue in a local CICS region, or function shipped to a remote CICS region over an IPIC connection. It is non-threadsafe when it is function shipped to a remote CICS region over another type of connection.

### Description

WRITEQ TD writes transient data to a predefined symbolic destination.

### Options

**FROM(*data-area*)**

Specifies the data that is to be written to the transient data queue.

**LENGTH(*data-value*)**

Specifies the length (halfword binary value) of the data to be written.

**QUEUE(*name*)**

Specifies the symbolic name (1 - 4 alphanumeric characters) of the queue to which the data is written. The named queue must have been defined to CICS.

**SYSID(*systemname*)**

(remote systems only) Specifies the name (1 - 4 characters) of the system to which the request is directed.

If SYSID is specified, the queue is assumed to be on a remote system whether or not it is defined as remote. Otherwise the transient data queue definition is used to find out whether the data set is on a local or a remote system.

### Conditions

**84 DISABLED**

Occurs when the queue has been disabled.

Default action: terminate the task abnormally.

**1 ERROR**

Occurs for an error that does not raise any other condition.

Default action: terminate the task abnormally.

**16 INVREQ**

Occurs if WRITEQ names an extrapartition queue that has been opened for input.

**Note:** This condition cannot be raised for intrapartition queues.

Default action: terminate the task abnormally.

**17 IOERR**

Occurs when an input/output error occurs and the data record in error is skipped.

Default action: terminate the task abnormally.

**54 ISCINVREQ**

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

**22 LENGERR**

Occurs in either of the following situations:

- WRITEQ names an extrapartition queue and does not specify a length consistent with the RECORDSIZE and associated formations specified in the TDQUEUE resource definition. The check is made after the XTDOU exit has been invoked; this exit may change the length of the data to be passed to the access method.
- WRITEQ names an intrapartition queue and does not specify a length consistent with the control interval defined for the intrapartition data set. Again, the check is made after the XTDOU exit has been invoked.

Default action: terminate the task abnormally.

**100 LOCKED**

Occurs when the request cannot be performed because use of the queue has been restricted owing to a unit of work failing indoubt. This can happen on any request for a logically-recoverable queue defined with WAIT(YES) and WAITACTION(REJECT) in the TDQUEUE resource definition.

Specify WAIT(YES) and WAITACTION(QUEUE) in the TDQUEUE resource definition if you want the transaction to wait.

Default action: terminate the task abnormally.

**18 NOSPACE**

Occurs if no more space exists on the intrapartition or extrapartition queue, or the relative byte address (RBA) for an intrapartition queue would exceed 2 GB. When this happens, no more data should be written to the queue because it may be lost.

Default action: terminate the task abnormally.

**70 NOTAUTH**

Occurs when a resource security check has failed on QUEUE(*name*).

Default action: terminate the task abnormally.

**19 NOTOPEN**

Occurs if the destination is closed.

**Note:** This condition cannot be raised for intrapartition queues.

Default action: terminate the task abnormally.

**44 QIDERR**

Occurs if the symbolic destination to be used with a transient data control command cannot be found.

Default action: terminate the task abnormally.

**53 SYSIDERR**

Occurs when the SYSID option specifies a name that is neither the local system


nor a remote system (made known to CICS by defining a CONNECTION or an IPCONN). SYSIDERR also occurs when the link to the remote system is closed.  
Default action: terminate the task abnormally.

---

## WRITEQ TS

Write data to a temporary storage queue.

### WRITEQ TS

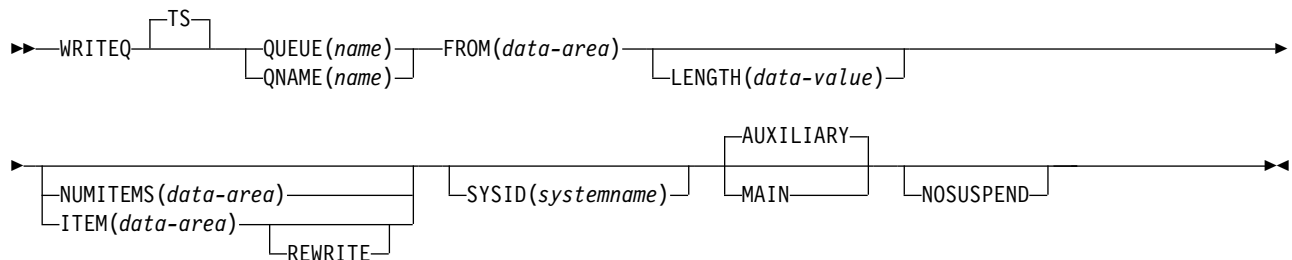

**Conditions:** INVREQ, IOERR, ISCINVREQ, ITEMERR, LENGERR, LOCKED, NOSPACE, NOTAUTH, QIDERR, SYSIDERR

| This command is threadsafe when it is used with a queue in main storage or auxiliary storage, either in a local CICS region, or function shipped to a remote CICS region over an IPIC connection. The command is non-threadsafe when  
| it is function shipped to a remote CICS region over another type of connection, or when it is used with a queue in a  
| shared temporary storage pool in a z/OS coupling facility that is managed by a temporary storage data sharing  
| server (TS server).

**Note for dynamic transaction routing:** Using this command might create inter-transaction affinities that adversely affect the use of dynamic transaction routing. For more information about transaction affinities, see *Affinity in Developing applications*.

### Description

WRITEQ TS stores temporary data records in a temporary storage queue in main or auxiliary storage.

If a queue is defined as recoverable, the program must not issue a WRITEQ TS command if a DELETEQ TS command has previously been issued in the same logical unit of work. That is, following a DELETEQ TS command, a WRITEQ TS command must not be issued until after a sync point occurs.

If there is insufficient space available in the temporary storage data set or main storage to satisfy the WRITEQ TS request, the task is suspended until space does become available. (Other tasks in the system might release space.) If space is not available and you specified the NOSUSPEND option, the NOSPACE condition is raised, and you can decide whether to stop the transaction with an abend, or wait.

### Options

#### AUXILIARY

Specifies that the temporary storage queue is on a direct access storage device in auxiliary storage. This is the default value for the first write.

This option is ignored in the following situations:

- For an existing queue
- If a TSMODEL resource definition with a matching prefix is installed in the system

- If the AUXILIARY option is specified for a temporary storage data queue that resides in a temporary storage pool.

**FROM**(*data-area*)

Specifies the data to be written to temporary storage.

**ITEM**(*data-area*)

Specifies, as a halfword binary value, the item number of the logical record to be replaced in the queue (REWRITE option also specified).

ITEM can be both an input and output field to CICS. Therefore, programmers must ensure that the ITEM field is not defined in protected storage when issuing a WRITEQ command. If the ITEM value was a literal (for example), command checking (CMDPROT=YES) would result in an AEYD abend occurring.

**Note:** In earlier releases, ITEM on a WRITEQ TS without REWRITE would perform a similar function to NUMITEMS. This function is retained for compatibility.

**LENGTH**(*data-value*)

Specifies the length, as a halfword binary value, of the data to be written.

You must specify this option if you are using SYSID.

The maximum length is 32763. For a description of a safe upper limit, see LENGTH options in CICS commands in Reference -> Application development.

**MAIN**

Specifies that the temporary storage queue is in main storage.

This option is ignored in the following situations:

- For an existing queue
- If a TSMODEL resource definition with a matching prefix is installed in the system
- If the MAIN option is specified for a temporary storage data sharing queue that resides in a temporary storage pool.

If you use the MAIN option to write data to a temporary storage queue on a remote system, the data is stored in main storage if the remote system is accessed by the CICS multiregion operation (MRO) facility or IPIC connectivity. If these conditions are not met, the data is stored in auxiliary storage.

If the system is MRO and MAIN is specified, the queue is not recoverable and SYNCPOINT ROLLBACK does not function.

**NOSUSPEND**

Specifies that if there is insufficient space in the temporary storage data set or in main storage to satisfy the WRITEQ TS request, the application program is not suspended. The NOSPACE condition is raised instead.

However, if a HANDLE CONDITION command for NOSPACE is active when the command is executed, this condition also overrides the default action, and control is passed to the user label supplied in the HANDLE CONDITION command. This condition takes precedence over the NOSUSPEND option but is, of course, negated by either NOHANDLE or RESP.

**NUMITEMS**(*data-area*)

Specifies a halfword binary field where CICS stores a number that indicates how many items there are now in the queue, after the WRITEQ TS command is executed.

If the record starts a new queue, the item number assigned is 1; subsequent item numbers follow on sequentially. NUMITEMS is not valid if REWRITE is specified.

**QNAME** (*name*)

An alternative to QUEUE, QNAME specifies the symbolic name (1 - 16 characters) of the queue to be written to. If the name has less than 16 characters, you must still use a 16-character field, padded with blanks if necessary. If the queue is defined to CICS as remote, the request is shipped to a remote system. Do not use X'FA' through X'FF', or \*\*, or \$\$, or DF, as the first character of the name; these characters are reserved for CICS use. The name cannot consist solely of binary zeros.

**QUEUE** (*name*)

Specifies the symbolic name (1 - 8 characters) of the queue to be written to. If the name has less than 8 characters, you must still use an 8-character field, padded with blanks if necessary. If the queue is defined to CICS as remote, the request is shipped to a remote system. Do not use X'FA' through X'FF', or \*\*, or \$\$, or DF, as the first character of the name; these characters are reserved for CICS use. The name cannot consist solely of binary zeros.

**REWRITE**

Specifies that the existing record in the queue is to be overwritten with the data provided. If the REWRITE option is specified, the ITEM option must also be specified. If the specified queue does not exist, the QIDERR condition occurs. If the correct item within an existing queue cannot be found, the ITEMERR condition occurs and the data is not stored.

**SYSID** (*systemname*)

(Remote and shared queues only) Specifies the system name (1 - 4 characters) identifying the remote system or shared queue pool to which the request is directed. Note that TSMODEL resource definitions do not support specifying a SYSID for a queue that resides in a temporary storage data sharing pool. Use the QUEUE or QNAME option instead. Using an explicit SYSID for a shared queue pool requires the support of a temporary storage table (TST).

## Conditions

**16 INVREQ**

Occurs in any of the following situations:

- A WRITEQ TS command specifies a queue name that consists solely of binary zeros.
- A WRITEQ TS command specifies a queue that is locked and awaiting ISC session recovery.
- The queue was created by CICS internal code.

Default action: terminate the task abnormally.

**17 IOERR**

RESP2 values:

- 5            There is an irrecoverable input/output error for a shared queue.

Default action: terminate the task abnormally.

**54 ISCINVREQ**

Occurs when the remote system indicates a failure that does not correspond to a known condition.

Default action: terminate the task abnormally.

## **26 ITEMERR**

Occurs in any of the following situations:

- The item number specified in a WRITEQ TS command with the REWRITE option, is not valid (that is, it is outside the range of entry numbers assigned for the queue).
- The maximum number of items (32767) is exceeded.

Default action: terminate the task abnormally.

## **22 LENGERR**

Occurs in any of the following situations:

- The length of the stored data is zero or negative.
- The length of the stored data is greater than 32763.

Default action: terminate the task abnormally.

## **100 LOCKED**

RESP2 values:

- 0            The request cannot be performed because use of the queue has been restricted owing to a unit of work failing indoubt.

Default action: terminate the task abnormally.

## **18 NOSPACE**

Occurs when the NOSUSPEND option is specified and there is no space for the data in the following:

- Main storage
- The auxiliary temporary storage data set
- The temporary storage pool list structure

This condition also occurs if there is no space and there is an active HANDLE CONDITION for NOSPACE.

Default action: ignore the condition.

## **70 NOTAUTH**

RESP2 values:

- 101        A resource security check has failed on QUEUE(name).

Default action: terminate the task abnormally.

## **44 QIDERR**

Occurs when the queue specified by a WRITEQ TS command with the REWRITE option cannot be found in any of the following:

- Main storage
- Auxiliary storage
- Temporary storage pool

Default action: terminate the task abnormally.

## **53 SYSIDERR**

RESP2 values:

- 4            Occurs in any of the following situations:
- The SYSID option specifies a name that is not the local system or a remote system (made known to CICS by defining a CONNECTION or an IPCONN).
  - When IPIC connectivity is used, the local system, the remote system, or both, are not CICS TS 4.2 or later regions.



- The link to the remote system is closed.
- The CICS region in which the temporary storage command is executed fails to connect to the TS server managing the TS pool that supports the referenced temporary storage queue. For example, this situation can occur if the CICS region is not authorized to access the temporary storage server.

This condition can also occur if the temporary storage server is not started, or because the server has failed (or been stopped) while CICS continues to run.


Default action: terminate the task abnormally.

---

## WSACONTEXT BUILD

Use the **WSACONTEXT BUILD** command to insert or replace WS-Addressing message addressing properties (MAPs) in the addressing context.

### WSACONTEXT BUILD

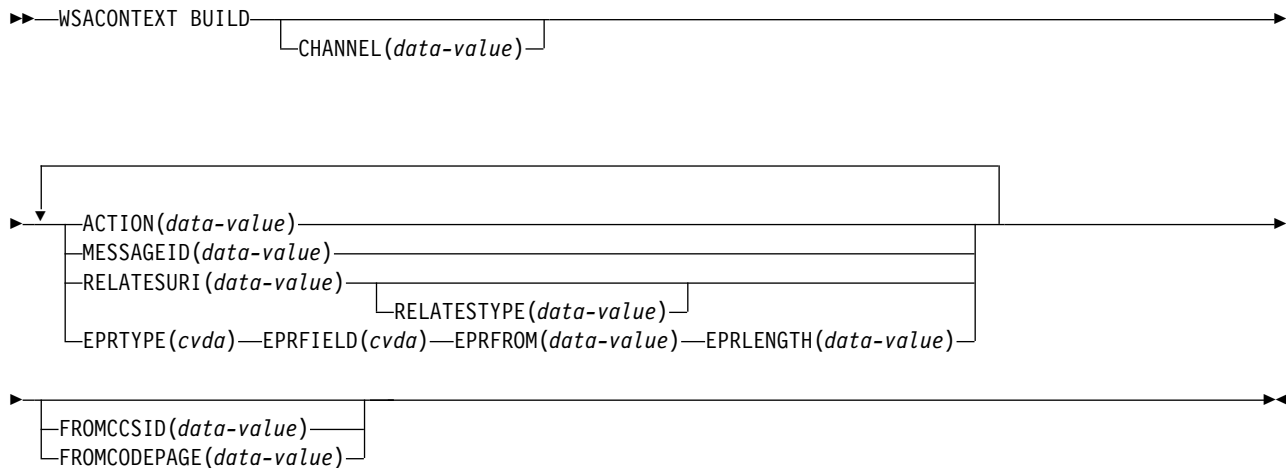

**Conditions:** CCSIDERR, CHANNELERR, CODEPAGEERR, INVREQ, LENGERR

This command is threadsafe.

### Description

Use the **WSACONTEXT BUILD** command for any of the following actions:

- To insert or replace the Action or Message ID MAPs
- To insert or replace the To, From, ReplyTo, or FaultTo endpoint reference MAPs.
- To insert the RelatesTo MAPs.

You can use the command repeatedly to supply different data on each call, for example different endpoint references (EPRs). The MAPs are applied to all outbound SOAP messages created by the **INVOKE SERVICE** or **INVOKE WEBSERVICE** commands and to response SOAP messages from a service provider.

### Options

#### **ACTION(data-value)**

Specifies an input value containing an Action MAP of the request or response SOAP message; for example, `http://example.ibm.com/namespace/bookingInterface/MakeBooking`. Actions are supplied in the WSDL or are calculated by the web services assistant, but can be overridden by this option. The data value must be 255 characters in length. If the Action MAP is less than 255 characters, you must pad the data value with trailing blanks.

#### **CHANNEL(data-value)**

Specifies the name of the channel that holds the addressing context. The name of the channel can be up to 16 characters in length. If the channel name is

fewer than 16 characters, you must pad the data value with trailing blanks. If you do not specify this option, the current channel is implied.

Acceptable characters for the channel name are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and \_ . Leading and embedded blank characters are not permitted. The accepted set of characters for channel names includes some characters that do not have the same representation in all EBCDIC code pages. It is therefore recommended that, if channels are to be shipped between regions, the characters used in naming them should be restricted to A-Z a-z 0-9 & : = , ; < > . - and \_ .

You can specify the channel name DFHTRANSACTION to use the transaction channel.

This option is required when the **WSACONTEXT BUILD** command is used by a web service requester application and is the channel name used by subsequent **INVOKE SERVICE** commands.

#### **EPRFIELD**(*cvda*)

Specifies the endpoint reference field. You can use this option multiple times to build a full endpoint reference.

##### **ADDRESS**

The Address field of the endpoint reference is specified as a URI in the EPRFROM option.

**ALL** A complete endpoint reference, described in XML, is specified in the EPRFROM option.

##### **METADATA**

The Metadata section of the endpoint reference, described in XML, is specified in the EPRFROM option.

##### **REFPARMS**

The ReferenceParameters section of the endpoint reference, described in XML, is specified in the EPRFROM option.

#### **EPRFROM**(*data-value*)

An input data value that contains a complete or partial endpoint reference that is to be placed in the addressing context. The EPRFIELD option describes what part of the endpoint reference is specified in this option by the application. The endpoint reference can be supplied by a web service application that uses the **WSAEPR CREATE** command or from another source, such as a service registry.

If the EPRFROM option contains an address, any special characters in the address are automatically escaped or unescaped.

The following characters in an address are replaced with an escape sequence:

" , > , < , ' , &

#### **EPRLNGTH**(*data-value*)

A fullword binary input data value used to contain the length of the supplied EPR.

#### **EPRTYPE**(*cvda*)

Specifies the type of EPR that is being built:

##### **TOEPR**

The destination EPR to which a SOAP message is sent.

##### **REPLYTOEPR**

An EPR to which a SOAP response message is returned.

**FAULTTOEPR**

An EPR to which a SOAP fault message is returned.

**FROMEPR**

An EPR that represents the sender of the SOAP message.

**FROMCCSID**(*data-value*)

Specifies the current Coded Character Set Identifier (CCSID) of the character data to be put into the addressing context, as a fullword binary number. If you want to specify an IANA name for the code page or if you want to specify the CCSID as alphanumeric characters, use the FROMCODEPAGE option instead.

For CICS Transaction Server for z/OS applications, the CCSID is typically an EBCDIC CCSID.

The default CCSID of the region is specified on the **LOCALCCSID** system initialization parameter.

For an explanation of CCSIDs, and a list of the CCSIDs supported by CICS, see the *CICS Intercommunication Guide*.

**FROMCODEPAGE**(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the current code page of the character data to be put into the addressing context, using up to 40 alphanumeric characters including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

Where an IANA name exists for a code page and CICS supports its use, the name is listed with the CCSID in the *CICS Intercommunication Guide*.

**MESSAGEID**(*data-value*)

Specifies a data value for a URI that uniquely identifies a SOAP message. The data value must be 255 characters in length. If the URI is less than 255 characters, you must pad the data area with trailing blanks.

**RELATESTYPE**(*data-value*)

Specifies a URI denoting the relationship type between the message to be sent and another message. The value must be 255 characters long. If the URI is less than 255 characters, you must pad the data value with trailing blanks. You are allowed to specify multiple RelatesTo MAPs. Subsequent calls of the RELATESTYPE and RELATESURI options create new RelatesTo MAPs.

If you do not specify a value for this option, the RelatesTo MAP does not have a type attribute in the SOAP message and defaults to a value of <http://www.w3.org/2005/08/addressing/reply>.

**RELATESURI**(*data-value*)

Specifies a URI denoting the message ID of a message that the message to be sent is related to. The value must be 255 characters long. If the URI is less than 255 characters long, you must pad the data value with trailing blanks.

**Conditions****123 CCSIDERR**

RESP2 values:

- 1 The CCSID specified on the FROMCCSID option is outside the range of valid CCSID values.
- 2 The CCSID specified on the FROMCCSID option and the CCSID of the addressing context are an unsupported combination.
- 4 One or more characters could not be converted. Each unconverted character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of the addressing context data.
- 6 Either the text encoding is not compatible with the specified CCSID on the FROMCCSID option, or one or more characters are truncated.

## **122 CHANNELERR**

RESP2 values:

- 1 The name specified for the CHANNEL option contains an illegal character or combination of characters.
- 2 The specified channel was not located.

## **125 CODEPAGEERR**

RESP2 values:

- 1 The code page specified on the FROMCODEPAGE option is not supported.
- 2 The code page specified on the FROMCODEPAGE option and the CCSID of the addressing context are an unsupported combination.
- 4 One or more characters could not be converted. Each unconverted character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container.
- 6 Either the text encoding is not compatible with the specified CCSID on the FROMCCSID option, or one or more characters are truncated.

## **16 INVREQ**

The INVREQ RESP2 values and the corresponding messages are shown below. For this command, if the EIBRESP2 value is > 100, the fullword EIBRESP2 field is regarded as a structure containing two halfwords. The low-order halfword always contains the error number. The high-order halfword contains the offset into the XML data where the parsing error occurred.

RESP2 values:

- 4 The CHANNEL option was not specified. There is no current channel because the program that issued the command was not passed the name of a channel.
- 6 The ACTION field does not contain valid URI characters.
- 7 The MESSAGEID field does not contain valid URI characters.
- 8 The RELATESURI field does not contain valid URI characters.
- 9 The RELATESTYPE field does not contain valid URI characters.
- 10 The EPRFROM option does not contain valid XML.
- 13 The EPRFROM option does not contain valid XML. The EPR <Metadata> might not contain valid XML.

- 14 The EPRFROM option does not contain valid XML. The EPR  
<ReferenceParameters> might not contain valid XML.
- 15 The EPRFROM option might not contain a valid URI.

**22 LENGERR**

RESP2 values:

- 20 This condition occurs when the length of the stored data is greater than the value specified by the EPRLENGTH option. This condition only applies to the EPRINTO option and cannot occur with the EPRSET option.

Default action: ends the task abnormally.

---

## WSACONTEXT DELETE

Use the **WSACONTEXT DELETE** command to delete the addressing context.

### WSACONTEXT DELETE

►►—WSADDCONTEXT DELETE—CHANNEL(*data-value*)—————►◄

**Conditions:** CHANNELERR, NOTFND, INVREQ

This command is threadsafe.

### Description

The **WSACONTEXT DELETE** command deletes the addressing contexts for the request and response SOAP messages from the specified channel. You can use this command only in a web service requester.

### Options

#### CHANNEL(*data-value*)

Specifies the name of the channel holding the addressing context. The name of the channel can be up to 16 characters in length. If the channel name is less than 16 characters, you must pad the data value with trailing blanks. You can specify the channel name DFHTRANSACTION to use the transaction channel.

### Conditions

#### 122 CHANNELERR

RESP2 values:

- 1 The name specified for the CHANNEL option contains an incorrect character or combination of characters.
- 2 The specified channel was not located.

#### 16 INVREQ

RESP2 values:

- 5 This command is not allowed in a web service provider.

#### 13 NOTFND

RESP2 values:

- 3 The addressing context was not located on the specified channel.


---

## WSACONTEXT GET

Use the **WSACONTEXT GET** command in a service provider to get the message addressing properties (MAPs) sent by the service requester. Use the **WSACONTEXT GET** command in a service requester to get the MAPs of the reply message.

This command cannot be used by Axis2 applications hosted in an Axis2 pipeline in CICS.

### WSACONTEXT GET

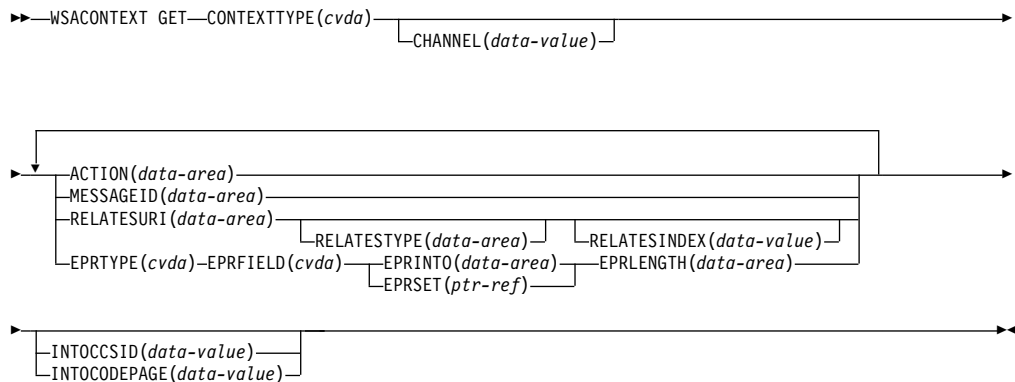

**Conditions:** CCSIDERR, CHANNELERR, CODEPAGEERR, INVREQ, LENGERR, NOTFND

This command is threadsafe.

### Description

The **WSACONTEXT GET** command is used in a service provider to get the MAPs of the requester from the addressing context, or in a service requester to get the MAPs of the provider from the response message. The **WSACONTEXT GET** command can be called repeatedly to return different MAPs.

### Options

#### **ACTION**(data-area)

Specifies an output area to contain the Action MAP of the request or response SOAP message. The data area must be 255 characters in length. If the Action MAP is fewer than 255 characters, CICS pads the data area with trailing blanks.

#### **CHANNEL**(data-value)

Specifies the name of the channel that holds the addressing context. The name of the channel can be up to 16 characters in length. If the channel name is fewer than 16 characters, you must pad the data value with trailing blanks. If you do not specify this option, the current channel is implied.

Acceptable characters for the channel name are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = , ; < > . - and \_ . Leading and embedded blank characters are not permitted. The accepted set of characters for channel names includes some characters that do not have the same representation in all EBCDIC code pages. It is therefore



recommended that, if channels are to be shipped between regions, the characters used in naming them should be restricted to A-Z a-z 0-9 & : = , ; < > . - and \_.

You can specify the channel name DFHTRANSACTION to use the transaction channel.

This option is required when the **WSACONTEXT GET** command is used by a web service requester application and is the channel name used by subsequent **INVOKE SERVICE** commands.

#### **CONTEXTTYPE**(*cvda*)

Specifies which type of addressing context to fetch the MAPs from. CVDA values are as follows:

##### **REQCONTEXT**

Addressing context containing the request. Either a web service requester, or a web service provider application can access the MAPs in this addressing context.

##### **RESPCONTEXT**

Addressing context containing the response. Only a web service requester application can access the MAPs in this addressing context.

#### **EPRFIELD**(*cvda*)

Specifies the part of the endpoint reference that is to be returned in the EPRINTO data area. CVDA values are as follows:

##### **ADDRESS**

Return the Address field of the endpoint reference.

**ALL** Return the complete endpoint reference in XML.

##### **METADATA**

Return the Metadata section of the endpoint reference in XML.

##### **REFPARMS**

Return the ReferenceParameters section of the endpoint reference in XML.

#### **EPRINTO**(*data-area*)

An output data area used to contain the complete or partial endpoint reference. The EPRINTO and EPRSET options are mutually exclusive.

If the EPRINTO option contains an address, any special characters in the address are automatically escaped or unescaped.

The following characters in an address are replaced with an escape sequence:

" , > , < , ' , &

#### **EPRLNGTH**(*data-area*)

Specifies the length, as a halfword binary value, of the endpoint reference.

If you specify the EPRINTO option, you must specify a value for EPRLNGTH unless the length can be generated by the compiler from the EPRINTO option.

The EPRLNGTH option defines the maximum length of data that the program accepts. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs.

#### **EPRSET**(*ptr-ref*)

Specifies the pointer reference that is set to the address of the output data area

used to contain the complete or partial endpoint reference. The pointer reference, unless changed by other commands or statements, is valid until the next **WSACONTEXT GET** command or the end of the task. The EPRINTO and EPRSET options are mutually exclusive.

**EPRTYPE**(*cvda*)

Specifies the type of endpoint reference that is being requested. CVDA values are as follows:

**TOEPR**

The destination endpoint reference to which a SOAP message is sent.

**REPLYTOEPR**

An endpoint reference to which a SOAP response message is returned.

**FAULTTOEPR**

An endpoint reference to which a SOAP fault message is returned.

**FROMEPR**

An endpoint reference that represents the sender of the SOAP message.

**INTOCCSID**(*data-value*)

Specifies the Coded Character Set Identifier (CCSID) into which the character data in the addressing context is to be converted, as a fullword binary number. If you prefer to specify an IANA name for the code page, or if you prefer to specify the CCSID as alphanumeric characters, use the INTOCODEPAGE option instead.

For CICS Transaction Server for z/OS applications, the CCSID is typically an EBCDIC CCSID.

For an explanation of CCSIDs, and a list of the CCSIDs supported by CICS, see CICS-supported conversions in Reference -> Connectivity and standards.

**INTOCODEPAGE**(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the code page into which the character data in the addressing context is to be converted, using up to 40 alphanumeric characters, including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

Where an IANA name exists for a code page and CICS supports its use, the name is listed with the CCSID in CICS-supported conversions in Reference -> Connectivity and standards.

**MESSAGEID**(*data-area*)

Specifies an output area to contain the MessageID MAP of the request or response SOAP message. The data area must be 255 characters in length. If the MessageID MAP is less than 255 characters, CICS pads the data area with trailing blanks.

**RELATESINDEX**(*data-value*)

Specifies a numeric value that indicates which RelatesTo MAP to return. If this value is not specified, the first RelatesTo MAP is returned. The index starts at 1. If the value of the index is greater than the number of RelatesTo MAPs, spaces are returned in the RELATESTYPE and RELATESURI data areas.

**RELATESTYPE**(*data-area*)

Specifies an output area that contains a URI denoting the relationship type between this message and another message. The data area must be 255 characters in length. If the URI is less than 255 characters, CICS pads the data area with trailing blanks.

**RELATESURI**(*data-area*)

Specifies an output area that contains the RelatesTo MAP relationship URI between this message and another. The data area must be 255 characters in length. If the MessageID MAP is less than 255 characters, CICS pads the data area with trailing blanks.

**Conditions****123 CCSIDERR**

RESP2 values:

- 1 The CCSID specified on the INTOCCSID option is outside the range of valid CCSID values.
- 2 The CCSID specified on the INTOCCSID option and the CCSID of the addressing context are an unsupported combination.
- 4 One or more characters could not be converted. Each unconverted character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of the addressing context data.

**122 CHANNELERR**

RESP2 values:

- 1 The name specified for the CHANNEL option contains an incorrect character or combination of characters.
- 2 The channel specified was not located.

**125 CODEPAGEERR**

RESP2 values:

- 1 The code page specified on the INTOCODEPAGE option is not supported.
- 2 The code page specified on the INTOCODEPAGE option and the CCSID of the addressing context are an unsupported combination.
- 4 One or more characters could not be converted. Each unconverted character has been replaced by a blank in the converted data.
- 5 There was an internal error in the code page conversion of a container.

**16 INVREQ**

RESP2 values:

- 4 The CHANNEL option was not specified. There is no current channel because the program that issued the command was not passed the name of a channel.
- 11 The RELATESINDEX option is not valid.
- 12 The RELATESINDEX option is greater than the number of RelatesTo MAPs.

**22 LENGERR**

RESP2 values:

- 20** This condition occurs when the length of the stored data is greater than the value specified by the EPRLENGTH option. This condition only applies to the EPRINTO option and cannot occur with the EPRSET option.

Default action: ends the task abnormally.

**13 NOTFND**

RESP2 values:


- 3** The addressing context was not located.

---

## WSAEPR CREATE

Use the **WSAEPR CREATE** command to create an endpoint reference (EPR) to represent a web service or web service resource.

### WSAEPR CREATE

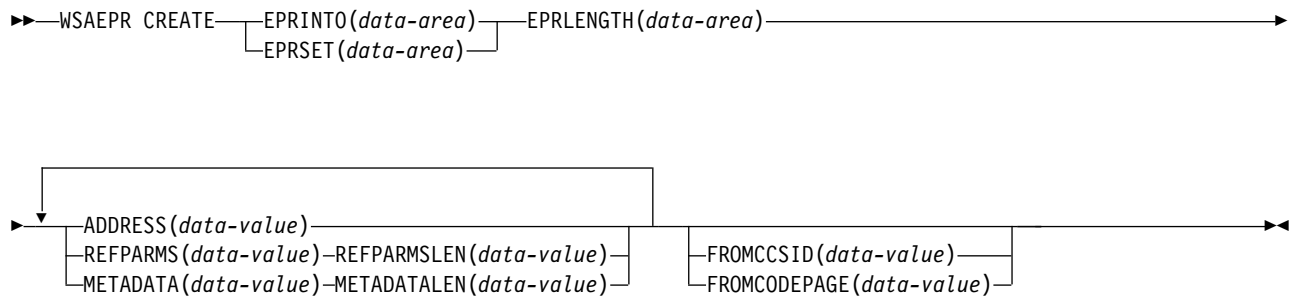

**Conditions:** CCSIDERR, CODEPAGEERR, INVREQ, LENGERR

This command is threadsafe.

### Description

The **WSAEPR CREATE** command creates an endpoint reference, which can represent a web service or web service resource. You can send this EPR to a client so that the addressing context is used for requests to the service.

### Options

#### **ADDRESS(data-value)**

Specifies a URI that forms the address of the endpoint reference. The value of this option must be 255 characters in length. If the URI is less than 255 characters, you must pad the data value with trailing blanks.

The default address of <http://www.w3.org/2005/08/addressing/anonymous> returns information to the caller of the command. Use an address of <http://www.w3.org/2005/08/addressing/none> if no request or response is required. If the To EPR contains a URI, the SOAP message is sent to this URI. If the ReplyTo or FaultTo EPRs contain a URI, response messages are sent to the web service using that URI and not back to the sender of the request message.

#### **EPRINTO(data-area)**

Specifies the data area used to contain the generated endpoint reference. The EPRINTO and EPRSET options are mutually exclusive.

If the EPRINTO option contains an address, any special characters in the address are automatically escaped or unescaped.

The following characters in an address are replaced with an escape sequence:

" , > , < , ' , &

#### **EPRLLENGTH(data-area)**

Specifies the length, as a halfword binary value, of the endpoint reference.

If you specify the EPRINTO option, you must specify a value for EPRLENGTH unless the length can be generated by the compiler from the EPRINTO option.

The EPRLENGTH option defines the maximum length of data that the program accepts. If the value specified is less than zero, zero is assumed. If the length of the data exceeds the value specified, the data is truncated to that value and the LENGERR condition occurs.

**EPRSET**(*ptr-ref*)

Specifies the pointer reference that is set to the address of the output data area used to contain the complete or partial endpoint reference. The pointer reference, unless changed by other commands or statements, is valid until the next **WSACONTEXT GET** command or the end of the task. The EPRINTO and EPRSET options are mutually exclusive.

**FROMCCSID**(*data-value*)

Specifies the current Coded Character Set Identifier (CCSID) of the character data to be read or written as a fullword binary number. If you prefer to specify an IANA name for the code page, or if you prefer to specify the CCSID as alphanumeric characters, use the FROMCODEPAGE option instead.

For CICS Transaction Server for z/OS applications, the CCSID is typically an EBCDIC CCSID.

The default CCSID of the region is specified on the LOCALCCSID system initialization option.

For an explanation of CCSIDs, and a list of the CCSIDs supported by CICS, see the *CICS Intercommunication Guide*.

**FROMCODEPAGE**(*data-value*)

Specifies an IANA-registered alphanumeric charset name or a Coded Character Set Identifier (CCSID) for the current code page of the character data to be read or written using up to 40 alphanumeric characters, including appropriate punctuation. Use this option instead of the CCSID option if you prefer to use an IANA-registered charset name, as specified in the Content-Type header for an HTTP request. CICS converts the IANA name into a CCSID, and the subsequent data conversion process is identical. Also use this option if you prefer to specify the CCSID in alphanumeric characters, rather than as a fullword binary number.

Where an IANA name exists for a code page and CICS supports its use, the name is listed with the CCSID in the *CICS Intercommunication Guide*.

**METADATA**(*data-value*)

Specifies metadata that describes the behavior, policies, and capabilities of the endpoint targeted by the endpoint reference. The metadata must be described in XML.

**METADATALEN**(*data-value*)

Specifies the length, as fullword binary, of the METADATA option.

**REFPARMS**(*data-value*)

Specifies application reference options that form part of the endpoint reference. These options are described in XML.

**REFPARMSLEN**(*data-value*)

Specifies the length, as fullword binary, of the reference options.

## Conditions

### 123 CCSIDERR

RESP2 values:

- 1 The CCSID specified on the FROMCCSID option is outside the range of valid CCSID values.
- 2 The CCSID specified on the FROMCCSID option and the CCSID of the container are an unsupported combination.
- 5 There was an internal error in the code page conversion of a container.
- 6 Either the text encoding is not compatible with the specified CCSID on the FROMCCSID option, or one or more characters are truncated.

### 125 CODEPAGEERR

RESP2 values:

- 1 The code page specified on the FROMCODEPAGE option is not supported.
- 2 The code page specified on the FROMCODEPAGE option and the CCSID of the container are an unsupported combination.
- 5 There was an internal error in the code page conversion of a container.
- 6 Either the text encoding is not compatible with the specified CODEPAGE on the FROMCODEPAGE option, or one or more characters are truncated.

### 16 INVREQ

The INVREQ RESP2 values and the corresponding messages are shown below. For this command, if the EIBRESP2 value is > 100, the fullword EIBRESP2 field is regarded as a structure containing two halfwords. The low-order halfword always contains the error number. The high-order halfword contains the offset into the XML data where the parsing error occurred.

RESP2 values:

- 8 One of the input parameters contains an incorrect value. The ADDRESS option might not contain a valid URI.
- 13 One of the input parameters contains an incorrect value. The METADATA option might not contain valid XML.
- 14 One of the input parameters contains an incorrect value. The REFPARMS option might not contain valid XML.

### 22 LENGERR

RESP2 values:

- 20 This condition occurs when the length of the stored data is greater than the value specified by the EPRLENGTH option. This condition only applies to the EPRINTO option and cannot occur with the EPRSET option.


Default action: ends the task abnormally.

---

## XCTL

Transfer program control.

### XCTL

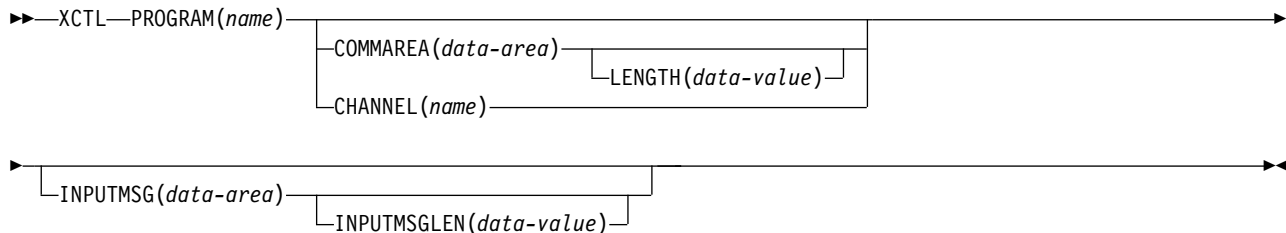

**Conditions:** CHANNELERR, INVREQ, LENGERR, NOTAUTH, PGMIDERR

This command is threadsafe.

### Description

XCTL transfers control from one application program to another at the same logical level. The program from which control is transferred is released. If the program to which control is transferred is not already in main storage, it is loaded.

This command operates in the current application context. If the command is issued by a program that is running under a task for an application deployed on a platform, CICS searches first for the named program in the private program directory for the application. If the named program is not found there, CICS then searches the public program directory.

### Options

#### CHANNEL(*name*)

Specifies the name (1–16 characters) of a channel that is to be made available to the invoked program. The acceptable characters are A-Z a-z 0-9 \$ @ # / % & ? ! : | " = ~ , ; < > . - and \_ . Leading and embedded blank characters are not permitted. If the name supplied is less than 16 characters, it is padded with trailing blanks up to 16 characters. If the channel does not exist, it is created. This new channel remains in scope until the link level changes. For more information about channel scope, see *The scope of a channel*.

Channel names are always in EBCDIC. The set of allowed characters for channel names, as listed earlier, includes some characters that do not have the same representation in all EBCDIC code pages. Therefore, if channels are to be shipped between regions, it is advisable to restrict the characters used to name them to A-Z a-z 0-9 & : = , ; < > . - and \_ .

You can specify the channel name `DFHTRANSACTION` to use a transaction channel. A transaction channel does not go out of scope when the link level changes: it is always accessible in the task. For more information, see *Channels and containers*.

The program that issues the XCTL command can do one of the following:

- Create the channel before issuing the XCTL command, by using one or more **PUT CONTAINER CHANNEL** or **PUT64 CONTAINER** commands.
- Specify its current channel, by name.



- Name a channel that does not currently exist. A new empty channel is created.

#### **COMMAREA**(*data-area*)

Specifies a communication area to be made available to the invoked program. In this option the contents of the data-area are passed. In COBOL, you must give this data area the name DFHCOMMAREA in the receiving program. See Passing data to other programs in Developing applications.

#### **INPUTMSG**(*data-area*)

Specifies data to be passed to the invoked program when it first issues a RECEIVE command. If the invoked program passes control to another program by using a **LINK** command, a linked chain is created, as described under the INPUTMSG option of the **LINK** command. The INPUTMSG data remains available until a **RECEIVE** command is issued or until control returns to CICS.

#### **INPUTMSGLEN**(*data-value*)

Specifies a halfword binary value that specifies the length of the data passed by INPUTMSG.

#### **LENGTH**(*data-value*)

Specifies the length (halfword binary data value) in bytes of the communication area. For a description of a suitable upper limit, see “LENGTH options in CICS commands” on page 11.

#### **PROGRAM**(*name*)

Specifies the identifier (1–8 alphanumeric characters) of the program to which control is to be passed unconditionally. The specified name must have been defined as a program to CICS, though if AUTOINSTALL is active a definition is autoinstalled.

Note the use of quotes:

PROGX is in quotes because it is the program name.

```
EXEC CICS LINK PROGRAM('PROGX')
```

DAREA is not in quotes because it is the name of a data area that contains the

```
EXEC CICS LINK PROGRAM(DAREA)
```

actual program name. If a data area is used to contain the program name, this data area must be defined as an 8 byte field in working storage.

## **Conditions**

### **122 CHANNELERR**

RESP2 values:

- 1 The name specified on the CHANNEL option contains an illegal character or combination of characters.

### **16 INVREQ**

RESP2 values:

- 8 An XCTL command with the INPUTMSG option is issued for a program that is not associated with a terminal, or that is associated with an APPC logical unit, or an IRC session.
- 29 EXEC XCTL is not allowed in a GLUE or TRUE.
- 30 The program manager domain has not yet been initialized. This is probably because an XCTL request was made in a first stage PLT.

**31** An XCTL command is issued from a program that is running with an application context, to another program that is an application entry point.

**200** An XCTL command with the INPUTMSG option is issued in a program invoked by DPL.

Default action: terminate the task abnormally.

## **22 LENGERR**

RESP2 values:

**11** LENGTH is less than 0 or greater than 32763.

**26** The COMMAREA address passed was zero, but LENGTH was non-zero.

**27** INPUTMSGLEN was less than 0 or greater than 32767.

**28** LENGTH or INPUTMSGLEN is greater than the length of the data area specified in the COMMAREA or INPUTMSG options, and while that data was being copied, a destructive overlap occurred because of the incorrect length.

Default action: terminate the task abnormally.

## **70 NOTAUTH**

RESP2 values:

**101** A resource security check has failed on PROGRAM(name).

Default action: terminate the task abnormally.

## **27 PGMIDERR**

RESP2 values:

**1** A program has no installed resource definition and either program autoinstall was switched off, or the program autoinstall control program indicated that the program should not be autoinstalled.

**2** The program is disabled.

**3** A program could not be loaded for one of the following reasons:

- This was the first load of the program and the program load failed, usually because the load module could not be found.
- This was a subsequent load of the program, but the first load failed.

To reset the load status, the load module must be in the DFHRPL or dynamic LIBRARY concatenation, and a SET PROGRAM NEWCOPY will be required

**9** The installed program definition is for a remote program.

**21** The program autoinstall control program failed, either because the program autoinstall control program is incorrect or incorrectly defined, or as a result of an abend in the program autoinstall control program. Program autoinstall is disabled and message DFHPG0202 or DFHPG0203 written to the CSPL.

**22** The model returned by the program autoinstall control program was not defined to CICS, or was not enabled.

**23** The program autoinstall control program returned invalid data.

**24** Define for the program failed because autoinstall returned an invalid program name or definition.

Default action: terminate the task abnormally.

## Examples

The following example shows how to request a transfer of control to an application program called PROG2:

```
EXEC CICS XCTL PROGRAM('PROG2')
```



---

## Appendix A. EXEC interface block fields

An application program can read all the fields in the EXEC interface block (EIB) of the associated task by name. An application must not change the contents of any of the fields, other than through an **EXEC CICS** command.

For each EIB field, the contents and format (for each of the application programming languages COBOL, C, PL/I, and Assembler) are given. Fields explained are EIBAID, EIBATT, EIBCALEN, EIBCOMPL, EIBCONF, EIBCPOSN, EIBDATE, EIBDS, EIBEOC, EIBERR, EIBERRCD, EIBFMH, EIBFN, EIBFREE, EIBNODAT, EIBRCODE, EIBRECV, EIBREQID, EIBRESP, EIBRESP2, EIBRLDBK, EIBRSRCE, EIBSIG, EIBSYNC, EIBSYNRB, EIBTASKN, EIBTIME, EIBTRMID, and EIBTRNID.

All fields contain binary zeros in the absence of meaningful information. Fields are listed in alphabetic order.

### EIBAID

Contains the attention identifier (AID) associated with the last terminal control or basic mapping support (BMS) input operation from a display device such as the 3270.

```
COBOL: PIC X(1).
C: unsigned char eibaid;
PL/I: CHAR(1)
Assembler: CL1
```

### EIBATT

Indicates that the RU contains attach header data (X'FF').

```
COBOL: PIC X(1).
C: unsigned char eibatt;
PL/I: CHAR(1)
Assembler: CL1
```

### EIBCALEN

Contains the length of the communication area that has been passed to the application program from the last program, using the COMMAREA and LENGTH options. If no communication area is passed, this field contains binary zeros.

```
COBOL: PIC S9(4) COMP.
C: short int eibcalen;
PL/I: FIXED BIN(15)
Assembler: H
```

### EIBCOMPL

Indicates, on a terminal control RECEIVE command, whether the data is complete (X'FF'). If the NOTRUNCATE option has been used on the RECEIVE command, CICS retains data in excess of the amount requested via the

LENGTH or MAXLENGTH option. EIBRECV is set indicating that further RECEIVE commands are required. EIBCOMPL is not set until the last of the data has been retrieved.

EIBCOMPL is always set when a RECEIVE command without the NOTRUNCATE option is executed.

```
COBOL: PIC X(1).
C: unsigned char eibcompl;
PL/I: CHAR(1)
Assembler: CL1
```

#### **EIBCONF**

Indicates that a CONFIRM request has been received (X'FF') for an APPC conversation.

```
COBOL: PIC X(1).
C: unsigned char eibconf;
PL/I: CHAR(1)
Assembler: CL1
```

#### **EIBCPOSN**

Contains the cursor address (position) associated with the last terminal control or basic mapping support (BMS) input operation from a display device such as the 3270.

```
COBOL: PIC S9(4) COMP.
C: short int eibcposn;
PL/I: FIXED BIN(15)
Assembler: H
```

#### **EIBDATE**

Contains the date the task is started; this field is updated by the ASKTIME command. The date is in packed decimal form (0CYYDDD+) where C shows the century with values 0 for the 1900s and 1 for the 2000s. For example, the date 31 December 1999 has the EIBDATE value of 0099365 and the date 1 January 2000 has an EIBDATE value of 0100001.

At midnight, if EIBTIME has the value of 0240000+, the value of EIBDATE is the day that has ended. If EIBTIME has the value of 0000000+, the value of EIBDATE is the day that is just beginning.

```
COBOL: PIC S9(7) COMP-3.
C: char eibdate [4];
PL/I: FIXED DEC(7,0)
Assembler: PL4
```

#### **EIBDS**

Contains the symbolic identifier of the last data set referred to in a file control request.

```
COBOL: PIC X(8).
C: char eibds [8];
PL/I: CHAR(8)
Assembler: CL8
```

### **EIBEOC**

Indicates that an end-of-chain indicator appears in the RU just received (X'FF').

```
COBOL: PIC X(1).
C: unsigned char eibeoc;
PL/I: CHAR(1)
Assembler: CL1
```

### **EIBERR**

Indicates that an error has been received (X'FF') on an APPC conversation.

```
COBOL: PIC X(1).
C: unsigned char eiberr;
PL/I: CHAR(1)
Assembler: CL1
```

### **EIBERRCD**

When EIBERR is set, contains the error code that has been received. The following values can be returned in the first two bytes of EIBERRCD:

- X'0889' Conversation error detected.
- X'0824' SYNCPOINT ROLLBACK requested.

```
COBOL: PIC X(4).
C: char eiberrcd [4];
PL/I: CHAR(4)
Assembler: CL4
```

See CICS mapping to the APPC architecture in the *CICS Distributed Transaction Programming Guide* for information about other EIBERRCD values that can occur.

### **EIBFMH**

Indicates that the user data received or retrieved contains an FMH (X'FF').

```
COBOL: PIC X(1).
C: unsigned char eibfmh;
PL/I: CHAR(1)
Assembler: CL1
```

### **EIBFN**

Contains a code that identifies the last CICS command issued by the task.

```
COBOL: PIC X(2).
C: char eibfn [2];
PL/I: CHAR(2)
Assembler: CL2
```

| Code | Command            |
|------|--------------------|
| 0202 | ADDRESS            |
| 0204 | HANDLE CONDITION   |
| 0206 | HANDLE AID         |
| 0208 | ASSIGN             |
| 020A | IGNORE CONDITION   |
| 020C | PUSH HANDLE        |
| 020E | POP HANDLE         |
| 0210 | ADDRESS SET        |
|      |                    |
| 0402 | RECEIVE            |
| 0404 | SEND               |
| 0406 | CONVERSE           |
| 0408 | ISSUE EODS         |
| 040A | ISSUE COPY         |
| 040C | WAIT TERMINAL      |
| 040E | ISSUE LOAD         |
| 0410 | WAIT SIGNAL        |
| 0412 | ISSUE RESET        |
| 0414 | ISSUE DISCONNECT   |
| 0416 | ISSUE ENDOUTPUT    |
| 0418 | ISSUE ERASEAUP     |
| 041A | ISSUE ENDFILE      |
| 041C | ISSUE PRINT        |
| 041E | ISSUE SIGNAL       |
| 0420 | ALLOCATE           |
| 0422 | FREE               |
| 0424 | POINT              |
| 0426 | BUILD ATTACH       |
| 0428 | EXTRACT ATTACH     |
| 042A | EXTRACT TCT        |
| 042C | WAIT CONVID        |
| 042E | EXTRACT PROCESS    |
| 0430 | ISSUE ABEND        |
| 0432 | CONNECT PROCESS    |
| 0434 | ISSUE CONFIRMATION |
| 0436 | ISSUE ERROR        |
| 0438 | ISSUE PREPARE      |
| 043A | ISSUE PASS         |
| 043C | EXTRACT LOGONMSG   |
| 043E | EXTRACT ATTRIBUTES |
|      |                    |
| 0602 | READ               |
| 0604 | WRITE              |
| 0606 | REWRITE            |
| 0608 | DELETE             |
| 060A | UNLOCK             |
| 060C | STARTBR            |
| 060E | READNEXT           |
| 0610 | READPREV           |
| 0612 | ENDBR              |
| 0614 | RESETBR            |
|      |                    |
| 0802 | WRITEQ TD          |
| 0804 | READQ TD           |



0806 DELETEQ TD  
  
 0A02 WRITEQ TS  
 0A04 READQ TS  
 0A06 DELETEQ TS  
  
 0C02 GETMAIN  
 0C04 FREEMAIN  
 0C12 GETMAIN64  
 0C14 FREEMAIN64  
  
 0E02 LINK  
 0E04 XCTL  
 0E06 LOAD  
 0E08 RETURN  
 0E0A RELEASE  
 0E0C ABEND  
 0E0E HANDLE ABEND  
 0E10 INVOKE APPLICATION  
  
 1002 ASKTIME  
 1004 DELAY  
 1006 POST  
 1008 START  
 1008 START ATTACH  
 1008 START BREXIT  
 100A RETRIEVE  
 100C CANCEL  
  
 1202 WAIT EVENT  
 1204 ENQ  
 1206 DEQ  
 1208 SUSPEND  
  
 1402 WRITE JOURNALNUM  
 1404 WAIT JOURNALNUM  
 1406 WRITE JOURNALNAME  
 1408 WAIT JOURNALNAME  
  
 1602 SYNCPOINT  
  
 1802 RECEIVE MAP  
 1804 SEND MAP  
 1806 SEND TEXT  
 1808 SEND PAGE  
 180A PURGE MESSAGE  
 180C ROUTE  
 180E RECEIVE PARTN  
 1810 SEND PARTNSET  
 1812 SEND CONTROL  
  
 1A02 TRACE  
 1A04 ENTER TRACEID  
  
 1C02 DUMP

1E02 ISSUE ADD  
 1E04 ISSUE ERASE  
 1E06 ISSUE REPLACE  
 1E08 ISSUE ABORT  
 1E0A ISSUE QUERY  
 1E0C ISSUE END  
 1E0E ISSUE RECEIVE  
 1E10 ISSUE NOTE  
 1E12 ISSUE WAIT  
 1E14 ISSUE SEND  
  
 2002 BIF DEEDIT  
  
 2004 DEFINE COUNTER  
 2006 GET COUNTER  
 2008 UPDATE COUNTER  
 200A DELETE COUNTER  
 200C REWIND COUNTER  
 200E QUERY COUNTER  
 2014 DEFINE DCOUNTER  
 2016 GET DCOUNTER  
 2018 UPDATE DCOUNTER  
 201A DELETE DCOUNTER  
 201C REWIND DCOUNTER  
 201E QUERY DCOUNTER  
  
 2020 BIF DIGEST  
 2602 TRANSFORM DATATOXML  
 2604 TRANSFORM XMLTODATA  
  
 2802 SIGNAL EVENT  
  
 3402 DEFINE ACTIVITY  
 3404 DEFINE PROCESS  
 3406 RUN ACTIVITY  
 3408 RUN ACQPROCESS  
 340E ACQUIRE PROCESS  
 3410 ACQUIRE ACTIVITYID  
 3412 DELETE CONTAINER  
 3414 GET CONTAINER  
 3416 PUT CONTAINER  
 3418 RESET ACTIVITY  
 341A CHECK ACTIVITY  
 341C CANCEL ACTIVITY  
 341E CANCEL ACQPROCESS  
 3420 SUSPEND ACTIVITY  
 3422 SUSPEND ACQPROCESS  
 3424 RESUME ACTIVITY  
 3426 RESUME ACQPROCESS  
 3428 DELETE ACTIVITY  
 342A LINK ACQPROCESS  
 342C LINK ACTIVITY  
 342E CANCEL ACQACTIVITY  
 3430 RUN ACQACTIVITY  
 3432 LINK ACQACTIVITY  
 3434 SUSPEND ACQACTIVITY

3436 RESUME ACQACTIVITY  
 3438 CHECK ACQPROCESS  
 343A CHECK ACQACTIVITY  
 343C RESET ACQPROCESS  
 3440 MOVE CONTAINER  
 3454 GET64 CONTAINER  
 3456 PUT64 CONTAINER  
 3458 QUERY CHANNEL  
 345A DELETE CHANNEL  
  
 3602 DEFINE INPUT EVENT  
 3602 DEFINE COMPOSITE EVENT  
 3604 DELETE EVENT  
 3608 ADD SUBEVENT  
 360A REMOVE SUBEVENT  
 360E TEST EVENT  
 3610 RETRIEVE REATTACH EVENT  
 3612 RETRIEVE SUBEVENT  
 3614 DEFINE TIMER  
 3616 DELETE TIMER  
 3618 CHECK TIMER  
 361A FORCE TIMER  
  
 3802 WEB RECEIVE  
 3804 WEB SEND  
 3806 WEB READ  
 3808 WEB STARTBROWSE  
 380A WEB READNEXT  
 380C WEB ENDBROWSE  
 380E WEB WRITE HTTPHEADER  
 3810 WEB EXTRACT  
 3814 WEB RETRIEVE  
 3816 WEB PARSE URL  
 3818 WEB OPEN  
 381A WEB CLOSE  
 381C WEB CONVERSE  
  
 3C02 DOCUMENT CREATE  
 3C04 DOCUMENT INSERT  
 3C06 DOCUMENT RETRIEVE  
 3C08 DOCUMENT SET  
 3C10 DOCUMENT DELETE  
  
 3E0E EXTRACT TCPIP  
 3E10 EXTRACT CERTIFICATE  
  
 4802 ENTER TRACENUM  
 4804 MONITOR  
  
 4A02 ASKTIME ABSTIME  
 4A04 FORMATTIME  
 4A06 CONVERTTIME  
  
 5602 SPOOLOPEN  
 5604 SPOOLREAD  
 5606 SPOOLWRITE

5610 SPOOLCLOSE

5E06 CHANGE TASK  
5E22 WAIT EXTERNAL  
5E32 WAITCICS

6A02 QUERY SECURITY  
6C02 WRITE OPERATOR  
6C12 CICSMESSAGE

7402 SIGNON  
7404 SIGNOFF  
7406 VERIFY PASSWORD  
7408 CHANGE PASSWORD  
740A VERIFY PHRASE  
740C CHANGE PHRASE  
740E VERIFY TOKEN  
7410 REQUEST PASSTICKET

7E02 DUMP TRANSACTION

8C02 WRITE MESSAGE

C002 INVOKE WEBSERVICE  
C004 SOAPFAULT CREATE  
C006 SOAPFAULT ADD  
C008 SOAPFAULT DELETE

C00A WSACONTEXT BUILD  
C00C WSACONTEXT GET  
C00D WSACONTEXT DELETE  
C010 WSAEPR CREATE

#### **EIBFREE**

Indicates that the application program cannot continue using the facility. The application program should either free the facility or should terminate so that the facility is freed by CICS (X'FF').

|            |                        |
|------------|------------------------|
| COBOL:     | PIC X(1).              |
| C:         | unsigned char eibfree; |
| PL/I:      | CHAR(1)                |
| Assembler: | CL1                    |

#### **EIBNODAT**

Indicates that no data has been sent by the remote application (X'FF'). A message has been received from the remote system that conveyed only control information. For example, if the remote application executed a SEND command with the WAIT option, any data would be sent across the link. If the remote application then executed a SEND INVITE command without using the FROM option to transmit data at the same time, it would be necessary to send the INVITE instruction across the link by itself. In this case, the receiving application finds EIBNODAT set. The use of this field is restricted to application programs holding conversations across APPC links only.

```

COBOL: PIC X(1).
C: unsigned char eibnodat;
PL/I: CHAR(1)
Assembler: CL1

```

## EIBRCODE

Contains the CICS response code returned after the function requested by the last CICS command to be issued by the task has been completed.

**Note:** For commands where EIBRESP and EIBRESP2 are used for interrogating the resulting condition of an executed command, byte 3 of EIBRCODE has the same value as EIBRESP. Any further information is in EIBRESP2 rather than EIBRCODE. For a normal response, this field contains hexadecimal zeros (6 X'00').

Almost all of the information in this field can be used within application programs by the **HANDLE CONDITION** command.

```

COBOL: PIC X(6).
C: char eibrccode [6];
PL/I: CHAR(6)
Assembler: CL6

```

The following list contains the values of the bytes together with the names of the conditions associated with the return codes.

See the notes at the end of the list of values for explanations of the numbers following some of the conditions.

| EIBFN | EIBRCODE    | Condition               |
|-------|-------------|-------------------------|
| 02 .. | E0 .. .. .  | INVREQ                  |
| 04 .. | 04 .. .. .  | EOF                     |
| 04 .. | 10 .. .. .  | EODS                    |
| 04 .. | C1 .. .. .  | EOF                     |
| 04 .. | C2 .. .. .  | ENDINPT                 |
| 04 .. | D0 .. .. .  | SYSIDERR (see note 1)   |
| 04 .. | D2 .. .. .  | SESSIONERR (see note 2) |
| 04 .. | D3 .. .. .  | SYSBUSY (see note 3)    |
| 04 .. | D4 .. .. .  | SESSBUSY                |
| 04 .. | D5 .. .. .  | NOTALLOC                |
| 04 .. | E0 .. .. .  | INVREQ (see note 4)     |
| 04 .. | E1 .. .. .  | LENGERR (see note 5)    |
| 04 .. | E3 .. .. .  | WRBRK                   |
| 04 .. | E4 .. .. .  | RDATT                   |
| 04 .. | E5 .. .. .  | SIGNAL                  |
| 04 .. | E6 .. .. .  | TERMIDERR               |
| 04 .. | E7 .. .. .  | NOPASSBKRD              |
| 04 .. | E8 .. .. .  | NOPASSBKWR              |
| 04 .. | EA .. .. .  | IGREQCD                 |
| 04 .. | EB .. .. .  | CBIDERR                 |
| 04 .. | EC .. .. .  | PARTNERIDERR            |
| 04 .. | ED .. .. .  | NETNAMEIDERR            |
| 04 .. | F1 .. .. .  | TERMERR                 |
| 04 .. | .. 20 .. .. | EOC                     |

| <b>EIBFN</b> | <b>EIBRCODE</b> | <b>Condition</b>      |
|--------------|-----------------|-----------------------|
| 04 ..        | .. 40 .. .. .   | INBFMH                |
| 04 ..        | .. .. F6 .. .   | NOSTART               |
| 04 ..        | .. .. F7 .. .   | NONVAL                |
| 06 ..        | 01 .. .. .      | FILENOTFOUND          |
| 06 ..        | 02 .. .. .      | ILLOGIC (see note 6)  |
| 06 ..        | 03 .. .. .      | LOCKED                |
| 06 ..        | 05 .. .. .      | RECORDBUSY            |
| 06 ..        | 08 .. .. .      | INVREQ                |
| 06 ..        | 0C .. .. .      | NOTOPEN               |
| 06 ..        | 0D .. .. .      | DISABLED              |
| 06 ..        | 0F .. .. .      | ENDFILE               |
| 06 ..        | 80 .. .. .      | IOERR (see note 6)    |
| 06 ..        | 81 .. .. .      | NOTFND                |
| 06 ..        | 82 .. .. .      | DUPREC                |
| 06 ..        | 83 .. .. .      | NOSPACE               |
| 06 ..        | 84 .. .. .      | DUPKEY                |
| 06 ..        | 85 .. .. .      | SUPPRESSED            |
| 06 ..        | 86 .. .. .      | LOADING               |
| 06 ..        | D0 .. .. .      | SYSIDERR (see note 1) |
| 06 ..        | D1 .. .. .      | ISCINVREQ             |
| 06 ..        | D6 .. .. .      | NOTAUTH               |
| 06 ..        | E1 .. .. .      | LENGERR               |
| 08 ..        | 01 .. .. .      | QZERO                 |
| 08 ..        | 02 .. .. .      | QIDERR                |
| 08 ..        | 04 .. .. .      | IOERR                 |
| 08 ..        | 08 .. .. .      | NOTOPEN               |
| 08 ..        | 10 .. .. .      | NOSPACE               |
| 08 ..        | C0 .. .. .      | QBUSY                 |
| 08 ..        | D0 .. .. .      | SYSIDERR (see note 1) |
| 08 ..        | D1 .. .. .      | ISCINVREQ             |
| 08 ..        | D6 .. .. .      | NOTAUTH               |
| 08 ..        | D7 .. .. .      | DISABLED              |
| 08 ..        | E0 .. .. .      | INVREQ                |
| 08 ..        | E1 .. .. .      | LENGERR               |
| 0A ..        | 01 .. .. .      | ITEMERR               |
| 0A ..        | 02 .. .. .      | QIDERR                |
| 0A ..        | 04 .. .. .      | IOERR                 |
| 0A ..        | 08 .. .. .      | NOSPACE               |
| 0A ..        | 20 .. .. .      | INVREQ                |
| 0A ..        | D0 .. .. .      | SYSIDERR (see note 1) |
| 0A ..        | D1 .. .. .      | ISCINVREQ             |
| 0A ..        | D6 .. .. .      | NOTAUTH               |
| 0A ..        | E1 .. .. .      | LENGERR               |
| 0C ..        | E0 .. .. .      | INVREQ                |
| 0C ..        | E1 .. .. .      | LENGERR               |
| 0C ..        | E2 .. .. .      | NOSTG                 |
| 0E ..        | 01 .. .. .      | PGMIDERR              |
| 0E ..        | D6 .. .. .      | NOTAUTH               |
| 0E ..        | D9 .. .. .      | RESUNAVAIL            |

| <b>EIBFN</b> | <b>EIBRCODE</b>    | <b>Condition</b>      |
|--------------|--------------------|-----------------------|
| 0E ..        | DA .. .. . .       | CHANNELERR            |
| 0E ..        | E0 .. .. . .       | INVREQ                |
| 0E ..        | E1 .. .. . .       | LENGERR               |
| 0E ..        | F1 .. .. . .       | TERMERR               |
| 10 ..        | 01 .. .. . .       | ENDDATA               |
| 10 ..        | 04 .. .. . .       | IOERR                 |
| 10 ..        | 11 .. .. . .       | TRANSIDERR            |
| 10 ..        | 12 .. .. . .       | TERMIDERR             |
| 10 ..        | 20 .. .. . .       | EXPIRED               |
| 10 ..        | 81 .. .. . .       | NOTFND                |
| 10 ..        | D0 .. .. . .       | SYSIDERR (see note 1) |
| 10 ..        | D1 .. .. . .       | ISCINVREQ             |
| 10 ..        | D6 .. .. . .       | NOTAUTH               |
| 10 ..        | D8 .. .. . .       | USERIDERR             |
| 10 ..        | D9 .. .. . .       | RESUNAVAIL            |
| 10 ..        | DA .. .. . .       | CHANNELERR            |
| 10 ..        | E1 .. .. . .       | LENGERR               |
| 10 ..        | E9 .. .. . .       | ENVDEFERR             |
| 10 ..        | FF .. .. . .       | INVREQ                |
| 12 ..        | 32 .. .. . .       | ENQBUSY               |
| 12 ..        | E0 .. .. . .       | INVREQ                |
| 12 ..        | E1 .. .. . .       | LENGERR               |
| 14 ..        | 01 .. .. . .       | JIDERR                |
| 14 ..        | 02 .. .. . .       | INVREQ                |
| 14 ..        | 05 .. .. . .       | NOTOPEN               |
| 14 ..        | 06 .. .. . .       | LENGERR               |
| 14 ..        | 07 .. .. . .       | IOERR                 |
| 14 ..        | 09 .. .. . .       | NOJBUFSP              |
| 14 ..        | D6 .. .. . .       | NOTAUTH               |
| 16 ..        | 01 .. .. . .       | ROLLEDBACK            |
| 18 ..        | 01 .. .. . .       | INVREQ                |
| 18 ..        | 02 .. .. . .       | RETPAGE               |
| 18 ..        | 04 .. .. . .       | MAPFAIL               |
| 18 ..        | 08 .. .. . .       | INVMPsz (see note 7)  |
| 18 ..        | 20 .. .. . .       | INVERRTERM            |
| 18 ..        | 40 .. .. . .       | RTESOME               |
| 18 ..        | 80 .. .. . .       | RTEFAIL               |
| 18 ..        | E1 .. .. . .       | LENGERR               |
| 18 ..        | E3 .. .. . .       | WRBRK                 |
| 18 ..        | E4 .. .. . .       | RDATT                 |
| 18 ..        | .. 02 .. .. . .    | PARTNFAIL             |
| 18 ..        | .. 04 .. .. . .    | INVPARTN              |
| 18 ..        | .. 08 .. .. . .    | INVPARTNSET           |
| 18 ..        | .. 10 .. .. . .    | INVLDC                |
| 18 ..        | .. 20 .. .. . .    | UNEXPIN               |
| 18 ..        | .. 40 .. .. . .    | IGREQCD               |
| 18 ..        | .. 80 .. .. . .    | TSIOERR               |
| 18 ..        | .. .. 01 .. .. . . | OVERFLOW              |
| 18 ..        | .. .. 04 .. .. . . | EODS                  |

| <b>EIBFN</b> | <b>EIBRCODE</b> | <b>Condition</b> |
|--------------|-----------------|------------------|
| 18 ..        | .. .. 08 .. ..  | EOC              |
| 18 ..        | .. .. 10 .. ..  | IGREQID          |
| 1A ..        | E0 .. .. . .    | INVREQ           |
| 1A ..        | 04 .. .. . .    | DSSTAT           |
| 1A ..        | 08 .. .. . .    | FUNCERR          |
| 1A ..        | 0C .. .. . .    | SELNERR          |
| 1A ..        | 10 .. .. . .    | UNEXPIN          |
| 1A ..        | E1 .. .. . .    | LENGERR          |
| 1A ..        | .. 11 .. .. . . | EODS             |
| 1A ..        | .. 2B .. .. . . | IGREQCD          |
| 1A ..        | .. .. 20 .. ..  | EOC              |
| 22 ..        | 80 .. .. . .    | INVEXITREQ       |
| 4A ..        | .. .. . 01 ..   | INVREQ           |
| 56 ..        | .. .. . 0D ..   | NOTFND           |
| 56 ..        | .. .. . 10 ..   | INVREQ           |
| 56 ..        | .. .. . 13 ..   | NOTOPEN          |
| 56 ..        | .. .. . 14 ..   | ENDFILE          |
| 56 ..        | .. .. . 15 ..   | ILLOGIC          |
| 56 ..        | .. .. . 16 ..   | LENGERR          |
| 56 ..        | .. .. . 2A ..   | NOSTG            |
| 56 ..        | .. .. . 46 ..   | NOTAUTH          |
| 56 ..        | .. .. . 50 ..   | NOSPOOL          |
| 56 ..        | .. .. . 55 ..   | ALLOCERR         |
| 56 ..        | .. .. . 56 ..   | STRELERR         |
| 56 ..        | .. .. . 57 ..   | OPENERR          |
| 56 ..        | .. .. . 58 ..   | SPOLBUSY         |
| 56 ..        | .. .. . 59 ..   | SPOLERR          |
| 56 ..        | .. .. . 5A ..   | NODEIDERR        |

**Note:**

1. When SYSIDERR occurs, further information is provided in bytes 1 and 2 of EIBRCODE, as shown in Figure 5 on page 899.



|                  |                                        |
|------------------|----------------------------------------|
| .. 04 00 .. .. . | request was for a function             |
|                  | that is not valid.                     |
| .. 04 04 .. .. . | no session available and               |
|                  | NOQUEUE.                               |
| .. 04 08 .. .. . | modename not found (for APPC only).    |
| .. 04 0C .. .. . | modename not valid (for APPC only).    |
| .. 04 10 .. .. . | task canceled or timed                 |
|                  | out during allocation (for APPC only). |
| .. 04 14 .. .. . | mode group is out of                   |
|                  | service (for APPC only).               |
| .. 04 18 .. .. . | close - DRAIN=ALL (for APPC only).     |
| .. 08 .. .. .    | sysid is not available.                |
| .. 08 00 .. .. . | no session available,                  |
|                  | all sessions are out                   |
|                  | of service, or released,               |
|                  | or being quiesced.                     |
| .. 08 04 .. .. . | no session available,                  |
|                  | request to queue rejected              |
|                  | by XZIQUE global user                  |
|                  | exit program.                          |
| .. 08 08 .. .. . | no session available;                  |
|                  | request rejected by XZIQUE             |
|                  | global user exit program.              |
| .. 0C xx .. .. . | sysid definition error.                |
| .. 0C 00 .. .. . | name not that of TCTSE.                |
| .. 0C 04 .. .. . | name not that of remote                |
|                  | TCTSE.                                 |
| .. 0C 08 .. .. . | mode name not found.                   |
| .. 0C 0C .. .. . | profile not found.                     |

Figure 5. Bytes 1 and 2 of EIBRCODE for SYSIDERR

Further information about SYSIDERR can be found in Sync point exchanges in the *CICS Intercommunication Guide*.

2. When SESSIONERR occurs, further information is provided in bytes 1 and 2 of EIBRCODE, as shown in Figure 6.

|                  |                          |
|------------------|--------------------------|
| .. 08 .. .. .    | session out of service   |
| .. 0C xx .. .. . | session definition error |
| .. 0C 00 .. .. . | name not found           |
| .. 0C 0C .. .. . | profile not found.       |

Figure 6. Bytes 1 and 2 of EIBRCODE for SESSIONERR

Further information about SESSIONERR can be found in CICS-to-IBM applications - DTP in the *CICS Intercommunication Guide*.

3. If SYSBUSY occurs on an ALLOCATE command that attempts to acquire a session to an APPC terminal or system, byte 3 of the EIBRCODE indicates where the error condition was detected as shown in Figure 7 on page 900.

|                  |                                                                                                                                                                 |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| .. .. . 00 .. .. | the request was for a session to a connected terminal or system.                                                                                                |
| .. .. . 01 .. .. | the request was for a session to a remotely connected terminal or system, and the error occurred in the terminal-owning region (TOR) or an intermediate system. |
| .. .. . 02 .. .. | the request was for a session to a remotely connected terminal or system, and the error occurred in the application-owning region (AOR).                        |

Figure 7. Byte 3 of EIBRCODE for SYSBUSY

Further information about SYSBUSY can be found in CICS-to-IBM applications - DTP in the *CICS Intercommunication Guide*.

4. When INVREQ occurs during terminal control operations, further information is provided in bytes 1 or 3 of EIBRCODE as shown in Figure 8.

|                  |                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------|
| .. 24 .. .. .    | ISSUE PREPARE command - STATE error.                                                          |
| .. .. . 04 .. .. | ALLOCATE command - TCTTE already allocated.                                                   |
| .. .. . 08 .. .. | FREE command - TCTTE in wrong state.                                                          |
| .. .. . 0C .. .. | CONNECT PROCESS command - SYNCLVL 2 requested, but cannot be supported on the session in use. |
| .. .. . 10 .. .. | EXTRACT ATTACH command - incorrect data.                                                      |
| .. .. . 14 .. .. | SEND command - CONFIRM option specified, but conversation not SYNCLVL 1.                      |
| .. .. . 18 .. .. | EXTRACT TCT command - incorrect netname.                                                      |
| .. .. . 1C .. .. | an incorrect command has been issued for the terminal or logical unit in use.                 |
| .. .. . 20 .. .. | an incorrect command has been issued for the LUTYPE6.2 conversation type in use.              |
| .. .. . 28 .. .. | GETMAIN failure on ISSUE PASS command.                                                        |
| .. .. . 2C .. .. | Command invalid in DPL environment.                                                           |

Figure 8. Bytes 1 or 3 of EIBRCODE for INVREQ

5. When LENGERR occurs during terminal control operations, further information is provided in byte 1 of EIBRCODE, as shown in Figure 9 on page 901.

|               |                                                                                                                 |
|---------------|-----------------------------------------------------------------------------------------------------------------|
| .. 00 .. .. . | input data is overlong and has been truncated.                                                                  |
| .. 04 .. .. . | on output commands, an incorrect (FROM)LENGTH has been specified, either less than zero or greater than 32 767. |
| .. 08 .. .. . | on input commands, an incorrect (TO)LENGTH has been specified, greater than 32 767.                             |
| .. 0C .. .. . | length error has occurred on ISSUE PASS command.                                                                |

Figure 9. Byte 1 of EIBRCODE for LENGERR

**Note:** This field is not used exclusively, and can take other values.

- When ILLOGIC or IOERR occurs during file control operations, further information is provided in field EIBRCODE, as shown in Figure 10. where:

|                   |                   |
|-------------------|-------------------|
| .. xx xx xx xx .. | BDAM response.    |
| .. xx .. .. .     | VSAM return code. |
| .. .. xx .. .. .  | VSAM error code.  |

Figure 10. EIBRCODE for ILLOGIC or IOERR

**byte 3 =**  
VSAM problem determination code (ILLOGIC only)

**byte 4 =**  
VSAM component code (ILLOGIC only)

Details of these response codes are described in the *DFSMS Macro Instructions for Data Sets* manual for VSAM, and the *DFSMS/MVS V1.3 Using Data Sets (SC26-4922)* for BDAM.

- When INVMP SZ occurs during BMS operations, byte 3 of field EIBRCODE contains the terminal code as shown in Figure 11.

|                 |                |
|-----------------|----------------|
| .. .. . xx .. . | terminal code. |
|-----------------|----------------|

Figure 11. Byte 3 of EIBRCODE for INVMP SZ

These are the same as the mapset suffixes shown in “DFHMSD” on page 955.

### EIBRECV

Indicates that the application program is to continue receiving data from the facility by executing RECEIVE commands (X'FF').

|            |                        |
|------------|------------------------|
| COBOL:     | PIC X(1).              |
| C:         | unsigned char eibrecv; |
| PL/I:      | CHAR(1)                |
| Assembler: | CL1                    |

### EIBREQID

Contains the request identifier assigned to an interval control command by CICS; this field is not used when a request identifier is specified in the

application program.

```
COBOL: PIC X(8).
C: char eibreqid [8];
PL/I: CHAR(8)
Assembler: CL8
```

### EIBRESP

Contains a number corresponding to the RESP condition that occurred. These numbers are listed (in decimal) for the conditions that can occur during execution of the commands described in this manual.

```
COBOL: PIC S9(8) COMP
C: long int eibresp;
PL/I: FIXED BIN(31)
Assembler: F
```

| No. Condition   | No. Condition   |
|-----------------|-----------------|
| 00 NORMAL       | 60 SESSBUSY     |
| 01 ERROR        | 61 NOTALLOC     |
| 02 RDATT        | 62 CBIDERR      |
| 03 WRBRK        | 63 INVEXITREQ   |
| 04 EOF          | 64 INVPARTNSET  |
| 05 EODS         | 65 INVPARTN     |
| 06 EOC          | 66 PARTNFAIL    |
| 07 INBFMH       | 69 USERIDERR    |
| 08 ENDINPT      | 70 NOTAUTH      |
| 09 NONVAL       | 71 VOLIDERR     |
| 10 NOSTART      | 72 SUPPRESSED   |
| 11 TERMIDERR    | 75 RESIDERR     |
| 12 FILENOTFOUND | 80 NOSPOOL      |
| 13 NOTFND       | 81 TERMERR      |
| 14 DUPREC       | 82 ROLLEDBACK   |
| 15 DUPKEY       | 83 END          |
| 16 INVREQ       | 84 DISABLED     |
| 17 IOERR        | 85 ALLOCERR     |
| 18 NOSPACE      | 86 STRELERR     |
| 19 NOTOPEN      | 87 OPENERR      |
| 20 ENDFILE      | 88 SPOLBUSY     |
| 21 ILLOGIC      | 89 SPOLERR      |
| 22 LENGERR      | 90 NODEIDERR    |
| 23 QZERO        | 91 TASKIDERR    |
| 24 SIGNAL       | 92 TCIDERR      |
| 25 QBUSY        | 93 DSNNOTFOUND  |
| 26 ITEMERR      | 94 LOADING      |
| 27 PGMIDERR     | 95 MODELIDERR   |
| 28 TRANSIDERR   | 96 OUTDESCRERR  |
| 29 ENDDATA      | 97 PARTNERIDERR |
| 30 INVTREQ      | 98 PROFILEIDERR |
| 31 EXPIRED      | 99 NETNAMEIDERR |
| 32 RETPAGE      | 100 LOCKED      |
| 33 RTEFAIL      | 101 RECORDBUSY  |
| 34 RTESOME      | 102 UOWNOTFOUND |

| No. Condition | No. Condition    |
|---------------|------------------|
| 35 TSIOERR    | 103 UOWLNOTFOUND |
| 36 MAPFAIL    | 104 LINKABEND    |
| 37 INVERRTERM | 105 CHANGED      |
| 38 INVMPsz    | 106 PROCESSBUSY  |
| 39 IGRREQID   | 107 ACTIVITYBUSY |
| 40 OVERFLOW   | 108 PROCESSERR   |
| 41 INVLDC     | 109 ACTIVITYERR  |
| 42 NOSTG      | 110 CONTAINERERR |
| 43 JIDERR     | 111 EVENTERR     |
| 44 QIDERR     | 112 TOKENERR     |
| 45 NOJBUFSP   | 113 NOTFINISHED  |
| 46 DSSTAT     | 114 POOLERR      |
| 47 SELNERR    | 115 TIMERERR     |
| 48 FUNCERR    | 116 SYMBOLERR    |
| 49 UNEXPIN    | 117 TEMPLATERR   |
| 50 NOPASSBKRD | 118 NOTSUPERUSER |
| 51 NOPASSBKWR | 119 CSDERR       |
| 52 SEGIDERR   | 120 DUPRES       |
| 53 SYSIDERR   | 121 RESUNAVAIL   |
| 54 ISCINVREQ  | 122 CHANNELERR   |
| 55 ENQBUSY    | 123 CCSIDERR     |
| 56 ENVDEFERR  | 124 TIMEDOUT     |
| 57 IGRREQCD   | 125 CODEPAGEERR  |
| 58 SESSIONERR | 126 INCOMPLETE   |
| 59 SYSBUSY    | 127 APPNOTFOUND  |

### EIBRESP2

Contains more detailed information that can help explain why the RESP condition occurred. This field contains meaningful values, as documented with each command to which it applies. For requests to remote files, EIBRESP2 contains binary zeros. If a program uses DPL to link to a program in another CICS region, an EIBRESP2 from the remote region is not returned to the program doing the DPL.

For programs written in C or C++, any value passed via the *exit* or *return* function is saved in EIBRESP2. This means that when DPL is used to link to a C or C++ program in a remote region, this value is not returned to the linking program.

|            |                    |
|------------|--------------------|
| COBOL:     | PIC S9(8) COMP.    |
| C:         | long int eibresp2; |
| PL/I:      | FIXED BIN(31)      |
| Assembler: | F                  |

### EIBRLDBK

Indicates rollback.

```

COBOL: PIC X(1).
C: unsigned char eibrldbk;
PL/I: CHAR(1)
Assembler: CL1

```

### EIBSRCE

Contains the symbolic identifier of the resource being accessed by the latest executed command as shown in Table 19

*Table 19. Symbolic identifier of resource being accessed*

| Command type              | Resource                                             | Length  |
|---------------------------|------------------------------------------------------|---------|
| BMS                       | Map name                                             | 7       |
| File control              | File name                                            | 8       |
| Interval control          | Transaction name                                     | 4       |
| Journal control           | Journal number                                       | H       |
| Journal control           | Journal name                                         | 8       |
| Program control           | Program name                                         | 8       |
| Temporary storage control | TS queue name                                        | 8 or 16 |
| Terminal control          | Terminal name; LU name; LU6.1 session or APPC convid | 4       |
| Transient data control    | TD queue name                                        | 4       |

### Note:

1. H= halfword binary.
2. Identifiers less than eight characters in length are padded on the right with blanks.
3. Identifiers greater than eight characters in length are truncated.

```

COBOL: PIC X(8).
C: char eibsrce [8];
PL/I: CHAR(8)
Assembler: CL8

```

### EIBSIG

Indicates that SIGNAL has been received (X'FF').

```

COBOL: PIC X(1).
C: unsigned char eibsig;
PL/I: CHAR(1)
Assembler: CL1

```

### EIBSYNC

Indicates that the application program must take a sync point or terminate. Before either is done, the application program must ensure that any other facilities, owned by it, are put into the send state, or are freed (X'FF').

```
COBOL: PIC X(1).
C: unsigned char eibsync;
PL/I: CHAR(1)
Assembler: CL1
```

#### **EIBSYNRB**

Indicates that the application program should issue a SYNCPOINT ROLLBACK command (X'FF'). This field is only set in application programs holding a conversation on an APPC or MRO link.

```
COBOL: PIC X(1).
C: unsigned char eibsynrb;
PL/I: CHAR(1)
Assembler: CL1
```

#### **EIBTASKN**

Contains the task number assigned to the task by CICS. This number appears in trace table entries generated while the task is in control. The format of the field is packed decimal.

```
COBOL: PIC S9(7) COMP-3.
C: char eibtaskn [4];
PL/I: FIXED DEC(7,0)
Assembler: PL4
```

#### **EIBTIME**

Contains the time at which the task is started (this field is updated by the ASKTIME command). The time is in packed decimal form (0HHMMSS+), and can contain a value in the range 0000000+ to 0240000+. Both 0000000+ and 0240000+ are valid.

```
COBOL: PIC S9(7) COMP-3.
C: char eibtime [4];
PL/I: FIXED DEC(7,0)
Assembler: PL4
```

#### **EIBTRMID**

Contains the symbolic terminal identifier of the principal facility (terminal or logical unit) associated with the task.

```
COBOL: PIC X(4).
C: char eibtrmid [4];
PL/I: CHAR(4)
Assembler: CL4
```

The following prefixes are used to identify intercommunication sessions, terminals, and devices:

Table 20. Standard prefixes for sessions, terminals, and devices

| Prefix                                           | Session, terminal, or device |
|--------------------------------------------------|------------------------------|
| -                                                | APPC session                 |
| }                                                | Bridge facility              |
| ⌘                                                | Console                      |
| /                                                | IPIC session                 |
| < or >                                           | MRO session                  |
| {                                                | Remote terminal              |
| \ (default system initialization VTPREFIX value) | Virtual terminal             |

### EIBTRNID

Contains the symbolic transaction identifier of the task.

```

COBOL: PIC X(4).
C: char eibtrnid [4];
PL/I: CHAR(4)
Assembler: CL4

```



---

## Appendix B. Codes returned by ASSIGN

The **ASSIGN** command can return codes in the **TERMCODE** and **FCI** options. The format and meaning of the codes are described.

---

### ASSIGN TERMCODE

The following list shows you the meanings of the terminal type codes in the first byte of the data area returned by the **TERMCODE** option of the **ASSIGN** command.

The codes are derived from the **DEVICE** attribute of the **TYPETERM** resource. The second byte of the data area contains a model number in character form, as set by the **TERMMODEL** attribute of the **TYPETERM** resource definition. **TYPETERM** is described in the *CICS Resource Definition Guide*.

The codes are listed here as both bit patterns and hexadecimal values.

| Code      |       | Meaning                      |
|-----------|-------|------------------------------|
| .... ...1 | X'01' | 7770                         |
| .... ..1. | X'02' | System 7                     |
| .... 1... | X'08' | Console                      |
| ...1 ..1. | X'12' | Sequential disk              |
| ...1 .1.. | X'14' | Magnetic tape                |
| ...1 1... | X'18' | Card reader or line printer  |
| ...1 1..1 | X'19' | Spooling system printer      |
| ...1 1.1. | X'1A' | Spooling internal reader     |
| ..1. .... | X'20' | Hard-copy terminals          |
| ..1. ...1 | X'21' | Model 33/35 TWX              |
| ..1. ..1. | X'22' | Teletypewriter               |
| ..1. .1.. | X'24' | 1050                         |
| ..1. 1... | X'28' | 2740                         |
| ..1. 1.1. | X'2A' | 2741 Correspondence          |
| ..1. 1.11 | X'2B' | 2741 EBCDIC                  |
| .1.. .... | X'40' | Video terminals              |
| .1.. ...1 | X'41' | 2260 local                   |
| .1.. 1... | X'48' | 2260 remote                  |
| .1.. 1.1. | X'4A' | 1053                         |
| .1.. 11.. | X'4C' | 2265                         |
| 1... .... | X'80' | Bisynchronous                |
| 1... ..1. | X'82' | 2770                         |
| 1... .1.. | X'84' | 2780                         |
| 1... .1.1 | X'85' | 3780                         |
| 1... .11. | X'86' | 2980                         |
| 1... 1... | X'88' | 3735                         |
| 1... 1..1 | X'89' | 3740                         |
| 1... 1.1. | X'8A' | 3600 bisynchronous           |
| 1..1 ...1 | X'91' | 3277 remote                  |
| 1..1 ..1. | X'92' | 3275 remote                  |
| 1..1 1..1 | X'99' | 3277 local                   |
| 1.1. .... | X'A0' | Bisynchronous - programmable |
| 1.1. ...1 | X'A1' | System/3                     |

| Code      |       | Meaning                                                                                                                                                                                            |
|-----------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.1. .1.. | X'A4' | z Systems                                                                                                                                                                                          |
| 1.1. .11. | X'A6' | System/7 with BSCA                                                                                                                                                                                 |
| 1.11 .... | X'B0' | SDLC device class                                                                                                                                                                                  |
| 1.11 ...1 | X'B1' | 3601                                                                                                                                                                                               |
| 1.11 ..1. | X'B2' | 3614                                                                                                                                                                                               |
| 1.11 .1.. | X'B4' | 3790                                                                                                                                                                                               |
| 1.11 .1.1 | X'B5' | 3790 User program                                                                                                                                                                                  |
| 1.11 .11. | X'B6' | 3790 SCS printer                                                                                                                                                                                   |
| 1.11 1... | X'B8' | 3650 Pipeline                                                                                                                                                                                      |
| 1.11 1.1  | X'B9' | 3653 Host conversational                                                                                                                                                                           |
| 1.11 1.1. | X'BA' | 3650 Attached 3270 HC                                                                                                                                                                              |
| 1.11 1.11 | X'BB' | 3650 User program                                                                                                                                                                                  |
| 1.11 11.1 | X'BD' | Contention logical unit                                                                                                                                                                            |
| 1.11 111. | X'BE' | Interactive logical unit                                                                                                                                                                           |
| 1.11 1111 | X'BF' | Batch logical unit                                                                                                                                                                                 |
| 11.. .... | X'C0' | LUTYPE 6<br><b>Note:</b> An ASSIGN TERMCODE for an ISC session returns X'C0' for LUTYPE 6. An INQUIRE CONNECTION then determines whether this ISC connection is using LUTYPE6.1 or APPC protocols. |
| 11.. ...1 | X'C1' | LUTYPE 4                                                                                                                                                                                           |
| 11.1 ...1 | X'D1' | ISC MM conversation                                                                                                                                                                                |
| 11.1 ..1. | X'D2' | LUC mode group entry                                                                                                                                                                               |
| 11.1 ..11 | X'D3' | LUC session                                                                                                                                                                                        |

## ASSIGN FCI

The following list shows you the meanings of the facility control indicator codes in the data area returned by the FCI option of the ASSIGN command.

| Code      |       | Meaning                       |
|-----------|-------|-------------------------------|
| .... .... | X'00' | None                          |
| .... ...1 | X'01' | Terminal facility indicator   |
| .... ..1. | X'02' | KCP macro file mask           |
| .... .1.. | X'04' | Interval control indicator    |
| .... 1... | X'08' | Destination control indicator |
| ...1 .... | X'10' | AID facility mask             |
| 111. .... | X'E0' | reserved                      |

---

## Appendix C. National language codes

Language codes are held as one character for NATLANG and NATLANGINUSE, and three characters for LANGUAGECODE and LANGINUSE.

Table 21. CICS language suffixes

| Suffix | IBM Code | Language name             |
|--------|----------|---------------------------|
| A      | ENG      | UK English                |
| B      | PTB      | Brazilian Portuguese      |
| C      | CHS      | Simplified Chinese        |
| D      | DAN      | Danish                    |
| E      | ENU      | US English                |
| F      | FRA      | French                    |
| G      | DEU      | German                    |
| H      | KOR      | Korean                    |
| I      | ITA      | Italian                   |
| J      | ISL      | Icelandic                 |
| K      | JPN      | Japanese                  |
| L      | BGR      | Bulgarian                 |
| M      | MKD      | Macedonian                |
| N      | NOR      | Norwegian                 |
| O      | ELL      | Greek                     |
| P      | PTG      | Portuguese                |
| Q      | ARA      | Arabic                    |
| R      | RUS      | Russian                   |
| S      | ESP      | Spanish                   |
| T      | CHT      | Traditional Chinese       |
| U      | UKR      | Ukrainian                 |
| V      | SVE      | Swedish                   |
| W      | FIN      | Finnish                   |
| X      | HEB      | Hebrew                    |
| Y      | SHC      | Serbo-Croatian (Cyrillic) |
| Z      | THA      | Thai                      |
| 1      | BEL      | Byelorussian              |
| 2      | CSY      | Czech                     |
| 3      | HRV      | Croatian                  |
| 4      | HUN      | Hungarian                 |
| 5      | PLK      | Polish                    |
| 6      | ROM      | Romanian                  |
| 7      | SHL      | Serbo-Croatian (Latin)    |
| 8      | TRK      | Turkish                   |

Table 21. CICS language suffixes (continued)

| Suffix | IBM Code | Language name |
|--------|----------|---------------|
| 9      | NLD      | Dutch         |

There are other IBM codes not supported by CICS.

Table 22. Other IBM language codes

| IBM Code | Language name           |
|----------|-------------------------|
| AFR      | Afrikaans               |
| CAT      | Catalan                 |
| DES      | Swiss German            |
| ENA      | Australian English      |
| ENP      | English Upper Case      |
| FRB      | Belgian French          |
| FRC      | Canadian French         |
| FRS      | Swiss French            |
| GAE      | Irish Gaelic            |
| ITS      | Swiss Italian           |
| NLB      | Belgian Dutch - Flemish |
| NON      | Norwegian - Nynorsk     |
| RMS      | Rhaeto-Romanic          |
| SKY      | Slovakian               |
| SLO      | Slovenian               |
| SRL      | Serbian (Latin)         |
| SRB      | Serbian (Cyrillic)      |
| SQI      | Albanian                |
| URD      | Urdu                    |

---

## Appendix D. Terminal control

This reference information applies to all terminals and logical units. For more detail, see the command descriptions.

---

### Commands and options for terminals and logical units

This section describes the commands and options that apply to terminals and logical units.

#### Fullword lengths

For all terminal control commands, fullword length options can be used instead of halfword length options. In particular, where the following options are used in CONVERSE, RECEIVE, or SEND, the corresponding alternative can be specified instead (except for those noted):

| Option     | Alternative |
|------------|-------------|
| LENGTH     | FLENGTH     |
| TOLENGTH   | TOFLENGTH   |
| FROMLENGTH | FROMFLENGTH |
| MAXLENGTH  | MAXFLENGTH  |

Application programs must be consistent in their use of fullword and halfword options on terminal control commands. The maximum value that can be specified as a parameter on any length keyword is 32 767. See the *CICS Application Programming Guide* for more information.

#### Read from terminal or logical unit (RECEIVE)

The RECEIVE command is used to read data from a terminal or logical unit. The INTO option is used to specify the area into which the data is to be placed. Alternatively, a pointer reference can be specified in the SET option. CICS acquires an area large enough to hold the data and sets the pointer reference to the address of that data.

The contents of this area are available to the task until the next terminal I/O command. However, the area does not belong to the task and is released by CICS while processing the next request. Therefore, this area cannot be passed back to CICS for further processing.

The application can use MAXLENGTH to specify the maximum length of data that the program accepts. If the MAXLENGTH option is omitted on a RECEIVE command for which the INTO option is specified, the maximum length of data the program accepts can be specified in the LENGTH option. If the MAXLENGTH option is omitted on a RECEIVE command for which the SET option is specified, CICS acquires enough storage to hold all the available data.

If the data exceeds the specified maximum length and the NOTRUNCATE option is specified, the remaining data is made available to satisfy subsequent RECEIVE commands. If NOTRUNCATE is not specified, the data is truncated and the

LENGERR condition occurs. In this event, if the LENGTH option is specified, the named data area is set to the actual data length (before truncation occurs) when data has been received. The first RECEIVE command in a task started by a terminal does not issue a terminal control read but copies the input buffer, even if the data length is zero. A second RECEIVE command must be issued to cause a terminal control read.

When a PA key is defined as a print key by the system initialization parameter PRINT, and that key is pressed in response to a RECEIVE command, it has no effect on the application program. The RECEIVE command is satisfied, and the application allowed to continue, when another attention (that is, one of the other PA keys, any of the PF keys, the ENTER key, or the light pen) is made at the keyboard.

### **Write to terminal or logical unit (SEND)**

The SEND command is used to write data to a terminal or logical unit. The options FROM and LENGTH specify the data area from which the data is to be taken and the length (in bytes) of the data. For a transaction started by automatic transaction initiation (ATI), a SEND command should always precede the first RECEIVE in a transaction.

Unless the WAIT option of the SEND command is specified also, the transmission of the data associated with the SEND command is deferred until a later event, such as a sync point, occurs. This deferred transmission reduces the flows of data by allowing data flow controls to be transmitted with the data.

Transmission is not deferred for distributed transaction processing when interregion communication (IRC) is in use.

### **Synchronize terminal I/O for a transaction (WAIT TERMINAL)**

This command is used to ensure that a terminal operation has completed before further processing occurs in a task under which more than one terminal or logical unit operation is performed. Alternatively, the WAIT option can be specified in a SEND command. (A wait is always carried out for a RECEIVE command.) Either method may cause execution of a task to be suspended. If suspension is necessary, control is returned to CICS. Execution of the task is resumed when the operation is completed.

Even if the WAIT option is not specified in a SEND command, the EXEC interface program ensures that the operation is completed before issuing a subsequent RECEIVE or SEND command.

### **Converse with terminal or logical unit (CONVERSE)**

For most terminals or logical unit types, a conversational mode of communication can be used. The CONVERSE command is used for this purpose and means that the 3650 application program communicates with the host processor. If this option is not specified, the 3650 application program cannot communicate with the host processor. In general, the CONVERSE command can be considered as a combination of a SEND command followed immediately by a WAIT TERMINAL command and then by a RECEIVE command. However, not all options of the SEND and RECEIVE commands are valid for the CONVERSE command; specific rules are given in the syntax descriptions for different devices. The TOLength option is equivalent to the LENGTH option of the RECEIVE command, and the

FROMLENGTH option is equivalent to the LENGTH option of the SEND command.

### **Send an asynchronous interrupt (ISSUE SIGNAL)**

This command is used, in a transaction in receive mode, to signal to the sending transaction that a mode change is needed. The execution of the command raises the SIGNAL condition on the next SEND or RECEIVE command executed in the sending transaction, and a previously executed HANDLE CONDITION command for this condition can be used either to action the request or to ignore it.

### **Disconnect a switched line (ISSUE DISCONNECT)**

This command is used to break a line connection between a terminal and the processor, or to break a session between SNA logical units (LUs), when the transaction is completed. If the terminal is a buffered device, the data in the buffers is lost.

When used with an SNA LU, ISSUE DISCONNECT, which does not become effective until the task completes, signs off the terminal, frees the COMMAREA, clears the next TRANID, stops any BMS paging, and, if autoinstall is in effect, deletes the terminal definition.

---

## **Teletypewriter programming**

The Teletypewriter (World Trade only) uses two different control characters for print formatting.

These control characters are as follows:

|   |                                                         |
|---|---------------------------------------------------------|
| < | carriage return (X'22' in ITA2 code or X'15' in EBCDIC) |
| = | line feed (X'28' in ITA2 code or X'25' in EBCDIC)       |

Use the character < first; otherwise following characters (data) can be printed while the type bar is moving to the left.

### **Message format**

To begin a new message on a new line at the left margin, start the message text with X'1517' (EBCDIC). CICS recognizes the X'17' and changes it to X'25' (X'17' is an IDLE character).

In the message body, to write several lines with a single transmission, the lines must be separated by X'1525', or if multiple blank lines are required, by X'152525...25'.

To allow input of the next message on a new line at the left margin, the preceding message must end with X'1517'. CICS recognizes X'15' and changes the character following it to X'25'.

If two or more successive output messages have "message begin" and "message end" which look the same, to make the "message end" of the preceding message

distinguishable from the “message begin” of the next message, the next to last character of the “message end” must not be X'15'.

## **Message length**

For messages for teletypewriter terminals do not exceed a length of about 3000 bytes or approximately 300 words.

## **Connection through z/OS Communications Server**

Both the TWX Model 33/35 Common Carrier Teletypewriter Exchange and the WTTY Teletypewriter (World Trade only) can be connected to CICS through z/OS Communications Server using NTO.

If a device is connected through z/OS Communications Server using NTO, the protocols used are the same as for the 3767 logical unit, and the application program can use these protocols (for example, HANDLE CONDITION SIGNAL). However, the data stream is not translated to a 3767 data stream but remains as that for a TWX/WTYY.

---

## **Display device operations**

In addition to the standard terminal control commands for sending and receiving data, several commands and lists are provided for use with display devices such as the 3270.

The commands are:

- Print displayed information (ISSUE PRINT)
- Copy displayed information (ISSUE COPY)
- Erase all unprotected fields (ISSUE ERASEAUP)
- Handle input without data (RECEIVE)
- Handle attention identifiers (HANDLE AID)

The lists are:

- Standard attention identifier list (DFHAID)
- Standard attribute and printer control character list (DFHBMSCA)

For devices with switchable screen sizes, the size of the screen that can be used, and the size to be used for a given transaction, are defined by CICS table generation. These values can be obtained with the ASSIGN command, described in “ASSIGN” on page 51.

Always include the ERASE option in the first SEND command, to clear the screen and format it according to the transmitted data. This first SEND with ERASE also selects the screen size to be used, as specified using the RDO option SCRNSIZE, or in the TCT. If ERASE is omitted, the screen size is the same as its previous setting, which can be incorrect.

Use the CLEAR key outside of a transaction to set the screen to its default size.

### **Print displayed information (ISSUE PRINT)**

ISSUE PRINT prints displayed data on the first available printer that is eligible to respond to a print request.



For a 3270 logical unit or a 3650 host-conversational (3270) logical unit, it is a printer defined by the RDO TERMINAL options PRINTER and ALTPRINTER, or by a printer supplied by the autoinstall user program.

For a 3270-display logical unit with the printer adapter feature (PRINTADAPTER(YES) option on RDO TYPETERM), used with a 3274 or 3276, it is a printer allocated by the printer authorization matrix. See *An Introduction to the IBM 3270 Information Display System*.

For a 3790 (3270-display) logical unit, it is a printer allocated by the 3790.

For a printer to be available, it must be in service and not currently attached to a task.

For a 3270 logical unit to be eligible, it must have been specified by RDO TERMINAL options PRINTER and ALTPRINTER or by a printer supplied by the autoinstall user program, and it must have the correct buffer capacity. If the copy feature is also specified (COPY(YES) on RDO TYPETERM definition the printer must be on the same control unit.

If an ISSUE PRINT command is executed, the printer involved must be owned by the same CICS system that owns the terminal that is running the transaction.

For some 3270 displays, it is possible also to print the displayed information without using CICS. See *An Introduction to the IBM 3270 Information Display System* manual.

## **Copy displayed information (ISSUE COPY)**

The ISSUE COPY command is used to copy the format and data contained in the buffer of a specified terminal into the buffer of the terminal that started the transaction.

This command cannot be used for an LUTYPE2 connection. Both terminals must be attached to the same remote control unit. The terminal whose buffer is to be copied is identified in the TERMID option. If the terminal identifier is not valid, that is, it does not exist in the TCT, then the TERMIDERR condition occurs. The copy function to be performed is defined by the copy control character (CCC) specified in the CTLCHAR option of the ISSUE COPY command.

The WAIT option of the ISSUE COPY command ensures that the operation has been completed before control is returned to the application program.

## **Erase all unprotected fields (ISSUE ERASEAUP)**

The ISSUE ERASEAUP command is used to erase all unprotected fields of a 3270 buffer.

It achieves this using the following actions:

1. All unprotected fields are cleared to nulls (X'00').
2. The modified data tags (MDTs) in each unprotected field are reset to zero.
3. The cursor is positioned to the first unprotected field.
4. The keyboard is restored.

The WAIT option of the ISSUE ERASEAUP command ensures that the operation has been completed before control is returned to the application program.

## Handle input without data (RECEIVE)

The RECEIVE command with no options causes input to take place and the EIB to be updated.

Data received by CICS is not passed on to the application program and is lost. A wait is implied. Two of the fields in the EIB that are updated are EIBCPOSN and EIBAID.

### Cursor position (EIBCPOSN)

For every terminal control (or BMS) input operation associated with a display device, the screen cursor address (position) is placed in the EIBCPOSN field in the EIB. The cursor address is in the form of a halfword binary value and remains until updated by a new input operation.

### Attention identifier (EIBAID)

For every terminal control (or BMS) input operation associated with a display device, an attention identifier (AID) is placed in field EIBAID in the EIB.

The AID indicates which method the terminal operator has used to initiate the transfer of information from the device to CICS; for example, the ENTER key, a program function key, the light pen, and so on. The field contents remain unaltered until updated by a new input operation.

Field EIBAID can be tested after each terminal control (or BMS) input operation to determine further processing, and a standard attention identifier list (DFHAID) is provided for this purpose. Alternatively, the HANDLE AID command can be used to pass control to specified labels when the AIDs are received.

EIBAID and EIBCPOSN are also updated at task initiation for non-ATI tasks and after each terminal control and BMS input.

---

## Appendix E. SAA Resource Recovery

SAA Resource Recovery is the recovery element of the Systems Application Architecture® (SAA) Common Programming Interface (CPI).

SAA Resource Recovery provides that architecture's alternative application programming interface (API) to EXEC CICS SYNCPOINT and EXEC CICS SYNCPOINT ROLLBACK functions in CICS. (See the *SAA Common Programming Interface-Resource Recovery Reference*, SC31-6821, for more details.)

CICS supports only those SAA Resource Recovery return codes that match existing EXEC CICS commands. This leaves only two return codes: RR\_OK and RR\_BACKED\_OUT.

### **SRRCMT**

The SAA Resource Recovery commit call SRRCMT (equivalent to EXEC CICS SYNCPOINT) has the following return codes:

- RR\_OK
- RR\_COMMITTED\_OUTCOME\_PENDING
- RR\_COMMITTED\_OUTCOME\_MIXED
- RR\_PROGRAM\_STATE\_CHECK
- RR\_BACKED\_OUT
- RR\_BACKED\_OUT\_OUTCOME\_PENDING
- RR\_BACKED\_OUT\_OUTCOME MIXED

Because of the restriction, these are replaced by:

- RR\_COMMITTED\_OUTCOME\_PENDING, RR\_OK
- RR\_COMMITTED\_OUTCOME\_MIXED, RR\_OK
- RR\_PROGRAM\_STATE\_CHECK, shown as abend code ASP2
- RR\_BACKED\_OUT\_OUTCOME\_PENDING, RR\_BACKED\_OUT
- RR\_BACKED\_OUT\_OUTCOME MIXED, RR\_BACKED\_OUT

### **SRRBACK**

The SAA Resource Recovery backout call SRRBACK (equivalent to EXEC CICS SYNCPOINT ROLLBACK) has the following return codes:

- RR\_OK
- RR\_COMMITTED\_OUTCOME\_PENDING
- RR\_COMMITTED\_OUTCOME\_MIXED

Because of the restriction, all these are replaced by RR\_OK.



---

## Appendix F. Common Programming Interface Communications (CPI Communications)

Common Programming Interface Communications (CPI Communications) is the communication element of the Systems Applications Architecture (SAA) Common Programming Interface (CPI).

CPI Communications in CICS provides an alternative application programming interface (API) to existing CICS Advanced Program-to-Program Communications (APPC) support. CPI Communications provides distributed transaction processing (DTP) on APPC sessions and can be used in assembler language, COBOL, PL/I, or C.

CPI Communications defines an API that can be used in APPC networks that include multiple system platforms, where the consistency of a common API is of benefit.

The CPI Communications interface can converse with applications on any system that provides an APPC API. This includes applications on CICS platforms. You can use APPC API commands on one end of a conversation and CPI Communications commands on the other. CPI Communications requires specific information (side information) to begin a conversation with a partner program. CICS implementation of side information is achieved using the partner resource, which your system programmer is responsible for maintaining.

Calls from the application to the CPI Communications interface are resolved by link-editing it with the CICS CPI Communications stub (DFHCPLC). For information about how to do this, see Including the CICS-supplied interface modules in Deploying.

The CPI Communications API is defined as a general call interface. The interface is described in the *Common Programming Interface Communications Reference*.



---

## Appendix G. Exception conditions for LINK command

There are error conditions introduced in support of DPL which are returned to the client and server programs.

### Exception conditions returned to the client program

Condition codes returned to a client program describe such events as “remote system not known” or “failure to commit” in the server program. There are different reasons, identified by EIBRESP2 values, for raising the INVREQ and LENGERR conditions on a LINK command. The ROLLEDBACK, SYSIDERR, and TERMERR conditions can also be raised. See CICS API commands in Reference -> Application development for programming information about these commands.

If the mirror transaction in the remote region fails, the application program that issued the DPL request can handle the abend of the mirror, and commit its own local resources, *only if both the following are true*:

1. The application program explicitly handles the abend caused by the failure of the mirror, and either:
  - Takes an implicit sync point by normal transaction termination
  - *or* Issues an explicit sync point request.
2. The remote mirror transaction performed no recoverable work within the scope of the unit of work of the application program. That is, the mirror was invoked only for a distributed program link (DPL) request with SYNCONRETURN.

In all other cases—that is, if the application program does not handle the abend, or the mirror does any recoverable work (for example, a file update, even to an unrecoverable file) CICS forces the transaction to be backed out.

The PGMIDERR condition is raised on the HANDLE ABEND PROGRAM, LOAD, RELEASE, and XCTL commands if the local program definition specifies that the program is remote. This exception is qualified by an EIBRESP2 value of 9.

### Exception conditions returned to the server program

The INVREQ condition covers the use of prohibited API commands. INVREQ is returned, qualified by an EIBRESP2 value of 200, to a server program if it issues one of the prohibited commands summarized in Table 23 on page 922. If the server program does not handle the INVREQ condition, the default action is to abend the mirror transaction under which the server program is running with abend code ADPL.

For programming information about the DPL-related exception conditions, see LINK in Reference -> Application development .

Table 23. API commands prohibited in programs invoked by DPL

| Command            | Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ASSIGN             | ALTSCRNHT ALTSCRNWD APLKYBD APLTEXT BTRANS<br>COLOR DEFSCRNHT DEFSCRNWD DELIMITER<br>DESTCOUNT DESTID DESTIDLENG DS3270 DSSCS<br>EWASUPP EXTDS FACILITY FCI GCHARS GCODES GMMI<br>HILIGHT INPARTN KATAKANA LDCMNEM LDCNUM<br>MAPCOLUMN MAPHEIGHT MAPLINE MAPWIDTH<br>MSRCONTROL NATLANGINUSE NEXTTRANSID<br>NUMTAB OPCLASS OPSECURITY OUTLINE PAGENUM<br>PARTNPAGE PARTNS PARTNSET PS QNAME SCRNHT<br>SCRNWD SIGDATA SOSI STATIONID TCTUALENG<br>TELLERID TERMCODE TERMPRIORITY TEXTKYBD<br>TEXTPRINT UNATTEND USERNAME USERPRIORITY<br>VALIDATION |
| CONNECT PROCESS    | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| CONVERSE           | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| EXTRACT ATTRIBUTES | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| EXTRACT PROCESS    | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| FREE               | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| HANDLE AID         | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ISSUE              | ABEND CONFIRMATION ERROR PREPARE SIGNAL<br>PRINT ABORT ADD END ERASE NOTE QUERY RECEIVE<br>REPLACE SEND WAIT                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| LINK               | INPUTMSG INPUTMSGLEN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| PURGE MESSAGE      | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| RECEIVE            | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| RETURN             | INPUTMSG INPUTMSGLEN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ROUTE              | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| SEND               | CONTROL MAP PARTNSET TEXT TEXT(MAPPED)<br>TEXT(NOEDIT) PAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| SIGNOFF            | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| SIGNON             | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| START              | TERMINID, where its value is the ID of the intersystem session.<br>(That is, where the issuing task's principal facility is a session<br>rather than a terminal.)                                                                                                                                                                                                                                                                                                                                                                                  |
| START CHANNEL      | TERMINID, where its value is the ID of the intersystem session.<br>(That is, where the issuing task's principal facility is a session<br>rather than a terminal.)                                                                                                                                                                                                                                                                                                                                                                                  |
| SYNCPOINT          | Can be issued in server region if SYNCONRETURN specified<br>on LINK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| SYNCPOINT ROLLBACK | Can be issued in server region if SYNCONRETURN specified<br>on LINK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| WAIT TERMINAL      | all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| XCTL               | INPUTMSG INPUTMSGLEN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

The following commands are also restricted but can be used in the server region if SYNCONRETURN is specified on the LINK:

- CPIRR COMMIT



- CPIRR BACK
- EXEC DLI TERM
- CALL DLI TERM

Where only certain options are prohibited on the command, they are shown. All the APPC commands listed are prohibited only when they refer to the principal facility. One of these, the CONNECT PROCESS command, causes an error even if it refers to the principal facility in a non-DPL environment. It is included here because, if a CONNECT PROCESS command refers to its principal facility in a server program, the exception condition raised indicates a DPL error.



---

## Appendix H. BMS-related constants

This information describes the BMS-related standard attribute and printer control characters, a bitmap for attributes, MSR control value constants, and attention identifier constants.

The standard list DFHBMSCA makes it simpler to provide field attributes and printer control characters. Table 24 lists the symbolic names for the various combinations of attributes and control characters. If you need combinations other than the ones shown, you must generate them separately. To help you do this, see Table 25 on page 927 for a bitmap of attributes. To find the value of an attribute constant, see the *3274 Control Unit Reference Summary*.

You can get the standard attribute and printer character control list by copying copybook DFHBMSCA into your application.

- For COBOL users, it consists of a set of 01 statements that can be copied into the working storage section.
- For C users, it is included in applications as follows:

```
#include "dfhbmsca.h"
```

- For PL/I users, it consists of DECLARE statements defining elementary character variables.
- For Assembler language users, the list consists of a set of EQU statements.

You must use the symbolic name DFHDFT in the application structure to override a map attribute with the default. You can use a high value, such as X'FF', to reset the COLOR, HILIGHT, OUTLINE, PS, SOSI, or VALIDN attributes to their default values. To specify default values in a set attribute (SA) sequence in text build, use the symbolic names DFHDFCOL, DFHBASE, or DFHDFHI.

Table 24. Standard attribute and printer control character list, DFHBMSCA

| Constant  | Meaning                 |
|-----------|-------------------------|
| DFHBMPPEM | Printer end-of-message  |
| DFHBMPNL  | Printer new-line        |
| DFHBMPFF  | Printer form feed       |
| DFHBMPCR  | Printer carriage return |
| DFHBMASK  | Autoskip                |
| DFHBMUNP  | Unprotected             |
| DFHBMUNN  | Unprotected and numeric |
| DFHBMPRO  | Protected               |
| DFHBMBRY  | Bright                  |
| DFHBMDAR  | Dark                    |
| DFHBMFSE  | MDT set                 |
| DFHBMPRF  | Protected and MDT set   |
| DFHBMAFSE | Autoskip and MDT set    |
| DFHBMAFSE | Autoskip and bright     |
| DFHBMPSE  | shift-out value X'0E'.  |
| DFHBMPSE  | shift-in value X'0F'.   |

Table 24. Standard attribute and printer control character list, DFHBMSCA (continued)

| Constant              | Meaning                                                          |
|-----------------------|------------------------------------------------------------------|
| DFHBMEOF              | Field erased                                                     |
| DFHBMCUR              | Field containing cursor flagged                                  |
| DFHBMEC               | Erased field containing cursor (COBOL only)                      |
| DFHBMFLG              | Flags (COBOL only)                                               |
| DFHBMDET              | Field detected                                                   |
| DFHSA <sup>1</sup>    | Set attribute (SA) order                                         |
| DFHERROR              | Error code                                                       |
| DFHCOLOR <sup>1</sup> | Color                                                            |
| DFHPS <sup>1</sup>    | Programmed symbols                                               |
| DFHHLT <sup>1</sup>   | Highlight                                                        |
| DFH3270 <sup>1</sup>  | Base 3270 field attribute                                        |
| DFHVAL                | Validation                                                       |
| DFHOUTLN              | Field outlining attribute code                                   |
| DFHBKTRN              | Background transparency attribute code                           |
| DFHALL <sup>1</sup>   | Reset all to defaults                                            |
| DFHDFT                | Default                                                          |
| DFHDFCOL <sup>1</sup> | Default color                                                    |
| DFHBLUE               | Blue                                                             |
| DFHRED                | Red                                                              |
| DFHPINK               | Pink                                                             |
| DFHGREEN              | Green                                                            |
| DFHTURQ               | Turquoise                                                        |
| DFHYELLO              | Yellow                                                           |
| DFHNEUTR              | Neutral                                                          |
| DFHBASE <sup>1</sup>  | Base programmed symbols                                          |
| DFHDFHI <sup>1</sup>  | Normal                                                           |
| DFHBLINK              | Blink                                                            |
| DFHREVRS              | Reverse video                                                    |
| DFHUNDLN              | Underscore                                                       |
| DFHMFIL <sup>2</sup>  | Mandatory fill                                                   |
| DFHMENT <sup>2</sup>  | Mandatory enter                                                  |
| DFHMFEE               | Mandatory fill and mandatory enter                               |
| DFHMT                 | Trigger                                                          |
| DFHMFT                | Mandatory fill and trigger                                       |
| DFHMET                | Mandatory enter and trigger                                      |
| DFHMFET               | Mandatory fill and mandatory enter and trigger                   |
| DFHUNNOD              | Unprotected, nondisplay, nonprint, nondetectable, MDT            |
| DFHUNIMD              | Unprotected, intensify, light-pen detectable, MDT                |
| DFHUNNUM              | Unprotected, numeric, MDT                                        |
| DFHUNNUB              | Unprotected, numeric, intensify, intensify, light-pen detectable |
| DFHUNINT              | Unprotected, numeric, intensify, light-pen detectable, MDT       |
| DFHUNNON              | Unprotected, numeric, nondisplay, nonprint, nondetectable, MDT   |
| DFHPROTI              | Protected, intensify, light-pen detectable                       |
| DFHPROTN              | Protected, nondisplay, nonprint, nondetectable                   |
| DFHDFFR               | Default outline                                                  |
| DFHUNDER              | Underline                                                        |
| DFHRIGHT              | Right vertical line                                              |
| DFHOVER               | Overline                                                         |
| DFHLEFT               | Left vertical line                                               |
| DFHBOX                | Underline and right vertical and overline and left vertical      |
| DFHSOSI               | SOSI=yes                                                         |
| DFHTRANS              | Background transparency                                          |

Table 24. Standard attribute and printer control character list, DFHBMSCA (continued)

| Constant | Meaning                    |
|----------|----------------------------|
| DFHOPAQ  | No background transparency |

**Notes:**

<sup>1</sup> For text processing only. Use for constructing embedded set attribute orders in user text.

<sup>2</sup> Cannot be used in set attribute orders.

Table 25. Bitmap for attributes

| prot | a/n | hi | spd | ndp | mdt | ebcd | ascii | char           |
|------|-----|----|-----|-----|-----|------|-------|----------------|
| U    |     |    |     |     |     | 40   | 20    | b (blank)      |
| U    |     |    |     |     | Y   | C1   | 41    | A              |
| U    |     |    | Y   |     |     | C4   | 44    | D              |
| U    |     |    | Y   |     | Y   | C5   | 45    | E              |
| U    |     | H  | Y   |     |     | C8   | 48    | H              |
| U    |     | H  | Y   |     | Y   | C9   | 49    | I              |
| U    |     |    |     | Y   |     | 4C   | 3C    | <              |
| U    |     |    |     | Y   | Y   | 4D   | 28    | (              |
| U    | N   |    |     |     |     | 50   | 26    |                |
| U    | N   |    |     |     | Y   | D1   | 4A    | J              |
| U    | N   |    | Y   |     |     | D4   | 4D    | M              |
| U    | N   |    | Y   |     | Y   | D5   | 4E    | N              |
| U    | N   | H  | Y   |     |     | D8   | 51    | Q              |
| U    | N   | H  | Y   |     | Y   | D9   | 52    | R              |
| U    | N   |    |     | Y   |     | 5C   | 2A    | *              |
| U    | N   |    |     | Y   | Y   | 5D   | 29    | )              |
| P    |     |    |     |     |     | 60   | 2D    | - (hyphen)     |
| P    |     |    |     |     | Y   | 61   | 2F    | /              |
| P    |     |    | Y   |     |     | E4   | 55    | U              |
| P    |     |    | Y   |     | Y   | E5   | 56    | V              |
| P    |     | H  | Y   |     |     | E8   | 59    | Y              |
| P    |     | H  | Y   |     | Y   | E9   | 5A    | Z              |
| P    |     |    |     | Y   |     | 6C   | 25    | %              |
| P    |     |    |     | Y   | Y   | 6D   | 5F    | _ (underscore) |
| P    | S   |    |     |     |     | F0   | 30    | 0              |
| P    | S   |    |     |     | Y   | F1   | 31    | 1              |
| P    | S   |    | Y   |     |     | F4   | 34    | 4              |
| P    | S   |    | Y   |     | Y   | F5   | 35    | 5              |
| P    | S   | H  | Y   |     |     | F8   | 38    | 8              |
| P    | S   | H  | Y   |     | Y   | F9   | 39    | 9              |
| P    | S   |    |     | Y   |     | 7C   | 40    | @              |
| P    | S   |    |     | Y   | Y   | 7D   | 27    | '              |

Table 26. Key to attributes and settings in bitmap

| Code | Meaning                   |
|------|---------------------------|
| a/n  | Automatic skip or numeric |

Table 26. Key to attributes and settings in bitmap (continued)

| Code  | Meaning                                                     |
|-------|-------------------------------------------------------------|
| ascii | American National Standard Code for Information Interchange |
| char  | Graphic character equivalent to hex code                    |
| ebcd  | Extended binary coded decimal interchange code              |
| hi    | High intensity                                              |
| H     | High                                                        |
| mdt   | modified data tag                                           |
| ndp   | nondisplay print                                            |
| N     | Numeric                                                     |
| prot  | Protected                                                   |
| P     | Protected                                                   |
| spd   | Selector pen detectable                                     |
| S     | Automatic skip                                              |
| U     | Unprotected                                                 |
| Y     | Yes                                                         |

## Magnetic slot reader (MSR) control value constants, DFHMSRCA

A selection of MSR control value constants has been created for CICS and stored in copybook DFHMSRCA. The patterns are stored as named constants that can be loaded by simple application program commands. Provision of such constants saves the programmer from having to build a commonly used bit pattern whenever it is required.

## MSR control byte values

A selection of MSR control byte values has been created for CICS and stored in the copybook DFHMSRCA. The following table shows you the meaning of each bit.

The constants supplied in DFHMSRCA are listed in Table 27.

Table 27. Standard list DFHMSRCA

| Constant | Meaning                                                                                             |
|----------|-----------------------------------------------------------------------------------------------------|
| DFHMSRST | MSR reset. All lights and buzzers off. MSR available for input.                                     |
| DFHMSCON | Transaction ready for more input. Green and yellow on; emit short buzz; IN PROCESS (user) mode set. |
| DFHMSFIN | Input complete. Green on; emit short buzz; IN PROCESS mode reset.                                   |
| DFHMSALR | Operator alert. Green, yellow, and red on; emit long buzz; IN PROCESS mode reset.                   |
| DFHMSALS | Operator alert. Green, yellow, and red on; emit long buzz; IN PROCESS mode set.                     |
| DFHMSIPY | IN PROCESS state set. Yellow on.                                                                    |
| DFHMSIPN | IN PROCESS state reset.                                                                             |
| DFHMSLKY | MSR operation inhibited. Yellow on.                                                                 |
| DFHMSLKN | MSR input allowed. Green on. Yellow on.                                                             |
| DFHMSAEY | MSR autoenter on. Yellow on.                                                                        |
| DFHMSAEN | MSR autoenter off. Yellow on.                                                                       |

Table 27. Standard list DFHMSRCA (continued)

| Constant | Meaning                             |
|----------|-------------------------------------|
| DFHMSLBN | Long buzzer suppressed. Yellow on.  |
| DFHMSLBY | Long buzzer permitted. Yellow on.   |
| DFHMSSBN | Short buzzer suppressed. Yellow on. |
| DFHMSSBY | Short buzzer permitted. Yellow on.  |
| DFHMSNOP | Leave all MSR settings unchanged.   |

## STATE MASK

If a bit is on in the STATE MASK byte, the state it represents is adopted by the device if the corresponding bit is also on in the STATE VALUE byte.

### 0 USER

User mode. Turn on the yellow light if the same bit is on in STATE VALUE.

### 1 LOCK

Locked/Unlocked. If locked, MSR input is inhibited.

### 2 AUTO

Autoenter on/off. If set on, any card read by the MSR causes an ENTER operation. If off, only a secure card causes an ENTER.

### 3 Ai1S

Suppress audible alarm 1.

### 4 Ai2S

Suppress audible alarm 2.

## STATE VALUE

Modifies state to on or off if the corresponding bit is set on in STATE MASK.

## INDICATOR MASK

Performs a similar function to STATE MASK, but for indicators.

0 Light 1 (Green)

1 Light 1 (Green)

2 Light2 (Yellow)

3 Audible alarm 1 (Long buzz)

4 Audible alarm 2 (Short buzz)

## INDICATOR VALUE

Performs a similar function to STATE VALUE.

---

## Attention identifier constants, DFHAID

The standard attention identifier list, DFHAID, simplifies testing the contents of the EIBAID field. The following table shows you the symbolic name for the attention identifier (AID) and the corresponding 3270 function.

You can get a copy of the list by copying DFHAID into your application program. For COBOL users, it consists of a set of 01 statements that must be copied into the working-storage section. For C users, it consists of a series of defined constants. For PL/I users, it consists of DECLARE statements defining elementary character variables.

Here is the table showing the names for the AID.

Table 1. Standard list DFHAID

| Constant             | Meaning                            |
|----------------------|------------------------------------|
| DFHENTER             | ENTER key.                         |
| DFHCLEAR             | CLEAR key.                         |
| DFHPA1–<br>DFHPA3    | PA1–PA3 keys.                      |
| DFHPPF1–<br>DFHPPF24 | PF1–PF24 keys.                     |
| DFHOPID              | OPERID or MSR.                     |
| DFHMSRE              | Extended (standard) MSR.           |
| DFHTRIG              | Trigger field.                     |
| DFHPEN               | SELECTOR PEN or CURSOR SELECT key. |
| DFHCLRP <sup>1</sup> | CLEAR PARTITION key.               |
| DFHSTRF <sup>1</sup> | Structured field pseudo-AID.       |

**Note:**

1. DFHCLRP and DFHSTRF do not apply to minimum function BMS.



---

## Appendix I. BMS macros

The syntax of each BMS macro is defined, separating the various operands and options into those appropriate to minimum, standard, and full BMS.

When coding, have the title in column 1, the macro in column 10, continuation lines should have \* in column 72 and continue on column 16 on the next line.

For more information about BMS, see the *CICS Application Programming Guide*.

---

### Map set, map, and field definition

Ensure that the names of maps, and names of fields within a map set (or within multiple map sets that are copied into one application program) are unique. However, a map can have the same name as a map set.

Before CICS can load a physical map, it requires an installed resource definition for the map object. You can either use program autoinstall to create the definition when the map set is first used, or define a map set in the CSD using the DEFINE MAPSET resource definition.

You assemble a BMS map set definition to generate either a symbolic description map or a physical map. The physical map is a structured data area used at execution time to build the data stream for the terminal. The symbolic map is a series of data structures which you copy into your program at compile time so you can refer to the fields in the map by name.

For programming information about the autoinstall user program, see the Writing a program to control autoinstall of terminals in the *CICS Customization Guide*.

#### DFHMSD

The DFHMSD macro defines a map set.

#### DFHMDI


The DFHMDI macro defines a map within the map set defined by the previous DFHMSD macro. A map contains zero or more fields.

#### DFHMDF

The DFHMDF macro defines a field within a map defined by the previous DFHMDI macro.

### Ending a mapset definition

A mapset definition ends with a macro of the form:

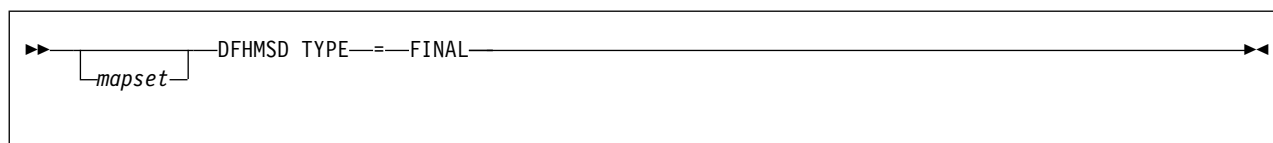

“mapset” is optional, but if used it must be the same as that on the DFHMSD macro that began the mapset definition.

## ADS descriptor

Physical maps produced by CICS Transaction Server for z/OS also include an ADS descriptor in the output load module. This is provided to allow interpretation of the BMS Application Data Structure (the structure used by the application program for the data in SEND and RECEIVE MAP requests), without requiring your program to include the relevant DSECT or copybook at compile time.

The ADS descriptor contains a header with general information about the map, and a field descriptor for every field that appears in the ADS (corresponding to every named field in the map definition macro).

The ADS descriptor is generated for all maps. You can use the DSECT option to select the long form of the ADS, where all fields are aligned on 4 byte boundaries. The long form of the ADS is required by the 3270 bridge when an interface to WebSphere® MQ is used.

---

## Partition set definition

Partitions are defined by coding the macros DFHPSD (partition set definition) and DFHPDI (partition definition). Each partition definition must be part of a partition set definition.

### DFHPSD

Each partition set definition contains a single DFHPSD macro followed by one or more DFHPDI macros, and ending with a partition set definition TYPE=FINAL.

Before CICS can load a physical map, you must define a physical map using an RDO transaction with the MAPSET attribute.


An alternative to defining maps using RDO is to use the program autoinstall exit to create the definition when the map set is first used. (For programming information about the autoinstall user program, see the Writing a program to control autoinstall of terminals in the *CICS Customization Guide*.)

### DFHPDI

A partition set contains one or more partitions. Each partition is defined by coding a partition definition macro.

## Ending a partition set definition

A partition set definition ends with a macro of the form:

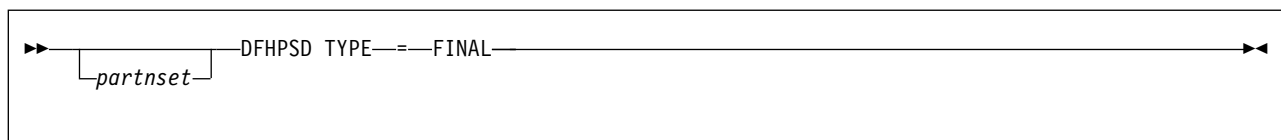

The PARTNSET name (if specified) must match that specified on the DFHPSD macro that started the partition set definition.

## Field groups

Very often, an output data display field has to contain several subfields, all sharing the same display attributes, and each of which might have to be modified separately.

At output, subfields that have not been modified by the program can adopt default data values from the output map. For example, a display can include a date field of a “day” subfield, “month” subfield, and “year” subfield. The contents of the year subfield remain constant over a relatively long period; its value can safely be taken from a map. However, the day value and month value must be updated regularly. Similarly, on input the terminal operator can enter data in each subfield separately.

You use the GRPNAME operand to define a group of subfields that combine to produce a field. The start of the group is indicated by a DFHMDF macro with the GRPNAME operand. This operand defines the first subfield, and specifies the attributes and name of the group. It is followed by other DFHMDF macros, one for each of the other subfields. Each of these must specify the group name, but cannot specify attribute values. The definition of the group is terminated by a DFHMDF macro that specifies a different group name, by one that specifies no group name, or by a DFHMDI or DFHMSD macro.

Briefly, a group of fields in a map would appear as follows in the map definition:

```
MAPSET DFHMSD....
 .
 .
MAP DFHMDI....
 .
 .
DD DFHMDF GRPNAME=DATE,POS=40,
 LENGTH=2,ATTRB=...
 .
MM DFHMDF GRPNAME=DATE,POS=46,
 LENGTH=2
 .
YY DFHMDF GRPNAME=DATE,POS=52,
 LENGTH=2
 .
FIELD DFHMDF LENGTH=5,COLOR=GREEN,...
 DFHMSD TYPE=FINAL
```


The POS operand specifies the position of the attribute byte of the field even though subfields of a group, other than the first, do not have attributes. If the subfields are positioned contiguously with no intervening blanks, the POS of the second and succeeding subfields must specify the position of the last character of the previous subfield.

---

## DFHMDF

The DFHMDF macro defines a field within a map defined by the previous DFHMDI macro.


## DFHMDF (part 1)

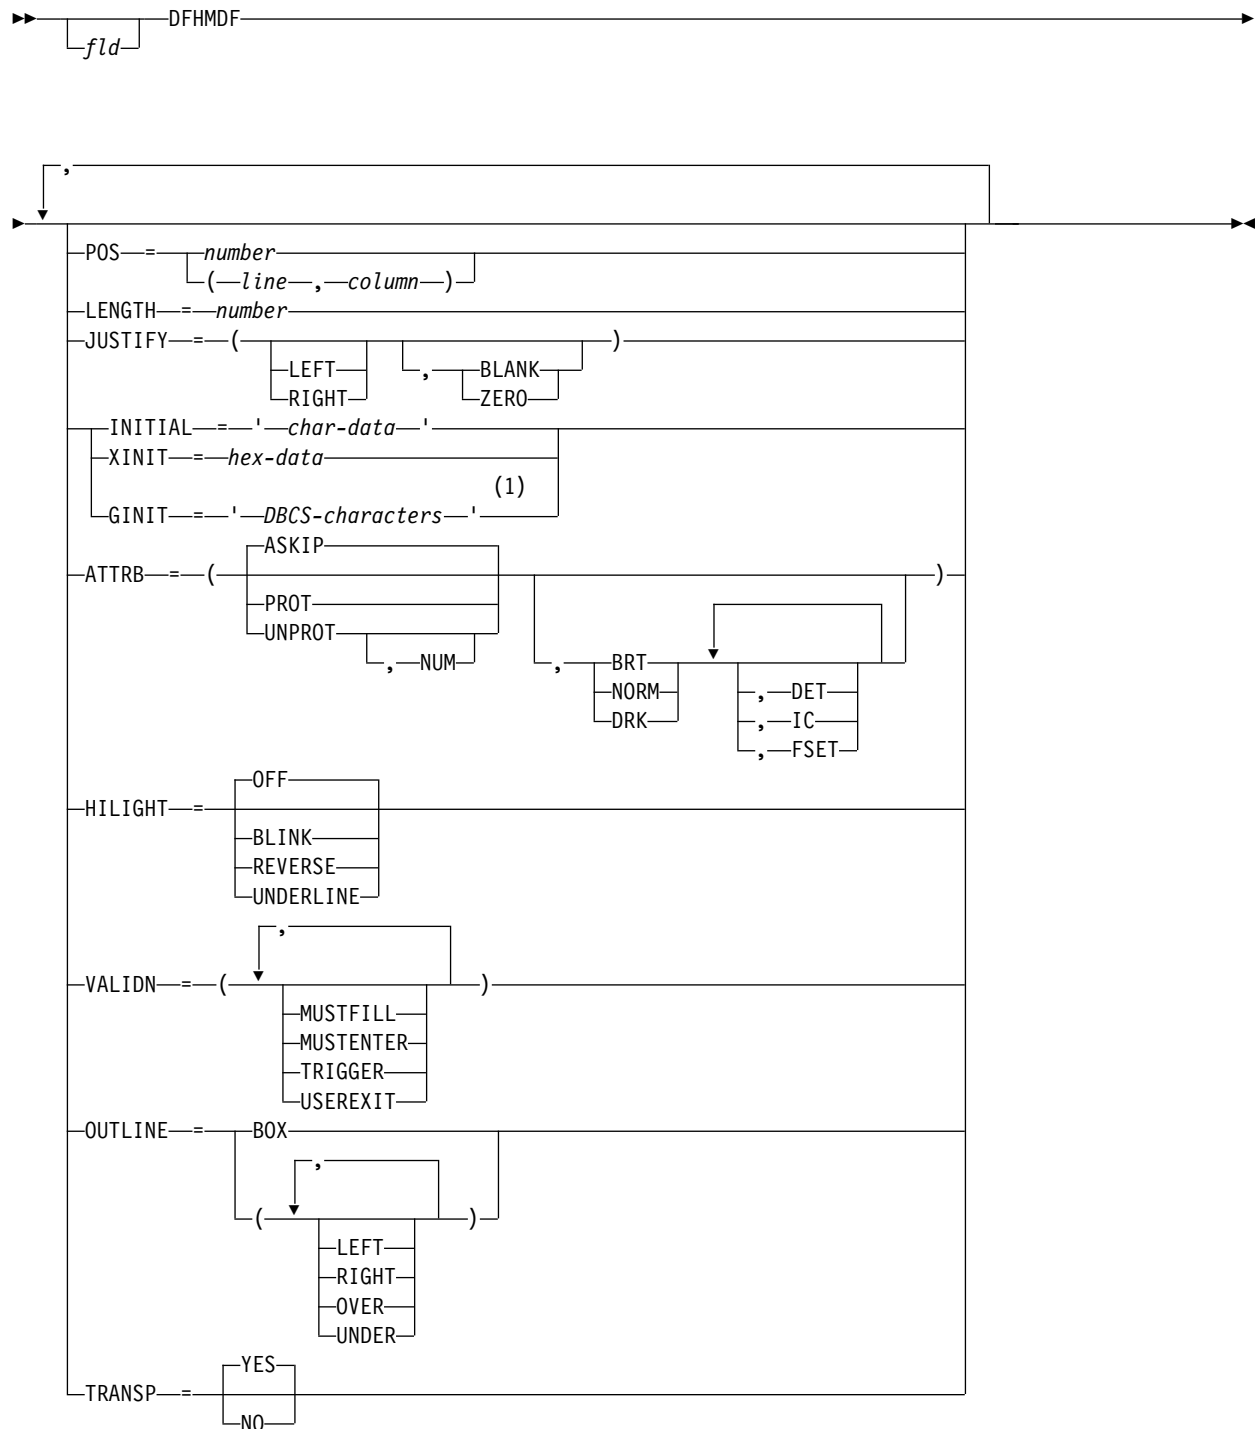

### Notes:

- 1 DBCS characters start with a shift-out character X'0E' and end with a shift-in character X'0F'.

## DFHMDF (part 2)

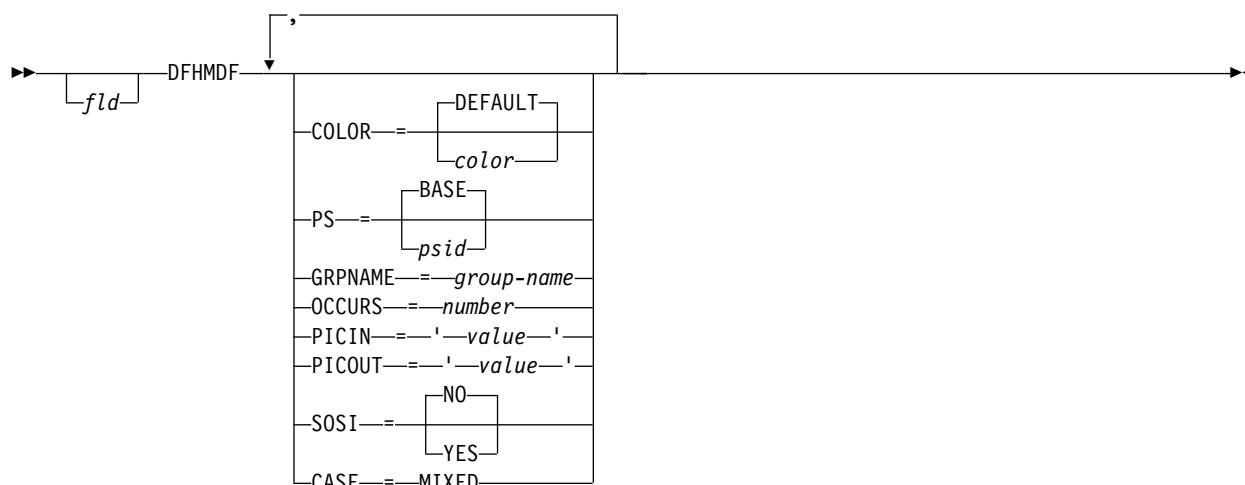

## Description

A map contains zero or more fields.

“fld” is the name (1–30 characters) of the field. Refer to your compiler manual to ensure that there are no other restrictions on the length.

For more information about defining field names, see the *CICS Application Programming Guide*. If “fld” is omitted, application programs cannot access the field to change its attributes or alter its contents. For an output map, omitting the field name might be appropriate when the INITIAL operand is used to specify the contents of a field. If a field name is specified and the map that includes the field is used in a mapping operation, data supplied by the user overlays data supplied by initialization (unless default data only is being written).

The performance of input mapping operations is optimized if DFHMDF macros are arranged in numeric order of the POS operand.

You cannot define more than 1023 named fields for a COBOL, C, or PL/I input/output map.

You must ensure that the names of maps, and names of fields within a mapset (or within multiple mapsets that are copied into one application program) are unique. However, a map can have the same name as a mapset.

Before CICS can load a physical map, you must define a physical map using an RDO transaction with the MAPSET attribute.

## Operands

### ATTRB

This operand applies only to 3270 data stream devices; it is ignored for other devices, except that ATTRB=DRK is honored for the SCS Printer Logical Unit. It is also ignored (except for ATTRB=DRK) if the NLEOM option is specified on the SEND MAP command for transmission to a 3270 printer. In particular,

ATTRB=DRK must not be used as a method of protecting secure data on output on non-3270, non-SCS printer terminals.

If ATTRB is specified within a group of fields, it must be specified in the first field entry. A group of fields appears as one field to the 3270. Therefore, the ATTRB specification refers to all the fields in a group as one field rather than as individual fields. It specifies device-dependent characteristics and attributes, such as the capability of a field to receive data, or the intensity to be used when the field is output. It could however, be used for making an input field nondisplay for secure entry of a password from a screen. For input map fields, DET and NUM are the only valid options; all others are ignored.

**ASKIP**

is the default and specifies that data cannot be keyed into the field and causes the cursor to skip over the field.

**BRT** specifies that a high-intensity display of the field is required. Because of the 3270 attribute character bit assignments, a field specified as BRT is also potentially detectable. However, for the field to be recognized as detectable by BMS, DET must also be specified.

**DET** specifies that the field is potentially detectable.

The first character of a 3270 detectable field must be one of the following:

? > & blank

If ? or >, the field is a selection field; if & or blank, the field is an attention field. (See *An Introduction to the IBM 3270 Information Display System* for further details about detectable fields.)

A field for which BRT is specified is potentially detectable to the 3270, because of the 3270 attribute character bit assignments, but is not recognized as such by BMS unless DET is also specified.

DET and DRK are mutually exclusive.

If DET is specified for a field on a map with MODE=IN, only one data byte is reserved for each input field. This byte is set to X'00', and remains unchanged if the field is not selected. If the field is selected, the byte is set to X'FF'.

No other data is supplied, even if the field is a selection field and the ENTER key has been pressed.

If the data in a detectable field is required, all the following conditions must be fulfilled:

1. The field must begin with one of the following characters:

? > & blank

and DET must be specified in the output map.

2. The ENTER key (or some other attention key) must be pressed after the field has been selected, although the ENTER key is not required for detectable fields beginning with & or a blank.
3. DET must not be specified for the field in the input map. DET must, however, be specified in the output map. For more information about BMS support of the light pen, see the *CICS Application Programming Guide*.

**DRK** specifies that the field is nonprint/nondisplay. DRK cannot be specified if DET is specified.

**FSET** specifies that the modified data tag (MDT) for this field must be set when the field is sent to a terminal.

Specification of FSET causes the 3270 to treat the field as though it has been modified. On a subsequent read from the terminal, this field is read, whether it has been modified. The MDT remains set until the field is rewritten without ATTRB=FSET, or until an output mapping request causes the MDT to be reset.

Either of two sets of defaults can apply when a field to be displayed on a 3270 is being defined but not all parameters are specified. If no ATTRB parameters are specified, ASKIP and NORM are assumed. If any parameter is specified, UNPROT and NORM are assumed for that field unless overridden by a specified parameter.

**IC** specifies that the cursor is to be placed in the first position of the field. The IC attribute for the last field for which it is specified in a map is the one that takes effect. If not specified for any fields in a map, the default location is zero. Specifying IC with ASKIP or PROT causes the cursor to be placed in an unkeyable field.

This option can be overridden by the CURSOR option of the SEND MAP command that causes the write operation.

**NORM**  
specifies that the field intensity is to be normal.

**NUM** ensures that the data entry keyboard is set to numeric shift for this field unless the operator presses the alpha shift key, and prevents entry of nonnumeric data if the Keyboard Numeric Lock feature is installed.

**PROT**  
specifies that data cannot be keyed into the field.

If data is to be copied from one device to another attached to the same 3270 control unit, the first position (address 0) in the buffer of the device to be copied from must not contain an attribute byte for a protected field. Therefore, when preparing maps for 3270s, ensure that the first map of any page does not contain a protected field starting at position 0.

**UNPROT**  
specifies that data can be keyed into the field.

**CASE**  
specifies that the field contains both uppercase and lowercase data that is to be converted to uppercase if the terminal definition specifies katakana support (KATAKANA(YES) option on RDO TYPETERM definition).

This must be specified if a field is known to contain lowercase Latin characters but can be displayed on a katakana display. It must not be specified if the field can contain valid katakana characters.

**COLOR**  
indicates the individual color, or the default color for the mapset (where applicable).

The valid colors are blue, red, pink, green, turquoise, yellow, and neutral.

The COLOR operand is ignored unless the terminal supports color, as indicated by the RDO option COLOR.



**GINIT**

specifies constant or default data for an output field. GINIT is used to specify data in DBCS character strings, which must be enclosed by SO (shift out, X'0E') and SI (shift in, X'0F') characters. When GINIT is specified, the length must be even and is the number of bytes in the string (that is, not the number of DBCS characters). If a graphic data type (PS=X'F8') is used, and the language is stated as COBOL2 (Enterprise COBOL or VS COBOL II), a PIC G is generated. Only one of GINIT, INITIAL, or XINIT can be specified.

**GRPNAME**

is the name used to generate symbolic storage definitions and to combine specific fields under one group name. The same group name must be specified for each field that is to belong to the group. The length of the name is up to 30 characters, refer to your compiler manual to ensure that there are no other restrictions on the length.

The rules for defining group names are the same as for defining field names. See the *CICS Application Programming Guide* for details.

If this operand is specified, the OCCURS operand cannot be specified.

The fields in a group must follow on; there can be gaps between them, but not other fields from outside the group. A field name must be specified for every field that belongs to the group, and the POS operand must also be specified to ensure that the fields follow each other. All the DFHMDF macros defining the fields of a group must be placed together, and in the correct order (ascending numeric order of the POS value).

For example, the first 20 columns of the first six lines of a map can be defined as a group of six fields, as long as the remaining columns on the first five lines are not defined as fields.

The ATTRB operand specified on the first field of the group applies to all of the fields within the group.

**HIGHLIGHT**

specifies the default highlighting attribute for all fields in all maps in a mapset.

**OFF** is the default and indicates that no highlighting is used.

**BLINK**

specifies that the field must flash.

**REVERSE**

specifies that the character or field is displayed in reverse video, for example, on a 3278, black characters on a green background.

**UNDERLINE**

specifies that a field is underlined.

The HIGHLIGHT operand is ignored unless the terminal supports highlighting, as indicated by the RDO TYPETERM option HIGHLIGHT(YES).

**INITIAL (or XINIT)**

specifies constant or default data for an output field. INITIAL is used to specify data in character form; XINIT is used to specify data in hexadecimal form.

For fields with the DET attribute, initial data that begins with one of the following characters:

? > & blank

must be supplied.

The number of characters that can be specified in the INITIAL operand is restricted to the continuation limitation of the assembler to be used or to the value specified in the LENGTH operand (whichever is the smaller).

Hexadecimal data is written as an even number of hexadecimal digits, for example, XINIT=C1C2. If the number of valid characters is smaller than the field length, the data is padded on the right with blanks. For example, if LENGTH=3, XINIT=C1C2 results in an initial field of 'AB'.

If hexadecimal data is specified that corresponds with line or format control characters, the results are unpredictable. The XINIT operand must therefore be used with care. Only one of GINIT, INITIAL, or XINIT can be specified.

#### **JUSTIFY**

specifies the field justifications for input operations. This operand is ignored for VTAM-supported 3600, 3650, and 3790 terminals, because input mapping is not available.

**LEFT** specifies that data in the input field is left-adjusted.

#### **RIGHT**

specifies that data in the input field is right-adjusted.

#### **BLANK**

specifies that blanks are to be inserted in any unfilled positions in an input field.

#### **ZERO**

specifies that zeros are to be inserted in any unfilled positions in an input field.

LEFT and RIGHT are mutually exclusive, as are BLANK and ZERO. If certain arguments are supplied but others are not, assumptions are made as follows:

| <b>Specified</b> | <b>Assumed</b> |
|------------------|----------------|
| LEFT             | BLANK          |
| RIGHT            | ZERO           |
| BLANK            | LEFT           |
| ZERO             | RIGHT          |

If JUSTIFY is omitted, but the NUM attribute is specified, RIGHT and ZERO are assumed. If JUSTIFY is omitted, but attributes other than NUM are specified, LEFT and BLANK are assumed.

**Note:** If a field is initialized by an output map or contains data from any other source, data that is typed as input overwrites only the equivalent length of the existing data; surplus existing data remains in the field and could cause unexpected interpretation of the new data.

#### **LENGTH**

specifies the length (1–256 bytes) of the field or group of fields. This length is the maximum length required for application program data to be entered into the field; it does not include the 1 byte attribute indicator appended to the field by CICS for use in subsequent processing. The length of each individual subfield within a group must not exceed 256 bytes.

In general LENGTH can be omitted if PICIN or PICOUT is specified, unless PICOUT defines a COBOL picture containing a currency symbol that replaces a currency sign of length greater than 1. LENGTH is required otherwise. You can specify a length of zero only if you omit the label (field name) from the DFHMDF macro. That is, the field is not part of the application data structure

and the application program cannot modify the attributes of the field. You can use a field with zero length to delimit an input field on a map.

The map dimensions specified in the SIZE operand of the DFHMDI macro defining a map can be smaller than the actual page size or screen size defined for the terminal.

If the LENGTH specification in a DFHMDF macro causes the map-defined boundary on the same line to be exceeded, the field on the output screen is continued by wrapping.

#### **OCCURS**

specifies that the indicated number of entries for the field are to be generated in a map, and that the map definition is to be generated in such a way that the fields are addressable as entries in a matrix or an array. This permits several data fields to be addressed by the same name (subscripted) without generating a unique name for each field.

OCCURS and GRPNAME are mutually exclusive; that is, OCCURS cannot be used when fields have been defined under a group name. If this operand is omitted, a value of OCCURS=1 is assumed.

#### **OUTLINE**

allows lines to be included above, below, to the left, or to the right of a field. You can use these lines in any combination to construct boxes around fields or groups of fields.

#### **PICIN (COBOL and PL/I only)**

specifies a picture to be applied to an input field in an IN or INOUT map; this picture serves as an editing specification that is passed to the application program, thus permitting the user to use the editing capabilities of COBOL or PL/I. BMS checks that the specified characters are valid picture specifications for the language of the map.

However, the validity of the input data is not checked by BMS or the high-level language when the map is used, so any wanted checking must be performed by the application program. The length of the data associated with "value" must be the same as that specified in the LENGTH operand if LENGTH is specified. If both PICIN and PICOUT are used, an error message is produced if their calculated lengths do not agree; the shorter of the two lengths is used. If PICIN or PICOUT is not coded for the field definition, a character definition of the field is automatically generated regardless of other operands that are coded, such as ATTRB=NUM.

As an example, assume that the following map definition is created for reference by a COBOL application program:

```
MAPX DFHMSD TYPE=DSECT,
 LANG=COBOL,
 MODE=INOUT
MAP DFHMDI LINE=1,COLUMN=1,
 SIZE=(1,80)
F1 DFHMDF POS=0,LENGTH=30
F2 DFHMDF POS=40,LENGTH=10,
 PICOUT='$$,,$$.00'
F3 DFHMDF POS=60,LENGTH=6,
 PICIN='9999V99',
 PICOUT='ZZ9.99'
 DFHMSD TYPE=FINAL
```

This generates the following DSECT:

```

01 MAPI.
02 F1L PIC S9(4) COMP.
02 F1A PIC X.
02 FILLER REDEFINES F1A.
03 F1F PIC X.
02 F1I PIC X(30).
02 FILLER PIC X.
02 F2L PIC S9(4) COMP.
02 F2A PIC X.
02 FILLER REDEFINES F2A.
03 F2F PIC X.
02 F2I PIC X(10).
02 FILLER PIC X.
02 F3L PIC S9(4) COMP.
02 F3A PIC X.
02 FILLER REDEFINES F3A.
03 F3F PIC X.
02 F3I PIC 9999V99.
02 FILLER PIC X.

01 MAP0 REDEFINES MAPI.
02 FILLER PIC X(3).
02 F10 PIC X(30).
02 FILLER PIC X.
02 FILLER PIC X(3).
02 F20 PIC $$$,$$0.00.
02 FILLER PIC X.
02 FILLER PIC X(3).
02 F30 PIC ZZ9.99.
02 FILLER PIC X.

```

Valid picture values for COBOL input maps are:

A P S V X 9 / and (

Valid picture values for PL/I input maps are:

A B E F G H I K M P R S T V  
X Y and Z

1 2 3 6 7 8 9 / + - , . \*  
\$ and (

Refer to the appropriate language reference manual for the correct syntax of the PICTURE attribute.

**Note:** PL/I supports multiple currency signs and multi-character currency signs in PICTURE specifications.

The default currency picture symbol is the dollar sign (\$), which represents the national currency symbol; for example the dollar (\$), the pound (£), or the yen (¥).

The default currency picture symbol can be replaced by a currency string enclosed by less than (<) and greater than (>) symbols. For example:

```

DECLARE
 USPRICE PICTURE '$99.99',
 UKPRICE PICTURE '<£>99.99',
 EUPRICE PICTURE '<EUR>99.99';

```

#### **PICOUT (COBOL and PL/I only)**

is like PICIN, except that a picture to be applied to an output field in the OUT or INOUT map is generated.

Valid picture values for COBOL output maps are:

A B E P S V X Z 0 9 , . + - \$  
CR DB / and (

Valid picture values for PL/I output maps are:

A B E F G H I K M P R S T V  
X Y and Z

1 2 3 6 7 8 9 / + - , . \* \$  
CR DB and (

Refer to the appropriate language reference manual for the correct syntax of the PICTURE attribute.

**Note:** PL/I supports multiple currency signs and multi-character currency signs in PICTURE specifications.

The default currency picture symbol is the dollar sign (\$), which represents the national currency symbol; for example the dollar (\$), the pound (£), or the yen (¥).

The default currency picture symbol can be replaced by a currency string enclosed by less than (<) and greater than (>) symbols. For example:

```
DECLARE
 USPRICE PICTURE '$99.99',
 UKPRICE PICTURE '<£>99.99',
 EUPRICE PICTURE '<EUR>99.99';
```

**Note:** COBOL supports multiple currency signs and multi-character currency signs in PICTURE specifications.

The default currency picture symbol is the dollar sign (\$), which represents the national currency symbol; for example the dollar (\$), the pound (£), or the yen (¥).

The default currency picture symbol can be replaced by a different currency picture symbol that is defined in the SPECIAL NAMES clause. The currency sign represented by the picture symbol is defined in the same clause. For example:

```
SPECIAL NAMES.
CURRENCY SIGN IS '$' WITH PICTURE SYMBOL '$'.
CURRENCY SIGN IS '£' WITH PICTURE SYMBOL '£'.
CURRENCY SIGN IS 'EUR' WITH PICTURE SYMBOL '#'.

```

```
WORKING STORAGE SECTION.
01 USPRICE PIC $99.99.
01 UKPRICE PIC £99.99.
01 ECPRICE PIC #99.99.

```

LENGTH must be specified when PICOUT specifies a COBOL picture containing a currency symbol that replaces a currency sign of length greater than 1.

## POS

specifies the location of a field. This operand specifies the individually addressable character location in a map at which the attribute byte that precedes the field is positioned.

### number

specifies the displacement (relative to zero) from the beginning of the map being defined.

**(line,column)**

specify lines and columns (relative to one) within the map being defined.

The location of data on the output medium is also dependent on DFHMDI operands.

The first position of a field is reserved for an attribute byte. When supplying data for input mapping from non-3270 devices, the input data must allow space for this attribute byte. Input data must not start in column 1 but can start in column 2.

The POS operand always contains the location of the first position in a field, which is normally the attribute byte when communicating with the 3270. For the second and subsequent fields of a group, the POS operand points to an assumed attribute-byte position, ahead of the start of the data, even though no actual attribute byte is necessary. If the fields follow on immediately from one another, the POS operand points to the last character position in the previous field in the group.

When a position number is specified that represents the last character position in the 3270, 2 special rules apply:

- ATTRIB=IC must not be coded. The cursor can be set to location zero by using the CURSOR option of a SEND MAP, SEND CONTROL, or SEND TEXT command.
- If the field is to be used in an output mapping operation with MAP=DATAONLY on the SEND MAP command, an attribute byte for that field must be supplied in the symbolic map data structure by the application program.

**PS**

specifies that programmed symbols are to be used. This overrides any PS operand set by the DFHMDI macro or the DFHMSD macro.

**BASE** is the default and specifies that the base symbol set is to be used.

**psid** specifies a single EBCDIC character, or a hexadecimal code of the form X'nn', that identifies the set of programmed symbols to be used.

The PS operand is ignored unless the terminal supports programmed symbols, as indicated by PROGSYMBOLS(YES) on the RDO TYPETERM definition.

**SOSI**

indicates that the field can contain a mixture of EBCDIC and DBCS data. The DBCS subfields within an EBCDIC field are delimited by SO (shift out) and SI (shift in) characters. SO and SI both occupy a single screen position (normally displayed as a blank). They can be included in any non-DBCS field on output, if they are correctly paired. The terminal user can transmit them inbound if they are already present in the field, but can add them to an EBCDIC field only if the field has the SOSI attribute.

**TRANSP**

determines whether the background of an alphanumeric field is transparent or opaque, that is, whether an underlying (graphic) presentation space is visible between the characters.

**VALIDN**

specifies that:

- validation is to be used on an 8775 terminal
- this field can be processed by the BMS global user exits

This overrides any VALIDN operand on the DFHMDI macro or the DFHMSD macro.

**MUSTFILL**

specifies that the field must be filled completely with data. An attempt to move the cursor from the field before it has been filled, or to transmit data from an incomplete field, raises the INHIBIT INPUT condition

**MUSTENTER**

specifies that data must be entered into the field, though need not fill it. An attempt to move the cursor from an empty field raises the INHIBIT INPUT condition

**TRIGGER**

specifies that this field is a trigger field. Trigger fields are discussed in the *CICS Application Programming Guide*.

**USEREXIT**

specifies that this field is to be processed by the BMS global user exits, XBMIN and XBMOU, if this field is received or transmitted in a 3270 datastream when the respective exit is enabled.

The MUSTFILL, MUSTENTER, and TRIGGER specifications are valid only for terminals that support the field validation extended attribute, otherwise they are ignored. The USEREXIT specification applies to all 3270 devices.

**Note:** The USEREXIT specification is unconnected with the field validation extended attribute as defined in the 3270 datastream architecture.


**XINIT**

see INITIAL, earlier in the list. Only one of GINIT, INITIAL, or XINIT can be specified.

## DFHMDI


The DFHMDI macro defines a map within the mapset defined by a previous DFHMSD macro.

### DFHMDI Minimum BMS

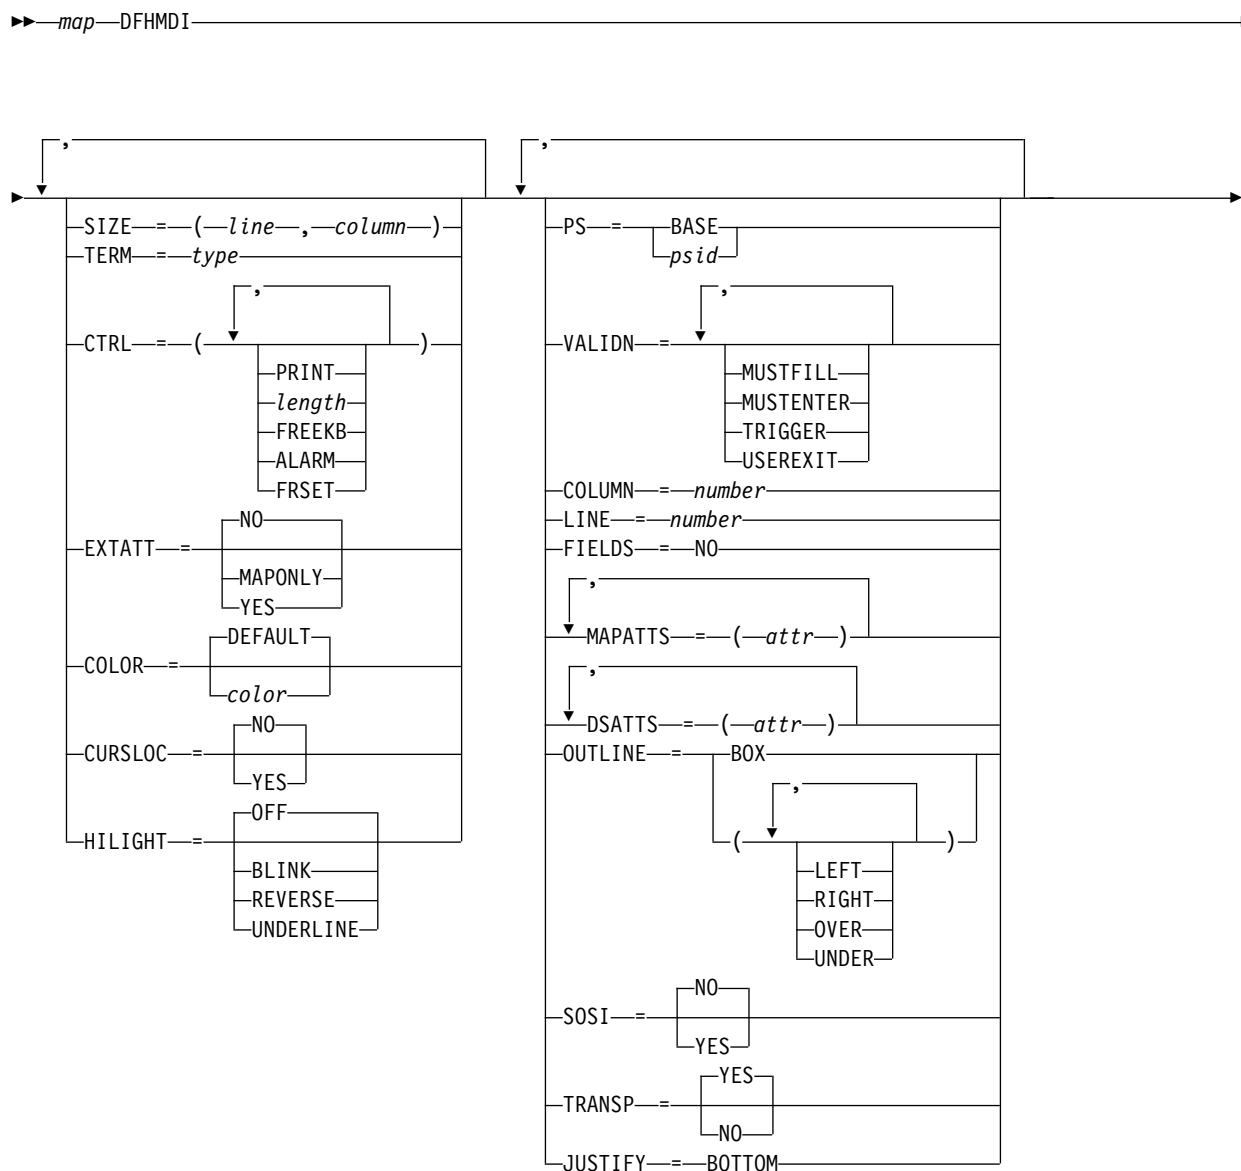




## DFHMDI Standard BMS

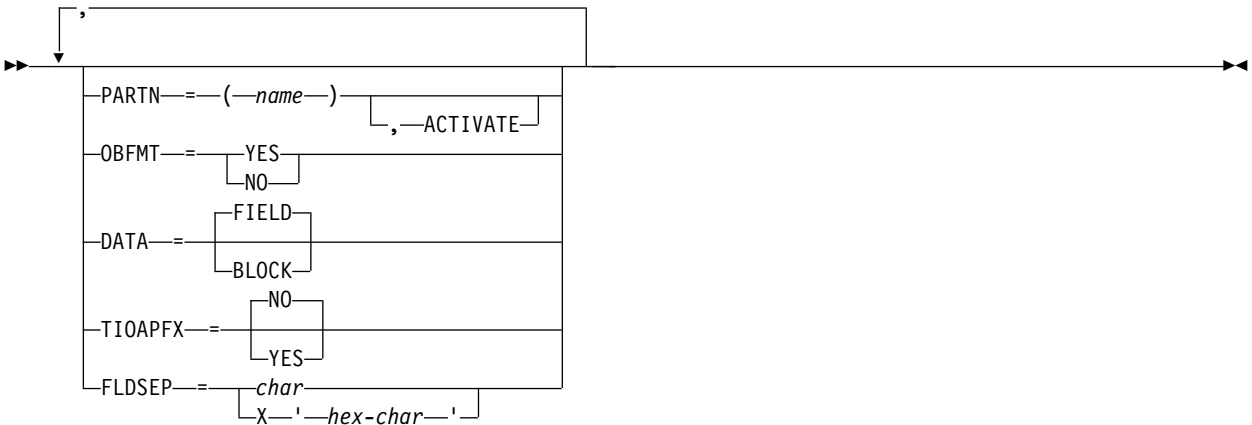

## DFHMDI Full BMS

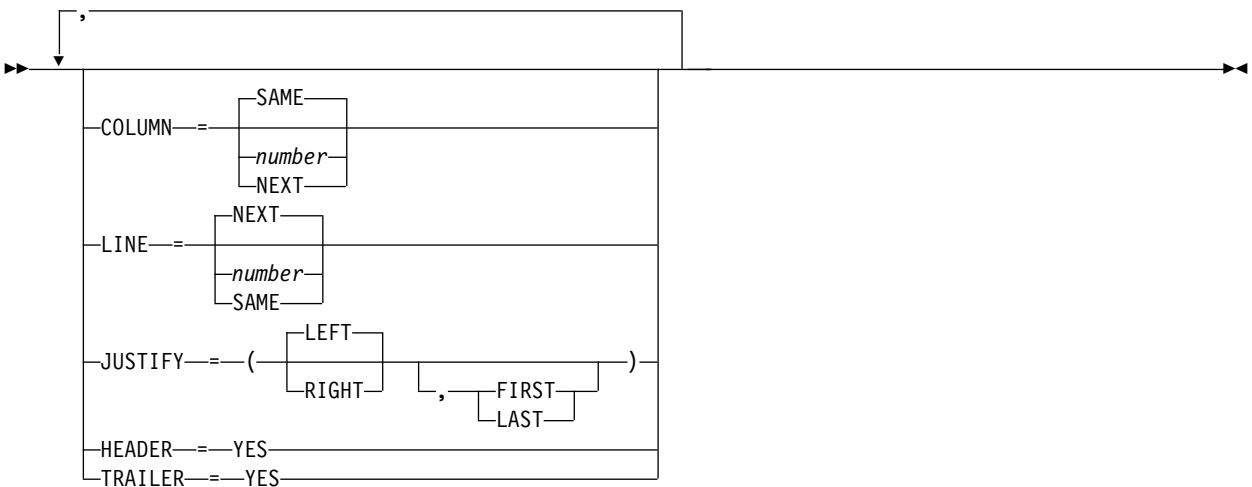

A map contains zero or more fields.

“map” is the name (1–7 characters) of the map.

## Operands

### COLOR

indicates the individual color, or the default color for the mapset (where applicable). This is overridden by the COLOR operand of the DFHMDF macro.

The valid colors are blue, red, pink, green, turquoise, yellow, and neutral.

The COLOR operand is ignored unless the terminal supports color, as indicated by the RDO TYPETERM definition option COLOR(YES).

**COLUMN**

specifies the column in a line at which the map is to be placed, that is, it establishes the left or right map margin. The JUSTIFY operand of the DFHMDI macro controls whether map and page margin selection and column counting are to be from the left or right side of the page. The columns between the specified map margin and the page margin are not available for subsequent use on the page for any lines included in the map.

**NUMBER**

is the column from the left or right page margin where the left or right map margin is to be established.

**NEXT**

indicates that the left or right map margin is to be placed in the next available column from the left or right on the current line.

**SAME**

indicates that the left or right map margin is to be established in the same column as the last nonheader or nontrailer map used that specified COLUMN=number and the same JUSTIFY operands as this macro.

For input operations, the map is positioned at the extreme left or right side, depending on whether JUSTIFY=LEFT or JUSTIFY=RIGHT has been specified.

**CTRL**

defines characteristics of IBM 3270 terminals. Use of any of the control options in the SEND MAP command overrides all control options in the DFHMDI macro, which in turn overrides all control options in the DFHMSD macro.

If CTRL is used with cumulative BMS paging (that is, the ACCUM option is used on the BMS SEND MAP commands), it must be specified on the last (or only) map of a page, unless it is overridden by the ALARM, FREEKB, and so on, options on the SEND MAP or accumulated SEND CONTROL command.

**PRINT**

must be specified if the printer is to be started; if omitted, the data is sent to the printer buffer but is not printed. This operand is ignored if the mapset is used with 3270 displays without the Printer Adapter feature.

**LENGTH**

indicates the line length on the printer; length can be specified as L40, L64, L80, or HONEOM. L40, L64, and L80 force a new line after 40, 64, or 80 characters. HONEOM causes the default printer line length to be used. If this option is omitted, BMS sets the line length from the TCT page size.

**FREEKB**

causes the keyboard to be unlocked after the map is written. If FREEKB is not specified, the keyboard remains locked; data entry from the keyboard is inhibited until this status is changed.

**ALARM**

activates the 3270 audible alarm. For non-3270 VTAM terminals it sets the alarm flag in the FMH. (This feature is not supported by interactive and batch logical units.)

**FRSET**

specifies that the modified data tags (MDTs) of all fields currently in

the 3270 buffer are to be reset to an unmodified condition (that is, field reset) before map data is written to the buffer. This allows the DFHMDF macro with the ATTRB operand to control the final status of any fields written or rewritten in response to a BMS command.

**Note:** CTRL cannot be specified in the DFHMDI and DFHMSD macros in the same mapset.

### CURSLOC

indicates that for all RECEIVE MAP operations using this map on 3270 terminals, BMS sets a flag in the application data structure element for the field where the cursor is located.

The flag might be tested by DFHBMCUR (see copybook DFHBMSA in Appendix H, “BMS-related constants,” on page 925).

To test the flag (COBOL example):

(DFHBMSA)

```
...
02 DFHMEOF PIC X VALUE X'80'.
02 DFHMCUR PIC X VALUE X'02'.
02 DFHBMEC PIC X VALUE X'82'.
02 DFHBMFLG PIC X.
 88 DFHERASE VALUES ARE X'80', X'82'.
 88 DFHCURSR VALUES ARE X'02', X'82'.
MOVE FLD1F TO DFHBMFLG.
IF DFHERASE THEN ...
 ELSE ...
IF DFHCURSR THEN ...
 ELSE ...
```

### Note:

1. If CURSLOC=YES is specified for the MAP definitions, and there is no data for any field of the application data structure, but the cursor lies within a field known to the application data structure, BMS sets the cursor flag for the appropriate field, but the data for all fields in the application data structure is null, and the MAPFAIL condition does not occur. The unmapped data stream is not available to the application program unless it is a RECEIVE DATA FROM request.
2. A valid CURSLOC definition in DFHMDI overrides the definition in DFHMSD.

### DATA

specifies the format of the data.

### FIELD

specifies that the data is passed as contiguous fields, each field having the format:

|    |   |            |
|----|---|------------|
| LL | A | data field |
|----|---|------------|

“LL” is two bytes specifying the length of the data as input from the terminal (ignored in output processing). “A” is a byte into which the programmer can place an attribute to override that specified in the map used to process this data (see copybook DFHBMSA in Appendix H, “BMS-related constants,” on page 925).

### BLOCK

specifies that the data is passed as a continuous stream in the following format:

|   |            |       |
|---|------------|-------|
| A | data field | space |
|---|------------|-------|

This stream is processed as line segments of the length specified in the map used to process the data. The data is in the form in which it appears at the terminal; that is, it contains data fields and interspersed blanks corresponding to any spaces that are to appear between the fields on output. You cannot use DSATTS=YES if you specify DATA=BLOCK.

Block data is further discussed in the *CICS Application Programming Guide*.

#### **DSATTS**

specifies the attribute types to be included in the symbolic description map. These types can be one or more of the following: COLOR, HIGHLIGHT, OUTLINE, PS, SOSI, TRANSP, and VALIDN. Any type included in DSATTS should also be included in MAPATTS.

#### **EXTATT**

this operand is supported for compatibility with previous releases. Each of the extended attributes can be defined individually. For new maps, the operands DSATTS and MAPATTS must be used instead.

**NO** is equivalent to not specifying the DSATTS operand or the MAPATTS operand.

**YES** is equivalent to:  
MAPATTS=(COLOR,HIGHLIGHT,PS,VALIDN)  
DSATTS=(COLOR,HIGHLIGHT,PS,VALIDN)

#### **MAPONLY**

is equivalent to:  
MAPATTS=(COLOR,HIGHLIGHT,PS,VALIDN)

#### **FIELDS**

specifies whether the map contains fields. If you specify FIELDS=NO, you create a null map that defines a “hole” in BMS's view of the screen. BMS cannot change the contents of such a hole after it has created it by sending a null map.

#### **FLDSEP**

specifies the field separator sequence (1–4 characters) for input from non-3270 devices. Input from non-3270 devices can be entered as a single string of data with the field separator sequence delimiting fields. The data between the field separators is moved to the input fields in the map in order.

#### **HEADER**

allows the map to be used during page building without terminating the OVERFLOW condition. This operand can be specified for more than one map in a map set.

#### **HIGHLIGHT**

specifies the default highlighting attribute for all fields in all maps in a mapset. This is overridden by the HIGHLIGHT operand of the DFHMDF.

**OFF** is the default and indicates that no highlighting is used.

#### **BLINK**

specifies that the field must flash.

**REVERSE**

specifies that the character or field is displayed in reverse video, for example, on a 3278, black characters on a green background.

**UNDERLINE**

specifies that a field is underlined.

The HIGHLIGHT operand is ignored unless the terminal supports highlighting, as indicated by HIGHLIGHT(YES) on the RDO TYPETERM definition,

**JUSTIFY**

specifies the position of the map on the page.

**LEFT** specifies that the map is to be positioned starting at the specified column from the left margin on the specified line.

**RIGHT**

specifies that the map is to be positioned starting at the specified column from the right margin on the specified line.

**FIRST**

specifies that the map is to be positioned as the first map on a new page. Any partially formatted page from preceding BMS commands is considered to be complete. This operand can be specified for only one map per page.

**LAST** indicates that the map is to be positioned at the foot of the current page. This operand can be specified for multiple maps to be placed on one page. However, maps other than the first map for which it is specified must be able to be positioned horizontally without requiring that more lines be used.

**BOTTOM**

for a SEND MAP ACCUM command has the same effect as LAST. For a SEND MAP command (without ACCUM) and a RECEIVE MAP command, JUSTIFY=BOTTOM positions the map at the foot of the screen if the number of lines in the map is specified in the SIZE operand. No account is taken of trailer maps in the mapset. JUSTIFY=BOTTOM is equivalent to specifying

$LINE = (screendepth - mapdepth + 1)$

on the map definition, but it allows the same map to be used for different screen sizes. JUSTIFY=BOTTOM is ignored if the number of lines is not also specified. If JUSTIFY=BOTTOM and LINE are both specified, the value specified in LINE is ignored.

LEFT and RIGHT are mutually exclusive, as are FIRST and LAST. If FIRST or LAST are not specified, the data is mapped at the next available position as determined by other parameters of the map definition and the current mapping operation. FIRST or LAST is ignored unless ACCUM is specified on SEND MAP commands; otherwise only one map is placed on each page.

**Note:** If a field is initialized by an output map or contains data from any other source, data that is keyed as input overwrites only the equivalent length of the existing data; surplus existing data remains in the field and could cause unexpected interpretation of the new data.

**LINE**

specifies the starting line on a page in which data for a map is to be formatted.

**NUMBER**

is a value in the range 1–240, specifying a starting line number. A request to map, on a line and column, data that has been formatted in response to a preceding BMS command, causes the current page to be treated as though complete. The new data is formatted at the requested line and column on a new page.

**NEXT**

specifies that formatting of data is to begin on the next available empty line. If LINE=NEXT is specified in the DFHMDI macro, it is ignored for input operations and LINE=1 is assumed.

**SAME**

specifies that formatting of data is to begin on the same line as that used for a preceding BMS command. If COLUMN=NEXT is specified, it is ignored for input operations and COLUMN=1 is assumed. If the data does not fit on the same line, it is placed on the next available line that is empty.

**MAPATTS**

specifies the attribute types to be included in the physical map. These types can be one or more of the following: COLOR, HILIGHT, OUTLINE, PS, SOSI, TRANSP, and VALIDN. This list must include all the attribute types to be specified for individual fields in the map (DFHMDF macro).

Where possible these values are deduced from operands already specified in the DFHMDI and DFHMSD macros. For example, if COLOR=BLUE has been specified, MAPATTS=COLOR is assumed.

**OBFMT**

specifies whether outboard formatting is to be used. This operand is available only for 3650 logical units, or for an 8100 series processor running DPS Release 2 and defined to CICS as an LUTYPE2 logical unit. For more information, see the *CICS Application Programming Guide*.

The OBFMT operand overrides the OBFMT operand on the DFHMSD macro.

**YES** specifies that this map definition can be used in outboard formatting.

**NO** specifies that this map definition cannot be used in outboard formatting.

**OUTLINE**

allows lines to be included above, below, to the left, or to the right of a field. You can use these lines in any combination to construct boxes around fields or groups of fields.

**PARTN**

specifies the default partition to be associated with maps in this mapset. If the ACTIVATE option is specified, the specified partition is also activated when maps in this mapset are output to a terminal that supports partitions.

This option overrides the PARTN option of the DFHMSD macro and is overridden by any OUTPARTN or ACTPARTN option on the SEND MAP command, or the INPARTN option on a RECEIVE MAP command.

The PARTN option is ignored if the target terminal does not support partitions, or if there is no partition set associated with the transaction.

**PS**

specifies that programmed symbols are to be used. This overrides the PS operand of the DFHMSD macro and is overridden by the PS operand of the DFHMDF macro.

**BASE** specifies that the base symbol set is to be used.

**psid** specifies a single EBCDIC character, or a hexadecimal code of the form X'nn', that identifies the set of programmed symbols to be used.

The PS operand is ignored unless the terminal supports programmed symbols, as indicated by the PROGSYMBOLS(YES) on the RDO TYPETERM definition.

**SIZE**

specifies the size of a map.

**line** is a value in the range 1–240, specifying the depth of a map as a number of lines.

**column**

is a value in the range 1–240, specifying the width of a map as a number of columns.

This operand is required in the following cases:

- An associated DFHMDF macro with the POS operand is used.
- The map is to be referred to in a SEND MAP command with the ACCUM option.
- The map is to be used when referring to input data from other than a 3270 terminal in a RECEIVE MAP command.
- The map is to be used to send or receive data by way of the CICS 3270 Web Bridge.

**SOSI**

indicates that the field can contain a mixture of EBCDIC and DBCS data. The DBCS subfields within an EBCDIC field are delimited by SO (shift out) and SI (shift in) characters. SO and SI both occupy a single screen position (normally displayed as a blank). They can be included in any non-DBCS field on output, if they are correctly paired. The terminal user can transmit them inbound if they are already present in the field, but can add them to an EBCDIC field only if the field has the SOSI attribute.

**TERM**

kept for compatibility with previous releases.

**TIOAPFX**

specifies whether BMS should include a filler in the symbolic description maps to allow for the unused TIOA prefix. This operand overrides the TIOAPFX operand specified or defaulted for the DFHMSD macro. If it is not specified, the value specified or defaulted on the DFHMSD macro is used.

**YES** specifies that the filler should be included in the symbolic description maps. Always use TIOAPFX=YES for command-level application programs.

**NO** specifies that the filler is not to be included.

**TRAILER**

allows the map to be used during page building without terminating the OVERFLOW condition. This operand can be specified for more than one map

in a mapset. If a trailer map is used other than in the overflow environment, the space normally reserved for overflow trailer maps is not reserved while mapping the trailer map.

#### **TRANSP**

determines whether the background of an alphanumeric field is transparent or opaque, that is, whether an underlying (graphic) presentation space is visible between the characters.

#### **VALIDN**

specifies that:

- validation is to be used on an 8775 terminal
- this field can be processed by the BMS global user exits

This is overridden by the VALIDN operand of the DFHMDF macro, and overrides the VALIDN operand of the DFHMSD macro.'

#### **MUSTFILL**

specifies that the field must be filled completely with data. An attempt to move the cursor from the field before it has been filled, or to transmit data from an incomplete field, raises the INHIBIT INPUT condition.

#### **MUSTENTER**

specifies that data must be entered into the field, though need not fill it. An attempt to move the cursor from an empty field raises the INHIBIT INPUT condition.

#### **TRIGGER**

specifies that this field is a trigger field. Trigger fields are discussed in the *CICS Application Programming Guide*.

#### **USEREXIT**

specifies that this field is to be processed by the BMS global user exits, XBMIN and XBMOU, if this field is received or transmitted in a 3270 datastream when the respective exit is enabled.

The MUSTFILL, MUSTENTER and TRIGGER specifications are valid only for terminals that support the field validation extended attribute, otherwise they are ignored. The USEREXIT specification applies to all 3270 devices.

**Note:** The USEREXIT specification is totally unconnected with the field validation extended attribute as defined in the 3270 datastream architecture.




---


## DFHMSD

The DFHMSD macro defines a mapset.

## DFHMSD Minimum BMS

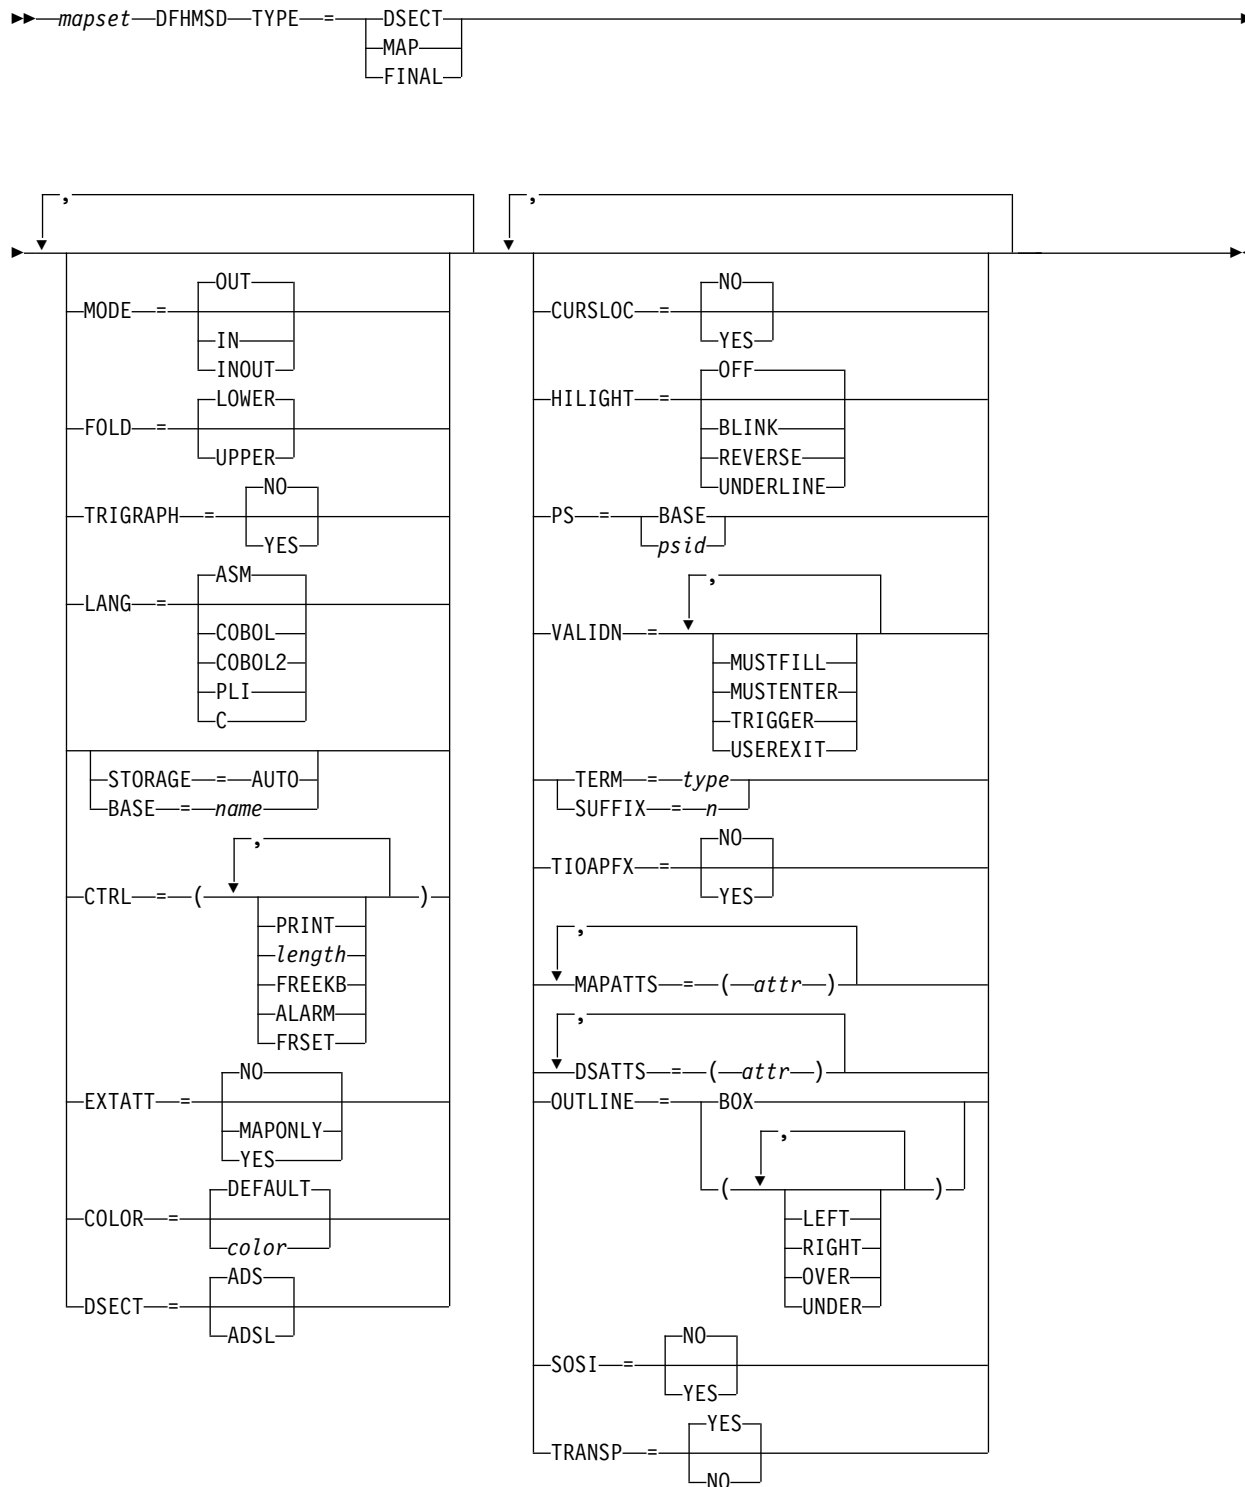

## DFHMSD Standard BMS

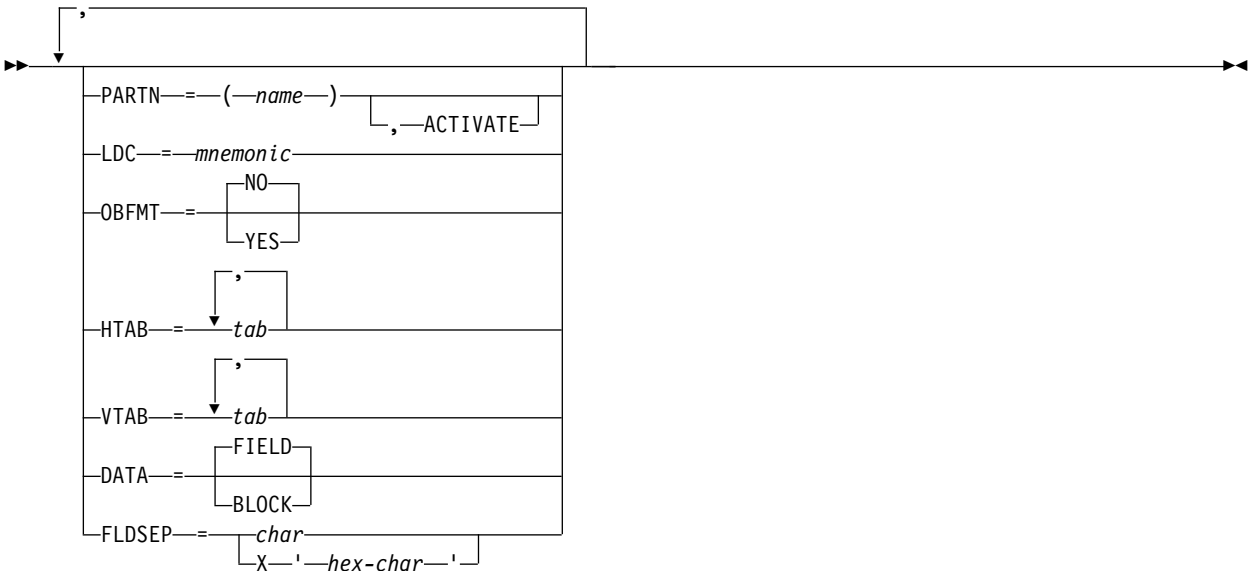

A DFHMSD macro defines a mapset. It begins with the following code:

```
DFHMSD TYPE=MAP (or TYPE=DSECT)
```

It ends with the following code:

```
DFHMSD TYPE=FINAL
```

*mapset* is the name of the mapset. Normally, the name is up to 7 characters in length. However, if the mapset is used to generate HTML templates, and contains more than 36 maps, the name must not exceed 6 characters in length.

A DFHMSD macro contains one or more map definition macros, each of which contains one or more field definition macros.

Ensure that the names of maps, and names of fields in a mapset (or in multiple mapsets that are copied into one application program) are unique. However, a map can have the same name as a mapset.

Before CICS can load a physical map, you must define a physical map using an RDO **DEFINE MAPSET** command.

You assemble a BMS mapset definition to generate either a symbolic description map or a physical map. For information about assembling and cataloging the maps, see the *CICS Application Programming Guide*.

## Operands

### BASE

Specifies that the same storage base is used for the symbolic description maps from more than one mapset. The same name is specified for each mapset that is to share the same storage base. Because all mapsets with the same base describe the same storage, data related to a previously used mapset might be overwritten when a new mapset is used. Different maps in the same mapset also overlay one another.

This operand is not valid for assembler language programs, and cannot be used when STORAGE=AUTO has been specified.

### COLOR

Indicates the individual color, or the default color for the mapset (where applicable). This is overridden by the COLOR operand of the DFHMDI macro, which is in turn overridden by the COLOR operand of the DFHMDF macro.

The valid colors are blue, red, pink, green, turquoise, yellow, and neutral.

The COLOR operand is ignored unless the terminal supports color, as indicated by the RDO TYPETERM definition COLOR(YES) option.

### CTRL

Defines characteristics of IBM 3270 terminals. Use of **any** of the control options in the SEND MAP command overrides all control options in the DFHMDI macro, which in turn overrides all control options in the DFHMSD macro.

If CTRL is used with cumulative BMS paging (that is, the ACCUM option is used on the BMS SEND MAP commands), it must be specified on the last (or only) map of a page, unless it is overridden by the ALARM, FREEKB, and so on, options on the SEND MAP or accumulated SEND CONTROL command.

### PRINT

Must be specified if the printer is to be started; if omitted, the data is sent to the printer buffer but is not printed. This operand is ignored if the mapset is used with 3270 displays without the Printer Adapter feature.

### LENGTH

Indicates the line length on the printer; length can be specified as L40, L64, L80, or HONEOM. L40, L64, and L80 force a new line after 40, 64, or 80 characters, respectively. HONEOM causes the default printer line length to be used. If this option is omitted, BMS sets the line length from the TCT page size.

### FREEKB

Causes the keyboard to be unlocked after the map is written. If FREEKB is not specified, the keyboard remains locked; data entry from the keyboard is inhibited until this status is changed.

### ALARM

Activates the 3270 audible alarm. For non-3270 VTAM terminals, it sets the alarm flag in the FMH. (This feature is not supported by interactive and batch logical units.)

### FRSET

Specifies that the modified data tags (MDTs) of all fields currently in the 3270 buffer are to be reset to a not-modified condition (that is, field reset) before map data is written to the buffer. This allows the DFHMDF macro with the ATTRB operand to control the final status of any fields written or rewritten in response to a BMS command.

## CURSLOC

Indicates that for all RECEIVE MAP operations using this map on 3270 terminals, BMS sets a flag in the application data structure element for the field where the cursor is located.

The flag can be tested by DFHBMCUR (see copybook DFHBMSCA in Appendix H, "BMS-related constants," on page 925).

To test the flag (COBOL example):

(DFHBMSCA)

```
...
02 DFHBMEOF PIC X VALUE X'80'.
02 DFHBMCUR PIC X VALUE X'02'.
02 DFHBMEC PIC X VALUE X'82'.
02 DFHBMLG PIC X.
 88 DFHERASE VALUES ARE X'80', X'82'.
 88 DFHCURSR VALUES ARE X'02', X'82'.
MOVE FLD1F TO DFHBMLG.
IF DFHERASE THEN ...
 ELSE ...
IF DFHCURSR THEN ...
 ELSE ...
```

### Note:

1. If CURSLOC=YES is specified for the MAP definitions, and there is no data for any field of the application data structure, but the cursor lies in a field known to the application data structure, BMS sets the cursor flag for the appropriate field, but the data for all fields in the application data structure is null, and the MAPFAIL condition does not occur. The unmapped data stream is not available to the application program unless it is a RECEIVE DATA FROM request.
2. A valid CURSLOC definition in DFHMDI overrides the definition in DFHMSD.

## DATA

Specifies the format of the data.

### FIELD

Specifies that the data is passed as contiguous fields, each field having the format:

|    |   |            |
|----|---|------------|
| LL | A | data field |
|----|---|------------|

LL is two bytes that specify the length of the data as input from the terminal (these two bytes are ignored in output processing). A is a byte into which the programmer can place an attribute to override that specified in the map used to process this data (see copybook DFHBMSCA in Appendix H, "BMS-related constants," on page 925).

### BLOCK

Specifies that the data is passed as a continuous stream in the following format:

|   |            |       |
|---|------------|-------|
| A | data field | space |
|---|------------|-------|

This stream is processed as line segments of the length specified in the map used to process the data. The data is in the form that it appears on the terminal; that is, it contains data fields and interspersed blanks

corresponding to any spaces that are to appear between the fields on output. You cannot use DSATTS=YES, if you specify DATA=BLOCK.

Block data is further discussed in the *CICS Application Programming Guide*.

#### **DSATTS**

Specifies the attribute types to be included in the symbolic description map. These types can be one or more of the following: COLOR, HIGHLIGHT, OUTLINE, PS, SOSI, TRANSP, and VALIDN. Any type included in DSATTS should also be included in MAPATTS.

#### **DSECT**

Specifies whether the copybook generated supports the normal or long form of the application data structure (ADS).

**ADS** Requests mapping of the normal form of the ADS (default).

#### **ADSL**

Requests mapping of the long form of the ADS, where all fields are aligned on four-byte boundaries. This form is required by the 3270 Bridge interface to WebSphere MQ.

This option requires LANG=C.

#### **EXTATT**

This operand is supported for compatibility with previous releases. Each extended attribute can be defined individually. For new maps, use the operands DSATTS and MAPATTS instead.

**NO** Is equivalent to specifying neither the DSATTS operand nor the MAPATTS operand.

**YES** Is equivalent to specifying the following operands:

MAPATTS=(COLOR,HIGHLIGHT,PS,VALIDN)

DSATTS=(COLOR,HIGHLIGHT,PS,VALIDN)

#### **MAPONLY**

Is equivalent to specifying the following operand:

MAPATTS=(COLOR,HIGHLIGHT,PS,VALIDN)

#### **FLDSEP**

Specifies the field separator sequence (1–4 characters) for input from non-3270 devices. Input from non-3270 devices can be entered as a single string of data with the field separator sequence delimiting fields. The data between the field separators is moved to the input fields in the map in order.

#### **FOLD**

Specifies whether to generate lowercase or uppercase characters in C language programs.

FOLD is only available for programs written in C.

#### **HIGHLIGHT**

Specifies the default highlighting attribute for all fields in all maps in a mapset. This is overridden by the HIGHLIGHT operand of the DFHMDI, which is in turn overridden by the HIGHLIGHT operand of the DFHMDF.

**OFF** Indicates that no highlighting is used (the default).

#### **BLINK**

Specifies that the field must flash.

**REVERSE**

Specifies that the character or field is displayed in reverse video, for example, on a 3278, black characters on a green background.

**UNDERLINE**

Specifies that a field is underlined.

The HILIGHT operand is ignored unless the terminal supports highlighting, as indicated by HILIGHT(YES) on the RDO TYPETERM definition.

**HTAB**

Specifies one or more tab positions for use with interactive and batch logical units and SCS printers with horizontal forms control.

**LANG**

Specifies the source language of the application programs into which the symbolic description maps in the mapset are copied. COBOL is OS/VS COBOL, which cannot run under this CICS version, and COBOL2 is either Enterprise COBOL or VS COBOL II. This option need only be coded for DFHMSD TYPE=DSECT. If a mapset is to be used by more than one program, and the programs are not all written in the same source language, a separate version of the mapset must be defined for each programming language.

**LDC**

Specifies the code to be used by CICS to determine the logical device mnemonic to be used for a BMS output operation. If no LDC operand has been specified on any previous BMS output in the logical message, this LDC will be transmitted in the function management header to the logical unit. This operand is used only for VTAM-supported 3600 terminals, and batch logical units.

**MAPATTS**

Specifies the attribute types to be included in the physical map. These types can be one or more of the following: COLOR, HILIGHT, OUTLINE, PS, SOSI, TRANSP, and VALIDN. This list must include all the attribute types to be specified for individual fields in the map (DFHMDI macro).

Where possible these values are deduced from operands already specified in the DFHMDI and DFHMSD macros. For example, if COLOR=BLUE has been specified, MAPATTS=COLOR is assumed.

**MODE**

Specifies whether the mapset is to be used for input, output, or both.

**OBFMT**

Specifies whether outboard formatting is to be used. This operand is available only for 3650 logical units, or for an 8100 series processor running DPS Release 2 and defined to CICS as an LUTYPE2 logical unit. For more information, see the *CICS Application Programming Guide*.

The OBFMT operand on DFHMSD is overridden by the OBFMT operand on DFHMDI.

**YES** Specifies that all maps in this mapset can be used in outboard formatting, except those for which OBFMT=NO is specified in the DFHMDI macro.

**NO** Specifies that no maps in this mapset can be used in outboard formatting, except those for which OBFMT=YES is specified in DFHMDI.

## OUTLINE

Allows lines to be included above, below, to the left, or to the right of a field. You can use these lines in any combination to construct boxes around fields or groups of fields.

## PARTN

Specifies the default partition to be associated with maps in this mapset. If the ACTIVATE option is specified, the specified partition is also activated when maps in this mapset are output to a terminal that supports partitions. This option is overridden by the PARTN operand of the DFHMDI macro, which is in turn overridden by any OUTPARTN or ACTPARTN option on the SEND MAP command, or the INPARTN option on a RECEIVE MAP command.

The PARTN operand is ignored if the target terminal does not support partitions, or if there is no partition set associated with the transaction.

## PS

Specifies that programmed symbols are to be used. This is overridden by the PS operand of the DFHMDI macro, which is in turn overridden by the PS operand of the DFHMDI macro.

**BASE** Specifies that the base symbol set is to be used.

**psid** Specifies a single EBCDIC character, or a hexadecimal code of the form X'nn', that identifies the set of programmed symbols to be used.

The PS operand is ignored unless the terminal supports programmed symbols, as indicated by PROGSYMBOLS(YES) on the RDO TYPETERM definition.

## SOSI

Indicates that the field can contain a mixture of EBCDIC and DBCS data. The DBCS subfields in an EBCDIC field are delimited by SO (shift out) and SI (shift in) characters. SO and SI both occupy a single screen position (normally displayed as a blank). They can be included in any non-DBCS field on output provided they are correctly paired. The terminal user can transmit them inbound if they are already present in the field, but can add them to an EBCDIC field only if the field has the SOSI attribute.

## STORAGE

The meaning of this operand depends upon the language in which application programs are written, as follows:

For a **COBOL** program, STORAGE=AUTO specifies that the symbolic description maps in the mapset are to occupy separate (that is, not redefined) areas of storage. This operand is used when the symbolic description maps are copied into the working-storage section and the storage for the separate maps in the mapset is to be used concurrently.

For a **C** program, STORAGE=AUTO specifies that the symbolic description maps are to be defined as having the automatic storage class. If STORAGE=AUTO is not specified, they are declared as pointers.

For a **PL/I** program, STORAGE=AUTO specifies that the symbolic description maps are to be declared as having the AUTOMATIC storage class. If STORAGE=AUTO is not specified, they are declared as BASED.

For an **assembler language** program, STORAGE=AUTO specifies that individual maps in a mapset are to occupy separate areas of storage instead of overlaying one another.

For all languages:



- You cannot specify both BASE=name and STORAGE=AUTO for the same mapset.
- If STORAGE=AUTO is specified and TIOAPFX is not, TIOAPFX=YES is assumed.

#### SUFFIX

Specifies a one-character, user-defined, device-dependent suffix for this mapset, as an alternative to a suffix generated by the TERM operand. The suffix specified by this operand should match the value of a transaction defined on the ALTSUFFIX attribute of a TYPETERM definition, or ALTSFX in the terminal control table TYPE=TERMINAL. Use a numeric value to avoid conflict with suffixes generated by the TERM operand.

#### TERM

Specifies the type of terminal or logical unit (LU) associated with the mapset. If no terminal type or LU is specified, 3270 is assumed. The terminal types and LUs you can specify, together with their generated suffixes, are shown in Table 28.

In addition, you should note the following:

If ALL is specified, ensure that device-dependent characters are not included in the mapset and that format characteristics such as page size are suitable for all input/output operations (and all terminals) in which the mapset is applied. For example, some terminals are limited to 480 bytes, others to 1920 bytes; the 3604 is limited to six lines of 40 characters each. Within these guidelines, use of ALL can offer important advantages. Because an assembly run is required for each map generation, the use of ALL, indicating that one map is to be used for more than one terminal, can result in significant time and storage savings.

However, better run-time performance for maps used by single terminal types is achieved if the terminal type (rather than ALL) is specified. Alternatively, BMS support for device-dependent mapsets can be bypassed by specifying NODDS in the BMS operand of the system initialization parameters.

Table 28. BMS terminal types

| Type                 | Suffix | Notes                                                                                    |
|----------------------|--------|------------------------------------------------------------------------------------------|
| CRLP                 | A      | Card-reader-in/line-printer-out                                                          |
| TAPE                 | B      |                                                                                          |
| DISK                 | C      |                                                                                          |
| TWX                  | D      |                                                                                          |
| 1050                 | E      |                                                                                          |
| 2740                 | F      |                                                                                          |
| 2741                 | G      |                                                                                          |
| 2770                 | I      |                                                                                          |
| 2780                 | J      |                                                                                          |
| 3780                 | K      |                                                                                          |
| 3270-1 (40-column)   | L      |                                                                                          |
| 3270-2 (80-column)   | M      |                                                                                          |
| INTLU/3767/3770I/SCS | P      | All interactive LUs including 3790 full-function LU and SCS printer LUs (3270 and 3790). |
| 2980                 | Q      |                                                                                          |
| 2980-4               | R      | Default if TERM omitted. Same as ALL; used when no need to distinguish between models.   |
| <u>3270</u>          | blank  |                                                                                          |
| 3601                 | U      |                                                                                          |
| 3653                 | V      |                                                                                          |
| 3650UP               | W      | Plus interpreter LU.                                                                     |

Table 28. BMS terminal types (continued)

| Type                   | Suffix | Notes                       |
|------------------------|--------|-----------------------------|
| 3650/3270              | X      | Plus host-conv (32700 LU.   |
| BCHLU/3770B            | Y      | Plus all batch and BDI LUs. |
| ALL (all of the above) | blank  |                             |

#### TIOAPFX

Specifies whether BMS should include a filler in the symbolic description maps to allow for the unused TIOA prefix.

**YES** Specifies that the filler should be included in the symbolic description maps. If TIOAPFX=YES is specified, all maps in the mapset have the filler, except when TIOAPFX=NO is specified on the DFHMDI macro. TIOAPFX=YES is the default if STORAGE=AUTO is specified. TIOAPFX=YES should **always** be used for command-level application programs.

**NO** Is the default, unless STORAGE=AUTO is specified, and specifies that the filler is not to be included. The filler can still be included for a map if TIOAPFX=YES is specified on DFHMDI.

#### TRANSP

Determines whether the background of an alphanumeric field is transparent or opaque, that is, whether an underlying (graphic) presentation space is visible between the characters.

#### TRIGRAPH

Specifies trigraph sequences to be used in C language symbolic description maps.

When TRIGRAPH=YES, trigraph sequences are produced:

```
{ prints as ??<
} prints as ??>
[prints as ??(
] prints as ??)
```

This option is available only for programs written in C.

#### TYPE

Specifies the type of map to be generated using the definition. Both types of map must be generated before the mapset can be used by an application program. If aligned symbolic description maps are required, you should ensure that you specify SYSPARM=ADSECT and SYSPARM=AMAP when you assemble the symbolic and physical maps respectively.

#### DSECT

Specifies that a symbolic description map is to be generated. Symbolic description maps must be copied into the source program before it is translated and compiled.

**MAP** Specifies that a physical map is to be generated. Physical maps must be assembled or compiled, link-edited, and cataloged in the CICS program library before an application program can use them.

If both map and DSECT are to be generated in the same job, the SYSPARM option can be used in the assembler job execution step.

**VALIDN**

Specifies that:

- Validation is to be used on an 8775 terminal
- This field can be processed by the BMS global user exits

This is overridden by the VALIDN operand of the DFHMDDI macro, which is in turn overridden by the VALIDN of the DFHMDDF macro.

**MUSTFILL**

Specifies that the field must be filled completely with data. An attempt to move the cursor from the field before it has been filled, or to transmit data from an incomplete field, raises the INHIBIT INPUT condition.

**MUSTENTER**

Specifies that data must be entered into the field, though need not fill it. An attempt to move the cursor from an empty field raises the INHIBIT INPUT condition.

**TRIGGER**

Specifies that this field is a trigger field. Trigger fields are discussed in the *CICS Application Programming Guide*.

**USEREXIT**

Specifies that this field is to be processed by the BMS global user exits, XBMIN and XBMOU, if this field is received or transmitted in a 3270 datastream when the respective exit is enabled.

The MUSTFILL, MUSTENTER, and TRIGGER specifications are valid only for terminals that support the field validation extended attribute, otherwise they are ignored. The USEREXIT specification applies to all 3270 devices.


**Note:** The USEREXIT specification is unconnected with the field validation extended attribute as defined in the 3270 datastream architecture.

**VTAB**

Specifies one or more tab positions for use with interactive and batch logical units and SCS printers having vertical forms control.

## DFHPDI

A partition set contains one or more partitions. Each partition is defined by coding a partition definition macro.

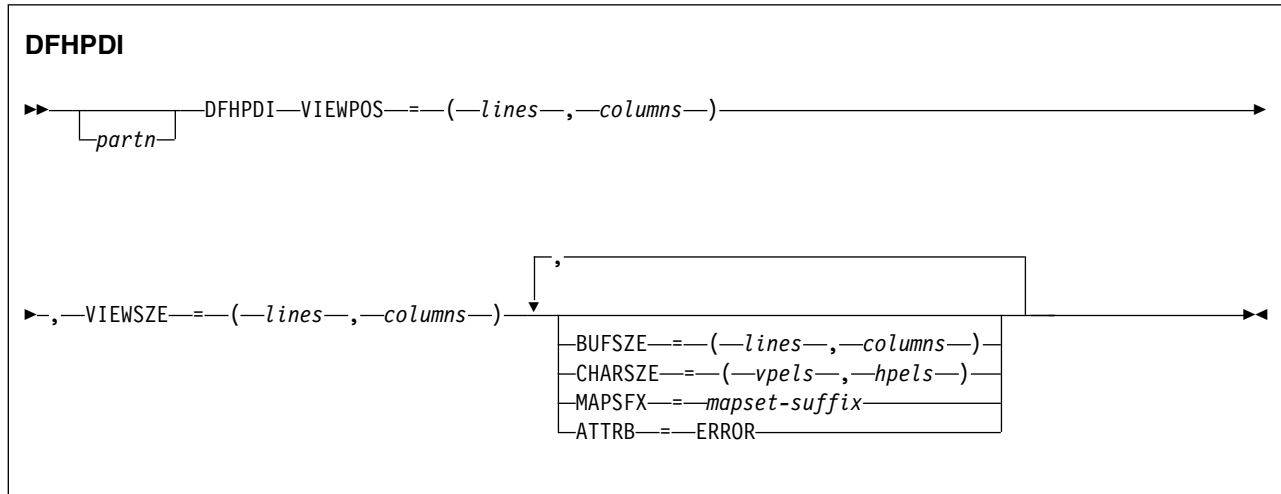

“partn” is a partition name (1–2 characters). It allows you to refer to the partition in your application programs.

Every partition in a partition set must have a different name. Only the error partition can be unnamed (see **ATTRB=ERROR** operand).

Partitions are defined by coding the macros **DFHPSD** (partition set definition) and **DFHPDI** (partition definition). Each partition definition must be part of a partition set definition.

### Operands

#### **ATTRB**

specifies that error messages are to be directed to this partition whenever possible. The partition is cleared before an error message is displayed. The **RDO TYPETERM** option **ERRHILIGHT** is honored, but the **LASTLINE** option is ignored.

#### **BUFSIZE(lines,columns)**

specifies the size of the presentation space for the partition. Device limitations mean that the “columns” value must be equal to the “columns” value specified by the **VIEWSIZE** operand. The “lines” value can be greater than or, by default, equal to the value specified by the **VIEWSIZE** operand. A greater lines value implies that the target terminal supports vertical scrolling.

#### **CHARSIZE(vpels,hpels)**

specifies the size of the character cell to be reserved for each character displayed in a partition. You specify the size as numbers of vertical picture elements (*vpels*) and numbers of horizontal picture elements (*hpels*). You can specify this operand on either the **DFHPSD** macro only, or on both the **DFHPSD** and **DFHPDI** macros. The values specified in the **DFHPSD** become the defaults for all partitions in the partition set. You can override these defaults for individual partitions by coding **CHARSIZE** in the **DFHPDI** macro.

**MAPSFX(mapset-suffix)**

specifies the partition's 1-character mapset suffix. BMS uses the suffix to select mapset versions in the same way as for the RDO option ALTSUFFIX. If this operand is omitted, a suffix L is assumed if the "columns" value of the BUFSIZE operand is less than or equal to 40; otherwise M is assumed.

**VIEWPOS(lines,columns)**

specifies the position of the top left-hand corner of this partition's viewport. You specify the position in numbers of lines and numbers of columns.

The DFHPDI macro checks that viewports do not overlap. If you have coded the RDO TYPETERM ALTSCREEN option, or the ALTSCRN operand of the DFHPSD macro, DFHPDI also checks that all viewports fit within the usable area of the terminal screen.


**Note:** The information given here on positioning viewports is necessarily brief. For more information you should consult the component description for the device you are using.

**VIEWSIZE(lines,columns)**

specifies the size, in lines and columns, of the partition's viewport. The DFHPDI macro checks that viewports do not overlap. If you code the RDO TYPETERM ALTSCREEN option, or the ALTSCRN operand of the DFHPSD macro partition set definition macro, DFHPDI checks that the partitions all fit within the usable area of the display screen.

## DFHPSD

Each partition set definition contains a single DFHPSD macro followed by one or more DFHPDI macros, and ending with a DFHPSD TYPE=FINAL partition set definition macro.

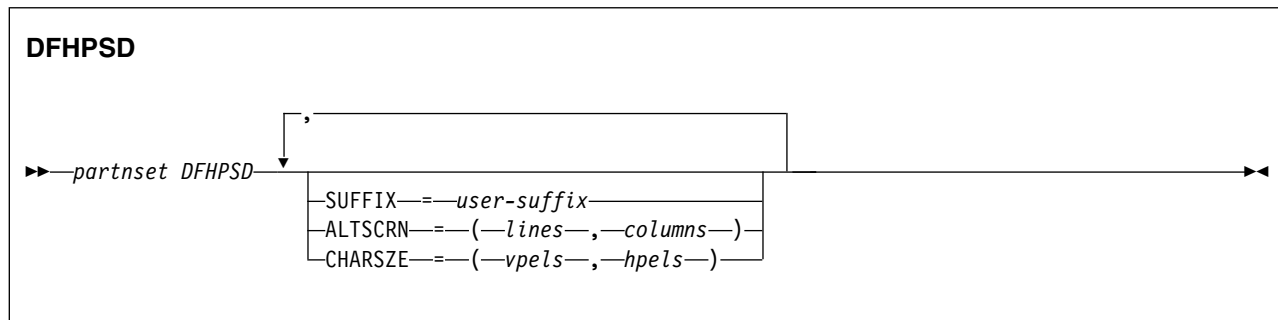

“partnset” is a partition set name (1–6 characters).

Partitions are defined by coding the macros DFHPSD (partition set definition) and DFHPDI (partition definition). Each partition definition must be part of a partition set definition.

### Operands

#### ALTSCRN(*lines,columns*)

specifies the size, in characters, of the usable area of the target terminal. This is normally the same as the RDO TYPETERM option ALTSCREEN. You use ALTSCRN to ensure that the viewports of partitions within a partition set fit into the usable area of the screen.

#### CHARSIZE(*vpels,hpels*)

specifies the size of the character cell to be reserved for each character displayed in a partition. You specify the size as numbers of vertical picture elements (vpels) and numbers of horizontal picture elements (hpels). You can specify this operand on either the DFHPSD macro only, or on both the DFHPSD and DFHPDI macros. The values specified in this operand become the defaults for all partitions in the partition set. You can override this default for individual partitions by coding CHARSIZE in the DFHPDI macro.

#### SUFFIX(*user-suffix*)

specifies a 1-character user suffix for this version of the partition set. It allows different versions of a partition set to be associated with different terminals. When the partition set is to be loaded, CICS looks for a version whose suffix matches the RDO TYPETERM option ALTSUFFIX. If it cannot find the correct partition set version, it loads a version with a default suffix (M or L). If it cannot find a suffixed version either, it loads an unsuffixed one. If it cannot find this, it abends with APCT.

### Ending DFHPSD

[*partnset*] DFHPSD TYPE=FINAL

The PARTNSET name (if specified) must match that specified on the DFHPSD macro that started the partition set definition.

---

## Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing  
Legal and Intellectual Property Law  
IBM Japan, Ltd.  
19-21, Nihonbashi-Hakozakicho, Chuo-ku  
Tokyo 103-8510, Japan

**The following paragraph does not apply in the United Kingdom or any other country where such provisions are inconsistent with local law:**

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore this statement may not apply to you.

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Licensees of this program who want to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact IBM United Kingdom Laboratories, MP151, Hursley Park, Winchester, Hampshire, England, SO21 2JN.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Programming License Agreement, or any equivalent agreement between us.

### **Privacy Policy Considerations**

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering's use of cookies is set forth below.

#### **CICSplex<sup>®</sup> SM Web User Interface :**

For the WUI main interface: Depending upon the configurations deployed, this Software Offering may use session and persistent cookies that collect each user's user name and other personally identifiable information for purposes of session management, authentication, enhanced user usability, or other usage tracking or functional purposes. These cookies cannot be disabled.

For the WUI Data Interface: Depending upon the configurations deployed, this Software Offering may use session cookies that collect each user's user name and other personally identifiable information for purposes of session management, authentication, or other usage tracking or functional purposes. These cookies cannot be disabled.

For the WUI Hello World page: Depending upon the configurations deployed, this Software Offering may use session cookies that collect no personally identifiable information. These cookies cannot be disabled.

For CICS Explorer<sup>®</sup>: Depending upon the configurations deployed, this Software Offering may use session and persistent preferences that collect each user's user name and password, for purposes of session management, authentication, and single sign-on configuration. These preferences cannot be disabled, although storing a user's password on disk in encrypted form can only be enabled by the user's explicit action to check a check box during sign-on.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at <http://www.ibm.com/privacy> and IBM's Online Privacy Statement at <http://www.ibm.com/privacy/details> the section entitled "Cookies, Web Beacons and Other Technologies" and the "IBM Software Products and Software-as-a-Service Privacy Statement" at <http://www-01.ibm.com/software/info/product-privacy/>.



---

## Trademarks

IBM, the IBM logo, and [ibm.com](http://ibm.com)<sup>®</sup> are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at Copyright and trademark information at [www.ibm.com/legal/copytrade.shtml](http://www.ibm.com/legal/copytrade.shtml).

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

UNIX is a registered trademark of The Open Group in the United States and other countries.



---

## Bibliography

---

### CICS books for CICS Transaction Server for z/OS

#### General

*CICS Transaction Server for z/OS Program Directory - base*, GI13-3375  
*CICS Transaction Server for z/OS Program Directory activation module - base*,  
GI13-3376  
*CICS Transaction Server for z/OS Program Directory activation module - Developer  
Trial*, GI13-3377  
*CICS Transaction Server for z/OS Program Directory activation module - Value Unit  
Edition*, GI13-3378  
*CICS Transaction Server for z/OS What's New*, GC34-7437  
*CICS Transaction Server for z/OS Upgrading to CICS TS Version 5.3*, GC34-7436  
*CICS Transaction Server for z/OS Installation Guide*, GC34-7414

#### Access to CICS

*CICS Internet Guide*, SC34-7416  
*CICS Web Services Guide*, SC34-7452

#### Administration

*CICS System Definition Guide*, SC34-7428  
*CICS Customization Guide*, SC34-7404  
*CICS Resource Definition Guide*, SC34-7425  
*CICS Operations and Utilities Guide*, SC34-7420  
*CICS RACF Security Guide*, SC34-7423  
*CICS Supplied Transactions*, SC34-7427

#### Programming

*CICS Application Programming Guide*, SC34-7401  
*CICS Application Programming Reference*, SC34-7402  
*CICS System Programming Reference*, SC34-7429  
*CICS Front End Programming Interface User's Guide*, SC34-7412  
*CICS C++ OO Class Libraries*, SC34-7405  
*CICS Distributed Transaction Programming Guide*, SC34-7410  
*CICS Business Transaction Services*, SC34-7403  
*Java Applications in CICS*, SC34-7417

#### Diagnosis

*CICS Problem Determination Guide*, GC34-7422  
*CICS Performance Guide*, SC34-7421  
*CICS Messages and Codes Vol 1*, GC34-7418  
*CICS Messages and Codes Vol 2*, GC34-7419  
*CICS Diagnosis Reference*, GC34-7409  
*CICS Recovery and Restart Guide*, SC34-7424  
*CICS Data Areas*, GC34-7406  
*CICS Trace Entries*, SC34-7430  
*CICS Debugging Tools Interfaces Reference*, GC34-7408

#### Communication

*CICS Intercommunication Guide*, SC34-7415  
*CICS External Interfaces Guide*, SC34-7411

## **Databases**

*CICS DB2 Guide, SC34-7407*

*CICS IMS Database Control Guide, SC34-7413*

*CICS Shared Data Tables Guide, SC34-7426*

---

## **CICSplex SM books for CICS Transaction Server for z/OS**

### **General**

*CICSplex SM Concepts and Planning, SC34-7441*

*CICSplex SM Web User Interface Guide, SC34-7451*

### **Administration and Management**

*CICSplex SM Administration, SC34-7438*

*CICSplex SM Operations Views Reference, SC34-7447*

*CICSplex SM Monitor Views Reference, SC34-7446*

*CICSplex SM Managing Workloads, SC34-7444*

*CICSplex SM Managing Resource Usage, SC34-7443*

*CICSplex SM Managing Business Applications, SC34-7442*

### **Programming**

*CICSplex SM Application Programming Guide, SC34-7439*

*CICSplex SM Application Programming Reference, SC34-7440*

### **Diagnosis**

*CICSplex SM Resource Tables Reference Vol 1, SC34-7449*

*CICSplex SM Resource Tables Reference Vol 2, SC34-7450*

*CICSplex SM Messages and Codes, GC34-7445*

*CICSplex SM Problem Determination, GC34-7448*

---

## Other CICS publications

The following publications contain further information about CICS, but are not provided as part of CICS Transaction Server for z/OS, Version 5 Release 3 .

*Designing and Programming CICS Applications*, SR23-9692

*CICS Application Migration Aid Guide*, SC33-0768

*CICS Family: API Structure*, SC33-1007

*CICS Family: Client/Server Programming*, SC33-1435

*CICS Family: Interproduct Communication*, SC34-6853

*CICS Family: Communicating from CICS on System/390*, SC34-6854

*CICS Transaction Gateway for z/OS Administration*, SC34-5528

*CICS Family: General Information*, GC33-0155

*CICS 4.1 Sample Applications Guide*, SC33-1173

*CICS/ESA 3.3 XRF Guide* , SC33-0661

---

## Other IBM publications

The following publications contain information about related IBM products.

### MVS

*z/OS MVS Initialization and Tuning Guide*, SA22-7591  
*z/OS MVS Initialization and Tuning Reference*, SA22-7592  
*z/OS MVS JCL Reference*, SA22-7597  
*OS/390 V2R8.0 MVS System Commands*, GC28-1781

### SNA

*Sessions between Logical Units*, GC20-1868.

### SQL

*DB2 Universal Database for OS/390 and z/OS: Application Programming and SQL Guide*, SC26-9933  
*DB2 Universal Database for OS/390 and z/OS: SQL Reference*, SC26-9944.

### Other related books

*An Introduction to the IBM 3270 Information Display System*, GA27-2739  
*3274 Control Unit Reference Summary*, GX20-1878  
*Component Description: IBM 2721 Portable Audio Terminal*, GA27-3029  
*IBM 2780 Data Transmission Terminal Component Description*, GA27-3035  
*CICS/ESE 3.3 IBM 3270 Data Stream Device Guide*, SC33-0232  
*IBM 3270 Data Stream Programmer's Reference*, GA23-0059  
*IBM 4700/3600/3630 Guide*, SC33-0233

---

## Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully.

You can perform most tasks required to set up, run, and maintain your CICS system in one of these ways:

- using a 3270 emulator logged on to CICS
- using a 3270 emulator logged on to TSO
- using a 3270 emulator as an MVS system console

IBM Personal Communications provides 3270 emulation with accessibility features for people with disabilities. You can use this product to provide the accessibility features you need in your CICS system.





---

## Index

### Special characters

- > 32K COMMAREAs (channels)
  - ASSIGN command 57
  - CHANNEL option of RETURN command 547
  - CHANNEL option of XCTL command 882
  - DELETE CHANNEL command 158
  - DELETE CONTAINER (CHANNEL) command 162
  - GET CONTAINER (CHANNEL) command 284
  - MOVE CONTAINER (CHANNEL) command 414
  - PUT CONTAINER (CHANNEL) command 428
  - QUERY CHANNEL command 436
  - START CHANNEL command 687

### Numerics

- 2260 Display Station
  - CONVERSE command 121
  - RECEIVE command 504
  - SEND command 594
- 2265 Display Station
  - CONVERSE command 121
  - RECEIVE command 504
  - SEND command 594
- 2980 general banking terminal system
  - RECEIVE/SEND commands 595
- 2980 General Banking Terminal System
  - DFH2980 structure 506
  - output control 506
  - output to common buffer 506
  - passbook control 505
  - RECEIVE/SEND commands 505
- 3270 information display system
  - logical unit 574
- 3270 Information Display System 379
  - logical unit 103, 349, 490
- 3600 finance communication system
  - 3614 logical unit 577
- 3600 Finance Communication System
  - 3601 logical unit 104, 492, 576
  - 3614 logical unit 105, 493
  - pipeline logical units 575
- 3630 Plant Communication System
  - RECEIVE command 492
  - SEND command 576
- 3650 Host Command Processor
  - CONVERSE command 109
- 3650 Logical Units
  - RECEIVE command 494
- 3650 Store System
  - host conversational
    - LU 3270 579
    - LU 3653 580
  - interpreter logical unit 106, 357, 364, 494, 578

- 3650/3680 Full-function Logical Unit
  - RECEIVE command 497
  - SEND command 584
- 3650/3680 Store System
  - host command processor LU 581
- 3680 Host Command Processor
  - CONVERSE command 109
- 3680 Programmable Store System
  - host command processor LU 581
- 3740 Data Entry System 355, 356
- 3767 communication terminal
  - interactive logical unit 582
- 3767 Communication Terminal
  - interactive logical unit 110, 495
- 3770 data communication system
  - batch logical unit 583
- 3770 Data Communication System
  - batch logical unit 111, 496
- 3770 Full Function Logical Unit
  - RECEIVE command 497
  - SEND command 584
- 3770 interactive logical unit
  - RECEIVE command 495
- 3770 Interactive Logical Unit
  - SEND command 582
- 3790 communication system
  - 3270-display logical unit 586
  - full-function logical unit 584
  - SCS printer logical unit 585
- 3790 Communication System
  - 3270-display logical unit 113, 508
  - Full Function Logical Unit 112
  - full-function logical unit 497

## A

- ABCODE option
  - ABEND command 32
  - ASSIGN command 53
  - CHECK ACQPROCESS command 87
  - CHECK ACTIVITY command 90
  - INQUIRE ACTIVITYID command 321
- ABDUMP option
  - ASSIGN command 53
- ABEND command 32
- ABEND exit, reactivating 314
- abend support commands 23
- abnormal termination, task 314
- ABOFFSET option
  - ASSIGN command 53
- ABPROGRAM option
  - ASSIGN command 53
  - CHECK ACQPROCESS command 87
  - CHECK ACTIVITY command 90
  - INQUIRE ACTIVITYID command 321
- absolute expressions 8
- ABSTIME option
  - ASKTIME command 50
  - FORMATIME command 235
- ABSTIME option (*continued*)
  - INQUIRE TIMER command 329
- access to system information
  - ADDRESS command 39
  - ADDRESS SET command 41
  - ASSIGN command 51
  - CICS storage areas 39, 41
- ACCUM option
  - SEND CONTROL command 600
  - SEND MAP command 606
  - SEND TEXT command 622
- ACEE option
  - ADDRESS command 39
- ACQACTIVITY option
  - CANCEL (BTS) command 79
  - CHECK ACTIVITY command 90
  - DELETE CONTAINER (BTS) command 160
  - FORCE TIMER command 233
  - GET CONTAINER (BTS) command 281
  - LINK ACTIVITY command 402
  - PUT CONTAINER (BTS) command 425
  - RESUME command 537
  - RUN command 565
  - SUSPEND (BTS) command 708
- ACQPROCESS option
  - CANCEL (BTS) command 79
  - CHECK ACQPROCESS command 87
  - DELETE CONTAINER (BTS) command 160
  - FORCE TIMER command 233
  - GET CONTAINER (BTS) command 281
  - LINK ACQPROCESS command 399
  - PUT CONTAINER (BTS) command 425
  - RESET ACQPROCESS command 528
  - RESUME command 537
  - RUN command 565
  - SUSPEND (BTS) command 708
- ACQUIRE command 34
- ACTION option
  - WEB CONVERSE command 759
  - WEB SEND command (Client) 826
  - WEB SEND command (Server) 818
  - WRITE OPERATOR command 858
- ACTIVE mode, of an activity 322
- activities
  - destruction of 156
  - modes 322
  - processing states 322
- ACTIVITY option
  - ASSIGN command 53
  - CANCEL (BTS) command 79
  - CHECK ACTIVITY command 90
  - DEFINE ACTIVITY command 129
  - DELETE ACTIVITY command 156
  - DELETE CONTAINER (BTS) command 160

- ACTIVITY option (*continued*)
  - GET CONTAINER (BTS)
    - command 281
  - GETNEXT ACTIVITY command 303
  - INQUIRE ACTIVITYID
    - command 321
  - LINK ACTIVITY command 402
  - PUT CONTAINER (BTS)
    - command 426
  - RESET ACTIVITY command 530
  - RESUME command 537
  - RUN command 565
  - SUSPEND (BTS) command 708
- activity-related commands
  - ACQUIRE 34
  - CANCEL (BTS) 79
  - CHECK ACQPROCESS 87
  - CHECK ACTIVITY 89
  - DEFINE ACTIVITY 129
  - DEFINE PROCESS 139
  - DELETE ACTIVITY 156
  - INQUIRE ACTIVITYID 321
  - INQUIRE PROCESS 328
  - LINK ACQPROCESS 398
  - LINK ACTIVITY 401
  - RESET ACQPROCESS 528
  - RESET ACTIVITY 530
  - RESUME 537
  - RUN 563
  - STARTBROWSE ACTIVITY 699
  - SUSPEND (BTS) 708
- ACTIVITYBUSY condition
  - ACQUIRE command 35
  - CANCEL (BTS) command 79
  - CHECK ACTIVITY command 91
  - DELETE ACTIVITY command 156
  - LINK ACTIVITY command 402
  - RESET ACTIVITY command 530
  - RESUME command 537
  - RUN command 565
  - SUSPEND (BTS) command 708
- ACTIVITYERR condition (*continued*)
  - STARTBROWSE ACTIVITY
    - command 700
  - STARTBROWSE CONTAINER
    - command 702
  - STARTBROWSE EVENT
    - command 703
  - SUSPEND (BTS) command 708
- ACTIVITYID option
  - ACQUIRE command 35
  - ASSIGN command 54
  - DEFINE ACTIVITY command 129
  - GETNEXT ACTIVITY command 303
  - GETNEXT PROCESS command 308
  - INQUIRE ACTIVITYID
    - command 321
  - INQUIRE CONTAINER
    - command 324
  - INQUIRE EVENT command 326
  - INQUIRE PROCESS command 328
  - INQUIRE TIMER command 329
  - STARTBROWSE ACTIVITY
    - command 699
  - STARTBROWSE CONTAINER
    - command 701
  - STARTBROWSE EVENT
    - command 703
- ACTPARTN option
  - SEND CONTROL command 601
  - SEND MAP command 606
  - SEND TEXT command 622
- ADD SUBEVENT command 37
- ADDRESS command 39
- ADDRESS SET command 41
- address, cursor 916
- ADS descriptor 931
- ADS value
  - DFHMSD 955
- ADSL value
  - DFHMSD 955
- ADW1 32
- AFTER option
  - DEFINE TIMER command 142
  - POST command 420
  - ROUTE command 559
  - START command 676
- AID option
  - RECEIVE MAP MAPPINGDEV
    - command 517
- ALARM option
  - SEND CONTROL command 601
  - SEND MAP command 606
  - SEND MAP MAPPINGDEV
    - command 613
  - SEND TEXT command 622
  - SEND TEXT NOEDIT command 630
- ALARM value
  - DFHMDI 946
  - DFHMSD 955
- ALIGNED attribute
  - PL/I 8
- ALL option
  - SEND PAGE command 616
- ALLOCATE (APPC) command 42
- ALLOCATE (LUTYPE6.1) command 46
- ALLOCATE (MRO) command 48
- ALLOCERR condition
  - SPOOLCLOSE command 655
  - SPOOLOPEN INPUT command 658
  - SPOOLOPEN OUTPUT
    - command 662
  - SPOOLREAD command 665
  - SPOOLWRITE command 668
- ALTER option
  - QUERY SECURITY command 440
- ALTERNATE option
  - CONVERSE (non-z/OS
    - Communications Server)
      - command 122
  - CONVERSE (z/OS Communications
    - Server) command 114
  - SEND (non-z/OS Communications
    - Server) command 596
  - SEND (z/OS Communications Server)
    - command 588
  - SEND CONTROL command 601
  - SEND MAP command 606
  - SEND TEXT command 622
  - SEND TEXT NOEDIT command 631
- ALTSCRN operand
  - DFHPSD 968
- ALTSCRNHT option
  - ASSIGN command 54
- ALTSCRNWD option
  - ASSIGN command 54
- AND option
  - DEFINE COMPOSITE EVENT
    - command 133
- ANYKEY option
  - HANDLE AID command 316
- APLKBYD option
  - ASSIGN command 54
- APLTEXT option
  - ASSIGN command 54
- APPC basic conversations
  - commands 23
- APPC logical unit
  - acquiring session to 42
  - initiating conversation with 94
  - returning mapped sessions to
    - CICS 240
  - sending and receiving 98
- APPC mapped conversations
  - abending 341
  - commands 23
  - ensuring transmission of accumulated
    - data 739
  - extracting attributes of 212
  - informing partner of error 362
  - issuing a positive response 347
  - receiving data 486
  - requesting change of direction 383
  - retrieving values from attach
    - header 221
  - returning sessions to CICS 240
  - sending data 569
- APPEND option
  - PUT CONTAINER (CHANNEL)
    - command 428
  - PUT64 CONTAINER command 432
- APPLICATION option 54
- INVOKE APPLICATION
  - command 331

- application performance,
  - monitoring 408
- APPLID option
  - ASSIGN command 54
- APPNOTFOUND condition
  - INVOKE APPLICATION command 333
- argument values
  - assembler language 8
  - C 5
  - COBOL 4
  - PL/I 6
- AS option
  - MOVE CONTAINER (BTS) command 412
  - MOVE CONTAINER (CHANNEL) command 415
- ASA option
  - SPOOLOPEN OUTPUT command 660
- ASIS option
  - CONVERSE (non-z/OS Communications Server) command 122
  - CONVERSE (z/OS Communications Server) command 114
  - RECEIVE (non-z/OS Communications Server) command 509
  - RECEIVE (z/OS Communications Server) command 498
  - RECEIVE MAP command 513
  - RECEIVE PARTN command 520
  - SEND (non-z/OS Communications Server) command 596
- ASKIP value
  - DFHMDf 934
- ASKTIME command 50
- ASKTIME option
  - CONVERTTIME command 128
- ASRAINTRPT option
  - ASSIGN command 54
- ASRAKEY option
  - ASSIGN command 54
- ASRAPSW option
  - ASSIGN command 55
- ASRAPSW16 option
  - ASSIGN command 55
- ASRAREGS option
  - ASSIGN command 55
- ASRAREGS64 option
  - ASSIGN command 55
- ASRASPC option
  - ASSIGN command 55
- ASRASTG option
  - ASSIGN command 56
- assembler language
  - argument values 8
  - LENGTH option default 9
  - register contents 14
  - translated code 14
- assembly language
  - program exit 14
- ASSIGN command 51, 54, 60, 61, 62
- asynchronous interrupt 911
- ASYNCHRONOUS option
  - RUN command 565

- AT option
  - DEFINE TIMER command 142
  - DOCUMENT INSERT command 178
  - POST command 420
  - ROUTE command 559
  - START command 676
- attach
  - start a task 682
- ATTACHID option
  - BUILD ATTACH (LUTYPE6.1) command 71
  - BUILD ATTACH (MRO) command 74
  - CONVERSE (non-z/OS Communications Server) command 122
  - CONVERSE (z/OS Communications Server) command 114
  - EXTRACT ATTACH (LUTYPE6.1) command 204
  - EXTRACT ATTACH (MRO) command 208
  - SEND (non-z/OS Communications Server) command 596
  - SEND (z/OS Communications Server) command 588
- attention identifier (AID) 316
- ATTRB operand
  - DFHMDf 934
  - DFHPDI 966
- attributes
  - control character list, DFHBMSCA 925
- AUTHENTICATE option
  - EXTRACT TCPIP command 223
  - WEB CONVERSE command (Client) 759
  - WEB SEND command (Client) 827
- authentication commands 23
- AUTOPAGE option
  - SEND PAGE command 616
- AUXILIARY option
  - WRITEQ TS command 863

## B

- back out to a syncpoint 711
- BASE operand
  - DFHMSD 955
- BASE value
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955
- basic mapping support (BMS)
  - ADS descriptor 931
  - commands 24
  - completing a logical message 616
  - deleting a logical message 423
  - determining input partition 520
  - field definition macro 931, 934
  - full BMS
    - RECEIVE MAP command 513
    - RECEIVE PARTN command 520
    - SEND CONTROL command 600
    - SEND MAP command 605
    - SEND PAGE 616
    - SEND PARTNSET 620

- basic mapping support (BMS) (*continued*)
  - full BMS (*continued*)
    - SEND TEXT command 621
    - SEND TEXT MAPPED 628
    - SEND TEXT NOEDIT 630
  - full-function BMS
    - PURGE MESSAGE 423
  - map definition macro 931, 946
  - mapping input data 513
  - mapping input data with MAPPINGDEV 517
  - mapset definition macro 931, 955
  - minimum BMS
    - RECEIVE MAP command 513
    - RECEIVE MAP MAPPINGDEV command 517
    - SEND CONTROL command 600
    - SEND MAP command 605
    - SEND MAP MAPPINGDEV command 613
  - partition definition macro 932, 966
  - partition set definition macro 932, 968
  - related constants 925
  - routing a logical message 559
  - sending previously mapped data 628
  - sending user-defined data
    - stream 630
  - standard BMS
    - RECEIVE MAP command 513
    - RECEIVE PARTN command 520
    - SEND CONTROL command 600
    - SEND MAP command 605
    - SEND PARTNSET 620
    - SEND TEXT command 621
- batch data interchange (BDI)
  - add record to data set 345
  - commands 24
  - conditions 365
  - delete a record from data set 358
  - read record from data set 374
  - request next record number 365
  - send data to output device 380
  - terminate data set 343, 353
  - update a record in data set 376
  - wait for function completion 386
- batch logical unit, 3770 111, 496, 583
- BELOW option
  - GETMAIN command 296
- BIF DEEDIT command 67
- BIF DIGEST command 69
- big COMMAREAs (channels)
  - ASSIGN command 57
  - DELETE CHANNEL command 158
  - DELETE CONTAINER (CHANNEL) command 162
  - QUERY CHANNEL command 436
- big COMMAREAs, channels 158, 162, 284, 414, 428, 436, 547, 687, 882
- BINARY option
  - DOCUMENT INSERT command 178
- BLANK value
  - DFHMDf 934
- BLINK value
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955

- BLOCK value
  - DFHMDI 946
  - DFHMSD 955
- BODYCHARSET option
  - WEB CONVERSE command 763
  - WEB RECEIVE command (Client) 809
  - WEB RECEIVE command (Server) 802
- BOOKMARK option
  - DOCUMENT INSERT command 178
- BOTTOM value
  - DFHMDI 946
- BRDATA option
  - START BREXIT command 684
- BRDATALENGTH option
  - START BREXIT command 684
- BREXIT option
  - START BREXIT command 684
- bridge (3270)
  - start a task 684
- BRIDGE option
  - ASSIGN command 56
- browse operation
  - ending 192
  - read next record 456
  - read previous record 467
  - reset starting point 532
  - starting 692
- BROWSETOKEN option
  - ENDBROWSE ACTIVITY command 195
  - ENDBROWSE CONTAINER command 196
  - ENDBROWSE EVENT command 197
  - ENDBROWSE PROCESS command 198
  - GETNEXT ACTIVITY command 303
  - GETNEXT CONTAINER command 305
  - GETNEXT EVENT command 306
  - GETNEXT PROCESS command 308
  - STARTBROWSE ACTIVITY command 699
  - STARTBROWSE CONTAINER command 701
  - STARTBROWSE EVENT command 703
  - STARTBROWSE PROCESS command 705
- browsing commands
  - ENDBROWSE ACTIVITY 195
  - ENDBROWSE CONTAINER 196
  - ENDBROWSE PROCESS 198
  - GETNEXT ACTIVITY 303
  - GETNEXT CONTAINER 305
  - GETNEXT EVENT 306
  - GETNEXT PROCESS 308
  - INQUIRE ACTIVITYID 321
  - INQUIRE CONTAINER 324
  - INQUIRE EVENT 326
  - INQUIRE PROCESS 328
  - INQUIRE TIMER 329
  - STARTBROWSE ACTIVITY 699
  - STARTBROWSE CONTAINER 701
  - STARTBROWSE PROCESS 705

- BRT value
  - DFHMDI 934
- BTRANS option
  - ASSIGN command 56
- BTS commands
  - ACQUIRE 34
  - ADD SUBEVENT 37
  - CANCEL (BTS) 79
  - CHECK ACQPROCESS 87
  - CHECK ACTIVITY 89
  - CHECK TIMER 92
  - DEFINE ACTIVITY 129
  - DEFINE COMPOSITE EVENT 132
  - DEFINE INPUT EVENT 138
  - DEFINE PROCESS 139
  - DEFINE TIMER 142
  - DELETE ACTIVITY 156
  - DELETE CONTAINER (BTS) 160
  - DELETE EVENT 165
  - DELETE TIMER 166
  - ENDBROWSE ACTIVITY 195
  - ENDBROWSE CONTAINER 196
  - ENDBROWSE EVENT 197
  - ENDBROWSE PROCESS 198
  - FORCE TIMER 233
  - GET CONTAINER (BTS) 281
  - GETNEXT ACTIVITY 303
  - GETNEXT CONTAINER 305
  - GETNEXT EVENT 306
  - GETNEXT PROCESS 308
  - INQUIRE ACTIVITYID 321
  - INQUIRE CONTAINER 324
  - INQUIRE EVENT 326
  - INQUIRE PROCESS 328
  - INQUIRE TIMER 329
  - LINK ACQPROCESS 398
  - LINK ACTIVITY 401
  - MOVE CONTAINER (BTS) 411
  - PUT CONTAINER (BTS) 425
  - REMOVE SUBEVENT 525
  - RESET ACQPROCESS 528
  - RESET ACTIVITY 530
  - RESUME 537
  - RETRIEVE REATTACH EVENT 543
  - RETRIEVE SUBEVENT 545
  - RUN 563
  - STARTBROWSE ACTIVITY 699
  - STARTBROWSE CONTAINER 701
  - STARTBROWSE EVENT 703
  - STARTBROWSE PROCESS 705
  - SUSPEND (BTS) 708
  - TEST EVENT 713
- BUFFER option
  - GDS RECEIVE command 273
  - RECEIVE (non-z/OS Communications Server) command 509
  - RECEIVE (z/OS Communications Server) command 498
- BUFSIZE operand
  - DFHPDI 966
- BUILD ATTACH (LUTYPE6.1)
  - command 71
- BUILD ATTACH (MRO) command 74
- built-in functions
  - commands 24

- BYTEOFFSET option
  - GET CONTAINER (CHANNEL) command 284
  - GET64 CONTAINER command 309

## C

- C language
  - ADDRESS COMMAREA 40
  - ADDRESS EIB 40
  - argument values 5
  - LENGTH option default 6
  - translated code 13
- CADDRLENGTH option
  - EXTRACT TCPIP command 223
- CANCEL (BTS) command 79
- CANCEL command 77
- CANCEL option
  - ABEND command 32
  - HANDLE ABEND command 315
- CANCELLING mode, of an activity 322
- CARD option
  - ISSUE ABORT command 343
  - ISSUE END command 353
  - ISSUE SEND command 380
  - ISSUE WAIT command 386
- CASE operand
  - DFHMDI 934
- CBIDERR condition
  - ALLOCATE (APPC) command 44
  - ALLOCATE (LUTYPE6.1) command 47
  - CONVERSE (non-z/OS Communications Server) command 125
  - CONVERSE (z/OS Communications Server) command 117
  - EXTRACT ATTACH (LUTYPE6.1) command 206
  - EXTRACT ATTACH (MRO) command 210
  - SEND (non-z/OS Communications Server) command 598
  - SEND (z/OS Communications Server) command 590
- CBUFF option
  - SEND (non-z/OS Communications Server) command 596
- CCSID option
  - GET CONTAINER (CHANNEL) command 284
  - GET64 CONTAINER command 309
- CCSIDERR condition
  - GET CONTAINER (CHANNEL) command 287
  - GET64 CONTAINER command 312
  - PUT CONTAINER (CHANNEL) command 430
  - PUT64 CONTAINER command 434
  - SOAPFAULT CREATE command 653
  - WSACONTEXT BUILD command 870
- CEE3250C 32
- CEEMSG 32
- CERTIFICATE option
  - EXTRACT CERTIFICATE command 216

CERTIFICATE option *(continued)*  
 WEB OPEN command 780  
 CHANGE PASSWORD command 84  
 CHANGE PHRASE command 82  
 CHANGE TASK command 86  
 CHANGED condition  
 DELETE command 148  
 REWRITE command 555  
 CHANGETIME option  
 VERIFY PASSWORD command 729  
 VERIFY PHRASE command 733  
 channel commands  
 CHANNEL option of RETURN  
 command 547  
 CHANNEL option of XCTL  
 command 882  
 DELETE CHANNEL 158  
 DELETE CONTAINER  
 (CHANNEL) 162  
 GET CONTAINER (CHANNEL) 284  
 GET64 CONTAINER 309  
 MOVE CONTAINER  
 (CHANNEL) 414  
 PUT CONTAINER (CHANNEL) 428  
 PUT64 CONTAINER 432  
 QUERY CHANNEL 436  
 START CHANNEL 687  
 Channel commands 25  
 CHANNEL option  
 ASSIGN command 57  
 DELETE CHANNEL command 158  
 DELETE CONTAINER (CHANNEL)  
 command 162  
 GET CONTAINER (CHANNEL)  
 command 285  
 GET64 CONTAINER command 310  
 INVOKE APPLICATION  
 command 331  
 LINK command 391  
 MOVE CONTAINER (CHANNEL)  
 command 415  
 PUT CONTAINER (CHANNEL)  
 command 428  
 PUT64 CONTAINER command 432  
 QUERY CHANNEL command 436  
 RETURN command 547  
 START TRANSID (CHANNEL)  
 command 687  
 TRANSFORM XMLTODATA  
 command 717  
 WEB CONVERSE command 760  
 WEB SEND command (Client) 827  
 WEB SEND command (Server) 818  
 XCTL command 882  
 CHANNELERR condition  
 DELETE CHANNEL command 158  
 DELETE CONTAINER (CHANNEL)  
 command 162  
 GET CONTAINER (CHANNEL)  
 command 287  
 GET64 CONTAINER command 312  
 INVOKE APPLICATION  
 command 334  
 LINK command 394  
 MOVE CONTAINER (CHANNEL)  
 command 415

CHANNELERR condition *(continued)*  
 PUT CONTAINER (CHANNEL)  
 command 430  
 PUT64 CONTAINER command 434  
 QUERY CHANNEL command 436  
 RETURN command 550  
 SIGNAL EVENT command 635  
 SOAPFAULT ADD command 648  
 SOAPFAULT CREATE command 653  
 SOAPFAULT DELETE command 654  
 START TRANSID (CHANNEL)  
 command 687  
 WEB CONVERSE command 768  
 WEB RECEIVE command  
 (Client) 813  
 WEB RECEIVE command  
 (Server) 806  
 WEB SEND command (Client) 833  
 WEB SEND command (Server) 823  
 WSACONTEXT BUILD  
 command 871  
 XCTL command 883  
 channels  
 ASSIGN command 57  
 channels as large COMMAREAs 158,  
 162, 284, 414, 428, 436, 547, 687, 882  
 CHARACTERSET option  
 DOCUMENT RETRIEVE  
 command 182  
 WEB CONVERSE command 760  
 WEB READ FORMFIELD  
 command 788  
 WEB RECEIVE command  
 (Server) 803  
 WEB SEND command (Client) 827  
 WEB SEND command (Server) 818  
 WEB STARTBROWSE FORMFIELD  
 command 836  
 CHARSIZE operand  
 DFHPDI 966  
 DFHPSD 968  
 CHECK ACQPROCESS command 87  
 CHECK ACTIVITY command 89  
 CHECK TIMER command 92  
 CHUNKING option  
 WEB SEND command (Client) 827  
 WEB SEND command (Server) 819  
 CICS business transaction services (BTS)  
 commands 24  
 CICS Event processing commands  
 SIGNAL EVENT 634  
 CICS Web Interface (CWI) commands  
 DOCUMENT CREATE 173  
 DOCUMENT DELETE 177  
 DOCUMENT INSERT 178  
 DOCUMENT RETRIEVE 182  
 DOCUMENT SET 184  
 EXTRACT CERTIFICATE 216  
 CICS Web support commands  
 CONVERSE WEB 757  
 EXTRACT WEB 228  
 WEB CLOSE 754  
 WEB CONVERSE 757  
 WEB ENDBROWSE  
 FORMFIELD 771  
 WEB ENDBROWSE  
 HTTPHEADER 772

CICS Web support commands *(continued)*  
 WEB ENDBROWSE  
 QUERYPARM 773  
 WEB EXTRACT 774  
 WEB OPEN 779  
 WEB PARSE URL 785  
 WEB READ FORMFIELD 788  
 WEB READ HTTPHEADER 791  
 WEB READ QUERYPARM 793  
 WEB READNEXT FORMFIELD 795  
 WEB READNEXT  
 HTTPHEADER 797  
 WEB READNEXT QUERYPARM 799  
 WEB RECEIVE 801  
 WEB RECEIVE (Client) 808  
 WEB RETRIEVE 815  
 WEB SEND (Client) 825  
 WEB SEND (Server) 817  
 WEB STARTBROWSE  
 FORMFIELD 836  
 WEB STARTBROWSE  
 HTTPHEADER 838  
 WEB STARTBROWSE  
 QUERYPARM 839  
 WEB WRITE HTTPHEADER 841  
 CICS DATAKEY option  
 GETMAIN command 296  
 GETMAIN64 command 301  
 CIPHERS option  
 WEB OPEN command 780  
 CLASS option  
 SPOOL OPEN INPUT command 657  
 SPOOL OPEN OUTPUT  
 command 660  
 CLEAR option  
 HANDLE AID command 316  
 client requests  
 extracting information 216  
 CLIENTADDR option  
 EXTRACT TCPIP command 224  
 CLIENTADDRNU option  
 EXTRACT TCPIP command 224  
 CLIENTCONV option  
 WEB CONVERSE command 766  
 WEB RECEIVE command  
 (Client) 809  
 WEB SEND command (Client) 829  
 CLIENTNAME option  
 EXTRACT TCPIP command 224  
 CLNTADDR6NU option  
 EXTRACT TCPIP command 224  
 CLNTCODEPAGE option  
 DOCUMENT RETRIEVE  
 command 183  
 WEB READ FORMFIELD  
 command 788  
 WEB RECEIVE command  
 (Server) 803  
 WEB SEND command (Server) 819  
 WEB STARTBROWSE FORMFIELD  
 command 836  
 CLNTIPFAMILY option  
 EXTRACT TCPIP command 224  
 CLOSESTATUS option  
 WEB CONVERSE command 760  
 WEB SEND command (Client) 828  
 WEB SEND command (Server) 819

- CLRPARTN option
  - HANDLE AID command 316
- CMDSEC option
  - ASSIGN command 57
- CNAMELENGTH option
  - EXTRACT TCPIP command 224
- CNOTCOMPL option
  - SEND (non-z/OS Communications Server) command 596
  - SEND (z/OS Communications Server) command 588
- COBOL
  - argument values 4
  - translated code 13
- CODEPAGE option
  - WEB OPEN command 780
- CODEPAGEERR condition
  - GET CONTAINER (CHANNEL) command 287
  - GET64 CONTAINER command 312
  - PUT CONTAINER (CHANNEL) command 430
  - PUT64 CONTAINER command 435
  - WSACONTEXT BUILD command 871
- COLOR operand
  - DFHMD 934
  - DFHMDI 946
  - DFHMSD 955
- COLOR option
  - ASSIGN command 57
- COLUMN operand
  - DFHMDI 946
- column value
  - DFHMDI 946
- command language translator
  - translated code 14
- commands
  - format, arguments 1
  - scheduling 27
  - security 27
  - spool 27
  - TCP/IP 28
  - temporary storage control 28
- COMMAREA option
  - ADDRESS command 39
  - INVOKE APPLICATION command 332
  - LINK command 391
  - RETURN command 548
  - XCTL command 883
- common buffer, output to, 2980 506
- common programming interface
  - communications (CPI communications) 919
- COMMONNAME option
  - EXTRACT CERTIFICATE command 217
- COMMONNAMLEN option
  - EXTRACT CERTIFICATE command 217
- COMPAREMAX option
  - GET COUNTER command 289
  - GET DOUNTER command 289
  - UPDATE COUNTER command 725
  - UPDATE DOUNTER command 725
- COMPAREMIN option
  - GET COUNTER command 289
  - GET DOUNTER command 289
  - UPDATE COUNTER command 725
  - UPDATE DOUNTER command 725
- COMPLETE mode, of an activity 322
- COMPLETE option
  - DUMP TRANSACTION command 187
- COMPOSITE option
  - GETNEXT EVENT command 306
  - INQUIRE EVENT command 326
- COMPSTATUS option
  - CHECK ACQPROCESS command 87
  - CHECK ACTIVITY command 90
  - INQUIRE ACTIVITYID command 321
- CONFIRM option
  - GDS SEND command 276
  - SEND (z/OS Communications Server) command 588
- CONNECT PROCESS command 94, 921
- CONSISTENT option
  - READ command 446
  - READNEXT command 459
  - READPREV command 470
- CONSOLE option
  - ISSUE ABORT command 343
  - ISSUE END command 353
  - ISSUE SEND command 380
  - ISSUE WAIT command 386
- console support commands 26
- constants
  - AID values, DFHAID 930
  - attribute values, DFHBMSCA 925
  - for 3270 attributes 925
  - for examining EIBAID field 930
  - for MSR control values 928
  - for printer format controls 925
  - MSR control, DFHtex read 928
  - printer control values, DFHBMSCA 925
- container commands
  - DELETE CHANNEL 158
  - DELETE CONTAINER (BTS) 160
  - DELETE CONTAINER (CHANNEL) 162
  - ENDBROWSE CONTAINER 196
  - GET CONTAINER (BTS) 281
  - GET CONTAINER (CHANNEL) 284
  - GET64 CONTAINER 309
  - GETNEXT CONTAINER 305
  - INQUIRE CONTAINER 324
  - MOVE CONTAINER (BTS) 411
  - MOVE CONTAINER (CHANNEL) 414
  - PUT CONTAINER (BTS) 425
  - PUT CONTAINER (CHANNEL) 428
  - PUT64 CONTAINER 432
  - QUERY CHANNEL 436
  - STARTBROWSE CONTAINER 701
- CONTAINER option
  - DELETE CONTAINER (BTS) command 160
  - DELETE CONTAINER (CHANNEL) command 162
- CONTAINER option (*continued*)
  - GET CONTAINER (BTS) command 281
  - GET CONTAINER (CHANNEL) command 285
  - GET64 CONTAINER command 310
  - GETNEXT CONTAINER command 305
  - INQUIRE CONTAINER command 324
  - MOVE CONTAINER (BTS) command 412
  - MOVE CONTAINER (CHANNEL) command 415
  - PUT CONTAINER (BTS) command 426
  - PUT CONTAINER (CHANNEL) command 429
  - PUT64 CONTAINER command 433
  - WEB CONVERSE command 760
  - WEB SEND command (Client) 829
  - WEB SEND command (Server) 820
- CONTAINERCNT option
  - QUERY CHANNEL command 436
- CONTAINERERR condition
  - DELETE CONTAINER (BTS) command 161
  - DELETE CONTAINER (CHANNEL) command 162
  - GET CONTAINER (BTS) command 282
  - GET CONTAINER (CHANNEL) command 288
  - GET64 CONTAINER command 313
  - INQUIRE CONTAINER command 325
  - MOVE CONTAINER (BTS) command 412
  - MOVE CONTAINER (CHANNEL) command 416
  - PUT CONTAINER (BTS) command 426
  - PUT CONTAINER (CHANNEL) command 431
  - PUT64 CONTAINER command 435
  - WEB CONVERSE command 768
  - WEB RECEIVE command (Client) 813
  - WEB RECEIVE command (Server) 807
  - WEB SEND command (Client) 833
  - WEB SEND command (Server) 823
- content type mapping viii
- content types viii
- context-switching
  - described 398, 401, 563
- CONTROL option
  - QUERY SECURITY command 440
- CONVDATA option
  - GDS CONNECT PROCESS command 254
  - GDS EXTRACT ATTRIBUTES command 257
  - GDS FREE command 261
  - GDS ISSUE ABEND command 263
  - GDS ISSUE CONFIRMATION command 265

- CONVDATA option *(continued)*
  - GDS ISSUE ERROR command 267
  - GDS ISSUE PREPARE command 269
  - GDS ISSUE SIGNAL command 271
  - GDS RECEIVE command 273
  - GDS SEND command 276
  - GDS WAIT command 279
- CONVERSE (2260) command 121
- CONVERSE (3270 logical) command 103
- CONVERSE (3600-3601) command 104
- CONVERSE (3600-3614) command 105
- CONVERSE (3650 interpreter) command 106
- CONVERSE (3650-3270) command 107
- CONVERSE (3650-3653) command 108
- CONVERSE (3650-3680) command 109
- CONVERSE (3767) command 110
- CONVERSE (3770) command 111
- CONVERSE (3790 3270-display) command 113
- CONVERSE (3790 full-function or inquiry) command 112
- CONVERSE (APPC) command 98
- CONVERSE (default) command 97
- CONVERSE (LUTYPE2/LUTYPE3) command 99
- CONVERSE (LUTYPE4) command 100
- CONVERSE (LUTYPE6.1) command 101
- CONVERSE (MRO) command 120
- CONVERSE (non-z/OS Communications Server default) command 119
- CONVERSE (SCS) command 102
- CONVERSE option
  - ISSUE LOAD command 364
  - CONVERSE WEB command 757
- converse with terminal or LU 911
- CONVERTST option
  - GET CONTAINER (CHANNEL) command 285
  - GET64 CONTAINER command 310
- CONVERTTIME command 127
- CONVID option
  - CONNECT PROCESS command 94
  - CONVERSE (non-z/OS Communications Server) command 122
  - CONVERSE (z/OS Communications Server) command 114
  - EXTRACT ATTACH (LUTYPE6.1) command 204
  - EXTRACT ATTACH (MRO) command 208
  - EXTRACT ATTRIBUTES (APPC) command 212
  - EXTRACT ATTRIBUTES (MRO) command 214
  - EXTRACT PROCESS command 221
  - FREE (APPC) command 240
  - FREE (LUTYPE6.1) command 242
  - FREE (MRO) command 243
  - GDS ALLOCATE command 250
  - GDS CONNECT PROCESS command 254
  - GDS EXTRACT ATTRIBUTES command 257
  - GDS EXTRACT PROCESS command 259
- CONVID option *(continued)*
  - GDS FREE command 261
  - GDS ISSUE ABEND command 263
  - GDS ISSUE CONFIRMATION command 265
  - GDS ISSUE ERROR command 267
  - GDS ISSUE PREPARE command 269
  - GDS ISSUE SIGNAL command 271
  - GDS RECEIVE command 273
  - GDS SEND command 276
  - GDS WAIT command 279
  - ISSUE ABEND command 341
  - ISSUE CONFIRMATION command 347
  - ISSUE ERROR command 362
  - ISSUE PREPARE command 369
  - ISSUE SIGNAL (APPC) command 383
  - ISSUE SIGNAL (LUTYPE6.1) command 385
  - POINT command 417
  - RECEIVE (z/OS Communications Server) command 498
  - SEND (z/OS Communications Server) command 588
  - WAIT CONVID command 739
  - WAIT TERMINAL command 750
- copy displayed information 915
- copybooks
  - DFHAID 930
  - DFHBMSCA 925
  - DFHEIBLK 14
  - DFHMSRCA 928
- COUNTER option
  - DEFINE COUNTER command 134
  - DEFINE DCOUNTER command 134
  - DELETE COUNTER command 163
  - GET COUNTER command 289
  - QUERY COUNTER command 437
  - REWIND COUNTER command 551
  - UPDATE COUNTER command 725
- COUNTRY option
  - EXTRACT CERTIFICATE command 217
- COUNTRYLEN option
  - EXTRACT CERTIFICATE command 217
- CPI communications (SAA) 919
- create a journal record 388, 852
- CTLCHAR option
  - CONVERSE (non-z/OS Communications Server) command 122
  - CONVERSE (z/OS Communications Server) command 114
  - ISSUE COPY (3270 logical) command 349
  - SEND (non-z/OS Communications Server) command 596
  - SEND (z/OS Communications Server) command 588
- CTRL operand
  - DFHMDI 946
  - DFHMSD 955
- CURRENT option
  - SEND PAGE command 617
- CURSLOC operand
  - DFHMDI 946
  - DFHMSD 955
- cursor address 916
- CURSOR option
  - RECEIVE MAP MAPPINGDEV command 517
  - SEND CONTROL command 601
  - SEND MAP command 606
  - SEND MAP MAPPINGDEV command 613
  - SEND TEXT command 622
- cursor position
  - terminal control 916
- CVDA (CICS-value data area)
  - command format 4
  - passing and receiving 16
- CVDA options
  - ACTION
    - WRITE OPERATOR command 858
  - ALTER
    - QUERY SECURITY command 440
  - ASRAKEY
    - ASSIGN command 54
  - ASRASPC
    - ASSIGN command 55
  - CONTROL
    - QUERY SECURITY command 440
  - LOGMESSAGE
    - QUERY SECURITY command 440
  - MAXLIFETIME
    - DEQ 172
    - ENQ 200
  - PURGEABILITY
    - WAIT EXTERNAL 744
    - WAITCICS 753
  - READ
    - QUERY SECURITY command 440
- STATE 116, 124, 499, 511, 589, 597
  - ALLOCATE (APPC) 44
  - ALLOCATE (MRO) 48
  - CONNECT PROCESS 95
  - EXTRACT ATTRIBUTES (APPC) 212
  - EXTRACT ATTRIBUTES (MRO) 214
  - FREE (APPC) 240
  - FREE (MRO) 243
  - GDS ALLOCATE 251
  - GDS CONNECT PROCESS 255
  - GDS EXTRACT ATTRIBUTES 257
  - GDS FREE 261
  - GDS ISSUE ABEND 263
  - GDS ISSUE
    - CONFIRMATION 265
    - ERROR 267
    - PREPARE 269
    - SIGNAL 271
    - RECEIVE 274
    - SEND 277
    - WAIT 279
  - ISSUE ABEND command 341
  - ISSUE CONFIRMATION 347
  - ISSUE ERROR 362
  - ISSUE PREPARE 369
  - ISSUE SIGNAL (APPC) 383

## CVDA options (continued)

### STATE (continued)

WAIT CONVID 739

### UPDATE

QUERY SECURITY command 442

## CVDA values 237

### ALLOCATED

ALLOCATE (APPC) 44

ALLOCATE (MRO) 48

CONNECT PROCESS 95

EXTRACT ATTRIBUTES

(APPC) 212

EXTRACT ATTRIBUTES

(MRO) 214

FREE (APPC) 240

FREE (MRO) 243

GDS ALLOCATE 251

GDS CONNECT PROCESS 255

GDS EXTRACT ATTRIBUTES 257

GDS FREE 261

GDS ISSUE ABEND 263

GDS ISSUE

CONFIRMATION 265

GDS ISSUE ERROR 267

GDS ISSUE PREPARE 269

GDS ISSUE SIGNAL 271

GDS RECEIVE 274

GDS SEND 277

GDS WAIT 279

ISSUE ABEND command 341

ISSUE CONFIRMATION 347

ISSUE ERROR 362

ISSUE PREPARE 369

ISSUE SIGNAL (APPC) 383

RECEIVE (MRO) command 511

RECEIVE (z/OS Communications

Server) command 499

SEND (non-z/OS Communications

Server) command 597

SEND (z/OS Communications

Server) command 589

WAIT CONVID 739

### ALTERABLE

QUERY SECURITY command 440

### ASSERTED

EXTRACT TCPIP command 223

### ATTLISAWARE

EXTRACT TCPIP command 223,  
226

### AUTOAUTH

EXTRACT TCPIP command 223

### AUTOREGISTER

EXTRACT TCPIP command 223

### BASE64

BIF DIGEST command 69

### BASESPACE

ASSIGN command 56

### BASICAUTH

EXTRACT TCPIP command 223

WEB CONVERSE command

(Client) 759

WEB SEND command

(Client) 827

### BINARY

BIF DIGEST command 69

### CERTIFICAUTH

EXTRACT TCPIP command 223

## CVDA values (continued)

### CHUNKEND

WEB SEND command

(Client) 828

WEB SEND command

(Server) 819

### CHUNKNO

WEB SEND command

(Client) 828

WEB SEND command

(Server) 819

### CHUNKYES

WEB SEND command

(Client) 828

WEB SEND command

(Server) 819

### CICSEXECKEY

ASSIGN command 54

### CLICONVERT

WEB CONVERSE command 767

WEB RECEIVE command

(Client) 810

WEB SEND command

(Client) 829

### CLIENTAUTH

EXTRACT TCPIP command 226

### CLOSE

WEB CONVERSE command 760

WEB SEND command

(Client) 828

WEB SEND command

(Server) 820

### CONFFREE

CONNECT PROCESS 95

EXTRACT ATTRIBUTES

(APPC) 212

FREE (APPC) 240

GDS ALLOCATE 251

GDS CONNECT PROCESS 255

GDS EXTRACT ATTRIBUTES 257

GDS FREE 261

GDS ISSUE ABEND 263

GDS ISSUE

CONFIRMATION 265

GDS ISSUE ERROR 267

GDS ISSUE PREPARE 269

GDS ISSUE SIGNAL 271

GDS RECEIVE 274

GDS SEND 277

GDS WAIT 279

ISSUE ABEND command 341

ISSUE CONFIRMATION 347

ISSUE ERROR 362

ISSUE PREPARE 369

ISSUE SIGNAL (APPC) 383

RECEIVE (z/OS Communications

Server) command 499

SEND (z/OS Communications

Server) command 589

WAIT CONVID 739

### CONFRECEIVE

CONNECT PROCESS 95

EXTRACT ATTRIBUTES

(APPC) 212

FREE (APPC) 240

GDS ALLOCATE 251

GDS CONNECT PROCESS 255

## CVDA values (continued)

### CONFRECEIVE (continued)

GDS EXTRACT ATTRIBUTES 257

GDS FREE 261

GDS ISSUE ABEND 263

GDS ISSUE

CONFIRMATION 265

GDS ISSUE ERROR 267

GDS ISSUE PREPARE 269

GDS ISSUE SIGNAL 271

GDS RECEIVE 274

GDS SEND 277

GDS WAIT 279

ISSUE ABEND command 341

ISSUE CONFIRMATION 347

ISSUE ERROR 362

ISSUE PREPARE 369

ISSUE SIGNAL (APPC) 383

RECEIVE (z/OS Communications

Server) command 499

SEND (z/OS Communications

Server) command 589

WAIT CONVID 739

### CONFSEND

CONNECT PROCESS 95

EXTRACT ATTRIBUTES

(APPC) 212

FREE (APPC) 240

GDS ALLOCATE 251

GDS CONNECT PROCESS 255

GDS EXTRACT ATTRIBUTES 257

GDS FREE 261

GDS ISSUE ABEND 263

GDS ISSUE

CONFIRMATION 265

GDS ISSUE ERROR 267

GDS ISSUE PREPARE 269

GDS ISSUE SIGNAL 271

GDS RECEIVE 274

GDS SEND 277

GDS WAIT 279

ISSUE ABEND command 341

ISSUE CONFIRMATION 347

ISSUE ERROR 362

ISSUE PREPARE 369

ISSUE SIGNAL (APPC) 383

RECEIVE (z/OS Communications

Server) command 499

SEND (z/OS Communications

Server) command 589

WAIT CONVID 739

### CRITICAL

WRITE OPERATOR

command 858

### CTRLABLE

QUERY SECURITY command 440

### DELETE

WEB CONVERSE command 762,

831

### DOCDELETE

WEB CONVERSE command 760

WEB SEND command

(Client) 830

WEB SEND command

(Server) 820



## CVDA values (continued)

EVENTUAL  
     WEB SEND command (Server) 818  
     WRITE OPERATOR command 858  
 EXPECT  
     WEB CONVERSE command 759  
     WEB SEND command (Client) 827  
 FREE  
     CONNECT PROCESS 95  
     EXTRACT ATTRIBUTES (APPC) 212  
     EXTRACT ATTRIBUTES (MRO) 214  
     FREE (APPC) 240  
     FREE (MRO) 243  
     GDS ALLOCATE 251  
     GDS CONNECT PROCESS 255  
     GDS EXTRACT ATTRIBUTES 257  
     GDS FREE 261  
     GDS ISSUE ABEND 263  
     GDS ISSUE  
         CONFIRMATION 265  
     GDS ISSUE ERROR 267  
     GDS ISSUE PREPARE 269  
     GDS ISSUE SIGNAL 271  
     GDS RECEIVE 274  
     GDS SEND 277  
     GDS WAIT 279  
     ISSUE ABEND command 341  
     ISSUE CONFIRMATION 347  
     ISSUE ERROR 362  
     ISSUE PREPARE 369  
     ISSUE SIGNAL (APPC) 383  
     RECEIVE (MRO) command 511  
     RECEIVE (z/OS Communications Server) command 499  
     SEND (non-z/OS Communications Server) command 597  
     SEND (z/OS Communications Server) command 589  
     WAIT CONVID 739  
 GET  
     WEB CONVERSE command 762  
     WEB SEND command (Client) 831  
 HEAD  
     WEB CONVERSE command 762  
     WEB SEND command (Client) 831  
 HEX  
     BIF DIGEST command 69  
 HOSTNAME  
     WEB EXTRACT or EXTRACT  
         WEB command 229, 775  
     WEB PARSE URL command 786  
 HTTP  
     WEB EXTRACT or EXTRACT  
         WEB command 231, 777  
     WEB OPEN command 782  
 HTTPNO  
     WEB EXTRACT or EXTRACT  
         WEB command 231, 777  
     WEB RECEIVE command (Server) 806

## CVDA values (continued)

HTTPS  
     WEB EXTRACT or EXTRACT  
         WEB command 231, 777  
     WEB OPEN command 782  
 HTTPYES  
     WEB EXTRACT or EXTRACT  
         WEB command 231, 777  
     WEB RECEIVE command (Server) 806  
 IMMEDIATE  
     WEB SEND command (Server) 818  
     WRITE OPERATOR command 858  
 IPV4  
     EXTRACT TCPIP command 224, 225  
     WEB EXTRACT or EXTRACT  
         WEB command 229, 775  
     WEB PARSE URL command 786  
 IPV6  
     EXTRACT TCPIP command 224, 225  
     WEB EXTRACT or EXTRACT  
         WEB command 229, 775  
     WEB PARSE URL command 786  
 LOG  
     QUERY SECURITY command 440  
 NOAUTHENTIC  
     EXTRACT TCPIP command 223  
 NOCLICONVERT  
     WEB CONVERSE command 767  
     WEB RECEIVE command (Client) 810  
     WEB SEND command (Client) 829  
 NOCLOSE  
     WEB CONVERSE command 760  
     WEB SEND command (Client) 829  
     WEB SEND command (Server) 820  
 NOCONVERT  
     GET CONTAINER (CHANNEL) command 285  
     GET64 CONTAINER command 310  
 NODOCDELETE  
     WEB CONVERSE command 761  
     WEB SEND command (Client) 830  
     WEB SEND command (Server) 820  
 NOINCONVERT  
     WEB CONVERSE command 767  
 NOLOG  
     QUERY SECURITY command 440  
 NONCICS  
     ASSIGN command 55  
 NONE  
     WEB CONVERSE command (Client) 759  
     WEB SEND command (Client) 827  
 NOOUTCONVERT  
     WEB CONVERSE command 767

## CVDA values (continued)

NOSRVCONVERT  
     WEB RECEIVE command (Server) 805  
     WEB SEND command (Server) 822  
 NOSSL  
     EXTRACT TCPIP command 226  
 NOTALTERABLE  
     QUERY SECURITY command 440  
 NOTAPPLIC  
     ASSIGN command 55, 56  
     EXTRACT TCPIP command 224, 225  
     WEB EXTRACT or EXTRACT  
         WEB command 229, 775  
 NOTCTRLABLE  
     QUERY SECURITY command 440  
 NOTPURGEABLE  
     WAIT EXTERNAL 744  
     WAITCICS 753  
 NOTREADABLE  
     QUERY SECURITY command 440  
 NOTSUPPORTED  
     EXTRACT TCPIP command 223  
 NOTUPDATABLE  
     QUERY SECURITY command 442  
 OPTIONS  
     WEB CONVERSE command 762  
     WEB SEND command (Client) 831  
 PENDFREE  
     CONNECT PROCESS 95  
     EXTRACT ATTRIBUTES (APPC) 212  
     EXTRACT ATTRIBUTES (MRO) 214  
     FREE (APPC) 240  
     FREE (MRO) 243  
     GDS ALLOCATE 251  
     GDS CONNECT PROCESS 255  
     GDS EXTRACT ATTRIBUTES 257  
     GDS FREE 261  
     GDS ISSUE ABEND 263  
     GDS ISSUE  
         CONFIRMATION 265  
     GDS ISSUE ERROR 267  
     GDS ISSUE PREPARE 269  
     GDS ISSUE SIGNAL 271  
     GDS RECEIVE 274  
     GDS SEND 277  
     GDS WAIT 279  
     ISSUE ABEND command 341  
     ISSUE CONFIRMATION 347  
     ISSUE ERROR 362  
     ISSUE PREPARE 369  
     ISSUE SIGNAL (APPC) 383  
     RECEIVE (MRO) command 511  
     RECEIVE (z/OS Communications Server) command 499  
     SEND (non-z/OS Communications Server) command 597  
     SEND (z/OS Communications Server) command 589  
     WAIT CONVID 739  
 PENDRECEIVE  
     CONNECT PROCESS 95

## CVDA values (continued)

## PENDRECEIVE (continued)

EXTRACT ATTRIBUTES (APPC) 212  
 FREE (APPC) 240  
 GDS ALLOCATE 251  
 GDS CONNECT PROCESS 255  
 GDS EXTRACT ATTRIBUTES 257  
 GDS FREE 261  
 GDS ISSUE ABEND 263  
 GDS ISSUE  
   CONFIRMATION 265  
 GDS ISSUE ERROR 267  
 GDS ISSUE PREPARE 269  
 GDS ISSUE SIGNAL 271  
 GDS RECEIVE 274  
 GDS SEND 277  
 GDS WAIT 279  
 ISSUE ABEND command 341  
 ISSUE CONFIRMATION 347  
 ISSUE ERROR 362  
 ISSUE PREPARE 369  
 ISSUE SIGNAL (APPC) 383  
 RECEIVE (z/OS Communications Server) command 499  
 SEND (z/OS Communications Server) command 590  
 WAIT CONVID 739

## PURGEABLE

WAIT EXTERNAL 744  
 WAITCICS 753

## PUT

WEB CONVERSE command 762  
 WEB SEND command (Client) 831

## READABLE

QUERY SECURITY command 440

## RECEIVE

CONNECT PROCESS 95  
 CONVERSE command (non-z/OS Communications Server) 124  
 EXTRACT ATTRIBUTES (APPC) 212  
 EXTRACT ATTRIBUTES (MRO) 214  
 FREE (APPC) 240  
 FREE (MRO) 243  
 GDS ALLOCATE 251  
 GDS CONNECT PROCESS 255  
 GDS EXTRACT ATTRIBUTES 257  
 GDS FREE 261  
 GDS ISSUE ABEND 263  
 GDS ISSUE  
   CONFIRMATION 265  
 GDS ISSUE ERROR 267  
 GDS ISSUE PREPARE 269  
 GDS ISSUE SIGNAL 271  
 GDS RECEIVE 274  
 GDS SEND 277  
 GDS WAIT 279  
 ISSUE ABEND command 341  
 ISSUE CONFIRMATION 347  
 ISSUE ERROR 362  
 ISSUE PREPARE 369  
 ISSUE SIGNAL (APPC) 383  
 RECEIVE (MRO) command 511

## CVDA values (continued)

## RECEIVE (continued)

RECEIVE (z/OS Communications Server) command 499  
 SEND (non-z/OS Communications Server) command 597  
 SEND (z/OS Communications Server) command 590  
 WAIT CONVID 739  
 REQUIRED  
   EXTRACT TCPIP command 223  
 RFC1123  
   FORMATTIME command 236  
 RFC3339  
   FORMATTIME command 237  
 ROLLBACK  
   CONNECT PROCESS 95  
   CONVERSE command (non-z/OS Communications Server) 124  
 EXTRACT ATTRIBUTES (APPC) 212  
 EXTRACT ATTRIBUTES (MRO) 214  
 FREE (APPC) 240  
 FREE (MRO) 243  
 GDS ALLOCATE 251  
 GDS CONNECT PROCESS 255  
 GDS EXTRACT ATTRIBUTES 258  
 GDS FREE 262  
 GDS ISSUE ABEND 263  
 GDS ISSUE  
   CONFIRMATION 266  
 GDS ISSUE ERROR 267  
 GDS ISSUE PREPARE 269  
 GDS ISSUE SIGNAL 271  
 GDS RECEIVE 274  
 GDS SEND 277  
 GDS WAIT 279  
 ISSUE ABEND command 341  
 ISSUE CONFIRMATION 347  
 ISSUE ERROR 362  
 ISSUE PREPARE 369  
 ISSUE SIGNAL (APPC) 383  
 RECEIVE (MRO) command 511  
 RECEIVE (z/OS Communications Server) command 500  
 SEND (non-z/OS Communications Server) command 597  
 SEND (z/OS Communications Server) command 590  
 WAIT CONVID 739  
 SEND  
   CONNECT PROCESS 95  
   CONVERSE command (non-z/OS Communications Server) 124  
 EXTRACT ATTRIBUTES (APPC) 212  
 EXTRACT ATTRIBUTES (MRO) 214  
 FREE (APPC) 240  
 FREE (MRO) 243  
 GDS ALLOCATE 251  
 GDS CONNECT PROCESS 255  
 GDS EXTRACT ATTRIBUTES 258  
 GDS FREE 262  
 GDS ISSUE ABEND 264

## CVDA values (continued)

## SEND (continued)

GDS ISSUE  
   CONFIRMATION 266  
 GDS ISSUE ERROR 268  
 GDS ISSUE PREPARE 270  
 GDS ISSUE SIGNAL 272  
 GDS RECEIVE 274  
 GDS SEND 277  
 GDS WAIT 280  
 ISSUE ABEND command 341  
 ISSUE CONFIRMATION 347  
 ISSUE ERROR 362  
 ISSUE PREPARE 369  
 ISSUE SIGNAL (APPC) 383  
 RECEIVE (MRO) command 511  
 RECEIVE (z/OS Communications Server) command 500  
 SEND (non-z/OS Communications Server) command 597  
 SEND (z/OS Communications Server) command 590  
 WAIT CONVID 739  
 SRVCONVERT  
   WEB RECEIVE command (Server) 805  
   WEB SEND command (Server) 822  
 SSL  
   EXTRACT TCPIP command 225  
 SUBSPACE  
   ASSIGN command 56  
 SUPPORTED  
   EXTRACT TCPIP command 225  
 SYNCFREE  
   CONNECT PROCESS 95  
   CONVERSE command (non-z/OS Communications Server) 124  
 EXTRACT ATTRIBUTES (APPC) 212  
 EXTRACT ATTRIBUTES (MRO) 214  
 FREE (APPC) 240  
 FREE (MRO) 243  
 GDS ALLOCATE 251  
 GDS CONNECT PROCESS 255  
 GDS EXTRACT ATTRIBUTES 258  
 GDS FREE 262  
 GDS ISSUE ABEND 264  
 GDS ISSUE  
   CONFIRMATION 266  
 GDS ISSUE ERROR 268  
 GDS ISSUE PREPARE 270  
 GDS ISSUE SIGNAL 272  
 GDS RECEIVE 274  
 GDS SEND 277  
 GDS WAIT 280  
 ISSUE ABEND command 341  
 ISSUE CONFIRMATION 347  
 ISSUE ERROR 362  
 ISSUE PREPARE 369  
 ISSUE SIGNAL (APPC) 383  
 RECEIVE (MRO) command 511  
 RECEIVE (z/OS Communications Server) command 500  
 SEND (non-z/OS Communications Server) command 597

CVDA values (*continued*)  
 SYNCFREE (*continued*)  
   SEND (z/OS Communications Server) command 590  
   WAIT CONVID 739  
 SYNCRECEIVE  
   CONNECT PROCESS 95  
   CONVERSE command (non-z/OS Communications Server) 124  
   EXTRACT ATTRIBUTES (APPC) 212  
   EXTRACT ATTRIBUTES (MRO) 214  
   FREE (APPC) 240  
   FREE (MRO) 243  
   GDS ALLOCATE 251  
   GDS CONNECT PROCESS 255  
   GDS EXTRACT ATTRIBUTES 258  
   GDS FREE 262  
   GDS ISSUE ABEND 264  
   GDS ISSUE  
     CONFIRMATION 266  
   GDS ISSUE ERROR 268  
   GDS ISSUE PREPARE 270  
   GDS ISSUE SIGNAL 272  
   GDS RECEIVE 274  
   GDS SEND 277  
   GDS WAIT 280  
   ISSUE ABEND command 341  
   ISSUE CONFIRMATION 347  
   ISSUE ERROR 362  
   ISSUE PREPARE 369  
   ISSUE SIGNAL (APPC) 383  
   RECEIVE (MRO) command 511  
   RECEIVE (z/OS Communications Server) command 500  
   SEND (non-z/OS Communications Server) command 597  
   SEND (z/OS Communications Server) command 590  
   WAIT CONVID 739  
 SYNCSEND  
   CONNECT PROCESS 95  
   CONVERSE command (non-z/OS Communications Server) 124  
   EXTRACT ATTRIBUTES (APPC) 212  
   EXTRACT ATTRIBUTES (MRO) 214  
   FREE (APPC) 240  
   FREE (MRO) 243  
   GDS ALLOCATE 251  
   GDS CONNECT PROCESS 255  
   GDS EXTRACT ATTRIBUTES 258  
   GDS FREE 262  
   GDS ISSUE ABEND 264  
   GDS ISSUE  
     CONFIRMATION 266  
   GDS ISSUE ERROR 268  
   GDS ISSUE PREPARE 270  
   GDS ISSUE SIGNAL 272  
   GDS RECEIVE 274  
   GDS SEND 277  
   GDS WAIT 280  
   ISSUE ABEND command 341  
   ISSUE CONFIRMATION 347  
   ISSUE ERROR 362

CVDA values (*continued*)  
 SYNCSEND (*continued*)  
   ISSUE PREPARE 369  
   ISSUE SIGNAL (APPC) 383  
   RECEIVE (MRO) command 511  
   RECEIVE (z/OS Communications Server) command 500  
   SEND (non-z/OS Communications Server) command 597  
   SEND (z/OS Communications Server) command 590  
   WAIT CONVID 739  
 TASK  
   DEQ 172  
   ENQ 200  
 TRACE  
   WEB CONVERSE command 762  
   WEB SEND command (Client) 831  
 UOW  
   DEQ 172  
   ENQ 200  
 UPDATABL  
   QUERY SECURITY command 442  
 USEREXECKEY  
   ASSIGN command 55  
 CWA option  
   ADDRESS command 40  
 CWALENG option  
   ASSIGN command 57

## D

data  
   passing to new tasks 671  
 DATA operand  
   DFHMDI 946  
   DFHMSD 955  
 DATA option  
   FREEMAIN command 245  
   FREEMAIN64 command 248  
 data sets  
   add records to 345  
   interrogating 372  
   processing termination 353  
   read records from 374  
   update records 376  
 data tables  
   CICS/user-maintained/coupling facility  
     DELETE command 148  
     ENDBR command 192  
     READ command 444  
     READNEXT command 456  
     READPREV command 467  
     RESETBR command 532  
     REWRITE command 554  
     STARTBR command 692  
     UNLOCK command 721  
     WRITE command 844  
   data to output device, sending 380  
 data-area argument  
   CICS command format 4  
   definition 1  
 data-area64  
   command format 4

data-value argument  
   CICS command format 4  
   definition 1  
 data, deleting  
   file control records 148  
   named counter 163  
   temporary storage queues 169  
   transient data queues 167  
 DATA1 option  
   MONITOR command 408  
 DATA2 option  
   MONITOR command 408  
 DATALENGTH option  
   INQUIRE CONTAINER command 325  
   LINK command 391  
 DATAONLY option  
   DOCUMENT RETRIEVE command 183  
   SEND MAP command 606  
   SEND MAP MAPPINGDEV command 614  
 DATAPOINTER option  
   FREEMAIN command 246  
   FREEMAIN64 command 249  
 DATASTR option  
   BUILD ATTACH (LUTYPE6.1) command 71  
   BUILD ATTACH (MRO) command 74  
   EXTRACT ATTACH (LUTYPE6.1) command 204  
   EXTRACT ATTACH (MRO) command 208  
 DATATYPE option  
   PUT CONTAINER (CHANNEL) command 429  
   PUT64 CONTAINER command 433  
 DATCONTAINERoption  
   TRANSFORM XMLTODATA command 717  
 DATE option  
   FORMATTIME command 235  
 DATEFORM option  
   FORMATTIME command 235  
 DATESEP option  
   FORMATTIME command 235  
 DATESTRING option  
   CONVERTTIME command 128  
   FORMATTIME command 235  
 DAYCOUNT option  
   FORMATTIME command 235  
 DAYOFMONTH option  
   DEFINE TIMER command 143  
   FORMATTIME command 236  
 DAYOFWEEK option  
   FORMATTIME command 236  
 DAYOFYEAR option  
   DEFINE TIMER command 143  
 DAYS option  
   DEFINE TIMER command 143  
 DAYSLEFT option  
   VERIFY PASSWORD command 729  
   VERIFY PHRASE command 733  
 DCOUNT option  
   DELETE DCOUNT command 163  
   GET DCOUNT command 289

DCOUNTER option (*continued*)  
 QUERY DOUNTER command 437  
 REWIND DOUNTER command 551  
 UPDATE DOUNTER command 725

DDMMYY option  
 FORMATIME command 236

DDMMYYYY option  
 FORMATIME command 236

DEBKEY option  
 READ command 446  
 STARTBR command 693

DEBREC option  
 READ command 446  
 STARTBR command 693

DEFAULT option  
 CONVERSE (non-z/OS Communications Server) command 122  
 CONVERSE (z/OS Communications Server) command 114  
 SEND (non-z/OS Communications Server) command 596  
 SEND (z/OS Communications Server) command 588  
 SEND CONTROL command 601  
 SEND MAP command 606  
 SEND TEXT command 622  
 SEND TEXT NOEDIT command 631

DEFINE ACTIVITY command 129

DEFINE COMPOSITE EVENT command 132

DEFINE COUNTER command 134

DEFINE DOUNTER command 134

DEFINE INPUT EVENT command 138

DEFINE PROCESS command 139

DEFINE TIMER command 142

DEFRESP option  
 CONVERSE (non-z/OS Communications Server) command 122  
 CONVERSE (z/OS Communications Server) command 114  
 ISSUE ADD command 345  
 ISSUE ERASE command 358  
 ISSUE REPLACE command 376  
 ISSUE SEND command 380  
 SEND (non-z/OS Communications Server) command 596  
 SEND (z/OS Communications Server) command 588

DEFSCRNHT option  
 ASSIGN command 57

DEFSCRNWD option  
 ASSIGN command 57

DELAY command 145

delay processing, task 145

DELETE ACTIVITY command 156

DELETE CHANNEL command 158

DELETE command 148

DELETE CONTAINER (BTS) command 160

DELETE CONTAINER (CHANNEL) command 162

DELETE COUNTER command 163

DELETE DOUNTER command 163

DELETE EVENT command 165

delete loaded program 523

DELETE option  
 SPOOLCLOSE command 655

delete records  
 batch data interchange records 358

DELETE TIMER command 166

DELETEQ TD command 167

DELETEQ TS command 169

deleting data  
 named counter 163  
 temporary storage queues 169  
 transient data queues 167

DELIMITER option  
 ASSIGN command 57

DEQ command 171

dequeue from resource 171

DESTCOUNT option  
 ASSIGN command 57

DESTID option  
 ASSIGN command 57  
 ISSUE ABORT command 343  
 ISSUE ADD command 345  
 ISSUE END command 353  
 ISSUE ERASE command 358  
 ISSUE NOTE command 365  
 ISSUE QUERY command 372  
 ISSUE REPLACE command 376  
 ISSUE SEND command 380  
 ISSUE WAIT command 386

DESTIDLENG option  
 ASSIGN command 58  
 ISSUE ABORT command 343  
 ISSUE ADD command 345  
 ISSUE END command 353  
 ISSUE ERASE command 358  
 ISSUE NOTE command 365  
 ISSUE QUERY command 372  
 ISSUE REPLACE command 376  
 ISSUE SEND command 381  
 ISSUE WAIT command 386

destruction of activities 156

DET value  
 DFHMDF 934

DFH2980 structure 506

DFHAID attention identifier list 930

DFHBMSCA, standard attribute and printer control character list, BMS 925

DFHEAI interface processor 14

DFHECALL macro 14

DFHEIBLK copybook 14

DFHEIEND macro 14

DFHEIENT macro  
 description 14

DFHEIGBL macro 14

DFHEIRET macro 14

DFHEISTG macro 14

DFHMDF macro 934

DFHMDI macro 946

DFHMIRS 393

DFHMSD macro 955

DFHMSRCA, MSR control value constants 928

DFHPDI macro 966

DFHPSD macro 968

DFHRESP, built-in function 12

DFHVALUE, translator routine 16

diagnostic services commands 26

DIGESTTYPE option  
 BIF DIGEST command 69

DISABLED condition  
 DELETE command 148  
 DELETEQ TD command 167  
 READ command 450  
 READQ TD command 478  
 STARTBR command 695  
 UNLOCK command 722  
 WRITE command 846  
 WRITEQ TD command 860

disconnect a switched line 911

display-device operations  
 attention identifier (AID) 916  
 attention identifier list, DFHAID 930  
 copy displayed information 915  
 cursor address 916  
 erase all unprotected fields 915  
 input operation without data 916  
 pass control on receipt of an AID 316  
 print displayed information 915  
 standard attribute and printer control character list, DFHBMSCA 925  
 terminal 914

distributed program link  
 exception conditions 921

DOCSIZE option  
 DOCUMENT INSERT command 179

DOCSTATUS option  
 WEB CONVERSE command 760  
 WEB SEND command (Client) 830  
 WEB SEND command (Server) 820

DOCTOKEN option  
 DOCUMENT RETRIEVE command 183  
 DOCUMENT SET command 184  
 WEB CONVERSE command 761  
 WEB RETRIEVE command 815  
 WEB SEND command (Client) 830  
 WEB SEND command (Server) 820

document  
 adding symbols to symbol table 184  
 creating 173  
 deleting 177

DOCUMENT CREATE command 173

DOCUMENT DELETE command 177

DOCUMENT INSERT command 178

DOCUMENT option  
 DOCUMENT INSERT command 179

DOCUMENT RETRIEVE command 182

document services  
 commands 26

DOCUMENT SET command 184

DORMANT mode, of an activity 322

DRK value  
 DFHMDF 934

DS3270 option  
 ASSIGN command 58

DSATTS operand  
 DFHMDI 946  
 DFHMSD 955

DSECT operand  
 DFHMSD 955

DSECT value  
 DFHMSD 955

DSSCS option  
 ASSIGN command 58

- DSSTAT condition
  - ISSUE RECEIVE command 375
- DUMP TRANSACTION command 187
- DUMPCODE option
  - DUMP TRANSACTION command 187
- DUMPID option
  - DUMP TRANSACTION command 187
- DUPKEY condition
  - DELETE command 148
  - READ command 451
  - READNEXT command 463
  - READPREV command 473
- DUPREC condition
  - REWRITE command 556
  - WRITE command 847
- dynamic allocation 660

## E

- ECADDR option
  - WAIT EVENT command 741
- ECBLIST option
  - WAIT EXTERNAL command 744
  - WAITCICS command 752
- EDF, execution diagnostic facility 671, 687
- EIB fields
  - EIBAID 887
  - EIBATT 887
  - EIBCALEN 887
  - EIBCOMPL 887
  - EIBCONF 887
  - EIBCPOSN 887
  - EIBDATE 887
  - EIBDS 887
  - EIBEOC 887
  - EIBERR 887
  - EIBERRCD 887
  - EIBFMH 887
  - EIBFN 887
  - EIBFREE 887
  - EIBNODAT 887
  - EIBRCODE 887
  - EIBRECV 887
  - EIBREQID 887
  - EIBRESP 887
  - EIBRESP2 887
  - EIBRLDBK 887
  - EIBRSRCE 887
  - EIBSIG 887
  - EIBSYNC 887
  - EIBSYNRB 887
  - EIBTASKN 887
  - EIBTIME 887
  - EIBTRMID 887
  - EIBTRNID 887
  - ILLOGIC condition
    - EIBRCODE 887
  - IOERR condition
    - EIBRCODE 887
- EIB option
  - ADDRESS command 40
- EIBAID 916
  - examining contents of field 930
- EIBRCODE 887
- EIBRESP 887
- ELEMNAME option
  - TRANSFORM XMLTODATA command 717
- ELEMNAMELEN option
  - TRANSFORM XMLTODATA command 717
- ELEMNS option
  - TRANSFORM XMLTODATA command 718
- ELEMNSLEN option
  - TRANSFORM XMLTODATA command 718
- END condition
  - GETNEXT ACTIVITY command 304
  - GETNEXT CONTAINER command 305
  - GETNEXT EVENT command 307
  - GETNEXT PROCESS command 308
  - RETRIEVE REATTACH EVENT command 544
  - RETRIEVE SUBEVENT command 546
- ENDACTIVITY option
  - RETURN command 548
- ENDBR command 192
- ENDBROWSE ACTIVITY command 195
- ENDBROWSE CONTAINER command 196
- ENDBROWSE EVENT command 197
- ENDBROWSE PROCESS command 198
- ENDDATA condition
  - RETRIEVE command 541
- ENDFILE condition
  - READNEXT command 463
  - READPREV command 473
  - SPOOLREAD command 665
  - WEB READNEXT FORMFIELD command 795
  - WEB READNEXT HTTPHEADER command 797
  - WEB READNEXT QUERYPARM command 799
- ENDFILE option
  - ISSUE ENDOUTPUT command 356
- ENDINPT condition
  - RECEIVE (non-z/OS Communications Server) command 511
- ENDOUTPUT option
  - ISSUE ENDFILE command 355
- English and katakana characters, mixed 122, 514, 521
- ENQ command 199
- ENQBUSY condition
  - ENQ command 201
- ensuring terminal operation has completed 750
- ENTER option
  - HANDLE AID command 316
- ENTER TRACEID command
  - monitoring aspects replaced by MONITOR command 408
  - tracing aspects replaced by ENTER TRACENUM command 202
- ENTER TRACENUM command 202
- ENTRY option
  - LOAD command 405
- entry to assembler-language program 14
- ENTRYNAME option
  - MONITOR command 409
- ENVDEFERR condition
  - RETRIEVE command 541
- environment services commands 26
- EOC condition
  - ALLOCATE (LUTYPE6.1) command 47
  - CONVERSE (non-z/OS Communications Server) command 125
  - CONVERSE (z/OS Communications Server) command 117
  - ISSUE RECEIVE command 375
  - RECEIVE (non-z/OS Communications Server) command 511
  - RECEIVE (z/OS Communications Server) command 500
  - RECEIVE MAP command 515
  - RECEIVE PARTN command 521
  - WAIT TERMINAL command 750
- EODS condition
  - CONVERSE (z/OS Communications Server) command 117
  - ISSUE RECEIVE command 375
  - RECEIVE (z/OS Communications Server) command 500
  - RECEIVE MAP command 515
  - RECEIVE PARTN command 521
- EOF condition
  - CONVERSE (non-z/OS Communications Server) command 125
  - RECEIVE (non-z/OS Communications Server) command 511
- EQUAL option
  - READ command 446
  - RESETBR command 533
  - STARTBR command 693
- equated symbols 8
- erase all unprotected fields 915
- ERASE option
  - CONVERSE (non-z/OS Communications Server) command 122
  - CONVERSE (z/OS Communications Server) command 114
  - SEND (non-z/OS Communications Server) command 596
  - SEND (z/OS Communications Server) command 588
  - SEND CONTROL command 601
  - SEND MAP command 606
  - SEND MAP MAPPINGDEV command 614
  - SEND TEXT command 622
  - SEND TEXT NOEDIT command 631
- ERASEAUP option
  - SEND CONTROL command 601
  - SEND MAP command 607
  - SEND MAP MAPPINGDEV command 614
- ERRORMSG option
  - ASSIGN command 58

- ERRORMSGELN option
  - ASSIGN command 58
- ERRTERM option
  - ROUTE command 559
- ESDS (entry-sequenced data set)
  - DELETE command 148
  - READ 448, 450
  - READNEXT 463
  - READPREV 473
  - RESETBR 534
  - STARTBR 695
  - STARTBR command 694
  - WRITE command 844
- ESM
  - ACEE pointer 39
  - QUERY SECURITY command,
    - NOTFND condition 443
  - QUERY SECURITY command,
    - RESCCLASS option 440
  - USERNAME 66
- ESM, external security manager 671, 687
- ESMAPNAME option
  - REQUEST PASSTICKET 526
- ESMREASON option
  - CHANGE PASSWORD command 84
  - CHANGE PHRASE command 82
  - SIGNON command 638
  - SIGNON TOKEN command 643
  - VERIFY PASSWORD command 729
  - VERIFY PHRASE command 734
  - VERIFY TOKEN command 737
- ESMRESP option
  - CHANGE PASSWORD command 84
  - CHANGE PHRASE command 82
  - REQUEST PASSTICKET 526
  - SIGNON command 638
  - SIGNON TOKEN command 643
  - VERIFY PASSWORD command 730
  - VERIFY PHRASE command 734
  - VERIFY TOKEN command 737
- EVENT option
  - ADD SUBEVENT command 37
  - DEFINE ACTIVITY command 129
  - DEFINE COMPOSITE EVENT
    - command 133
  - DEFINE INPUT EVENT
    - command 138
  - DEFINE TIMER command 143
  - DELETE EVENT command 165
  - GETNEXT EVENT command 306
  - INQUIRE ACTIVITYID
    - command 322
  - INQUIRE EVENT command 326
  - INQUIRE TIMER command 329
  - REMOVE SUBEVENT command 525
  - RETRIEVE REATTACH EVENT
    - command 544
  - RETRIEVE SUBEVENT
    - command 545
  - SIGNAL EVENT command 634
  - TEST EVENT command 713
- event processing commands 26
- event-related commands
  - CHECK TIMER 92
  - DEFINE COMPOSITE EVENT 132
  - DEFINE INPUT EVENT 138
  - DEFINE TIMER 142
- event-related commands (*continued*)
  - DELETE EVENT 165
  - DELETE TIMER 166
  - ENDBROWSE EVENT 197
  - FORCE TIMER 233
  - GETNEXT EVENT 306
  - INQUIRE EVENT 326
  - INQUIRE TIMER 329
  - REMOVE SUBEVENT 525
  - RETRIEVE REATTACH EVENT 543
  - RETRIEVE SUBEVENT 545
  - STARTBROWSE EVENT 703
  - TEST EVENT 713
- EVENTERR condition
  - ADD SUBEVENT command 37
  - DEFINE ACTIVITY command 130
  - DEFINE COMPOSITE EVENT
    - command 133
  - DEFINE INPUT EVENT
    - command 138
  - DEFINE TIMER command 144
  - DELETE EVENT command 165
  - INQUIRE EVENT command 327
  - LINK ACQPROCESS command 399
  - LINK ACTIVITY command 402
  - REMOVE SUBEVENT command 525
  - RETRIEVE SUBEVENT
    - command 546
  - RUN command 566
  - SIGNAL EVENT command 635
  - TEST EVENT command 713
- events, timer
  - control area, timer 419
  - monitoring point 408
  - waiting for 741
- EVENTTYPE option
  - GETNEXT EVENT command 306
  - INQUIRE EVENT command 326
  - RETRIEVE REATTACH EVENT
    - command 544
  - RETRIEVE SUBEVENT
    - command 545
- EWASUPP option
  - ASSIGN command 58
- EXACTMATCH option
  - INVOKE APPLICATION
    - command 332
- examples
  - using the ADDRESS SET
    - command 41
  - using the ASKTIME command 50
  - using the ASSIGN command 66
  - using the BIF DEEDIT command 67
  - using the CANCEL command 32
  - using the DELAY command 145
  - using the DELETE command 148
  - using the DEQ command 172
  - using the DUMP TRANSACTION
    - command 187
  - using the ENQ command 202
  - using the ENTER TRACENUM
    - command 203
  - using the FORMATTIME
    - command 238
  - using the FREEMAIN command 246
  - using the GETMAIN command 297, 302
- examples (*continued*)
  - using the HANDLE ABEND
    - command 315
  - using the HANDLE AID
    - command 317
  - using the HANDLE CONDITION
    - command 318
  - using the LINK command 397
  - using the LOAD command 407
  - using the MONITOR command 409
  - using the POST command 422
  - using the READ command 455
  - using the READQ TD command 480
  - using the READQ TS command 484
  - using the RELEASE command 524
  - using the RETRIEVE command 541
  - using the REWRITE command 558
  - using the START ATTACH
    - command 682
  - using the START BREXIT
    - command 684
  - using the START command 671
  - using the WAIT EVENT
    - command 742
  - using the WAIT EXTERNAL
    - command 745
  - using the WAIT JOURNALNAME
    - command 747
  - using the WAITCICS command 752
  - using the WRITE command 850
  - using the WRITE JOURNALNAME
    - command 854
  - using the XCTL command 885
- EXCEPTION option
  - ENTER TRACENUM command 202
- exception support commands 26
- exclusive control release, UNLOCK
  - command 721
- EXEC CICS command format 1
- execution diagnostic facility (EDF) 671, 687
- exit from ASM program 14
- exit, abnormal termination recovery 314
- expiration time, notification when
  - reached 419
- EXPIRED condition
  - DELAY command 145
  - POST command 421
  - WRITE OPERATOR command 859
- EXPIRYTIME option
  - VERIFY PASSWORD command 730
  - VERIFY PHRASE command 734
- EXTATT operand
  - DFHMDI 946
  - DFHMSD 955
- EXTDS option
  - ASSIGN command 58
- extended relative byte address
  - (XRBA) 148
- external security manager (ESM) 440, 671, 687
- EXTRACT ATTACH (LUTYPE6.1)
  - command 204
- EXTRACT ATTACH (MRO)
  - command 208
- EXTRACT ATTRIBUTES (APPC)
  - command 212

EXTRACT ATTRIBUTES (MRO)  
 command 214  
 EXTRACT CERTIFICATE command 216  
 EXTRACT LOGONMSG command 219  
 EXTRACT PROCESS command 221  
 EXTRACT TCPIP command 223  
 EXTRACT TCT command 227  
 EXTRACT WEB command 228

## F

FACILITY option  
 ASSIGN command 58  
 FACILITYTOKEN option  
 RUN command 565  
 FCI option  
 ASSIGN command 59, 908  
 FCT option  
 DUMP TRANSACTION  
 command 188  
 field  
 extracting information 788  
 field definition macro, BMS 931  
 FIELD option  
 BIF DEEDIT command 67  
 field separator operand 946, 955  
 FIELD value  
 DFHMDI 946  
 DFHMSD 955  
 FIELDS operand  
 DFHMDI 946  
 file control  
 commands 26  
 deleting VSAM records 148  
 end browse operation 192  
 read next record 456  
 read previous record 467  
 release exclusive control 721  
 specify start for browse 692  
 update a record 554  
 writing new record 844  
 FILE option  
 DELETE command 148  
 ENDBR command 192  
 READ command 446  
 READNEXT command 459  
 READPREV command 470  
 RESETBR command 533  
 REWRITE command 554  
 STARTBR command 693  
 UNLOCK command 722  
 WRITE command 845  
 filename  
 definition 5, 6, 7, 9, 10  
 filename argument, CICS command  
 format 4  
 FILENOTFOUND condition  
 DELETE command 148  
 ENDBR command 193  
 READ command 451  
 READNEXT command 463  
 READPREV command 473  
 RESETBR command 534  
 REWRITE command 556  
 STARTBR command 695  
 UNLOCK command 722  
 WRITE command 847

FIRESTATUS option  
 GETNEXT EVENT command 306  
 INQUIRE EVENT command 326  
 TEST EVENT command 713  
 FIRST value  
 DFHMDI 946  
 FLDSEP operand  
 DFHMDI 946  
 DFHMSD 955  
 FLENGTH option  
 DUMP TRANSACTION  
 command 188  
 fullword alternative to LENGTH 911  
 GDS RECEIVE command 273  
 GDS SEND command 276  
 GET CONTAINER (BTS)  
 command 281  
 GET CONTAINER (CHANNEL)  
 command 285  
 GET64 CONTAINER command 310  
 GETMAIN command 296  
 GETMAIN64 command 301  
 LOAD command 406  
 PUT CONTAINER (BTS)  
 command 426  
 PUT CONTAINER (CHANNEL)  
 command 429  
 PUT64 CONTAINER command 433  
 RECEIVE (non-z/OS Communications  
 Server) command 509  
 RECEIVE (z/OS Communications  
 Server) command 498  
 SEND (non-z/OS Communications  
 Server) command 597  
 SEND (z/OS Communications Server)  
 command 589  
 SIGNAL EVENT command 635  
 SPOOLWRITE command 668  
 WRITE JOURNALNAME  
 command 852  
 FMH option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 115  
 SEND (non-z/OS Communications  
 Server) command 597  
 SEND (z/OS Communications Server)  
 command 589  
 START command 676  
 FMHPARM option  
 SEND MAP command 607  
 SEND PAGE command 617  
 SEND TEXT command 622  
 FOLD operand  
 DFHMSD 955  
 FOR option  
 DELAY command 145  
 FORCE TIMER command 233  
 form field  
 extracting information 788  
 FORMATTIME command 234  
 FORMFEED option  
 SEND CONTROL command 601  
 SEND MAP command 607

FORMFEED option (*continued*)  
 SEND MAP MAPPINGDEV  
 command 614  
 SEND TEXT command 622  
 FORMFIELD option  
 WEB READ FORMFIELD  
 command 788  
 WEB READNEXT FORMFIELD  
 command 795  
 WEB STARTBROWSE FORMFIELD  
 command 836  
 FREE (APPC) command 240  
 FREE (LUTYPE6.1) command 242  
 FREE (MRO) command 243  
 FREE command 239  
 free main storage 245, 248  
 FREEKB option  
 SEND CONTROL command 601  
 SEND MAP command 607  
 SEND MAP MAPPINGDEV  
 command 614  
 SEND TEXT command 623  
 SEND TEXT NOEDIT command 631  
 FREEKB value  
 DFHMDI 946  
 DFHMSD 955  
 FREEMAIN command 245  
 FREEMAIN64 command 248  
 FROM option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 115  
 DUMP TRANSACTION  
 command 188  
 ENTER TRACENUM command 203  
 GDS SEND command 276  
 ISSUE ADD command 345  
 ISSUE PASS command 367  
 ISSUE REPLACE command 376  
 ISSUE SEND command 381  
 PUT CONTAINER (BTS)  
 command 426  
 PUT CONTAINER (CHANNEL)  
 command 430  
 PUT64 CONTAINER command 434  
 RECEIVE MAP command 514  
 RECEIVE MAP MAPPINGDEV  
 command 518  
 REWRITE command 555  
 SEND (non-z/OS Communications  
 Server) command 597  
 SEND (z/OS Communications Server)  
 command 589  
 SEND MAP command 607  
 SEND MAP MAPPINGDEV  
 command 614  
 SEND TEXT command 623  
 SEND TEXT MAPPED  
 command 628  
 SEND TEXT NOEDIT command 631  
 SIGNAL EVENT command 634  
 SPOOLWRITE command 668  
 START ATTACH command 682  
 START command 676  
 WEB CONVERSE command 761

FROM option (*continued*)  
 WEB SEND command (Client) 830  
 WEB SEND command (Server) 820  
 WRITE command 845  
 WRITE JOURNALNAME  
 command 852  
 WRITEQ TD command 860  
 WRITEQ TS command 864  
 FROMACTIVITY option  
 MOVE CONTAINER (BTS)  
 command 412  
 FROMCCSID option  
 PUT CONTAINER (CHANNEL)  
 command 430  
 PUT64 CONTAINER command 434  
 FROMCHANNEL option  
 SIGNAL EVENT command 634  
 FROMCODEPAGE option  
 GET CONTAINER (CHANNEL)  
 command 430, 434  
 FROMDOC option  
 DOCUMENT INSERT command 179  
 FROMFLENGTH option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 115  
 fullword alternative to  
 FROMLENGTH 911  
 FROMLENGTH option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 115  
 ENTER TRACENUM command 203  
 fullword length alternative  
 (FROMFLENGTH) 911  
 WEB CONVERSE command 761  
 WEB SEND command (Client) 830  
 WEB SEND command (Server) 821  
 FROMPROCESS option  
 MOVE CONTAINER (BTS)  
 command 412  
 FRSET option  
 SEND CONTROL command 602  
 SEND MAP command 607  
 SEND MAP MAPPINGDEV  
 command 614  
 FRSET value  
 DFHMDI 946  
 DFHMSD 955  
 FSET value  
 DFHMDF 934  
 Full Function Logical Unit, 3790 112,  
 497, 584  
 FULLDATE option  
 FORMATTIME 236  
 fullword length option 911  
 FUNCERR condition  
 ISSUE ABORT command 344  
 ISSUE ADD command 346  
 ISSUE END command 354  
 ISSUE ERASE command 359  
 ISSUE NOTE command 365  
 ISSUE QUERY command 372

FUNCERR condition (*continued*)  
 ISSUE REPLACE command 377  
 ISSUE SEND command 381  
 ISSUE WAIT command 387

**G**

GCHARS option  
 ASSIGN command 59  
 GCODES option  
 ASSIGN command 59  
 GDS (generalized data stream) 23  
 GDS ALLOCATE command 250  
 GDS ASSIGN command 253  
 GDS CONNECT PROCESS  
 command 254  
 GDS EXTRACT ATTRIBUTES  
 command 257  
 GDS EXTRACT PROCESS  
 command 259  
 GDS FREE command 261  
 GDS ISSUE ABEND command 263  
 GDS ISSUE CONFIRMATION  
 command 265  
 GDS ISSUE ERROR command 267  
 GDS ISSUE PREPARE command 269  
 GDS ISSUE SIGNAL command 271  
 GDS RECEIVE command 273  
 GDS SEND command 276  
 GDS WAIT command 279  
 General Banking Terminal System (2980  
 General Banking Terminal System) 505  
 generalized data stream (GDS) 23  
 generic applid, XRF 54  
 GENERIC option  
 DELETE command 148  
 READ command 446  
 RESETBR command 533  
 STARTBR command 693  
 GET CONTAINER (BTS) command 281  
 GET CONTAINER (CHANNEL)  
 command 284  
 GET COUNTER command 289  
 GET DOUNTER command 289  
 get main 64-bit storage 299  
 get main storage 294  
 GETMAIN command 294  
 GETMAIN64 command 299  
 GETNEXT ACTIVITY command 303  
 GETNEXT CONTAINER command 305  
 GETNEXT EVENT command 306  
 GETNEXT PROCESS command 308  
 GINIT operand  
 DFHMDF 934  
 GMMI option  
 ASSIGN command 59  
 GROUPID option  
 SIGNON command 638  
 SIGNON TOKEN command 643  
 GRPNAME operand  
 DFHMDF 934  
 GTEQ option  
 READ command 447  
 RESETBR command 533  
 STARTBR command 693

**H**

HANDLE ABEND command 314  
 HANDLE AID command 316  
 HANDLE CONDITION command 318  
 header  
 browsing 771, 836  
 retrieve next 795  
 HEADER operand  
 DFHMDI 946  
 HEADER option  
 SEND TEXT command 623  
 hhmss argument, CICS command  
 format 4  
 HIGHLIGHT operand  
 DFHMDF 934  
 DFHMDI 946  
 DFHMSD 955  
 HIGHLIGHT option  
 ASSIGN command 59  
 HOLD option  
 LOAD command 406  
 HONEOM option  
 SEND CONTROL command 602  
 SEND MAP command 607  
 SEND TEXT command 623  
 SEND TEXT NOEDIT command 631  
 host command processor LU,  
 3650/3680 581  
 host conversational LU 3650  
 (3270) 107, 579  
 (3653) 108, 580  
 HOST option  
 WEB EXTRACT or EXTRACT WEB  
 command 229, 775  
 WEB OPEN command 781  
 WEB PARSE URL command 785  
 HOSTCODEPAGE option  
 WEB READ FORMFIELD  
 command 789  
 WEB READ QUERYPARM  
 command 793  
 WEB RECEIVE command  
 (Server) 803  
 WEB SEND command (Server) 821  
 WEB STARTBROWSE FORMFIELD  
 command 836  
 WEB STARTBROWSE QUERYPARM  
 command 839  
 HOSTLENGTH option  
 WEB EXTRACT or EXTRACT WEB  
 command 229, 775  
 WEB OPEN command 781  
 WEB PARSE URL command 785  
 HOSTTYPE option  
 WEB EXTRACT or EXTRACT WEB  
 command 229, 775  
 WEB PARSE URL command 786  
 HOURS option  
 DEFINE TIMER command 143  
 DELAY command 145  
 POST command 420  
 ROUTE command 560  
 START command 676  
 HTAB operand  
 DFHMSD 955



HTTPHEADER option  
     WEB READ HTTPHEADER  
         command 791  
     WEB READNEXT HTTPHEADER  
         command 797  
     WEB WRITE HTTPHEADER  
         command 842  
 HTTPMETHOD option  
     WEB EXTRACT or EXTRACT WEB  
         command 229, 775  
 HTTPNUM option  
     WEB OPEN command 781  
 HTTPVERSION option  
     WEB EXTRACT or EXTRACT WEB  
         command 229, 775  
 HTTPVNUM option  
     WEB OPEN command 781

**I**  
 IC value  
     DFHMDF 934  
 IGNORE CONDITION command 320  
 IGREQCD condition  
     CONVERSE (z/OS Communications  
         Server) command 117  
     ISSUE SEND command 381  
     SEND (z/OS Communications Server)  
         command 590  
     SEND CONTROL command 603  
     SEND MAP command 610  
     SEND PAGE command 618  
     SEND TEXT command 626  
     SEND TEXT MAPPED  
         command 629  
     SEND TEXT NOEDIT command 632  
 IGREQID condition  
     ROUTE command 562  
     SEND CONTROL command 603  
     SEND MAP command 610  
     SEND TEXT command 626  
     SEND TEXT MAPPED  
         command 629  
     SEND TEXT NOEDIT command 632  
 ILLOGIC condition  
     DELETE command 148  
     ENDBR command 193  
     ENDBROWSE ACTIVITY  
         command 195  
     ENDBROWSE CONTAINER  
         command 196  
     ENDBROWSE PROCESS  
         command 198  
     GETNEXT ACTIVITY command 304  
     GETNEXT CONTAINER  
         command 305  
     GETNEXT PROCESS command 308  
     INQUIRE PROCESS command 328  
     READ command 451  
     READNEXT command 463  
     READPREV command 474  
     RESETBR command 534  
     REWRITE command 556  
     SPOOLOPEN INPUT command 658  
     SPOOLOPEN OUTPUT  
         command 663  
     SPOOLREAD command 666

ILLOGIC condition (*continued*)  
     STARTBR command 695  
     UNLOCK command 722  
     WEB STARTBROWSE FORMFIELD  
         command 837  
     WEB STARTBROWSE HTTPHEADER  
         command 838  
     WEB STARTBROWSE QUERYPARM  
         command 840  
     WRITE command 847  
 IMMEDIATE option  
     RETURN command 549  
 implicit SPOOLCLOSE 657  
 INBFMH condition  
     CONVERSE (non-z/OS  
         Communications Server)  
         command 125  
     CONVERSE (z/OS Communications  
         Server) command 117  
     RECEIVE (non-z/OS Communications  
         Server) command 511  
     RECEIVE (z/OS Communications  
         Server) command 500  
 INCREMENT option  
     GET COUNTER command 289  
     GET DCOUNTER command 289  
     REWIND COUNTER command 551  
     REWIND DCOUNTER  
         command 551  
 INITIAL mode, of an activity 322  
 INITIAL operand  
     DFHMDF 934  
 initialize main 64-bit storage 299  
 initialize main storage 294  
 initiate a task 671  
 INITIMG option  
     GETMAIN command 296  
 INITPARM option  
     ASSIGN command 59  
 INITPARMLEN option  
     ASSIGN command 59  
 INPARTN option  
     ASSIGN command 59  
     RECEIVE MAP command 514  
 input operation without data 916  
 INPUTEVENT option  
     LINK ACQPROCESS command 399  
     LINK ACTIVITY command 402  
     RUN command 565  
 INPUTMSG option  
     LINK command 392  
     RETURN command 549  
     XCTL command 883  
 INPUTMSGLEN option  
     ASSIGN command 59  
     LINK command 392  
     RETURN command 549  
     XCTL command 883  
 INQUIRE ACTIVITYID command 321  
 INQUIRE CONTAINER command 324  
 INQUIRE EVENT command 326  
 INQUIRE PROCESS command 328  
 INQUIRE TIMER command 329  
 interactive logical units 110, 495, 582  
 interface processor DFHEAI 14  
 interpreter logical unit, 3650  
     CONVERSE command 106

interpreter logical unit, 3650 (*continued*)  
     ISSUE EODS command 357  
     ISSUE LOAD command 364  
     RECEIVE command 494  
     SEND (z/OS Communications Server)  
         command 578  
 interrogate a data set 372  
 interval control  
     ASKTIME options 50  
     cancel interval control command 77  
     CANCEL options 78  
     commands 26  
     DELAY options 145  
     delay processing of task 145  
     FORMATTIME options 235  
     notification when specified time  
         expires 419  
     request current time of day 50  
     retrieve data stored for task 539  
     start a task 671  
     wait for event to occur 741  
 INTERVAL option  
     DELAY command 145  
     POST command 420  
     ROUTE command 560  
     START command 676  
 INTO option  
     CONVERSE (non-z/OS  
         Communications Server)  
         command 123  
     CONVERSE (z/OS Communications  
         Server) command 115  
     DOCUMENT RETRIEVE  
         command 183  
     EXTRACT LOGONMSG  
         command 219  
     GDS RECEIVE command 273  
     GET CONTAINER (BTS)  
         command 282  
     GET CONTAINER (CHANNEL)  
         command 286  
     GET64 CONTAINER command 311  
     ISSUE RECEIVE command 374  
     READ command 447  
     READNEXT command 459  
     READPREV command 470  
     READQ TD command 477  
     READQ TS command 481  
     RECEIVE (non-z/OS Communications  
         Server) command 509  
     RECEIVE (z/OS Communications  
         Server) command 498  
     RECEIVE MAP command 514  
     RECEIVE MAP MAPPINGDEV  
         command 518  
     RECEIVE PARTN command 521  
     RETRIEVE command 540  
     SPOOLREAD command 665  
     WEB CONVERSE command 764  
     WEB RECEIVE command  
         (Client) 810  
     WEB RECEIVE command  
         (Server) 803  
 INTOCCSID option  
     GET CONTAINER (CHANNEL)  
         command 286  
     GET64 CONTAINER command 311

- INTOCODEPAGE option
  - GET CONTAINER (CHANNEL)
    - command 286
  - GET64 CONTAINER command 311
- INVALIDCOUNT option
  - VERIFY PASSWORD command 730
  - VERIFY PHRASE command 734
- INVERRTERM condition
  - ROUTE command 562
- INVITE option
  - GDS SEND command 277
  - SEND (non-z/OS Communications Server) command 597
  - SEND (z/OS Communications Server) command 589
- INVLDC condition
  - ROUTE command 562
  - SEND CONTROL command 604
  - SEND MAP command 610
  - SEND TEXT command 626
- INVMPsz condition
  - EIBRCODE byte 3 887
  - RECEIVE MAP command 515
  - RECEIVE MAP MAPPINGDEV command 518
  - SEND MAP command 611
  - SEND MAP MAPPINGDEV command 615
- INVOKE APPLICATION command 331
- INVOKE SERVICE command 335
- INVOKE WEBSERVICE command 335, 340
- INVOKINGPROG option
  - ASSIGN command 59
- INVPARTN condition
  - RECEIVE MAP command 515
  - RECEIVE PARTN command 522
  - SEND CONTROL command 604
  - SEND MAP command 611
  - SEND TEXT command 626
  - SEND TEXT NOEDIT command 632
- INVPARTNSET condition
  - SEND PARTNSET command 620
- INVREQ condition
  - ACQUIRE command 35
  - ADD SUBEVENT command 37
  - ALLOCATE (APPC) command 44
  - ALLOCATE (LUTYPE6.1) command 47
  - ALLOCATE (MRO) command 48
  - ASSIGN command 66
  - BIF DIGEST command 69
  - CANCEL (BTS) command 79
  - CHANGE PASSWORD command 84
  - CHANGE PHRASE command 83
  - CHANGE TASK command 86
  - CHECK ACQPROCESS command 88
  - CHECK ACTIVITY command 91
  - CHECK TIMER command 92
  - CONNECT PROCESS command 95
  - CONVERSE (z/OS Communications Server) command 117
  - CONVERTTIME command 128
  - DEFINE ACTIVITY command 130
  - DEFINE COMPOSITE EVENT command 133
- INVREQ condition (*continued*)
  - DEFINE INPUT EVENT
    - command 138
  - DEFINE PROCESS command 140
  - DEFINE TIMER command 144
  - DELAY command 145
  - DELETE ACTIVITY command 156
  - DELETE command 148
  - DELETE CONTAINER (BTS)
    - command 161
  - DELETE CONTAINER (CHANNEL)
    - command 162
  - DELETE COUNTER command 134, 163, 437
  - DELETE DOUNTER command 134
  - DELETE EVENT command 165
  - DELETE TIMER command 166
  - DELETEQ TD command 167
  - DELETEQ TS command 170
  - DEQ command 172
  - DUMP TRANSACTION
    - command 190
  - EIBRCODE bytes 1-3 887
  - ENDBR command 193
  - ENQ command 201
  - ENTER TRACENUM command 203
  - EXTRACT ATTACH (LUTYPE6.1)
    - command 207
  - EXTRACT ATTACH (MRO)
    - command 210
  - EXTRACT ATTRIBUTES (APPC)
    - command 212
  - EXTRACT CERTIFICATE
    - command 218
  - EXTRACT PROCESS command 221
  - EXTRACT TCPIP command 226
  - EXTRACT TCT command 227
  - FORCE TIMER command 233
  - FORMATTIME command 238
  - FREE (APPC) command 241
  - FREE (LUTYPE6.1) command 242
  - FREE (MRO) command 243
  - FREEMAIN command 246, 249
  - GET CONTAINER (BTS)
    - command 282
  - GET CONTAINER (CHANNEL)
    - command 288
  - GET64 CONTAINER command 313
  - GETMAIN64 command 302
  - HANDLE AID command 317
  - INQUIRE EVENT command 327
  - INQUIRE TIMER command 330
  - INVOKE APPLICATION
    - command 334
  - ISSUE ABEND command 341
  - ISSUE ABORT command 344
  - ISSUE ADD command 346
  - ISSUE CONFIRMATION
    - command 347
  - ISSUE END command 354
  - ISSUE ENDFILE command 355
  - ISSUE ENDOUTPUT command 356
  - ISSUE EODS command 357
  - ISSUE ERASE command 359
  - ISSUE ERASEAUP command 360
  - ISSUE ERROR command 363
  - ISSUE NOTE command 365
- INVREQ condition (*continued*)
  - ISSUE PASS command 368
  - ISSUE PREPARE command 370
  - ISSUE PRINT command 371
  - ISSUE QUERY command 372
  - ISSUE RECEIVE command 375
  - ISSUE REPLACE command 377
  - ISSUE SEND command 381
  - ISSUE SIGNAL (APPC)
    - command 384
  - ISSUE WAIT command 387
  - LINK ACQPROCESS command 399
  - LINK ACTIVITY command 402
  - LINK command 394
  - LOAD command 406
  - MONITOR command 409
  - MOVE CONTAINER (BTS)
    - command 412
  - MOVE CONTAINER (CHANNEL)
    - command 416
  - POP HANDLE command 418
  - POST command 421
  - PURGE MESSAGE command 423
  - PUT CONTAINER (BTS)
    - command 426
  - PUT CONTAINER (CHANNEL)
    - command 431
  - PUT64 CONTAINER command 435
  - QUERY SECURITY command 442
  - READ command 451
  - READNEXT command 464
  - READPREV command 474
  - READQ TD command 478
  - READQ TS command 482
  - RECEIVE (non-z/OS Communications Server) command 512
  - RECEIVE MAP command 515
  - RECEIVE MAP MAPPINGDEV command 519
  - RECEIVE PARTN command 522
  - RELEASE command 523
  - REMOVE SUBEVENT command 525
  - REQUEST PASSTICKET
    - command 527
  - RESET ACQPROCESS command 528
  - RESET ACTIVITY command 530
  - RESETBR command 535
  - RESUME command 538
  - RETRIEVE command 541
  - RETRIEVE REATTACH EVENT
    - command 544
  - RETRIEVE SUBEVENT
    - command 546
  - RETURN command 550
  - REWRITE command 556
  - ROUTE command 562
  - RUN command 566
  - SEND (non-z/OS Communications Server) command 598
  - SEND CONTROL command 604
  - SEND MAP command 611
  - SEND MAP MAPPINGDEV command 615
  - SEND PAGE command 618
  - SEND PARTNSET command 620
  - SEND TEXT command 626

## INVREQ condition (continued)

SEND TEXT MAPPED  
command 629

SEND TEXT NOEDIT command 633

SIGNON command 636

SIGNON command 639, 644

SOAPFAULT ADD command 648

SOAPFAULT CREATE command 653

SOAPFAULT DELETE command 654

SPOOLCLOSE command 656

SPOOLOPEN INPUT command 658

SPOOLOPEN OUTPUT  
command 663

SPOOLREAD command 666

SPOOLWRITE command 669

START ATTACH command 682

START BREXIT command 684

START command 671

START TRANSID (CHANNEL)  
command 687

STARTBR command 695

STARTBROWSE EVENT  
command 703

SUSPEND (BTS) command 708

SYNCPPOINT command 710

SYNCPPOINT ROLLBACK  
command 712

TEST EVENT command 713

UNLOCK command 723

VERIFY PASSWORD command 730, 734

VERIFY TOKEN command 737

WAIT CONVID command 739

WAIT EVENT command 741

WAIT EXTERNAL command 744

WAIT TERMINAL command 750

WAITCICS command 753

WEB CONVERSE command 768

WEB ENDBROWSE FORMFIELD  
command 771

WEB ENDBROWSE HTTPHEADER  
command 772

WEB ENDBROWSE QUERYPARM  
command 773

WEB EXTRACT or EXTRACT WEB  
command 231, 777

WEB OPEN command 783

WEB PARSE URL command 787

WEB READ FORMFIELD  
command 789

WEB READ HTTPHEADER  
command 792

WEB READ QUERYPARM  
command 794

WEB READNEXT FORMFIELD  
command 795

WEB READNEXT HTTPHEADER  
command 797

WEB READNEXT QUERYPARM  
command 799

WEB RECEIVE command  
(Client) 813

WEB RECEIVE command  
(Server) 807

WEB RETRIEVE command 815

WEB SEND command (Client) 833

WEB SEND command (Server) 823

## INVREQ condition (continued)

WEB STARTBROWSE FORMFIELD  
command 837

WEB STARTBROWSE HTTPHEADER  
command 838

WEB STARTBROWSE QUERYPARM  
command 840

WEB WRITE HTTPHEADER  
command 843

WRITE command 847

WRITE JOURNALNAME  
command 854

WRITE OPERATOR command 859

WRITEQ TD command 860

WRITEQ TS command 865

WSACONTEXT BUILD  
command 871

XCTL command 883

## INVREQ option

DOCUMENT RETRIEVE  
command 183

## IOERR condition

ACQUIRE command 35

CANCEL (BTS) command 79

CHECK ACTIVITY command 91

CHECK TIMER command 92

DEFINE ACTIVITY command 130

DEFINE PROCESS command 141

DELETE ACTIVITY command 156

DELETE command 148

DELETE CONTAINER (BTS)  
command 161

DUMP TRANSACTION  
command 190

ENDBR command 193

GET CONTAINER (BTS)  
command 283

GETNEXT ACTIVITY command 304

GETNEXT PROCESS command 308

INQUIRE CONTAINER  
command 325

INQUIRE EVENT command 327

INQUIRE TIMER command 330

LINK ACQPROCESS command 399

LINK ACTIVITY command 403

MOVE CONTAINER (BTS)  
command 412

PUT CONTAINER (BTS)  
command 427

READ command 452

READNEXT command 464

READPREV command 474

READQ TD command 479

READQ TS command 483

RESET ACQPROCESS command 528

RESET ACTIVITY command 531

RESETBR command 535

RESUME command 538

RETRIEVE command 541

REWRITE command 556

RUN command 566

START command 671

STARTBR command 696

STARTBROWSE CONTAINER  
command 702

STARTBROWSE EVENT  
command 703

## IOERR condition (continued)

STARTBROWSE PROCESS  
command 705

SUSPEND (BTS) command 709

UNLOCK command 723

WEB CONVERSE command 770

WEB EXTRACT or EXTRACT WEB  
command (Client) 232, 778

WEB OPEN command 783

WEB RECEIVE command  
(Client) 814

WEB SEND command (Client) 834

WEB SEND command (Server) 824

WRITE command 848

WRITE JOURNALNAME  
command 854

WRITEQ TD command 861

WRITEQ TS command 865

## IOERR option

WAIT JOURNALNAME  
command 747

## ISCINVREQ condition

CANCEL command 78

DELETE command 148

DELETEQ TD command 167

DELETEQ TS command 170

ENDBR command 193

READ command 452

READNEXT command 465

READPREV command 475

READQ TD command 479

READQ TS command 483

RESETBR command 535

REWRITE command 557

START command 671

START TRANSID (CHANNEL)  
command 687

STARTBR command 696

UNLOCK command 723

WRITE command 848

WRITEQ TD command 861

WRITEQ TS command 865

ISSUE ABEND command 341

ISSUE ABORT command 343

ISSUE ADD command 345

ISSUE CONFIRMATION command 347

ISSUE COPY (3270 logical)  
command 349

ISSUE COPY command  
general information 915

ISSUE DISCONNECT (default)  
command 350

ISSUE DISCONNECT (LUTYPE6.1)  
command 352

ISSUE DISCONNECT command  
general information 911

ISSUE END command 353

ISSUE ENDFILE command 355

ISSUE ENDOUTPUT command 356

ISSUE EODS command 357

ISSUE ERASE command 358

ISSUE ERASEAUP command 360  
general information 915

ISSUE ERROR command 362

ISSUE LOAD command 364

ISSUE NOTE command 365

ISSUE PASS command 367

- ISSUE PREPARE command 369
- ISSUE PRINT command 371
  - general information 915
- ISSUE QUERY command 372
- ISSUE RECEIVE command 374
- ISSUE REPLACE command 376
- ISSUE RESET command 379
- ISSUE SEND command 380
- ISSUE SIGNAL (APPC) command 383
- ISSUE SIGNAL (LUTYPE6.1)
  - command 385
- ISSUE SIGNAL command
  - general information 911
- ISSUE WAIT command 386
- ISSUER option
  - EXTRACT CERTIFICATE
    - command 217
- ISUSERID option
  - VERIFY TOKEN command 737
- ITEM option
  - READQ TS command 481
  - WRITEQ TS command 864
- ITEMERR condition
  - READQ TS command 483
  - WRITEQ TS command 866
- IUTYPE option
  - BUILD ATTACH (LUTYPE6.1)
    - command 72
  - BUILD ATTACH (MRO)
    - command 75
  - EXTRACT ATTACH (LUTYPE6.1)
    - command 205
  - EXTRACT ATTACH (MRO)
    - command 209

## J

- JIDERR condition
  - WRITE JOURNALNAME
    - command 854
- JIDERR option
  - WAIT JOURNALNAME
    - command 747
- JOURNAL command 388
- journal control
  - create a journal record 388
- journal record, creating 852
- journaling commands 27
- JOURNALNAME option
  - WAIT JOURNALNAME
    - command 746
  - WRITE JOURNALNAME
    - command 852
- JTYPEID option
  - WRITE JOURNALNAME
    - command 853
- JUSFIRST option
  - SEND TEXT command 623
- JUSLAST option
  - SEND TEXT command 623
- JUSTIFY operand
  - DFHMDf 934
  - DFHMDI 946
- JUSTIFY option
  - SEND TEXT command 623

## K

- katakana and English characters,
  - mixed 122, 521
- KATAKANA option
  - ASSIGN command 60
- katakana terminals
  - CONVERSE (3270 logical)
    - command 114
  - CONVERSE (LUTYPE2/LUTYPE3)
    - command 114
  - CONVERSE command (3270
    - display) 122
  - CONVERSE command (3600
    - BTAM) 122
  - CONVERSE command (3735) 122
  - CONVERSE command (3740) 122
  - CONVERSE command
    - (System/3) 122
  - CONVERSE command
    - (System/7) 122
  - RECEIVE (non-z/OS Communications
    - Server) command 509
  - RECEIVE (z/OS Communications
    - Server) command 498
  - RECEIVE MAP command 514
  - RECEIVE PARTN command 521
  - SEND (non-z/OS Communications
    - Server) command 596
- KEEP option
  - SPOOLCLOSE command 655
- KEYLENGTH option
  - DELETE command 148
  - ISSUE ERASE command 358
  - ISSUE REPLACE command 376
  - READ command 447
  - READNEXT command 459
  - READPREV command 470
  - RESETBR command 533
  - STARTBR command 694
  - WRITE command 845
- KEYNUMBER option
  - ISSUE ERASE command 358
  - ISSUE REPLACE command 376
- keyword length 911
- Knowledge Center viii
- Knowledge Center content types viii

## L

- L40, L64, or L80 options
  - SEND CONTROL command 602
  - SEND MAP command 608
  - SEND TEXT command 624
  - SEND TEXT NOEDIT command 631
- label argument, CICS command
  - format 4
- LABEL option
  - HANDLE ABEND command 315
- LANG operand
  - DFHMSD 955
- LANGINUSE option
  - ASSIGN 60
  - SIGNON command 638
  - SIGNON TOKEN command 644
- language codes 909
- LANGUAGECODE option
  - SIGNON command 638
  - SIGNON TOKEN command 643
- large COMMAREAs, channels 158, 162,
  - 284, 414, 428, 436, 547, 687, 882
- LAST option
  - GDS SEND command 277
  - SEND (non-z/OS Communications
    - Server) command 597
  - SEND (z/OS Communications Server)
    - command 589
  - SEND CONTROL command 602
  - SEND MAP command 607
  - SEND PAGE command 617
  - SEND TEXT command 624
  - SEND TEXT MAPPED
    - command 628
  - SEND TEXT NOEDIT command 631
- LAST value
  - DFHMDI 946
- LASTUSETIME option
  - VERIFY PASSWORD command 730
  - VERIFY PHRASE command 734
- LDC operand
  - DFHMSD 955
- LDC option
  - CONVERSE (z/OS Communications
    - Server) command 115
  - ROUTE command 560
  - SEND (z/OS Communications Server)
    - command 589
  - SEND CONTROL command 602
  - SEND MAP command 607
  - SEND TEXT command 624
- LDCMNEM option
  - ASSIGN command 60
- LDCNUM option
  - ASSIGN command 60
- LEAVEKB option
  - CONVERSE (non-z/OS
    - Communications Server)
      - command 123
    - RECEIVE (non-z/OS Communications
      - Server) command 509
    - SEND (non-z/OS Communications
      - Server) command 597
- LEFT value
  - DFHMDf 934
  - DFHMDI 946
- LENGERR condition
  - BIF DEEDIT command 67
  - BIF DIGEST command 69
  - CHANGE PHRASE command 83
  - CONNECT PROCESS command 96
  - CONVERSE (non-z/OS
    - Communications Server)
      - command 125
    - CONVERSE (z/OS Communications
      - Server) command 118
    - DEQ command 172
    - EIBRCODE byte 1 887
    - ENQ command 201
    - ENTER TRACENUM command 203
    - EXTRACT CERTIFICATE
      - command 218
    - EXTRACT PROCESS command 221
    - EXTRACT TCPIP command 226

LENGERR condition (*continued*)  
   GET CONTAINER (BTS)  
     command 283  
   GET CONTAINER (CHANNEL)  
     command 288  
   GET64 CONTAINER command 313  
   GETMAIN command 297  
   GETMAIN64 command 302  
   INVOKE APPLICATION  
     command 334  
   ISSUE COPY (3270 logical)  
     command 349  
   ISSUE PASS command 368  
   ISSUE RECEIVE command 375  
   LINK command 394  
   LOAD command 406  
   PUT CONTAINER (CHANNEL)  
     command 431  
   PUT64 CONTAINER command 435  
   QUERY SECURITY command 442  
   READ command 452  
   READNEXT command 465  
   READPREV command 475  
   READQ TD command 479  
   READQ TS command 483  
   RECEIVE (non-z/OS Communications  
     Server) command 512  
   RECEIVE (z/OS Communications  
     Server) command 500  
   RECEIVE PARTN command 522  
   RETRIEVE command 541  
   RETURN command 550  
   REWRITE command 557  
   SEND (non-z/OS Communications  
     Server) command 598  
   SEND (z/OS Communications Server)  
     command 591  
   SEND TEXT command 626  
   SIGNAL EVENT command 635  
   SIGNON command 640, 645  
   SOAPFAULT CREATE  
     command 649, 653  
   SPOOLOPEN OUTPUT  
     command 663  
   SPOOLREAD command 666  
   SPOOLWRITE command 669  
   START ATTACH command 682  
   START BREXIT command 684  
   START command 671  
   VERIFY PHRASE command 735  
   VERIFY Token command 738  
   WEB CONVERSE command 769  
   WEB EXTRACT or EXTRACT WEB  
     command 232, 778  
   WEB OPEN command 784  
   WEB PARSE URL command 787  
   WEB READ FORMFIELD  
     command 789  
   WEB READ HTTPHEADER  
     command 792  
   WEB READ QUERYPARM  
     command 794  
   WEB READNEXT FORMFIELD  
     command 796  
   WEB READNEXT HTTPHEADER  
     command 798

LENGERR condition (*continued*)  
   WEB READNEXT QUERYPARM  
     command 800  
   WEB RECEIVE command  
     (Client) 814  
   WEB RECEIVE command  
     (Server) 807  
   WEB SEND command (Client) 824,  
     834  
   WEB STARTBROWSE FORMFIELD  
     command 837  
   WEB STARTBROWSE QUERYPARM  
     command 840  
   WEB WRITE HTTPHEADER  
     command 843  
   WRITE command 848  
   WRITE JOURNALNAME  
     command 854  
   WRITE OPERATOR command 859  
   WRITEQ TD command 861  
   WRITEQ TS command 866  
   XCTL command 884  
 LENGERR option  
   DOCUMENT RETRIEVE  
     command 183  
 LENGTH operand  
   DFHMD5 934  
 LENGTH option  
   BIF DEEDIT command 67  
   built-in function 67  
   default (assembler language) 9  
   default (C) 6  
   default (PL/I) 8  
   DEQ command 172  
   DOCUMENT RETRIEVE  
     command 183  
   DOCUMENT SET command 184  
   DUMP TRANSACTION  
     command 188  
   ENQ command 200  
   EXTRACT CERTIFICATE  
     command 217  
   EXTRACT LOGONMSG  
     command 219  
   fullword length alternative  
     (FLENGTH) 911  
   GETMAIN command 296  
   INVOKE APPLICATION  
     command 332  
   ISSUE ADD command 345  
   ISSUE PASS command 367  
   ISSUE RECEIVE command 374  
   ISSUE REPLACE command 377  
   ISSUE SEND command 381  
   LINK command 392  
   LOAD command 406  
   READ command 447  
   READNEXT command 460  
   READPREV command 470  
   READQ TD command 477  
   READQ TS command 481  
   RECEIVE (non-z/OS Communications  
     Server) command 509  
   RECEIVE (z/OS Communications  
     Server) command 498  
   RECEIVE MAP command 514

LENGTH option (*continued*)  
   RECEIVE MAP MAPPINGDEV  
     command 518  
   RECEIVE PARTN command 521  
   RETRIEVE command 540  
   RETURN command 549  
   REWRITE command 555  
   SEND (non-z/OS Communications  
     Server) command 597  
   SEND (z/OS Communications Server)  
     command 589  
   SEND MAP command 608  
   SEND MAP MAPPINGDEV  
     command 614  
   SEND TEXT command 624  
   SEND TEXT MAPPED  
     command 628  
   SEND TEXT NOEDIT command 631  
   START ATTACH command 682  
   START command 676  
   WEB RECEIVE command  
     (Client) 810  
   WEB RECEIVE command  
     (Server) 803  
   WEB SEND command (Server) 821  
   WRITE command 845  
   WRITEQ TD command 860  
   WRITEQ TS command 864  
   XCTL command 883  
 LENGTH value  
   DFHMDI 946  
   DFHMSD 955  
 LENGTHLIST option  
   DUMP TRANSACTION  
     command 188  
 LEVEL option  
   GETNEXT ACTIVITY command 303  
 LIGHTPEN option  
   HANDLE AID command 316  
 LINE operand  
   DFHMDI 946  
 LINE option  
   SPOOLWRITE command 668  
 line value  
   DFHMDI 946  
 line,column value  
   DFHMD5 934  
 LINEADDR option  
   CONVERSE (non-z/OS  
     Communications Server)  
     command 123  
   SEND (non-z/OS Communications  
     Server) command 597  
 LINK ACQPROCESS command 398  
 LINK ACTIVITY command 401  
 LINK command 389  
 link to program expecting return 389  
 LINKLEVEL option  
   ASSIGN command 60  
 LIST option  
   ROUTE command 561  
 literal constants 8  
 LLID option  
   GDS RECEIVE command 274  
 LOAD command 405  
 load programs, tables, or maps 405

LOADING condition  
 DELETE command 148  
 READ command 453  
 READNEXT command 465  
 STARTBR command 696  
 WRITE command 848  
LOCAL 237  
LOCALITY option  
 EXTRACT CERTIFICATE  
 command 217  
LOCALITYLEN option  
 EXTRACT CERTIFICATE  
 command 217  
LOCATION(LOC24) option  
 GETMAIN64 command 301  
LOCKED condition  
 ACQUIRE command 35  
 CANCEL (BTS) command 80  
 CHECK ACTIVITY command 91  
 DELETE ACTIVITY command 157  
 DELETE command 148  
 DELETE CONTAINER (BTS)  
 command 161  
 DELETEQ TD command 167  
 DELETEQ TS command 170  
 GET CONTAINER (BTS)  
 command 283  
 LINK ACTIVITY command 403  
 MOVE CONTAINER (BTS)  
 command 413  
 PUT CONTAINER (BTS)  
 command 427  
 READ command 453  
 READNEXT command 465  
 READPREV command 475  
 READQ TD command 479  
 RESET ACQPROCESS command 528  
 RESET ACTIVITY command 531  
 RESUME command 538  
 REWRITE command 557  
 RUN command 566  
 SUSPEND (BTS) command 709  
 WRITE command 849  
 WRITEQ TD command 861  
 WRITEQ TS command 866  
logical device code (LDC) 104, 576  
logical messages, BMS  
 completing a logical message 616  
 full BMS  
 ROUTE command 559  
 purging a logical message 423  
 routing a logical message 559  
LOGMESSAGE option  
 QUERY SECURITY command 440  
LOGMODE option  
 ISSUE PASS command 367  
LOGONLOGMODE option  
 ISSUE PASS 368  
LU (logical unit)  
 3270 Information Display  
 System 103, 349, 490, 574  
 3270 SCS Printer 102, 573  
 3270-Display, LUTYPE2 99, 487, 570  
 3270-Display, LUTYPE3 487, 570  
 3600 (3601) 104, 492, 576  
 3600 (3614) 105, 493, 577  
 3600 pipeline 491, 575

LU (logical unit) *(continued)*  
 3650 host conversational (3270) 107, 579  
 3650 host conversational (3653) 108, 580  
 3650 interpreter 106, 357, 364, 494, 578  
 3650/3680 host command  
 processor 581  
 3770 batch 111, 496, 583  
 3790 (3270-display) 113, 508, 586  
 3790 (3270-printer) 587  
 3790 full-function 497, 584  
 3790 full-function or inquiry 112  
 3790 SCS printer 585  
 batch 111, 496, 583  
 conversing with (CONVERSE) 911  
 interactive 110  
 reading data from 374, 911  
 writing data to 345, 911  
LUNAME option  
 ISSUE PASS command 368  
LUTYPE2, 3270-Display LU 99, 487, 570  
LUTYPE3, 3270-Display LU 487, 570  
LUTYPE4  
 logical unit 100, 488, 571  
LUTYPE6.1 logical unit  
 acquiring a session 46  
 communicating on LUTYPE6.1  
 session 101  
 converting 8-character names to 4  
 characters 227  
 disconnecting 352  
 getting information about 417  
 receiving data 489  
 requesting change of direction 385  
 retrieving values from an LUTYPE6.1  
 header 204  
 sending data 572  
 specifying values for an MRO attach  
 header 74  
 specifying values for LUTYPE6.1  
 attach header 71

## M

macros, BMS, summary 931  
magnetic slot reader (MSR) 928  
main 64-bit storage 299  
MAIN option  
 WRITEQ TS command 864  
main storage 294  
MAJORVERSION option 60  
 INVOKE APPLICATION  
 command 332  
map definition macro, BMS 931, 946  
MAP option  
 RECEIVE MAP command 514  
 RECEIVE MAP MAPPINGDEV  
 command 518  
 SEND MAP command 608  
 SEND MAP MAPPINGDEV  
 command 615  
MAP value  
 DFHMSD 955  
MAPATTS operand  
 DFHMDI 946

MAPATTS operand *(continued)*  
 DFHMSD 955  
MAPCOLUMN option  
 ASSIGN command 60  
MAPFAIL condition  
 RECEIVE MAP command 515  
 RECEIVE MAP MAPPINGDEV  
 command 519  
MAPHEIGHT option  
 ASSIGN command 60  
MAPLINE option  
 ASSIGN command 61  
MAPONLY option  
 SEND MAP command 608  
 SEND MAP MAPPINGDEV  
 command 615  
MAPONLY value  
 DFHMDI 946  
 DFHMSD 955  
MAPPINGDEV option  
 RECEIVE MAP MAPPINGDEV  
 command 518  
 SEND MAP MAPPINGDEV  
 command 615  
maps, loading 405  
mapset definition macro  
 (DFHMSD) 931, 955  
MAPSET option  
 RECEIVE MAP command 514  
 RECEIVE MAP MAPPINGDEV  
 command 518  
 SEND MAP command 608  
 SEND MAP MAPPINGDEV  
 command 615  
MAPSFX operand  
 DFHPDI 966  
MAPWIDTH option  
 ASSIGN command 61  
MASSINSERT option  
 WRITE command 845  
MAXDATALEN option  
 EXTRACT TCPIP command 224  
MAXFLENGTH option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 115  
fullword alternative to  
 MAXLENGTH 911  
GDS RECEIVE command 274  
RECEIVE (non-z/OS Communications  
 Server) command 510  
RECEIVE (z/OS Communications  
 Server) command 499  
SPOOLREAD command 665  
MAXIMUM option  
 DEFINE COUNTER command 134  
 DEFINE DCOUNTER command 134  
 QUERY COUNTER command 437  
 QUERY DCOUNTER command 437  
MAXLENGTH option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 115

MAXLENGTH option (*continued*)  
 DOCUMENT RETRIEVE  
   command 183  
 fullword length alternative  
   (MAXLENGTH) 911  
 RECEIVE (non-z/OS Communications  
   Server) command 510  
 RECEIVE (z/OS Communications  
   Server) command 499  
 WEB CONVERSE command 764  
 WEB RECEIVE command  
   (Client) 811  
 WEB RECEIVE command  
   (Server) 804  
 WRITE OPERATOR command 858  
 MAXLIFETIME option  
   DEQ command 172  
   ENQ command 200  
 MAXPROCLN option  
   EXTRACT PROCESS command 221  
   GDS EXTRACT PROCESS  
     command 259  
 MCC option  
   SPOOL OPEN OUTPUT  
     command 661  
 MEDIATYPE option  
   WEB CONVERSE command 761, 764  
   WEB RECEIVE command  
     (Client) 811  
   WEB RECEIVE command  
     (Server) 804  
   WEB SEND command (Client) 830  
   WEB SEND command (Server) 821  
 METHOD option  
   WEB CONVERSE command 762  
   WEB SEND command (Client) 831  
 METHODLENGTH option  
   WEB EXTRACT or EXTRACT WEB  
     command 230, 776  
 MICROVERSION option 61  
 MILLISECONDS option  
   FORMATIME command 236  
 MINIMUM option  
   DEFINE COUNTER command 134  
   DEFINE DCOUNTER command 134  
   INVOKE APPLICATION  
     command 333  
   QUERY COUNTER command 437  
   QUERY DCOUNTER command 437  
 MINORVERSION option 61  
   INVOKE APPLICATION  
     command 333  
 MINUTES option  
   DEFINE TIMER command 143  
   DELAY command 145  
   POST command 421  
   ROUTE command 561  
   START command 677  
 MMDDYY option  
   FORMATIME command 236  
 MMDDYYYY option  
   FORMATIME command 236  
 MODE operand  
   DFHMSD 955  
 MODE option  
   CHECK ACQPROCESS command 88  
   CHECK ACTIVITY command 90

MODE option (*continued*)  
 INQUIRE ACTIVITYID  
   command 322  
 model codes (terminal) 907  
 MODENAME option  
   GDS ALLOCATE command 250  
 modes, of an activity  
   ACTIVE 322  
   CANCELLING 322  
   COMPLETE 322  
   DORMANT 322  
   INITIAL 322  
 MONITOR command 408  
 monitoring application performance 408  
 monitoring commands 27  
 MONTH option  
   DEFINE TIMER command 143  
 MONTHOFYEAR option  
   FORMATIME command 236  
 MOVE CONTAINER (BTS)  
   command 411  
 MOVE CONTAINER (CHANNEL)  
   command 414  
 MSR (magnetic slot reader)  
   control byte values and  
     constants 928  
   DFHMSRCA, 928  
 MSR option  
   SEND CONTROL command 602  
   SEND MAP command 609  
   SEND TEXT command 624  
 MSRCONTROL option  
   ASSIGN command 61  
 multi region operation (MRO) commands  
   ALLOCATE 48  
   BUILD ATTACH 74  
   CONVERSE command 120  
   EXTRACT ATTACH 208  
   EXTRACT ATTRIBUTES 214  
   FREE 243  
   RECEIVE 503  
   SEND 593  
 MUSTENTER value  
   DFHMDf 934  
   DFHMDI 946  
   DFHMSD 955  
 MUSTFILL value  
   DFHMDf 934  
   DFHMDI 946  
   DFHMSD 955

## N

name argument, CICS command  
 format 4  
 NAME option  
   WAIT EVENT command 741  
   WAIT EXTERNAL command 744  
   WAITCICS command 752  
 named counter  
   define named counter 134  
   delete named counter 163  
   query named counter 437  
 named counter server commands 27  
 named counter server, GET  
   command 289

named counter server, REWIND  
 command 551  
 named counter server, UPDATE  
 command 725  
 NAMELENGTH option  
   WEB READ FORMFIELD  
     command 789  
   WEB READ HTTPHEADER  
     command 791  
   WEB READ QUERYPARM  
     command 794  
   WEB READNEXT FORMFIELD  
     command 795  
   WEB READNEXT HTTPHEADER  
     command 797  
   WEB READNEXT QUERYPARM  
     command 799  
   WEB STARTBROWSE FORMFIELD  
     command 837  
   WEB STARTBROWSE QUERYPARM  
     command 840  
   WEB WRITE HTTPHEADER  
     command 842  
 national language codes 909  
 NATLANG option  
   SIGNON command 638  
   SIGNON TOKEN command 644  
 NATLANGINUSE option  
   ASSIGN command 61  
   SIGNON command 639  
   SIGNON TOKEN command 644  
 NETNAME option  
   ASSIGN command 61  
   EXTRACT TCT command 227  
 NETNAMEIDERR condition  
   ALLOCATE (APPC) command 44  
 new tasks, passing data to 671  
 NEWPASSWORD option  
   CHANGE PASSWORD command 84  
   SIGNON command 639  
 NEWPHRASE option  
   CHANGE PHRASE command 82  
   SIGNON command 639  
 NEWPHRASELEN option  
   CHANGE PHRASE command 83  
   SIGNON command 639  
 NEXT option  
   READQ TS command 482  
 NEXT value  
   DFHMDI 946  
 NEXTTRANSID option  
   ASSIGN command 61  
 NLEOM option  
   ROUTE command 561  
   SEND MAP command 609  
   SEND TEXT command 624  
 NO value  
   DFHMDI 946  
   DFHMSD 955  
 NOAUTOPAGE option  
   SEND PAGE command 617  
 NOCC option  
   SPOOL OPEN OUTPUT  
     command 661  
 NOCHECK option  
   DEFINE PROCESS command 139  
   START command 677

NODATA option  
     GET CONTAINER (BTS)  
         command 282  
     GET CONTAINER (CHANNEL)  
         command 286  
     GET64 CONTAINER command 311  
 NODE option  
     SPOOLOPEN OUTPUT  
         command 661  
 NODEIDERR condition  
     SPOOLOPEN OUTPUT  
         command 663  
 NODUMP option  
     ABEND command 32  
 NOFLUSH option  
     SEND MAP command 609  
 NOHANDLE option  
     deactivating HANDLE CONDITION  
         command 318  
     option 11  
     overriding HANDLE AID 12  
 NOJBUFSP condition  
     WRITE JOURNALNAME  
         command 854  
 NONVAL condition  
     ISSUE LOAD command 364  
 NOPASSBKRD condition  
     RECEIVE (non-z/OS Communications  
         Server) command 512  
 NOPASSBKWR condition  
     SEND (non-z/OS Communications  
         Server) command 598  
 NOQUEUE option  
     ALLOCATE (APPC) command 43  
     ALLOCATE (LUTYPE6.1)  
         command 46  
     ALLOCATE (MRO) command 48  
     GDS ALLOCATE command 250  
 NOQUIESCE  
     ISSUE PASS command 368  
 NORM value  
     DFHMDf 934  
 NOSPACE condition  
     DUMP TRANSACTION  
         command 191  
     REWRITE command 557  
     WRITE command 849  
     WRITEQ TD command 861  
     WRITEQ TS command 866  
 NOSPOOL condition  
     SPOOLCLOSE command 656  
     SPOOLOPEN INPUT command 658  
     SPOOLOPEN OUTPUT  
         command 663  
     SPOOLREAD command 666  
     SPOOLWRITE command 669  
 NOSTART condition  
     ISSUE LOAD command 364  
 NOSTG condition  
     DUMP TRANSACTION  
         command 191  
     GETMAIN command 297  
     GETMAIN64 command 302  
     SPOOLCLOSE command 656  
     SPOOLOPEN INPUT command 658  
     SPOOLOPEN OUTPUT  
         command 663  
 NOSTG condition (*continued*)  
     SPOOLREAD command 666  
     SPOOLWRITE command 669  
 NOSUSPEND option  
     ALLOCATE (APPC) 42  
     ALLOCATE (LUTYPE6.1)  
         command 46  
     DELETE 148  
     ENQ command 200  
     GETMAIN command 296  
     GETMAIN64 command 301  
     READ command 448  
     READNEXT command 461  
     READPREV command 471  
     READQ TD command 478  
     REWRITE command 555  
     WRITE command 846  
     WRITE JOURNALNAME  
         command 853  
     WRITEQ TS command 864  
 NOTALLOC condition  
     CONNECT PROCESS command 96  
     CONVERSE (non-z/OS  
         Communications Server)  
         command 125  
     CONVERSE (z/OS Communications  
         Server) command 118  
     EXTRACT ATTACH (LUTYPE6.1)  
         command 207  
     EXTRACT ATTACH (MRO)  
         command 211  
     EXTRACT ATTRIBUTES (APPC)  
         command 213  
     EXTRACT ATTRIBUTES (MRO)  
         command 215  
     EXTRACT LOGONMSG  
         command 220  
     EXTRACT PROCESS command 221  
     EXTRACT TCT command 227  
     FREE (APPC) command 241  
     FREE (LUTYPE6.1) command 242  
     FREE (MRO) command 244  
     FREE command 239  
     ISSUE ABEND command 342  
     ISSUE CONFIRMATION  
         command 348  
     ISSUE COPY (3270 logical)  
         command 349  
     ISSUE DISCONNECT (LUTYPE6.1)  
         command 352  
     ISSUE ENDFILE command 355  
     ISSUE ENDOUTPUT command 356  
     ISSUE EODS command 357  
     ISSUE ERASEAUP command 360  
     ISSUE ERROR command 363  
     ISSUE LOAD command 364  
     ISSUE PASS command 368  
     ISSUE PREPARE command 370  
     ISSUE PRINT command 371  
     ISSUE SIGNAL (APPC)  
         command 384  
     ISSUE SIGNAL (LUTYPE6.1)  
         command 385  
     POINT command 417  
     RECEIVE (non-z/OS Communications  
         Server) command 512  
 NOTALLOC condition (*continued*)  
     RECEIVE (z/OS Communications  
         Server) command 500  
     SEND (non-z/OS Communications  
         Server) command 598  
     SEND (z/OS Communications Server)  
         command 591  
     WAIT CONVID command 740  
     WAIT SIGNAL command 749  
     WAIT TERMINAL command 750  
 NOTAUTH condition  
     ACQUIRE command 35  
     CANCEL (BTS) command 80  
     CANCEL command 78  
     CHANGE PASSWORD command 83,  
         85  
     DEFINE ACTIVITY command 131  
     DEFINE PROCESS command 141  
     DELETE command 148  
     DELETEQ TD command 168  
     DELETEQ TS command 170  
     ENDBR command 193  
     HANDLE ABEND command 315  
     INQUIRE ACTIVITYID  
         command 323  
     INQUIRE CONTAINER  
         command 325  
     INQUIRE EVENT command 327  
     INQUIRE PROCESS command 328  
     INQUIRE TIMER command 330  
     INVOKE APPLICATION  
         command 334  
     LINK ACQPROCESS command 399  
     LINK ACTIVITY command 403  
     LINK command 395  
     LOAD command 406  
     READ command 453  
     READNEXT command 466  
     READPREV command 475  
     READQ TD command 479  
     READQ TS command 483  
     RELEASE command 524  
     RESET ACQPROCESS command 528  
     RESET ACTIVITY command 531  
     RESETBR command 535  
     REWRITE command 558  
     RUN command 566  
     SIGNON command 640, 645  
     SPOOLOPEN INPUT command 658  
     START ATTACH command 682  
     START BREXIT command 684  
     START command 671  
     START TRANSID (CHANNEL)  
         command 687  
     STARTBR command 697  
     STARTBROWSE ACTIVITY  
         command 700  
     STARTBROWSE CONTAINER  
         command 702  
     STARTBROWSE EVENT  
         command 704  
     STARTBROWSE PROCESS  
         command 705  
     UNLOCK command 723  
     VERIFY PASSWORD command 730  
     VERIFY PHRASE command 735  
     VERIFY Token command 738



NOTAUTH condition *(continued)*  
 WEB CONVERSE command 770  
 WEB OPEN command 784  
 WEB SEND command (Client) 835  
 WRITE command 849  
 WRITE JOURNALNAME  
 command 854  
 WRITEQ TD command 861  
 WRITEQ TS command 866  
 XCTL command 884

NOTFND condition  
 CANCEL command 78  
 DELETE command 148  
 DELETE COUNTER command 289,  
 551, 725  
 QUERY SECURITY command 442  
 READ command 454  
 READNEXT command 466  
 READPREV command 475  
 RESETBR command 536  
 REWRITE 557  
 SOAPFAULT DELETE command 654  
 SPOOLCLOSE command 656  
 SPOOLOPEN INPUT command 658  
 SPOOLOPEN OUTPUT  
 command 663  
 SPOOLREAD command 666  
 STARTBR command 697  
 WEB CONVERSE command 769  
 WEB EXTRACT or EXTRACT WEB  
 command 232, 778  
 WEB OPEN command 784  
 WEB READ FORMFIELD  
 command 790  
 WEB READ HTTPHEADER  
 command 792  
 WEB READ QUERYPARM  
 command 794  
 WEB RECEIVE command  
 (Server) 807  
 WEB RETRIEVE command 816  
 WEB SEND command (Client) 835  
 WEB SEND command (Server) 824  
 WEB STARTBROWSE FORMFIELD  
 command 837  
 WEB STARTBROWSE HTTPHEADER  
 command 838  
 WEB STARTBROWSE QUERYPARM  
 command 840

NOTFND option  
 DOCUMENT RETRIEVE  
 command 183

NOTOPEN condition  
 DELETE command 148  
 DUMP TRANSACTION  
 command 191  
 READ command 454  
 READQ TD command 479  
 SPOOLCLOSE command 656  
 SPOOLOPEN INPUT command 659  
 SPOOLOPEN OUTPUT  
 command 664  
 SPOOLREAD command 667  
 SPOOLWRITE command 669  
 STARTBR command 697  
 UNLOCK command 723  
 WEB CLOSE command 756

NOTOPEN condition *(continued)*  
 WEB CONVERSE command 768  
 WEB ENDBROWSE HTTPHEADER  
 command 772  
 WEB EXTRACT or EXTRACT WEB  
 command 232, 778  
 WEB READ HTTPHEADER  
 command 792  
 WEB READNEXT HTTPHEADER  
 command 798  
 WEB RECEIVE command  
 (Client) 813  
 WEB SEND command (Client) 835  
 WEB STARTBROWSE HTTPHEADER  
 command 838  
 WEB WRITE HTTPHEADER  
 command 843  
 WRITE command 849  
 WRITE JOURNALNAME  
 command 854  
 WRITEQ TD command 861

NOTOPEN option  
 WAIT JOURNALNAME  
 command 747

NOTRUNCATE option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 CONVERSE (z/OS Communications  
 Server) command 116  
 RECEIVE (non-z/OS Communications  
 Server) command 510  
 RECEIVE (z/OS Communications  
 Server) command 499  
 WEB CONVERSE command 764  
 WEB RECEIVE command  
 (Client) 811  
 WEB RECEIVE command  
 (Server) 804

NOWAIT option  
 ISSUE ADD command 345  
 ISSUE ERASE command 358  
 ISSUE REPLACE command 377  
 ISSUE SEND command 381

NSCONTAINER option  
 TRANSFORM XMLTODATA  
 command 718

NUM value  
 DFHMDF 934

number value  
 DFHMDF 934

NUMBER value  
 DFHMDI 946

NUMCIPHERS option  
 WEB OPEN command 782

NUMEVENTS option  
 WAIT EXTERNAL command 744  
 WAITCICS command 752

NUMITEMS option  
 READQ TS command 482  
 WRITEQ TS command 864

NUMREC option  
 DELETE command 148  
 ISSUE ADD command 346  
 ISSUE ERASE command 359  
 ISSUE REPLACE command 377

NUMROUTES option  
 WRITE OPERATOR command 858

NUMSEGMENTS option  
 DUMP TRANSACTION  
 command 188

NUMTAB option  
 ASSIGN command 61

## O

OBFMT operand  
 DFHMDI 946  
 DFHMSD 955

OCCURS operand  
 DFHMDF 934

OFF value  
 DFHMDF 934  
 DFHMDI 946  
 DFHMSD 955

OIDCARD option  
 SIGNON command 639

ON option  
 DEFINE TIMER command 143

OPCLASS option  
 ASSIGN command 62  
 ROUTE command 561

OPENERR condition  
 DUMP TRANSACTION  
 command 191  
 SPOOLOPEN INPUT command 659  
 SPOOLOPEN OUTPUT  
 command 664

OPERATION option 62  
 INVOKE APPLICATION  
 command 333

OPERID option  
 HANDLE AID command 316

OPERKEYS option  
 ASSIGN command 62

OPERPURGE option  
 SEND PAGE command 617

OPID option  
 ASSIGN command 62

OPSECURITY option  
 ASSIGN command 62

options  
 BMS 513, 517, 622  
 length 911

OPTIONS(MAIN)  
 in PL/I 13

OR option  
 DEFINE COMPOSITE EVENT  
 command 133

ORGABCODE option  
 ASSIGN command 62

ORGANIZATION option  
 EXTRACT CERTIFICATE  
 command 217

ORGANIZATLEN option  
 EXTRACT CERTIFICATE  
 command 217

ORGUNIT option  
 EXTRACT CERTIFICATE  
 command 217

ORGUNITLEN option  
 EXTRACT CERTIFICATE  
 command 217

- OUTDESCR option
  - SPOOLOPEN OUTPUT command 661
- OUTDESCRERR condition
  - SPOOLOPEN OUTPUT command 664
- OUTLINE operand
  - DFHMDI 946
  - DFHMSD 955
- OUTLINE option
  - ASSIGN command 62
- OUTPARTN option
  - SEND CONTROL command 602
  - SEND MAP command 609
  - SEND TEXT command 625
  - SEND TEXT NOEDIT command 631
- output control, 2980 General Banking Terminal System 506
- output to common buffer, 2980 506
- OVERFLOW condition
  - SEND MAP command 611
- OWNER option
  - EXTRACT CERTIFICATE command 217

## P

- PA1-PA3 option
  - HANDLE AID command 316
- PAGE option
  - SPOOLWRITE command 668
- PAGENUM option
  - ASSIGN command 62
- PAGING option
  - SEND CONTROL command 603
  - SEND MAP command 609
  - SEND TEXT command 625
  - SEND TEXT MAPPED command 628
  - SEND TEXT NOEDIT command 632
- partition definition macro (DFHPDI) 932, 966
- partition set definition macro (DFHPSD) 932, 968
- PARTN operand
  - DFHMDI 946
  - DFHMSD 955
- PARTN option
  - RECEIVE PARTN command 521
- PARTNER option
  - ALLOCATE(APPC) command 43
  - CONNECT PROCESS command 94
  - GDS ALLOCATE command 251
  - GDS CONNECT PROCESS command 254
- PARTNERIDERR condition
  - ALLOCATE (APPC) command 44
  - CONNECT PROCESS command 96
- PARTNFAIL condition
  - RECEIVE MAP command 515
- PARTNPAGE option
  - ASSIGN command 62
- PARTNS option
  - ASSIGN command 62
- PARTNSET option
  - ASSIGN command 62
- PASSBK option
  - RECEIVE (non-z/OS Communications Server) command 510
  - SEND (non-z/OS Communications Server) command 597
- passbook control, 2980 505
- passing a session 367
- passing control
  - expecting return (LINK) 389
  - on receipt of an AID (HANDLE AID command) 316
  - without return (XCTL) 882
- passing data to new tasks 671
- PASSTICKET option
  - REQUEST PASSTICKET 527
- PASSWORD option
  - CHANGE PASSWORD command 84
  - SIGNON command 639
  - VERIFY PASSWORD command 730
  - WEB CONVERSE command 762
  - WEB SEND command (Client) 831
- password phrase
  - WEB CONVERSE command 762
- PASSWORDLEN option
  - WEB CONVERSE command 762
  - WEB SEND command (Client) 832
- PATH option
  - WEB CONVERSE command 762
  - WEB EXTRACT or EXTRACT WEB command 230, 776
  - WEB PARSE URL command 786
  - WEB SEND command (Client) 832
- PATHLENGTH option
  - WEB CONVERSE command 763
  - WEB EXTRACT or EXTRACT WEB command 230, 776
  - WEB PARSE URL command 786
  - WEB SEND command (Client) 832
- PCT option
  - DUMP TRANSACTION command 188
- performance, application, monitoring 408
- PF1-24 option
  - HANDLE AID command 316
- PFXLENG option
  - WRITE JOURNALNAME command 853
- PGMIDERR condition
  - HANDLE ABEND command 315
  - INVOKE APPLICATION command 334
  - LINK ACQPROCESS command 400
  - LINK ACTIVITY command 403
  - LINK command 395
  - LOAD command 406
  - RELEASE command 524
  - START BREXIT command 684
  - XCTL command 884
- PHRASE option
  - CHANGE PHRASE command 83
  - SIGNON command 639
  - VERIFY PHRASE command 734
- PHRASELEN option
  - CHANGE PHRASE command 83
  - SIGNON command 639
  - VERIFY PHRASE command 734
- PICIN operand
  - DFHMDI 934
- PICOUT operand
  - DFHMDI 934
- pipeline logical units 491, 575
- PIPLENGTH option
  - CONNECT PROCESS command 94
  - EXTRACT PROCESS command 221
  - GDS CONNECT PROCESS command 254
  - GDS EXTRACT PROCESS command 259
- PIPLIST option
  - CONNECT PROCESS command 94
  - EXTRACT PROCESS command 221
  - GDS CONNECT PROCESS command 255
  - GDS EXTRACT PROCESS command 259
- PL/I language
  - argument values 6
  - LENGTH option default 8
  - PROCEDURE statement 13
  - STAE option 32
  - translated code 13
- PLATFORM option 62
  - INVOKE APPLICATION command 333
- plus 32K COMMAREAs (channels)
  - ASSIGN command 57
  - CHANNEL option of RETURN command 547
  - CHANNEL option of XCTL command 882
  - DELETE CHANNEL command 158
  - DELETE CONTAINER (CHANNEL) command 162
  - GET CONTAINER (CHANNEL) command 284
  - MOVE CONTAINER (CHANNEL) command 414
  - PUT CONTAINER (CHANNEL) command 428
  - QUERY CHANNEL command 436
  - START CHANNEL command 687
- POINT command 417
- POINT option
  - MONITOR command 409
- pointer-ref argument, CICS command format 4
- pointer-value argument, CICS command format 4
- POOL option
  - DEFINE COUNTER command 134
  - DEFINE DCOUNTER command 134
  - DELETE COUNTER command 163
  - DELETE DCOUNTER command 163
  - GET COUNTER command 289
  - GET DCOUNTER command 289
  - QUERY COUNTER command 437
  - QUERY DCOUNTER command 437
  - REWIND COUNTER command 551
  - REWIND DCOUNTER command 551
  - UPDATE COUNTER command 725
  - UPDATE DCOUNTER command 725
- POP HANDLE command 418

PORTNUMBER option  
 EXTRACT TCPIP command 225  
 WEB EXTRACT or EXTRACT WEB  
 command 230, 776  
 WEB OPEN command 782  
 WEB PARSE URL command 786  
 PORTNUMNU option  
 EXTRACT TCPIP command 225  
 POS operand 933  
 DFHMDF 934  
 POST command 419  
 posting timer-event control area 419  
 PPT option  
 DUMP TRANSACTION  
 command 188  
 PREDICATE option  
 GETNEXT EVENT command 307  
 INQUIRE EVENT command 327  
 PREFIX option  
 WRITE JOURNALNAME  
 command 853  
 PRINCONVID option  
 GDS ASSIGN command 253  
 PRINSYSID option  
 ASSIGN command 63  
 GDS ASSIGN command 253  
 print displayed information 915  
 PRINT option  
 ISSUE ABORT command 343  
 ISSUE END command 353  
 ISSUE SEND command 381  
 ISSUE WAIT command 386  
 SEND CONTROL command 603  
 SEND MAP command 609  
 SEND MAP MAPPINGDEV  
 command 615  
 SEND TEXT command 625  
 SEND TEXT NOEDIT command 632  
 SPOOL OPEN OUTPUT  
 command 661  
 PRINT value  
 DFHM DI 946  
 DFHM SD 955  
 printer control character list,  
 DFHBMSCA 925  
 priority of task, changing 86  
 PRIORITY option  
 CHANGE TASK command 86  
 PRIVACY option  
 EXTRACT TCPIP command 223  
 PROCESS option  
 ACQUIRE command 35  
 ASSIGN command 63  
 BUILD ATTACH (LUTYPE6.1)  
 command 72  
 BUILD ATTACH (MRO)  
 command 75  
 DEFINE PROCESS command 139  
 DELETE CONTAINER (BTS)  
 command 160  
 EXTRACT ATTACH (LUTYPE6.1)  
 command 205  
 EXTRACT ATTACH (MRO)  
 command 209  
 GET CONTAINER (BTS)  
 command 282  
 GETNEXT PROCESS command 308

PROCESS option (*continued*)  
 INQUIRE ACTIVITYID  
 command 322  
 INQUIRE CONTAINER  
 command 325  
 INQUIRE PROCESS command 328  
 PUT CONTAINER (BTS)  
 command 426  
 STARTBROWSE ACTIVITY  
 command 700  
 STARTBROWSE CONTAINER  
 command 702  
 PROCESSBUSY condition  
 ACQUIRE command 35  
 CANCEL (BTS) command 80  
 DELETE CONTAINER (BTS)  
 command 161  
 GET CONTAINER (BTS)  
 command 283  
 LINK ACQPROCESS command 400  
 PUT CONTAINER (BTS)  
 command 427  
 RESET ACQPROCESS command 529  
 RUN command 566  
 PROCESSERR condition  
 ACQUIRE command 36  
 CANCEL (BTS) command 80  
 DEFINE PROCESS command 141  
 GETNEXT PROCESS command 308  
 INQUIRE CONTAINER  
 command 325  
 INQUIRE PROCESS command 328  
 LINK ACQPROCESS command 400  
 RESET ACQPROCESS command 529  
 RESUME command 538  
 RUN command 567  
 STARTBROWSE ACTIVITY  
 command 700  
 STARTBROWSE CONTAINER  
 command 702  
 STARTBROWSE PROCESS  
 command 705  
 SUSPEND (BTS) command 709  
 processing state, of an activity  
 ACTIVE 322  
 CANCELLING 322  
 COMPLETE 322  
 DORMANT 322  
 INITIAL 322  
 processing task, control delay of 145  
 PROCESSTYPE option  
 ACQUIRE command 35  
 ASSIGN command 63  
 DEFINE PROCESS command 140  
 INQUIRE ACTIVITYID  
 command 322  
 INQUIRE CONTAINER  
 command 325  
 INQUIRE PROCESS command 328  
 STARTBROWSE ACTIVITY  
 command 700  
 STARTBROWSE CONTAINER  
 command 702  
 STARTBROWSE PROCESS  
 command 705  
 PROCLENGTH option  
 CONNECT PROCESS command 94

PROCLENGTH option (*continued*)  
 EXTRACT PROCESS command 221  
 GDS CONNECT PROCESS  
 command 255  
 GDS EXTRACT PROCESS  
 command 259  
 PROCNAME option  
 CONNECT PROCESS command 94  
 EXTRACT PROCESS command 221  
 GDS CONNECT PROCESS  
 command 255  
 GDS EXTRACT PROCESS  
 command 259  
 PROFILE option  
 ALLOCATE (APPC) command 44  
 ALLOCATE (LUTYPE6.1)  
 command 46  
 ALLOCATE (MRO) command 48  
 program control  
 commands 27  
 deleting loaded program 523  
 LINK command options 391  
 linking to another program 389  
 load a program, table, or map 405  
 returning program control 547  
 transfer program control 882  
 PROGRAM option  
 ASSIGN command 63  
 DEFINE ACTIVITY command 130  
 DEFINE PROCESS command 140  
 DUMP TRANSACTION  
 command 189  
 HANDLE ABEND command 315  
 INQUIRE ACTIVITYID  
 command 322  
 ISSUE LOAD command 364  
 LINK command 392  
 LOAD command 406  
 RELEASE command 523  
 XCTL command 883  
 PROT value  
 DFHMDF 934  
 PROTECT option  
 START command 677  
 PS operand  
 DFHMDF 934  
 DFHM DI 946  
 DFHM SD 955  
 PS option  
 ASSIGN command 63  
 PSEUDOBIN option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 123  
 RECEIVE (non-z/OS Communications  
 Server) command 510  
 SEND (non-z/OS Communications  
 Server) command 597  
 psid value  
 DFHMDF 934  
 DFHM DI 946  
 DFHM SD 955  
 ptr-ref64  
 command format 4  
 ptr-value64  
 command format 4

- PUNCH option
  - SPOOL OPEN OUTPUT
    - command 662
- PURGE MESSAGE command 423
- PURGEABILITY option
  - WAIT EXTERNAL command 744
  - WAITCICS command 753
- PUSH HANDLE command 424
- PUT CONTAINER (BTS) command 425
- PUT CONTAINER (CHANNEL)
  - command 428
- PUT64 CONTAINER command 432

## Q

- QBUSY condition
  - READQ TD command 479
- QIDERR condition
  - DELETEQ TD command 168
  - DELETEQ TS command 170
  - QUERY SECURITY command 443
  - READQ TD command 479
  - READQ TS command 483
  - WRITEQ TD command 861
  - WRITEQ TS command 866
- QNAME option
  - ASSIGN command 63
  - DELETEQ TS command 169
  - READQ TS command 482
  - WRITEQ TS command 865
- QUERY CHANNEL command 436
- QUERY COUNTER command 437
- QUERY DOUNTER command 437
- QUERY SECURITY command 440
- QUERYPARM option
  - WEB READ QUERYPARM
    - command 793
  - WEB READNEXT QUERYPARM
    - command 799
  - WEB STARTBROWSE QUERYPARM
    - command 839
- QUERYSTRING option
  - WEB EXTRACT or EXTRACT WEB
    - command 230, 776
  - WEB PARSE URL command 786
  - WEB SEND command 763
  - WEB SEND command (Client) 832
- QUERYSTRLEN option
  - WEB EXTRACT or EXTRACT WEB
    - command 230, 776
  - WEB PARSE URL command 786
  - WEB SEND command 763
  - WEB SEND command (Client) 832
- QUEUE option
  - BUILD ATTACH (LUTYPE6.1)
    - command 72
  - BUILD ATTACH (MRO)
    - command 75
  - DELETEQ TD command 167
  - DELETEQ TS command 169
  - EXTRACT ATTACH (LUTYPE6.1)
    - command 205
  - EXTRACT ATTACH (MRO)
    - command 209
  - READQ TD command 478
  - READQ TS command 482
  - RETRIEVE command 540

- QUEUE option (*continued*)
  - START command 677
  - WRITEQ TD command 860
  - WRITEQ TS command 865
- QZERO condition
  - READQ TD command 480

## R

- RBA option
  - DELETE command 148
  - READ command 448
  - READNEXT command 461
  - READPREV command 471
  - RESETBR command 533
  - STARTBR command 694
  - WRITE command 846
- RDATT condition
  - CONVERSE (non-z/OS
    - Communications Server)
      - command 125
  - RECEIVE (non-z/OS Communications
    - Server) command 512
  - RECEIVE MAP command 516
- reactivate an ABEND exit 314
- READ command 444
- READ option
  - QUERY SECURITY command 440
- reading records
  - batch data interchange 374
  - browsing, next 456
  - browsing, previous (VSAM) 467
  - file control 444
  - from temporary storage queue 481
  - from terminal or LU 911
  - from transient data queue 477
- READNEXT command 456
- READPREV command 467
- READQ TD command 477
- READQ TS command 481
- REALM option
  - WEB EXTRACT or EXTRACT WEB
    - command 231, 777
- REALMLEN option
  - WEB EXTRACT or EXTRACT WEB
    - command 231, 777
- RECEIVE (2260) command 504
- RECEIVE (2980) command 505
- RECEIVE (3270 logical) command 490
- RECEIVE (3600 pipeline) command 491
- RECEIVE (3600-3601) command 492
- RECEIVE (3600-3614) command 493
- RECEIVE (3650) command 494
- RECEIVE (3767) command 495
- RECEIVE (3770) command 496
- RECEIVE (3790 3270-display)
  - command 508
- RECEIVE (3790 full-function or inquiry)
  - command 497
- RECEIVE (APPC) command 485
- RECEIVE (LUTYPE2/LUTYPE3)
  - command 487
- RECEIVE (LUTYPE4) command 488
- RECEIVE (LUTYPE6.1) command 489
- RECEIVE (MRO) command 503
- RECEIVE (non-z/OS Communications
  - Server) command 502

- RECEIVE (z/OS Communications Server
  - default) command 485
- RECEIVE command
  - input operation without data 916
  - read from terminal or logical
    - unit 911
- RECEIVE MAP command 513
- RECEIVE MAP MAPPINGDEV
  - command 517
- RECEIVE PARTN command 520
- RECFM option
  - BUILD ATTACH (LUTYPE6.1)
    - command 73
  - BUILD ATTACH (MRO)
    - command 75
  - EXTRACT ATTACH (LUTYPE6.1)
    - command 205
  - EXTRACT ATTACH (MRO)
    - command 209
- RECORD option
  - BIF DIGEST command 69
- RECORDBUSY condition
  - DELETE command 148
  - READ command 454
  - READNEXT command 466
  - READPREV command 476
  - REWRITE command 558
  - WRITE command 850
- RECORDLEN option
  - BIF DIGEST command 69
- RECORDLENGTH option
  - SPOOL OPEN OUTPUT
    - command 662
- records
  - deleting VSAM 148
  - reading 374, 444
  - release exclusive control 721
  - requesting next number 365
  - updating 376, 554
  - writing new 844
  - writing new (adding) 345
- REDUCE option
  - GET COUNTER command 289
  - GET DOUNTER command 289
- register contents in assembler
  - language 14
- relative byte address (RBA) 148
- RELEASE command 523
- RELEASE option
  - SEND PAGE command 617
- relocatable expression 8
- REMOVE SUBEVENT command 525
- REPEATABLE option
  - READ command 448
  - READNEXT command 461
  - READPREV command 471
- REPLY option
  - WRITE OPERATOR command 858
- REPLYLENGTH option
  - WRITE OPERATOR command 858
- REQID option
  - CANCEL command 78
  - DELAY command 145
  - ENDBR command 193
  - POST command 421
  - READNEXT command 461
  - READPREV command 472

- REQID option (*continued*)
    - RESETBR command 534
    - ROUTE command 561
    - SEND CONTROL command 603
    - SEND MAP command 610
    - SEND TEXT command 625
    - SEND TEXT MAPPED command 629
    - SEND TEXT NOEDIT command 632
    - START command 677
    - STARTBR command 694
    - WAIT JOURNALNAME command 747
    - WRITE JOURNALNAME command 853
  - REQUEST PASSTICKET command 526
  - REQUESTTYPE option
    - WEB EXTRACT or EXTRACT WEB command 231, 777
  - RESCCLASS option
    - QUERY SECURITY command 440
  - RESET ACQPROCESS command 528
  - RESET ACTIVITY command 530
  - RESET option
    - HANDLE ABEND command 315
  - reset start for browse 532
  - RESETBR command 532
  - RESID option
    - QUERY SECURITY command 441
  - RESIDLENGTH option
    - QUERY SECURITY command 441
  - RESOURCE option
    - BUILD ATTACH (LUTYPE6.1) command 73
    - BUILD ATTACH (MRO) command 76
    - DEQ command 172
    - ENQ command 201
    - ENTER TRACENUM command 203
    - EXTRACT ATTACH (LUTYPE6.1) command 206
    - EXTRACT ATTACH (MRO) command 210
  - resource scheduling 171
  - RESP
    - deactivating NOHANDLE 318
    - option 12
    - values in EIBRESP 887
  - RESP2
    - EXPIRED in messages to console operators 859
    - INVREQ in messages to console operators 859
    - INVREQ in SIGNOFF command (Security control) 636
    - INVREQ in SIGNON (Security control) 639, 644
    - INVREQ in WAIT EXTERNAL 744
    - INVREQ on WAITCICS 753
    - LENGERR in messages to console operators 859
    - NOTAUTH in SIGNON (Security control) 640
    - option 12
    - USERIDERR in SIGNON (Security control) 641
    - values in EIBRESP2 887
  - RESSEC option
    - ASSIGN command 63
  - RESTART option
    - ASSIGN command 63
  - RESTYPE option
    - QUERY SECURITY command 441
  - RESULT option
    - BIF DIGEST command 69
    - built-in function 69
  - RESUME command 537
  - RESUNAVAIL condition
    - LINK command 396
    - START command 671
    - START TRANSID (CHANNEL) command 687
  - RETAIN option
    - SEND PAGE command 617
  - RETCODE option
    - GDS ALLOCATE command 251
    - GDS ASSIGN command 253
    - GDS CONNECT PROCESS command 255
    - GDS EXTRACT ATTRIBUTES command 257
    - GDS EXTRACT PROCESS command 260
    - GDS FREE command 261
    - GDS ISSUE ABEND command 263
    - GDS ISSUE CONFIRMATION command 265
    - GDS ISSUE ERROR command 267
    - GDS ISSUE PREPARE command 269
    - GDS ISSUE SIGNAL command 271
    - GDS RECEIVE command 274
    - GDS SEND command 277
    - GDS WAIT command 279
  - RETPAGE condition
    - SEND CONTROL command 604
    - SEND MAP command 611
    - SEND PAGE command 618
    - SEND TEXT command 627
  - RETRIEVE command 539
  - retrieve data stored for task 539
  - RETRIEVE REATTACH EVENT command 543
  - RETRIEVE SUBEVENT command 545
  - RETURN command 547
  - return program control 547
  - RETURNPROG option
    - ASSIGN command 63
  - REVERSE value
    - DFHMDF 934
    - DFHMDI 946
    - DFHMSD 955
  - REWIND COUNTER command 551
  - REWIND DCOUNTER command 551
  - REWRITE command 554
  - REWRITE option
    - WRITEQ TS command 865
  - RIDFLD option
    - DELETE command 148
    - ISSUE ADD command 346
    - ISSUE ERASE command 359
    - ISSUE NOTE command 365
    - ISSUE REPLACE command 377
    - READ command 448
    - READNEXT command 461
  - RIDFLD option (*continued*)
    - READPREV command 472
    - RESETBR command 534
    - STARTBR command 694
    - WRITE command 846
  - RIGHT value
    - DFHMDF 934
    - DFHMDI 946
  - ROLLBACK option
    - SYNCPOINT ROLLBACK command 711
  - ROLLED BACK condition
    - LINK command 396
    - SYNCPOINT command 710
  - ROUTE command 559
  - ROUTE CODES option
    - WRITE OPERATOR command 858
  - RPROCESS option
    - BUILD ATTACH (LUTYPE6.1) command 73
    - BUILD ATTACH (MRO) command 76
    - EXTRACT ATTACH (LUTYPE6.1) command 206
    - EXTRACT ATTACH (MRO) command 210
  - RRESOURCE option
    - BUILD ATTACH (LUTYPE6.1) command 73
    - BUILD ATTACH (MRO) command 76
    - EXTRACT ATTACH (LUTYPE6.1) command 206
    - EXTRACT ATTACH (MRO) command 210
  - RRN option
    - DELETE command 148
    - ISSUE ADD command 346
    - ISSUE ERASE command 359
    - ISSUE NOTE command 365
    - ISSUE REPLACE command 377
    - READ command 449
    - READNEXT command 462
    - READPREV command 472
    - RESETBR command 534
    - STARTBR command 695
    - WRITE command 846
  - RTEFAIL condition
    - ROUTE command 562
  - RTERMID option
    - RETRIEVE command 540
    - START command 677
  - RTESOME condition
    - ROUTE command 562
  - RTRANSID option
    - RETRIEVE command 540
    - START command 677
  - RUN command 563
- S**
- SAA (Systems Application Architecture) communications (CPI) 919
  - Resource Recovery 917
  - SADDRLLENGTH option
    - EXTRACT TCPIP command 225

SAME value  
     DFHMDI 946  
 schedule use of resource by task 171, 199  
 scheduling commands 27  
 SCHEME option  
     WEB EXTRACT or EXTRACT WEB command 231, 777  
     WEB OPEN command 782  
 SCHEMENAME option  
     WEB PARSE URL command 786  
 SCRNHHT option  
     ASSIGN command 64  
 SCRNRWD option  
     ASSIGN command 64  
 SCS (SNA character string)  
     CONVERSE command 102  
     SEND (z/OS Communications Server) command 585  
     SEND command 573  
 SCS printer logical unit, 3790 585  
 SECONDS option  
     DEFINE TIMER command 143  
     DELAY command 145  
     POST command 421  
     ROUTE command 561  
     START command 678  
 security commands 27  
 SEGMENTLIST option  
     DUMP TRANSACTION command 189  
 SELNERR condition  
     ISSUE ABORT command 344  
     ISSUE ADD command 346  
     ISSUE END command 354  
     ISSUE ERASE command 359  
     ISSUE NOTE command 366  
     ISSUE QUERY command 373  
     ISSUE REPLACE command 377  
     ISSUE SEND command 381  
     ISSUE WAIT command 387  
 SEND (2260) command 594  
 SEND (2980) command 595  
 SEND (3270 logical) command 574  
 SEND (3600 pipeline) command 575  
 SEND (3600-3601) command 576  
 SEND (3600-3614) command 577  
 SEND (3650 interpreter) command 578  
 SEND (3650-3270) command 579  
 SEND (3650-3653) command 580  
 SEND (3650-3680) command 581  
 SEND (3767) command 582  
 SEND (3770) command 583  
 SEND (3790 3270-display) command 586  
 SEND (3790 3270-printer) command 587  
 SEND (3790 full-function or inquiry) command 584  
 SEND (3790 SCS) command 585  
 SEND (APPC) command 569  
 SEND (LUTYPE2/LUTYPE3) command 570  
 SEND (LUTYPE4) command 571  
 SEND (LUTYPE6.1) command 572  
 SEND (MRO) command 593  
 SEND (non-z/OS Communications Server default) command 592  
 SEND (SCS) command 573  
 SEND (z/OS Communications Server default) command 568  
 send asynchronous interrupt 911  
 SEND command  
     write to terminal 911  
 SEND CONTROL command 600  
 SEND MAP command 605  
 SEND MAP MAPPINGDEV command 613  
 SEND PAGE command 616  
 SEND PARTNSET command 620  
 SEND TEXT command 621  
 SEND TEXT MAPPED command 628  
 SEND TEXT NOEDIT command 630  
 sending data to output device 380  
 sequential retrieval, browsing  
     reading records 444  
 SERIALNUM option  
     EXTRACT CERTIFICATE command 217  
 SERIALNUMLEN option  
     EXTRACT CERTIFICATE command 218  
 SERVADDRNU option  
     EXTRACT TCPIP command 225  
 SERVERADDR option  
     EXTRACT TCPIP command 225  
 SERVERCONV option  
     WEB RECEIVE command (Server) 805  
     WEB SEND command (Server) 821  
 SERVERNAME option  
     EXTRACT TCPIP command 225  
 SESSBUSY condition  
     ALLOCATE (LUTYPE6.1) command 47  
 SESSION option  
     ALLOCATE (LUTYPE6.1) command 46  
     CONNECT PROCESS command 95  
     CONVERSE (non-z/OS Communications Server) command 124  
     CONVERSE (z/OS Communications Server) command 116  
     EXTRACT ATTACH (LUTYPE6.1) command 206  
     EXTRACT ATTACH (MRO) command 210  
     EXTRACT ATTRIBUTES (MRO) command 214  
     FREE (LUTYPE6.1) command 242  
     FREE (MRO) command 243  
     ISSUE DISCONNECT (LUTYPE6.1) command 352  
     ISSUE SIGNAL (LUTYPE6.1) command 385  
     POINT command 417  
     RECEIVE (non-z/OS Communications Server) command 510  
     RECEIVE (z/OS Communications Server) command 499  
     SEND (non-z/OS Communications Server) command 597  
     SEND (z/OS Communications Server) command 589  
     WAIT TERMINAL command 750  
 session, passing 367  
 SESSIONERR condition  
     ALLOCATE (LUTYPE6.1) command 47  
     EIBRCODE bytes 1-2 887  
 SESSTOKEN option  
     WEB CLOSE command 756  
     WEB CONVERSE command 763  
     WEB ENDBROWSE HTTPHEADER command 772  
     WEB EXTRACT or EXTRACT WEB command 231, 777  
     WEB OPEN command 782  
     WEB READ HTTPHEADER command 791  
     WEB READNEXT HTTPHEADER command 797  
     WEB RECEIVE command (Client) 811  
     WEB SEND command (Client) 832  
     WEB STARTBROWSE HTTPHEADER command 838  
     WEB WRITE HTTPHEADER command 843  
 SET option  
     ADDRESS SET command 41  
     CONVERSE (non-z/OS Communications Server) command 124  
     CONVERSE (z/OS Communications Server) command 116  
     EXTRACT LOGONMSG command 219  
     GDS RECEIVE command 274  
     GET CONTAINER (BTS) command 282  
     GET CONTAINER (CHANNEL) command 286  
     GET64 CONTAINER command 312  
     GETMAIN command 297  
     GETMAIN64 command 301  
     INQUIRE CONTAINER command 325  
     ISSUE RECEIVE command 374  
     LOAD command 406  
     POST command 421  
     READ command 449  
     READNEXT command 462  
     READPREV command 472  
     READQ TD command 478  
     READQ TS command 482  
     RECEIVE (non-z/OS Communications Server) command 510  
     RECEIVE (z/OS Communications Server) command 499  
     RECEIVE MAP command 514  
     RECEIVE MAP MAPPINGDEV command 518  
     RECEIVE PARTN command 521  
     RETRIEVE command 540  
     SEND CONTROL command 603  
     SEND MAP command 610  
     SEND MAP MAPPINGDEV command 615  
     SEND PAGE command 617  
     SEND TEXT command 625  
     WEB CONVERSE command 765

SET option (*continued*)  
 WEB READ FORMFIELD  
 command 789  
 WEB READ QUERYPARM  
 command 794  
 WEB RECEIVE command  
 (Client) 811  
 WEB RECEIVE command  
 (Server) 805

SHARED option  
 GETMAIN command 297  
 GETMAIN64 command 301

SIGDATA option  
 ASSIGN command 64

SIGNAL condition  
 CONVERSE (z/OS Communications  
 Server) command 118  
 ISSUE CONFIRMATION  
 command 348  
 ISSUE DISCONNECT (default)  
 command 350  
 ISSUE ERROR command 363  
 RECEIVE (z/OS Communications  
 Server) command 501  
 SEND (z/OS Communications Server)  
 command 591  
 WAIT SIGNAL command 749  
 WAIT TERMINAL command 750

SIGNAL EVENT command 634  
 SIGNOFF command 636  
 SIGNON command 637  
 SIGNON TOKEN command 642  
 single thread used with JES 657

SIT option  
 DUMP TRANSACTION  
 command 189

SIZE operand  
 DFHMDI 946

SNAMELENGTH option  
 EXTRACT TCPIP command 225

SOAPFAULT ADD command 647  
 SOAPFAULT CREATE command 650  
 SOAPFAULT DELETE command 654

SOSI operand  
 DFHMDF 934  
 DFHMDI 946  
 DFHMSD 955

SOSI option  
 ASSIGN command 64

SPCOMMAND  
 RESID value not valid 443

SPOLBUSY condition  
 SPOOLOPEN INPUT command 659  
 SPOOLOPEN OUTPUT  
 command 664

SPOLERR condition  
 SPOOLOPEN INPUT command 659  
 SPOOLREAD command 667  
 SPOOLWRITE command 669

Spool commands 27  
 SPOOLCLOSE command 655  
 SPOOLCLOSE, implicit 657  
 SPOOLOPEN INPUT command 657  
 SPOOLOPEN OUTPUT 660  
 SPOOLREAD command 665  
 SPOOLWRITE command 668

SRVRADDR6NU option  
 EXTRACT TCPIP command 225

SRVRIPFAMILY option  
 EXTRACT TCPIP command 225

SSLTYPE option  
 EXTRACT TCPIP command 225

STAE option, PL/I 32

standard attribute and printer control  
 character list, BMS (DFHBMSCA) 925

START ATTACH command 682  
 START CHANNEL command 687  
 START command 671, 684  
 STARTBR command 692  
 STARTBROWSE ACTIVITY  
 command 699  
 STARTBROWSE CONTAINER  
 command 701  
 STARTBROWSE EVENT command 703  
 STARTBROWSE PROCESS  
 command 705  
 STARTCODE option  
 ASSIGN command 64

STATE option  
 ALLOCATE (APPC) command 44  
 ALLOCATE (MRO) command 48  
 CONNECT PROCESS command 95  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 124  
 CONVERSE (z/OS Communications  
 Server) command 116  
 EXTRACT ATTRIBUTES (APPC)  
 command 212  
 EXTRACT ATTRIBUTES (MRO)  
 command 214  
 EXTRACT CERTIFICATE  
 command 218  
 FREE (APPC) command 240  
 FREE (MRO) command 243  
 GDS ALLOCATE command 251  
 GDS CONNECT PROCESS  
 command 255  
 GDS EXTRACT ATTRIBUTES  
 command 257  
 GDS FREE command 261  
 GDS ISSUE ABEND command 263  
 GDS ISSUE CONFIRMATION  
 command 265  
 GDS ISSUE ERROR command 267  
 GDS ISSUE PREPARE command 269  
 GDS ISSUE SIGNAL command 271  
 GDS RECEIVE command 274  
 GDS SEND command 277  
 GDS WAIT command 279  
 ISSUE ABEND command 341  
 ISSUE CONFIRMATION  
 command 347  
 ISSUE ERROR command 362  
 ISSUE PREPARE command 369  
 ISSUE SIGNAL (APPC)  
 command 383  
 RECEIVE (non-z/OS Communications  
 Server) command 511  
 RECEIVE (z/OS Communications  
 Server) command 499  
 SEND (non-z/OS Communications  
 Server) command 597

STATE option (*continued*)  
 SEND (z/OS Communications Server)  
 command 589  
 WAIT CONVID command 739

STATELEN option  
 EXTRACT CERTIFICATE  
 command 218

STATIONID option  
 ASSIGN command 65

STATUS option  
 CHECK TIMER command 92  
 INQUIRE TIMER command 329

STATUSCODE option  
 WEB CONVERSE command 765  
 WEB RECEIVE command  
 (Client) 812  
 WEB SEND command (Server) 822

STATUSLEN option  
 WEB CONVERSE command 765  
 WEB RECEIVE command  
 (Client) 812  
 WEB SEND command (Server) 823

STATUSTEXT option  
 WEB CONVERSE command 765  
 WEB RECEIVE command  
 (Client) 812  
 WEB SEND command (Server) 823

storage area length 51  
 storage control commands 28

STORAGE operand  
 DFHMSD 955

STORAGE option  
 DUMP TRANSACTION  
 command 189

STRELERR condition  
 SPOOLCLOSE command 656  
 SPOOLOPEN INPUT command 659  
 SPOOLOPEN OUTPUT  
 command 664  
 SPOOLREAD command 667  
 SPOOLWRITE command 669

STRFIELD option  
 CONVERSE (non-z/OS  
 Communications Server)  
 command 124  
 CONVERSE (z/OS Communications  
 Server) command 116  
 SEND (non-z/OS Communications  
 Server) command 598  
 SEND (z/OS Communications Server)  
 command 590

STRINGFORMAT option  
 FORMATTIME command 236

STRINGZONE option  
 FORMATTIME command 237

stub, program 14

SUBADDR option  
 ISSUE ABORT command 343  
 ISSUE END command 353  
 ISSUE SEND command 381  
 ISSUE WAIT command 386

SUBEVENT option  
 ADD SUBEVENT command 37  
 DEFINE COMPOSITE EVENT  
 command 133  
 REMOVE SUBEVENT command 525

SUBEVENT option (*continued*)  
 RETRIEVE SUBEVENT  
   command 546  
 SUFFIX operand  
   DFHMSD 955  
   DFHPSD 968  
 SUPPRESSED condition  
   DUMP TRANSACTION  
     command 191  
   GET COUNTER command 289  
   REWIND COUNTER command 551  
   UPDATE COUNTER command 725  
   WRITE command 850  
 SUSPEND (BTS) command 708  
 SUSPEND command 707  
 SUSPSTATUS option  
   CHECK ACQPROCESS command 88  
   CHECK ACTIVITY command 91  
   INQUIRE ACTIVITYID  
     command 322  
 switched line disconnection 911  
 SYMBOL option  
   DOCUMENT INSERT command 179  
   DOCUMENT SET command 185  
 SYMBOLERR condition  
   DOCUMENT SET command 185  
 SYMBOLLIST option  
   DOCUMENT SET command 174, 185  
 synchronization levels  
   basic conversations 260  
 synchronize, action  
   journal output (WAIT  
     JOURNALNAME) 746  
   terminal input/output 911  
 SYNCHRONOUS option  
   RUN command 565  
 SYNCLEVEL option  
   CONNECT PROCESS command 95  
   EXTRACT PROCESS command 221  
   GDS CONNECT PROCESS  
     command 255  
   GDS EXTRACT PROCESS  
     command 260  
 SYNCONRETURN option 921  
   LINK command 393  
 syncpoint  
   backing out 711  
   commands 28  
   establishing 710  
 SYNCPOINT command 710  
 SYNCPOINT ROLLBACK command 711  
 syntax notation 2  
 SYSBUSY condition  
   ALLOCATE (APPC) command 44  
   ALLOCATE (LUTYPE6.1)  
     command 47  
   ALLOCATE (MRO) command 49  
   EIBRCODE byte 3 887  
 SYSID option  
   ALLOCATE (APPC) command 44  
   ALLOCATE (LUTYPE6.1)  
     command 46  
   ALLOCATE (MRO) command 48  
   ASSIGN command 65  
   CANCEL command 78  
   DELETE command 148  
   DELETEQ TD command 167

SYSID option (*continued*)  
   DELETEQ TS command 169, 865  
   ENDBR command 193  
   EXTRACT TCT command 227  
   GDS ALLOCATE command 251  
   LINK command 393  
   READ command 449  
   READNEXT command 462  
   READPREV command 472  
   READQ TD command 478  
   READQ TS command 482  
   RESETBR command 534  
   REWRITE command 555  
   START command 678  
   START TRANSID (CHANNEL)  
     command 687  
   STARTBR command 695  
   UNLOCK command 722  
   WRITE command 846  
   WRITEQ TD command 860  
 SYSIDERR condition  
   ALLOCATE (APPC) command 44  
   ALLOCATE (LUTYPE6.1)  
     command 47  
   ALLOCATE (MRO) command 49  
   CANCEL command 78  
   DELETE command 148  
   DELETEQ TD command 168  
   DELETEQ TS command 170  
   EIBRCODE bytes 1-2 887  
   ENDBR command 193  
   LINK command 396  
   READ command 454  
   READNEXT command 466  
   READPREV command 476  
   READQ TD command 480  
   READQ TS command 483  
   RESETBR command 536  
   REWRITE command 558  
   START command 671  
   START TRANSID (CHANNEL)  
     command 687  
   STARTBR command 697  
   UNLOCK command 724  
   WRITE command 850  
   WRITEQ TD command 861  
   WRITEQ TS command 866  
 systemname  
   definition 5, 6, 7, 9, 10  
 systemname argument, CICS command  
   format 4

## T

TABLES option  
   DUMP TRANSACTION  
     command 189  
 tables, loading 405  
 task  
   initiation 671  
 task control commands 28  
 TASK option  
   DUMP TRANSACTION  
     command 189  
 task, abnormal termination 314  
 task, delay processing of 145

TASKDATALOC resource definition  
   option 40  
 TASKPRIORITY option  
   ASSIGN command 65  
 TCP/IP services 28  
 TCPIPSERVICE option  
   EXTRACT TCPIP command 226  
 TCT option  
   DUMP TRANSACTION  
     command 190  
 TCTUA option  
   ADDRESS command 40  
 TCTUALENG option  
   ASSIGN command 65  
 teletypewriter  
   messages 913  
   programming 913  
 TELLERID option  
   ASSIGN command 65  
 TEMPLATE option  
   DOCUMENT INSERT command 180  
 temporary storage control commands 28  
 TERM operand  
   DFHMDI 946  
   DFHMSD 955  
 TERMCODE option  
   ASSIGN command 65, 907  
 TERMERR condition  
   CONNECT PROCESS command 96  
   CONVERSE (non-z/OS  
     Communications Server)  
     command 125  
   CONVERSE (z/OS Communications  
     Server) command 118  
   ISSUE ABEND command 342  
   ISSUE CONFIRMATION  
     command 348  
   ISSUE COPY (3270 logical)  
     command 349  
   ISSUE DISCONNECT (default)  
     command 350  
   ISSUE DISCONNECT (LUTYPE6.1)  
     command 352  
   ISSUE EODS command 357  
   ISSUE ERASEAUP command 360  
   ISSUE ERROR command 363  
   ISSUE LOAD command 364  
   ISSUE PREPARE command 370  
   ISSUE PRINT command 371  
   ISSUE SIGNAL (APPC)  
     command 384  
   ISSUE SIGNAL (LUTYPE6.1)  
     command 385  
   LINK command 397  
   RECEIVE (non-z/OS Communications  
     Server) command 512  
   RECEIVE (z/OS Communications  
     Server) command 501  
   SEND (non-z/OS Communications  
     Server) command 598  
   SEND (z/OS Communications Server)  
     command 591  
   WAIT SIGNAL command 749  
   WAIT TERMINAL command 751  
 TERMID option  
   EXTRACT TCT command 227



TERMID option (*continued*)  
     ISSUE COPY (3270 logical)  
         command 349  
     START command 678  
     START TRANSID (CHANNEL)  
         command 687  
 TERMIDERR condition  
     START command 671  
     START TRANSID (CHANNEL)  
         command 687  
 terminal control 911  
     commands 28  
 terminal model codes 907  
 terminal operator paging, initiate paging  
     transaction 616  
 TERMINAL option  
     DUMP TRANSACTION  
         command 190  
     RECEIVE MAP command 515  
     SEND CONTROL command 603  
     SEND MAP command 610  
     SEND TEXT command 625  
     SEND TEXT MAPPED  
         command 629  
     SEND TEXT NOEDIT command 632  
 terminal type codes 907  
 terminate data set processing  
     abnormal 343  
     normal 353  
 TERMPRIORITY option  
     ASSIGN command 65  
 TERMTHDACT 32  
 TEST EVENT command 713  
 TEXT option  
     DOCUMENT INSERT command 180  
     WRITE OPERATOR command 858  
 TEXTKYBD option  
     ASSIGN command 65  
 TEXTLENGTH option  
     WRITE OPERATOR command 858  
 TEXTPRINT option  
     ASSIGN command 65  
 threadsafe commands 17  
 time of day, requesting 50  
 TIME option  
     DELAY command 145  
     FORMATTIME command 237  
     POST command 421  
     ROUTE command 561  
     START command 671  
 TIMEOUT condition  
     WEB CONVERSE command 770  
     WEB EXTRACT or EXTRACT WEB  
         command (Client) 232, 778  
     WEB OPEN command 784  
     WEB RECEIVE command  
         (Client) 814  
 TIMEOUT option  
     WRITE OPERATOR command 859  
 TIMER option  
     CHECK TIMER command 92  
     DEFINE TIMER command 143  
     DELETE TIMER command 166  
     FORCE TIMER command 233  
     GETNEXT EVENT command 307  
     INQUIRE EVENT command 327  
     INQUIRE TIMER command 329  
 timer-event control area 419  
 TIMERERR condition  
     CHECK TIMER command 92  
     DEFINE TIMER command 144  
     DELETE TIMER command 166  
     FORCE TIMER command 233  
     INQUIRE TIMER command 330  
 TIMESEP option  
     FORMATTIME command 237  
 TIOAPFX operand  
     DFHMDI 946  
     DFHMSD 955  
 TITLE option  
     ROUTE command 562  
 TO option  
     DOCUMENT INSERT command 180  
 TOACTIVITY option  
     MOVE CONTAINER (BTS)  
         command 412  
 TOCHANNEL option  
     MOVE CONTAINER (CHANNEL)  
         command 415  
     WEB CONVERSE command 765  
     WEB RECEIVE command  
         (Client) 812  
     WEB RECEIVE command  
         (Server) 805  
 TOCONTAINER option  
     WEB CONVERSE command 766  
     WEB RECEIVE command  
         (Client) 812  
     WEB RECEIVE command  
         (Server) 806  
 TOFLENGTH option  
     CONVERSE (non-z/OS  
         Communications Server)  
         command 124  
     CONVERSE (z/OS Communications  
         Server) command 116  
     fullword alternative to  
         TOLENGTH 911  
     SPOOLREAD command 665  
 TOKEN option  
     DELETE command 148  
     READ command 449  
     READNEXT 462  
     READPREV command 472  
     REWRITE command 555  
     SIGNON TOKEN command 644  
     SPOOLCLOSE command 655  
     SPOOLOPEN INPUT command 657  
     SPOOLOPEN OUTPUT  
         command 662  
     SPOOLREAD command 665  
     SPOOLWRITE command 668  
     UNLOCK command 722  
     VERIFY TOKEN command 737  
 TOKENERR condition  
     ENDBROWSE ACTIVITY  
         command 195  
     ENDBROWSE CONTAINER  
         command 196  
     ENDBROWSE EVENT command 197  
     ENDBROWSE PROCESS  
         command 198  
     GETNEXT ACTIVITY command 304  
 TOKENERR condition (*continued*)  
     GETNEXT CONTAINER  
         command 305  
     GETNEXT EVENT command 307  
     GETNEXT PROCESS command 308  
     WEB CONVERSE command 769  
     WEB SEND command (Client) 835  
 TOKENLEN option  
     SIGNON TOKEN command 644  
     VERIFY TOKEN command 737  
 TOKENTYPE option  
     SIGNON TOKEN command 644  
     VERIFY TOKEN command 737  
 TOLength option  
     CONVERSE (non-z/OS  
         Communications Server)  
         command 124  
     CONVERSE (z/OS Communications  
         Server) command 116  
     fullword length alternative  
         (TOLENGTH) 911  
     WEB CONVERSE command 766  
 TOPROCESS option  
     MOVE CONTAINER (BTS)  
         command 412  
 TRACENUM option  
     ENTER TRACENUM command 203  
 trademarks 971  
 TRAILER operand  
     DFHMDI 946  
 TRAILER option  
     SEND PAGE command 618  
     SEND TEXT command 625  
 TRANPRIORITY option  
     ASSIGN command 65  
 transfer program control 882  
 TRANSFORM DATATOXML  
     command 714  
 TRANSFORM XMLTODATA  
     command 717  
 TRANSID option  
     CANCEL command 78  
     DEFINE ACTIVITY command 130  
     DEFINE PROCESS command 140  
     INQUIRE ACTIVITYID  
         command 322  
     LINK command 393  
     RETURN command 549  
     SEND PAGE command 618  
     START ATTACH command 682  
     START BREXIT command 684  
     START command 671  
     START TRANSID (CHANNEL)  
         command 687  
 TRANSIDERR condition  
     DEFINE ACTIVITY command 131  
     DEFINE PROCESS command 141  
     START ATTACH command 682  
     START BREXIT command 684  
     START command 671  
     START TRANSID (CHANNEL)  
         command 687  
 transient data commands 30  
 transient data control  
     delete intrapartition queue 167  
     read data from TD queue 477  
     write data to TD queue 860

- translated code 13
- TRANSP operand
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955
- TRIGGER option
  - HANDLE AID command 316
- TRIGGER value
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955
- TRIGRAPH operand
  - DFHMSD 955
- TRT option
  - DUMP TRANSACTION command 190
- TSIOERR condition
  - PURGE MESSAGE command 423
  - SEND CONTROL command 604
  - SEND MAP command 611
  - SEND PAGE command 618
  - SEND TEXT command 627
  - SEND TEXT MAPPED command 629
  - SEND TEXT NOEDIT command 633
- TWA option
  - ADDRESS command 40
- TWALENG option
  - ASSIGN command 65
- type codes (terminal) 907
- TYPE operand
  - DFHMSD 955
- TYPE option
  - WEB RECEIVE command (Server) 806
- TYPENAME option
  - TRANSFORM XMLTODATA command 718
- TYPENAMELEN option
  - TRANSFORM XMLTODATA command 718
- TYPENS option
  - TRANSFORM XMLTODATA command 718
- TYPENSLEN option
  - TRANSFORM XMLTODATA command 718

## U

- UNATTEND option
  - ASSIGN command 65
- UNCOMMITTED
  - READ command 450
- UNCOMMITTED option
  - READNEXT 463
  - READPREV command 473
- UNDERLINE value
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955
- UNEXPIN condition
  - ISSUE ABORT command 344
  - ISSUE ADD command 346
  - ISSUE END command 354
  - ISSUE ERASE command 359
  - ISSUE NOTE command 366

- UNEXPIN condition (*continued*)
  - ISSUE QUERY command 373
  - ISSUE RECEIVE command 375
  - ISSUE REPLACE command 378
  - ISSUE SEND command 382
  - ISSUE WAIT command 387
  - RECEIVE MAP command 516
- UNLOCK command 721
- UNPROT value
  - DFHMDf 934
- UNTIL option
  - DELAY command 145
- UPDATE COUNTER command 725
- UPDATE DOUNTER command 725
- UPDATE option
  - QUERY SECURITY command 442
  - READ command 450
  - READNEXT 463
  - READPREV command 473
- updating records
  - batch data interchange 376
  - file control 554
- URIMAP option
  - WEB EXTRACT or EXTRACT WEB command 231, 777
  - WEB OPEN command 763, 782, 832
- URL option
  - WEB PARSE URL command 786
- URLLENGTH option
  - WEB PARSE URL command 787
- USERDATAKEY option
  - GETMAIN command 297
  - GETMAIN64 command 302
- USEREXIT value
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955
- USERID option
  - ASSIGN command 66
  - CHANGE PASSWORD command 84
  - CHANGE PHRASE command 83
  - DEFINE ACTIVITY command 130
  - DEFINE PROCESS command 140
  - EXTRACT CERTIFICATE command 218
  - INQUIRE ACTIVITYID command 323
  - SIGNON command 639
  - SPOOLOPEN INPUT command 657
  - SPOOLOPEN OUTPUT command 662
  - START BREXIT command 684
  - START command 671
  - START TRANSID (CHANNEL) command 687
  - VERIFY PASSWORD command 730
  - VERIFY PHRASE command 734
- USERIDERR condition
  - CHANGE PASSWORD command 83, 85
  - SIGNON command 641
  - START BREXIT command 684
  - START command 671
  - START TRANSID (CHANNEL) command 687
  - VERIFY PASSWORD command 731
  - VERIFY PHRASE command 735

- USERNAME option
  - ASSIGN command 66
  - WEB CONVERSE command 763
  - WEB SEND command (Client) 833
- USERNAMELEN option
  - WEB CONVERSE command 763
  - WEB SEND command (Client) 833
- USERPRIORITY option
  - ASSIGN command 66
- USING option
  - ADDRESS SET command 41
- UTC 237

## V

- VALIDATION option
  - ASSIGN command 66
- VALIDN operand
  - DFHMDf 934
  - DFHMDI 946
  - DFHMSD 955
- VALUE option
  - DEFINE COUNTER command 134
  - DEFINE DOUNTER command 134
  - DOCUMENT SET command 185
  - GET COUNTER command 289
  - GET DOUNTER command 289
  - QUERY COUNTER command 437
  - QUERY DOUNTER command 437
  - UPDATE COUNTER command 725
  - UPDATE DOUNTER command 725
  - WEB READ FORMFIELD command 789
  - WEB READ HTTPHEADER command 791
  - WEB READ QUERYPARM command 794
  - WEB READNEXT FORMFIELD command 795
  - WEB READNEXT HTTPHEADER command 797
  - WEB READNEXT QUERYPARM command 799
  - WEB WRITE HTTPHEADER command 843
- VALUELENGTH option
  - WEB READ FORMFIELD command 789
  - WEB READ HTTPHEADER command 791
  - WEB READ QUERYPARM command 794
  - WEB READNEXT FORMFIELD command 795
  - WEB READNEXT HTTPHEADER command 797
  - WEB READNEXT QUERYPARM command 799
  - WEB WRITE HTTPHEADER command 843
- VERIFY PASSWORD command 728
- VERIFY PHRASE command 732
- VERIFY TOKEN command 736
- VERSIONLEN option
  - WEB EXTRACT or EXTRACT WEB command 231, 777

VIEWPOS operand  
     DFHPDI 966  
 VIEWSIZE operand  
     DFHPDI 966  
 VOLUME option  
     ISSUE ABORT command 344  
     ISSUE ADD command 346  
     ISSUE END command 354  
     ISSUE ERASE command 359  
     ISSUE NOTE command 365  
     ISSUE QUERY command 372  
     ISSUE REPLACE command 377  
     ISSUE SEND command 381  
     ISSUE WAIT command 387  
 VOLUMELENG option  
     ISSUE ABORT command 344  
     ISSUE ADD command 346  
     ISSUE END command 354  
     ISSUE ERASE command 359  
     ISSUE NOTE command 365  
     ISSUE QUERY command 372  
     ISSUE REPLACE command 377  
     ISSUE SEND command 381  
     ISSUE WAIT command 387  
 VSAM WRITE MASSINSERT  
     DISABLED cannot occur 722  
     NOTOPEN cannot occur 724  
     terminate operation 721  
 VTAB operand  
     DFHMSD 955

## W

WAIT CONVID (APPC) command 739  
 WAIT EVENT command 741  
 WAIT EXTERNAL command 743  
 WAIT JOURNALNAME command 746  
 WAIT JOURNALNUM command 748  
 WAIT option  
     GDS SEND command 277  
     ISSUE COPY (3270 logical)  
       command 349  
     ISSUE ERASEAUP command 360  
     RETRIEVE command 540  
     SEND (non-z/OS Communications  
       Server) command 598  
     SEND (z/OS Communications Server)  
       command 590  
     SEND command 911  
     SEND CONTROL command 603  
     SEND MAP command 610  
     SEND TEXT command 626  
     SEND TEXT MAPPED  
       command 629  
     SEND TEXT NOEDIT command 632  
     terminal control 911  
     WRITE JOURNALNAME  
       command 853  
 WAIT SIGNAL command 749  
 WAIT TERMINAL command 750  
     general information 911  
 WAITCICS command 752  
 waits  
     batch data interchange 386  
     for event to occur 741  
     terminal control operation 911  
 WEB CLOSE command 754  
 WEB CONVERSE command 757  
 WEB ENDBROWSE FORMFIELD  
     command 771  
 WEB ENDBROWSE HTTPHEADER  
     command 772  
 WEB ENDBROWSE QUERYPARM  
     command 773  
 WEB EXTRACT command 774  
 WEB OPEN command 779  
 WEB PARSE URL command 785  
 WEB READ FORMFIELD command 788  
 WEB READ HTTPHEADER  
     command 791  
 WEB READ QUERYPARM  
     command 793  
 WEB READNEXT FORMFIELD  
     command 795  
 WEB READNEXT HTTPHEADER  
     command 797  
 WEB READNEXT QUERYPARM  
     command 799  
 WEB RECEIVE command (Client) 808  
 WEB RECEIVE command (Server) 801  
 WEB RETRIEVE command 815  
 WEB SEND command (Client) 825  
 WEB SEND command (Server) 817  
 web services commands 30  
 WEB STARTBROWSE FORMFIELD  
     command 836  
 WEB STARTBROWSE HTTPHEADER  
     command 838  
 WEB STARTBROWSE QUERYPARM  
     command 839  
 web support 30  
 WEB WRITE HTTPHEADER  
     command 841  
 WPMEDIA option  
     ISSUE ABORT command 344  
     ISSUE END command 354  
     ISSUE SEND command 381  
     ISSUE WAIT command 387  
 WRAP option  
     GET COUNTER command 289  
     GET DCOUNTER command 289  
 WRBRK condition  
     CONVERSE (non-z/OS  
       Communications Server)  
       command 126  
     SEND (non-z/OS Communications  
       Server) command 598  
     SEND CONTROL command 604  
     SEND MAP command 611  
     SEND PAGE command 619  
     SEND TEXT command 627  
     SEND TEXT MAPPED  
       command 629  
     SEND TEXT NOEDIT command 633  
 WRITE command 844  
 WRITE JOURNALNAME command 852  
 WRITE JOURNALNUM command 856  
 WRITE OPERATOR command 857  
     critical action 858  
     eventual action 858  
     immediate action 858  
 WRITEQ TD command 860  
 WRITEQ TS command 863

writing data  
     to temporary storage queue 863  
     to terminal or logical unit 911  
     to transient data queue 860  
 writing records to data sets  
     batch data interchange 345  
     file control 844  
 WSACONTEXT BUILD command 868  
 WSACONTEXT DELETE command 873  
 WSACONTEXT GET command 874  
 WSAEPR CREATE command 879

## X

XCTL command 882  
 XINIT operand  
     DFHMDI 934  
 XMLCONTAINER option  
     TRANSFORM XMLTODATA  
       command 718  
 XMLTRANSFORM option  
     TRANSFORM XMLTODATA  
       command 718  
 XRBA option  
     DELETE command 148  
     READ command 450  
     READNEXT command 463  
     READPREV command 473  
     RESETBR command 534  
     STARTBR command 695  
     WRITE command 846  
 XRF, generic applid 54

## Y

YEAR option  
     DEFINE TIMER command 143  
     FORMATTIME command 237  
 YES value  
     DFHMDI 946  
     DFHMSD 955  
 YYDDD option  
     FORMATTIME command 237  
 YYDDMM option  
     FORMATTIME command 237  
 YYMMDD option  
     FORMATTIME command 237  
 YYYYDDD option  
     FORMATTIME command 238  
 YYYYDDMM option  
     FORMATTIME command 238  
 YYYYMMDD option  
     FORMATTIME command 238

## Z

z/OS Communications Server 97  
 z/OS Communications Server logon data,  
     access to 219  
 ZERO value  
     DFHMDI 934



---

## Readers' Comments — We'd Like to Hear from You

CICS Transaction Server for z/OS  
Version 5 Release 3  
Application Programming Reference

Publication No. SC34-7402-00

We appreciate your comments about this publication. Please comment on specific errors or omissions, accuracy, organization, subject matter, or completeness of this book. The comments you send should pertain to only the information in this manual or product and the way in which the information is presented.

For technical questions and information about products and prices, please contact your IBM branch office, your IBM business partner, or your authorized remarketer.

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you state on this form.

Comments:

Thank you for your support.

Submit your comments using one of these channels:

- Send your comments to the address on the reverse side of this form.
- Send a fax to the following number: +44 1962 816151
- Send your comments via email to: [idrctf@uk.ibm.com](mailto:idrctf@uk.ibm.com)

If you would like a response from IBM, please fill in the following information:

\_\_\_\_\_  
Name

\_\_\_\_\_  
Address

\_\_\_\_\_  
Company or Organization

\_\_\_\_\_  
Phone No.

\_\_\_\_\_  
Email address

**Readers' Comments — We'd Like to Hear from You**  
SC34-7402-00



Cut or Fold  
Along Line

### Fold and Tape

**Please do not staple**

### Fold and Tape

PLACE  
POSTAGE  
STAMP  
HERE

IBM United Kingdom Limited  
User Technologies Department (MP189)  
Hursley Park  
Winchester  
Hampshire  
United Kingdom  
SO21 2JN

Fold and Tape

**Please do not staple**

Fold and Tape

SC34-7402-00

Cut or Fold  
Along Line





SC34-7402-00

