

CICS Transaction Server for z/OS



# CICSplex SM Application Programming Reference

*Version 3 Release 1*



CICS Transaction Server for z/OS



# CICSplex SM Application Programming Reference

*Version 3 Release 1*

**Note!**

Before using this information and the product it supports, be sure to read the general information under "Notices" on page 197.

This edition applies to Version 3 Release 1 of CICS Transaction Server for z/OS, program number 5655-M15, and to all subsequent versions, releases, and modifications until otherwise indicated in new editions. Make sure you are using the correct edition for the level of the product.

© Copyright IBM Corporation 1995, 2011.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

---

# Contents

<b>Preface</b> . . . . .	v
Who this book is for . . . . .	v
What you need to know . . . . .	v
How to use this book . . . . .	v
Notes on terminology . . . . .	v
CICS System Connectivity . . . . .	vi
<b>Summary of changes</b> . . . . .	vii
Changes for CICS Transaction Server for z/OS Version 3 Release 1 . . . . .	vii
Changes for CICS Transaction Server for z/OS, Version 2 Release 3 . . . . .	vii
Changes for CICS Transaction Server for z/OS, Version 2 release 2 . . . . .	vii
<b>Chapter 1. Introduction to the commands</b> . . . . .	1
Using the command-level interface . . . . .	1
Command format . . . . .	1
Argument values. . . . .	1
Using the run-time interface . . . . .	5
Command format . . . . .	5
Argument values. . . . .	5
Syntax notation used in this book . . . . .	7
MVS restrictions . . . . .	8
Language considerations . . . . .	8
CICS and CICSplex SM value data areas . . . . .	8
Length options . . . . .	9
RESPONSE and REASON options . . . . .	9
<b>Chapter 2. The API commands</b> . . . . .	11
ADDRESS . . . . .	12
CANCEL . . . . .	14
CONNECT . . . . .	16
COPY . . . . .	20
CREATE . . . . .	24
DELETE . . . . .	27
DISCARD . . . . .	30
DISCONNECT . . . . .	33
FEEDBACK . . . . .	35
FETCH . . . . .	39
GET . . . . .	46
GETDEF . . . . .	52
GROUP . . . . .	58
LISTEN . . . . .	62
LOCATE . . . . .	65
MARK . . . . .	70
ORDER . . . . .	74
PERFORM OBJECT . . . . .	77
PERFORM SET . . . . .	83
QUALIFY . . . . .	88
QUERY . . . . .	91
RECEIVE . . . . .	94
REFRESH . . . . .	97
REMOVE . . . . .	102
SET . . . . .	105
SPECIFY FILTER . . . . .	111

SPECIFY VIEW . . . . .	114
TERMINATE . . . . .	117
TRANSLATE . . . . .	118
UNMARK . . . . .	121
UPDATE . . . . .	125
<b>Chapter 3. REXX functions and commands . . . . .</b>	<b>129</b>
Functions . . . . .	129
EYUAPI() . . . . .	130
EYUINIT() . . . . .	131
EYUREAS() . . . . .	132
EYURESP() . . . . .	133
EYUTERM() . . . . .	134
Commands . . . . .	135
TBUILD . . . . .	136
TPARSE . . . . .	138
<b>Appendix A. RESPONSE and REASON values . . . . .</b>	<b>141</b>
<b>Appendix B. EYUDA values . . . . .</b>	<b>149</b>
EYUDA general values in numerical order . . . . .	149
EYUDA general values in alphabetic order . . . . .	162
EYUDA RESPONSE values in numerical order . . . . .	180
EYUDA RESPONSE values in alphabetic order . . . . .	180
EYUDA REASON values in numerical order. . . . .	181
EYUDA REASON values in alphabetic order . . . . .	183
<b>Bibliography . . . . .</b>	<b>187</b>
The CICS Transaction Server for z/OS library . . . . .	187
The entitlement set . . . . .	187
PDF-only books . . . . .	187
Other CICS books . . . . .	189
Determining if a publication is current . . . . .	189
<b>Accessibility . . . . .</b>	<b>191</b>
<b>Index . . . . .</b>	<b>193</b>
<b>Notices . . . . .</b>	<b>197</b>
Sample programs . . . . .	198
Programming interface information . . . . .	198
Trademarks. . . . .	198
<b>Sending your comments to IBM . . . . .</b>	<b>199</b>

---

## Preface

This book provides programming information for the CICSplex<sup>®</sup> System Manager (CICSplex SM) element of CICS<sup>®</sup> Transaction Server for z/OS<sup>®</sup>. It describes how to use the application programming interface (API) to access CICSplex SM data and services.

---

## Who this book is for

This book is for application programmers who want to access the services of CICSplex SM.

---

## What you need to know

It is assumed that you have experience writing programs in COBOL, C, PL/I, assembler language, or REXX. You should also have knowledge of the CICSplex SM concepts and terminology introduced in the *CICSplex System Manager Concepts and Planning* book.

For guidance information on how to use the CICSplex SM API see the *CICSplex System Manager Application Programming Guide*.

While you are using this book, you will need to refer to the *CICSplex System Manager Resource Tables Reference* for descriptions of the resource tables that you can access. You may also need to refer to the following books:

*CICSplex System Manager Managing Business Applications*

For information about Business Application Services definitions.

*CICSplex System Manager Managing Resource Usage*

For information about real-time analysis and Monitoring definitions.

*CICSplex System Manager Managing Workloads*

For information about Workload Manager definitions.

---

## How to use this book

This book contains reference information about the API commands. Each command description includes:

- A description of what the command does
- The syntax of the command
- A description of the command options in alphabetical order
- A list of the command response values.

---

## Notes on terminology

In the text of this book, the term **CICSplex SM** (spelled with an uppercase letter 'P') means the IBM<sup>®</sup> CICSplex System Manager element of CICS Transaction Server for z/OS. The term **CICSplex** (spelled with a lowercase letter 'p') means the largest set of CICS systems to be managed by CICSplex SM as a single entity.

Other terms used in this book are:

**Term**    **Meaning**

**API**     Application programming interface

**ASM** Assembler language

**CICS TS for OS/390®**

The CICS element of the CICS TS for OS/390

**MVS™** MVS/Enterprise Systems Architecture SP (MVS)

---

## CICS System Connectivity

This release of CICSplex SM can be used to control CICS systems that are directly connected to it.

For this release of CICSplex SM, the connectable CICS systems are:

- CICS Transaction Server for z/OS 3.1
- CICS Transaction Server for z/OS 2.3
- CICS Transaction Server for z/OS 2.2
- CICS Transaction Server for OS/390 1.3

You can use this release of CICSplex SM to control systems running supported releases of CICS that are connected to, and managed by, your previous release of CICSplex SM. However, if you have any directly-connectable release levels of CICS, as listed above, that are connected to a previous release of CICSplex SM, you are strongly recommended to migrate them to the current release of CICSplex SM, to take full advantage of the enhanced management services. See the *CICS Transaction Server for z/OS Migration from CICS TS Version 2.3* for information on how to do this.

Table 1 shows which supported CICS systems can be directly connected to which releases of CICSplex SM.

Table 1. Directly-connectable CICS systems by CICSplex SM release

CICS system	CICSplex SM component of CICS TS 3.1	CICSplex SM component of CICS TS 2.3	CICSplex SM component of CICS TS 2.2	CICSplex SM component of CICS TS 1.3
CICS TS 3.1	Yes	No	No	No
CICS TS 2.3	Yes	Yes	No	No
CICS TS 2.2	Yes	Yes	Yes	No
CICS TS 1.3	Yes	Yes	Yes	Yes
TXSeries 4.3.0.4	No	Yes	Yes	No
TXSeries 5.0	No	Yes	Yes	No



---

## Summary of changes

This book is based on the CICS Transaction Server for z/OS, Version 2 Release 3 edition of the *CICSplex System Manager Application Programming Reference*. The information in this book has been updated to incorporate changes made for CICSplex SM for CICS Transaction Server for z/OS, Version 3 Release 1. Changes made since the last edition are indicated by vertical bars to the left of the change.

---

### Changes for CICS Transaction Server for z/OS Version 3 Release 1

There have been no major changes for this edition.

---

### Changes for CICS Transaction Server for z/OS, Version 2 Release 3

New keywords are added to the GETDEF command to support new resource tables:

- METANAME
- METAPARM
- PARMAVA

See “GETDEF” on page 52 for more information about these changes.

---

### Changes for CICS Transaction Server for z/OS, Version 2 release 2

There has been a change in CICSplex SM field naming conventions in this release. Data set name fields such as DSNAME, file name fields such as LOCFILE and REMFILE, and transient data queue name fields such as EXTRATDQ and INTRATDQ are now case-sensitive. When entering data set and file names into the CICSplex SM interfaces (end user interface, API and the web user interface), ensure that you enter the data in the correct case. In previous releases of CICSplex SM, the data set names and file names are automatically converted to upper case.

There are no other significant changes for this edition.



---

# Chapter 1. Introduction to the commands

This chapter provides standard usage information about the CICSplex SM application programming interface (API) commands:

- “Using the command-level interface”
- “Using the run-time interface” on page 5

---

## Using the command-level interface

### Command format

The format of an API command when issued through the command-level interface is EXECUTE CPSM (or EXEC CPSM) followed by the name of the required command and possibly by one or more options, as follows:

```
EXEC CPSM command option(arg)....
```

where:

**command**

Describes the operation required (for example, CONNECT).

**option** Describes any of the required or optional facilities available with each command. Some options are followed by an argument in parentheses. You can write options (including those that require arguments) in any order.

**arg** Which is short for argument, is a value such as *data-value* or *data-ref*. A *data-value* can be a constant. This means that an argument that sends data to CICSplex SM is generally a *data-value*. An argument that receives data from CICSplex SM must be a *data-ref*.

Here is an example of an EXEC CPSM command:

```
EXEC CPSM CONNECT
          USER(JONES) VERSION(0310)
          CONTEXT(EYUPLX01) SCOPE(EYUCSG01)
          THREAD(THRDTKN)
          RESPONSE(RESVVAR) REASON(REASVVAR)
```

You must add an end-of-command delimiter that is valid for the programming language you are using. In COBOL programs, for example, the end-of-command delimiter is an END-EXEC statement. In PL/I and C programs, the delimiter is a semicolon (;).

### Argument values

For the command-level interface, the parenthesized argument values that follow options in an API command are specified as follows:

*data-value*

A sending argument used to pass data from your program to CICSplex SM.

The data you pass can be fullword binary data, fixed or variable length character data, or unspecified. If the data type is unspecified, CICSplex SM assumes a composite data structure made up of multiple fields of varying data types. The argument can be in one of these forms:

- Variable name
- Self-defining term

## using the command-level interface

- Expression.

*data-value* includes *data-ref* as a subset.

### *data-ref*

A receiving (or sending and receiving) argument used primarily to pass data from CICSplex SM to your program.

The data can be any of the same types allowed for *data-value* arguments. However, the argument must be a named variable.

In some cases, you can use a *data-ref* argument to provide input to CICSplex SM before CICSplex SM returns its output to you (the COUNT option on the FETCH command is an example of this).

### *data-area*

A sending or receiving argument used to identify a buffer that contains data. A *data-area* argument can be considered a *data-ref* argument with an unspecified data type. A *data-area* cannot be defined by a self-defining term or expression; it must be a named variable.

*ptr-ref* A receiving argument used to pass pointer values from CICSplex SM to your program.

A *ptr-ref* argument is a special form of *data-ref* argument. The data being passed is an address pointer, rather than binary or character data.

### *cpsm-token*

A sending or receiving argument used to pass identifying tokens that are generated by CICSplex SM. A *cpsm-token* argument can be considered a *data-ref* argument with an unspecified data type.

Tokens are created by CICSplex SM to identify API processing threads, result sets, filters, and notifications.

Because token values are created by CICSplex SM, your program must receive a token into a variable before it can specify that token on subsequent commands. A token cannot be defined by a self-defining term or expression; it must be a named variable.

## COBOL argument values

The argument values can be replaced as follows:

### *data-value*

Can be replaced by any COBOL data name of the correct data type for the argument, or by a constant that can be converted to the correct type for the argument. The data type can be specified as one of the following:

- Halfword binary — PIC S9(4) USAGE BINARY
- Fullword binary — PIC S9(8) USAGE BINARY
- Character string — PIC X(n) where “n” is the number of bytes.

*data-value* includes *data-ref* as a subset.

### *data-ref*

Can be replaced by any COBOL data name of the correct data type for the argument. The data type can be specified as one of the following:

- Halfword binary — PIC S9(4) USAGE BINARY
- Fullword binary — PIC S9(8) USAGE BINARY
- Character string — PIC X(n) where “n” is the number of bytes.

Where the data type is unspecified, *data-ref* can refer to an elementary or group item.

*data-area*

Can be replaced by any COBOL data name with a data type of halfword binary (PIC S9(4) COMP), fullword binary (PIC S9(8) COMP), or character string (PIC X(n)).

*ptr-ref* Can be replaced by a pointer variable or an ADDRESS special register.

*cpsm-token*

Can be replaced by any COBOL data name with a data type of fullword binary, PIC S9(8) COMP.

**C argument values**

The argument values can be replaced as follows:

*data-value*

Can be replaced by any C expression that can be converted to the correct data type for the argument. The data type can be specified as one of the following:

- Halfword binary — short int
- Fullword binary — long int
- Character array — char[n] where “n” is the number of bytes in the field (the field must be padded with blank spaces).

*data-value* includes *data-ref* as a subset.

*data-ref*

Can be replaced by any C data reference that has the correct data type for the argument. The data type can be specified as one of the following:

- Halfword binary — short int
- Fullword binary — long int
- Character array — char[n] where “n” is the number of bytes in the field (the field is padded with blank spaces).

If the data type is unspecified, *data-ref* can refer to a scalar data type, array, or structure. The reference must be to contiguous storage.

*data-area*

Can be replaced by any named variable with a data type of halfword binary (short int), fullword binary (long int), or character array (char[n]).

*ptr-ref* Can be replaced by any C pointer type reference.

*cpsm-token*

Can be replaced by any named variable with a data type of fullword binary, long int.

**PL/I argument values**

The argument values can be replaced as follows:

*data-value*

Can be replaced by any PL/I expression that can be converted to the correct data type for the argument. The data type can be specified as one of the following:

- Halfword binary — FIXED BIN(15)
- Fullword binary — FIXED BIN(31)
- Character string — CHAR(n) where “n” is the number of bytes.

*data-value* includes *data-ref* as a subset.

## using the command-level interface

### *data-ref*

Can be replaced by any PL/I data reference that has the correct data type for the argument. The data type can be specified as one of the following:

- Halfword binary — FIXED BIN(15)
- Fullword binary — FIXED BIN(31)
- Character string — CHAR(n) where “n” is the number of bytes.

If the data type is unspecified, *data-ref* can refer to an element, array, or structure; for example, FROM(P->STRUCTURE) LENGTH(LNG). The reference must be to connected storage.

The data area must also have the correct PL/I alignment attribute: ALIGNED for binary items, and UNALIGNED for strings.

If you use a varying data string without an explicit length, the data passed begins with two length bytes, and its length is the maximum length declared for the string. If you explicitly specify a length in the command, the data passed has this length; that is, the two length bytes followed by data up to the length you specified.

### *data-area*

Can be replaced by any named variable with a data type of halfword binary (FIXED BIN(15)), fullword binary (FIXED BIN(31)), or character string (CHAR(n)).

*ptr-ref* Can be replaced by any PL/I reference of type POINTER ALIGNED.

### *cpsm-token*

Can be replaced by any named variable with a data type of fullword binary, FIXED BIN(31).

## Assembler language argument values

In general, an argument may be either the address of the data or the data itself (in assembler-language terms, either a relocatable expression or an absolute expression).

A relocatable expression must not contain unmatched brackets (outside quotation marks) or unmatched quotation marks (apart from length-attribute references). If this rule is obeyed, any expression can be used, including literal constants, such as =AL2(100), forms such as 20(0,R11), and forms that use the macro-replacement facilities.

An absolute expression must be a single term that is either a length-attribute reference, or a self-defining constant.

Care must be taken with equated symbols, which should be used only when referring to registers (pointer references). If an equated symbol is used for a length, for example, it is treated as the address of the length and an unpredictable error occurs.

The argument values can be replaced as follows:

### *data-value*

Can be replaced by a relocatable expression that is an assembler-language reference to data of the correct type for the argument, or by a constant of the correct type for the argument.

### *data-ref*

Can be replaced by a relocatable expression that is an assembler-language reference to data of the correct type for the argument.

*data-area*

Can be replaced by a relocatable expression that is an assembler-language reference to data with a type of halfword (DS H), fullword (DS F), or character string (CLn).

*ptr-ref*

Can be replaced by any absolute expression that is an assembler-language reference to a register.

*cpsm-token*

Can be replaced by a relocatable expression that is an assembler-language reference to data with a type of fullword, DS F.

---

## Using the run-time interface

### Command format

An API command can be passed from REXX to CICSplex SM in one of two ways. The first method is to use the REXX ADDRESS command, like this:

```
ADDRESS CPSM 'command option(arg)...'
```

This method of calling the API invokes a CICSplex SM host subcommand environment.

Alternatively, you can use the EYUAPI() function supplied by CICSplex SM:

```
var = EYUAPI('command option(arg)...')
```

This method invokes the CICSplex SM REXX function package.

Note that with both methods you can enter text in either upper or lower case.

Here is an example of an API command as it would be issued from a REXX program:

```
var = EYUAPI('CONNECT'
            'CONTEXT('WCCONTEXT')' ,
            'SCOPE('WSCOPE')'      ,
            'VERSION(0310)'        ,
            'THREAD(THRDTKN)'      ,
            'RESPONSE(RESVAR)'     ,
            'REASON(REASVAR)')
:
:
```

### Argument values

The CICSplex SM run-time interface makes full use of the standard REXX variable interface. REXX processes variables differently depending on the parameter's data type and whether it is used for input, output, or both. In addition, REXX provides substitution of variables into a command stream that may in some cases make them transparent to the run-time interface.

For the REXX run-time interface, the parenthesized argument values that follow options in an API command are specified as follows:

*data-value*

A sending argument used to pass character or binary data from your program to CICSplex SM.

## using the run-time interface

A *data-value* argument is considered to be character input. Binary data (including EYUDA and CVDA values) is translated into the appropriate internal format. User tokens are not translated.

### *data-ref*

A receiving (or sending and receiving) argument used primarily to pass data from CICSplex SM to your program.

A *data-ref* argument must be a named variable that can be used to receive the resulting output. The output data is translated as appropriate:

- Character data is not translated; the data is placed into the variable as is.
- Binary data is translated to display format (decimal) and placed into the variable.
- User tokens are not translated; the token value is placed into the variable as is.
- Address values are not translated; the specified storage buffer is placed directly into one or more variables.

In some cases, you can use a *data-ref* argument to provide input to CICSplex SM before CICSplex SM returns its output to you (the COUNT option on the FETCH command is an example of this). If a *data-ref* argument can be supplied as input, you must specify a variable for that argument. If you do not want to specify an input value, you should initialize the variable.

### *data-area*

A sending or receiving argument used to identify a buffer that contains data. A *data-area* argument must be a named variable.

For output buffers that could receive multiple resource table records, CICSplex SM creates (or fills) stem variables to hold the data. The zero entry of the stem array indicates the number of entries in the array.

For example, in the stem variable called W\_INT0\_EVALDEF, the W\_INT0\_EVALDEF.0 entry contains the number of EVALDEF resource table records returned. The entries W\_INT0\_EVALDEF.1 through W\_INT0\_EVALDEF.n contain the actual resource table records.

A stem variable is created regardless of whether the actual output is a single record or multiple records.

*ptr-ref* A receiving argument used to pass pointer values from CICSplex SM to your program.

A *ptr-ref* argument must be a named variable that can be used to receive the resulting output. The data being passed is a character representation of a hexadecimal address.

### *cpsm-token*

A sending or receiving argument used to pass identifying tokens that are generated by CICSplex SM.

A *cpsm-token* argument must be a named variable. Tokens are not translated; the token value is placed into the variable as is.

**Note:** Each variable (or stem variable) returned by CICSplex SM contains an entire resource table record. You can use the TPARSE command to break a record into individual fields. For a description of this command, see Chapter 3, “REXX functions and commands,” on page 129.








## Syntax notation used in this book

In this book, the CICSplex SM API commands are presented in a standard way.

The EXEC CPSM that precedes the command name in the command-level interface is not shown, nor is the end-of-command delimiter. Likewise, the ADDRESS CPSM or var=EYUAPI() that is required for the REXX run-time interface is not shown.

You interpret the syntax diagrams shown in this book by following the arrows from left to right. The conventions are:

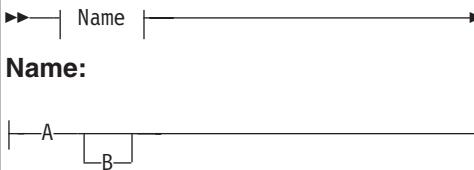Symbol	Meaning
	A set of mutually exclusive alternatives, one of which you <i>must</i> code.
	A set of mutually exclusive alternatives, one of which you <i>may</i> code.
	A set of alternatives, any number of which you may code.
	Alternatives where A is the default.
	See the separate syntax fragment whose name is shown.
Punctuation and uppercase characters	Code exactly as shown.
Lowercase italics	Code your own text, as appropriate (for example, <i>name</i> ).

For example, with `CONNECT VERSION(data-value)` you must code `CONNECT VERSION` and `()` as they appear, but are free to code any four-character number that represents a valid release of CICSplex SM.

---

### MVS restrictions

The following general restrictions apply to all CICSplex SM API commands:

- The program must be in primary addressing mode when invoking any CICSplex SM service. The primary address space must be the home address space. All parameters passed to CICSplex SM must reside in the primary address space.
- CICSplex SM does not always preserve access registers across commands. If your program uses access registers, it should save them before invoking a CICSplex SM service, and restore them before reusing them.

---

### Language considerations

All of the language considerations that apply to the various environments (CICS, MVS batch, TSO, and NetView®) also apply to CICSplex SM programs written to run in those environments.

---

### CICS and CICSplex SM value data areas

The values for some CICSplex SM resource table attributes are maintained in an encoded form. These values can be:

- CICSplex SM value data areas (EYUDAs)
- CICS value data areas (CVDAs).

You can use one of two built-in translator functions to translate these values:

#### EYUDAs

Use the CICSplex SM translator function called EYUVALUE. You must also specify the CPSM translator option when you run the CICS/ESA translator.

#### CVDAs

Use the CICS translator function called DFHVALUE. You must also specify the CICS translator option when you run the CICS/ESA translator.

For example, consider the following COBOL statement:

```
MOVE EYUVALUE(QUIESCING) TO EYUDATA
```

This statement translates the EYUDA character value of QUIESCING into its numeric equivalent of 48 when the program is translated.

#### Notes:

1. The EYUVALUE function is not available to programs written in REXX. You can use the TPARSE command, which is supplied specifically for REXX programs, to access and translate the attribute values in a resource table. For a description of this command, see Chapter 3, “REXX functions and commands,” on page 129.
2. In some CICS environments, the DFHVALUE function returns incompatible CVDA values for the following resource table attribute:

Resource table	Attribute value	CICS Environment
LOCTRAN	RESSEC(RESSECEXT)	CICS/MVS

Because these CVDA values conflict with values used in other CICS environments, CICSplex SM must modify them to retain their uniqueness. CICSplex SM adds 9000 to the value returned by DFHVALUE for each of these CICS CVDA attributes.

CICSplex SM also provides a TRANSLATE command to translate EYUDA and CVDA values at run time. You can use TRANSLATE to convert an EYUDA or CVDA value that is associated with a specific resource table and attribute. For example:

```
EXEC CPSM TRANSLATE OBJECT(WLMAWAOR)
                     ATTRIBUTE(STATUS)
                     FROMCV(48)
                     TOCHAR(EYUCHAR)
                     RESPONSE(RESPDATA)
                     REASON(REASDATA)
```

This command translates the EYUDA value for the STATUS attribute of the WLMAWAOR resource table into its character value when the program is run.

For a description of the TRANSLATE command, see “TRANSLATE” on page 118.

**Note:** For a list of the EYUDA values used by CICSplex SM, see Appendix B, “EYUDA values,” on page 149.

---

## Length options

Many API commands involve the transfer of data between the application program and CICSplex SM.

In VS COBOL II, PL/I, and Assembler language, the translator can default certain length options; this means they may be optional in programs that specify data areas. In C and REXX, all length options must be specified.

The CICSplex SM API allows most data-value arguments, which are only passed from your program to CICSplex SM, to default. The exception is the LENGTH option on the following commands:

- CREATE
- REMOVE
- UPDATE

On the other hand, data-ref arguments, which can be passed from your program to CICSplex SM and back again, must always be specified.

When an API command offers a length option, it is always expressed as a signed fullword binary value. This puts a theoretical upper limit of 2 147 483 647 bytes on the length. The achievable upper limit varies from command to command and with various language compilers, but the maximum limit of all input data areas on an API command is typically 16 124 bytes. When this limit is exceeded the API command fails with a response of INVALIDCMD and a reason of LENGTH.

---

## RESPONSE and REASON options

Once an API command completes processing, it returns a response and, if appropriate, a reason. You must specify the RESPONSE and REASON options on each command to receive the response and reason values returned by that command.

**Note:** The TBUILD and TPARSE commands, which can be used only with the REXX run-time interface, do not use the RESPONSE and REASON options. The result of these REXX-specific processes is returned by their STATUS

## RESPONSE and REASON options

option. For more information, see the descriptions of the TBUILD and TPARSE commands in Chapter 3, “REXX functions and commands,” on page 129.

### **RESPONSE**(*data-ref*)

*data-ref* is a user-defined variable. On return from the command, it contains a character value that describes the result of command processing. RESPONSE values are given in the description of each command.

### **REASON**(*data-ref*)

*data-ref* is a user-defined variable. On return from the command, it contains a value that further qualifies the response to certain commands. REASON values are given with the RESPONSE values, for those responses that use them.

For more information about the RESPONSE and REASON options, see *CICSplex System Manager Application Programming Guide*. For a summary of RESPONSE and REASON values by command, see Appendix A, “RESPONSE and REASON values,” on page 141.

---

## Chapter 2. The API commands

This chapter contains detailed descriptions of the CICSplex SM API commands. All of these commands can be used with either the command-level interface or the REXX run-time interface.

Each description includes the following, as appropriate:

- A description of the command
- Usage notes
- Related commands
- Syntax of the command
- Available options for the command
- Responses returned by the command


The commands are presented in alphabetical order:

- “ADDRESS” on page 12
- “CANCEL” on page 14
- “CONNECT” on page 16
- “COPY” on page 20
- “CREATE” on page 24
- “DELETE” on page 27
- “DISCARD” on page 30
- “DISCONNECT” on page 33
- “FEEDBACK” on page 35
- “FETCH” on page 39
- “GET” on page 46
- “GETDEF” on page 52
- “GROUP” on page 58
- “LISTEN” on page 62
- “LOCATE” on page 65
- “MARK” on page 70
- “ORDER” on page 74
- “PERFORM OBJECT” on page 77
- “PERFORM SET” on page 83
- “QUALIFY” on page 88
- “QUERY” on page 91
- “RECEIVE” on page 94
- “REFRESH” on page 97
- “REMOVE” on page 102
- “SET” on page 105
- “SPECIFY FILTER” on page 111
- “SPECIFY VIEW” on page 114
- “TERMINATE” on page 117
- “TRANSLATE” on page 118
- “UNMARK” on page 121
- “UPDATE” on page 125

---

**ADDRESS**

Provide access to CICSplex SM storage areas.



## Description

The ADDRESS command provides access to CICSplex SM storage areas.

- ADDRESS returns the addresses of two control fields that are associated with each API thread:
  - the event control block (ECB)
  - the sentinel.
- If your program is written in REXX, the ECB and sentinel values are returned as character representations of the hexadecimal addresses. You have to use the REXX STORAGE function to access the storage at those addresses.

## Related commands

LISTEN, RECEIVE

## Options

### ECB(*ptr-ref*)

Names a variable to receive the address of the ECB that will be posted when asynchronous requests associated with this thread are awaiting processing. The ECB field is cleared whenever the counter value in the SENTINEL field reaches 0.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### SENTINEL(*ptr-ref*)

Names a variable to receive the address of a 4-byte counter of completed asynchronous requests associated with this thread.

The sentinel value increases each time an asynchronous request completes. Examples of asynchronous requests include:

- A command is issued with the NOWAIT option
- An event occurs that is named in a LISTEN command.

The sentinel value decreases when a RECEIVE command is issued. If the counter value is 0, it means there are no outstanding asynchronous requests to be received.

**Note:** Each API processing thread can handle a maximum of 256 asynchronous requests (as indicated by the SENTINEL counter) at one time.

**THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the ADDRESS command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

ECB

SENTINEL

THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## CANCEL

---

## CANCEL

Cancel the notification request produced by a previous LISTEN command.

►►—CANCEL—NOTIFICATION(*cpsm-token*)—THREAD(*cpsm-token*)—RESPONSE(*data-ref*)—►►  
►—REASON(*data-ref*)—►►

## Description

This command cancels the notification request produced by a previous LISTEN command.

## Related commands

LISTEN

## Options

### NOTIFICATION(*cpsm-token*)

Identifies the notification request to be cancelled. The *cpsm-token* value that identifies a notification request is returned by the LISTEN command.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### THREAD(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the CANCEL command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### FAILED

The command failed for one of the following reasons:

#### ABENDED

Command processing abended.

#### EXCEPTION

Command processing encountered an exceptional condition.

### ENVIRONERROR

An environment error occurred for one of the following reasons:

#### NOSERVICE

The application stub program could not load the API service module.

#### NOSTORAGE

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.



**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

NOTIFICATION

THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## CONNECT

Establish a connection with CICSplex SM, defines an API processing thread, and provides default settings to be used by the thread.

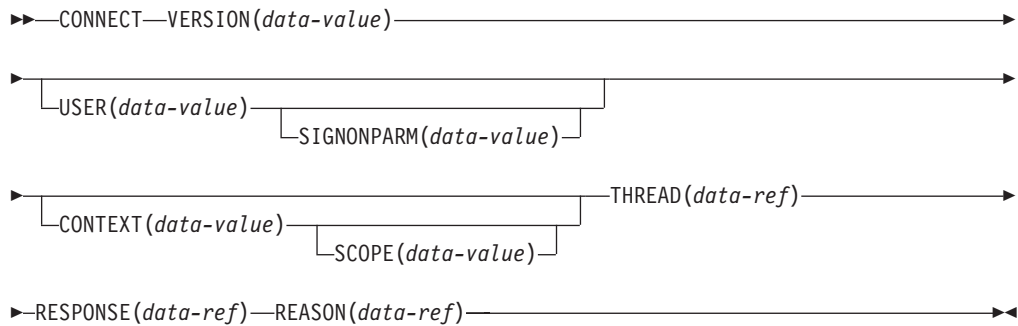

## Description

The specifics of the connection process depend upon the environment in which your program is running. For a complete description of the connection process, see *CICSplex System Manager Application Programming Guide*.

## Related commands

DISCONNECT, QUALIFY, TERMINATE

## Options

### CONTEXT (data-value)

Identifies the default context for commands issued against this thread. The context must be the 1- to 8-character name of a CMAS or CICSplex.

The default context is in effect for all commands issued against the thread unless you override it for a specific command or change it by issuing the QUALIFY command. As an alternative to specifying a default context for the thread, you can specify the context for individual commands as they are processed.

If you do not specify the CONTEXT option, the default context for the thread is the CMAS to which the thread is connected.

### REASON (data-ref)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE (data-ref)

Names a variable to receive the fullword response value returned by this command.

### SCOPE (data-value)

Identifies the default scope for commands issued against this thread.

The SCOPE option qualifies the CONTEXT option. When the context is a CICSplex, the scope can be:

- The 1- to 8-character name of the CICSplex itself
- A CICS system or CICS system group within the CICSplex
- A logical scope, as defined in a CICSplex SM resource description (RESDESC).

When the context is a CMAS, this option has no meaning and is ignored.

The default scope is in effect for all commands issued against the thread unless you override it for a specific command or change it by issuing the QUALIFY command. If you do not specify the SCOPE option, no default scope is assumed.

**Note:** Certain API commands require a valid scope when the context is a CICSplex. If you do not specify a scope on a CONNECT or QUALIFY command, then you must specify the SCOPE option when you issue any of these commands for a resource table that represents a CICS resource:

- GET
- PERFORM OBJECT
- PERFORM SET
- REFRESH
- SET.

#### **SIGNONPARM**(*data-value*)

Identifies a 1- to 8-character signon parameter to be passed to the API security exit routine (EYU9XESV) at your enterprise.

If CMAS security is active and CICSplex SM finds no security defined in the environment where the API program is running, it passes the USER and SIGNONPARM values from the CONNECT command to EYU9XESV. For more information about API security, see *CICSplex System Manager Application Programming Guide*.

#### **THREAD**(*data-ref*)

Names a variable to receive the fullword token that CICSplex SM assigns to this processing thread.

This identifying token must be specified on all subsequent commands issued against this thread.

#### **USER**(*data-value*)

Identifies a 1- to 8-character user ID to be passed to the API security exit routine (EYU9XESV) at your enterprise.

If CMAS security is active and CICSplex SM finds no security defined in the environment where the API program is running, it passes the USER and SIGNONPARM values from the CONNECT command to EYU9XESV. For more information about API security, see *CICSplex System Manager Application Programming Guide*.

#### **VERSION**(*data-value*)

Identifies the release of CICSplex SM resource table data that you want to be available to your program. The VERSION value must be the 4-character number of a valid CICSplex SM release, such as 0310 for CICS Transaction Server for z/OS, Version 3 Release 1.

#### **Notes:**

1. The VERSION value must be 0120 or greater. The API cannot access data from a release of CICSplex SM earlier than Release 2.
2. The VERSION value must be less than or equal to the version of the CICSplex SM run-time environment.
3. You can specify a VERSION value that is greater than the release under which your API program was originally written, provided:
  - You compile your program using the appropriate copy books for the version specified.

## CONNECT

- Your program is compatible with the copy books for the version specified.

For complete details on things to consider when running under a different release, see *CICSplex System Manager Application Programming Guide*.

## Conditions

The following is a list of the RESPONSE values that can be returned by the CONNECT command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **APITASKERR**

The API control subtask encountered an error during startup.

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

#### **SOERESOURCE**

A required resource that is owned by the Environment Services System Services (ESSS) address space is not available.

#### **SOLRESOURCE**

A required resource that is locally owned (that is, owned by the address space where the processing thread is running) is not available.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT

SCOPE

SIGNONPARM

USRID

VERSION.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**CPSMSERVER**

The CMAS to which the processing thread was trying to connect is not available.

**CPSMSYSTEM**

No CICSplex SM systems are available.

**CPSMVERSION**

No CICSplex SM system at the specified version is available.

**NOTPERMIT**

A not permitted condition occurred for one of the following reasons:

**EXPIRED**

The security authorization of the specified user ID has expired.

**SIGNONPARAM**

The specified signon parameter is not authorized for the user ID.

**USRID**

The specified user ID does not have the required security authorization.

**VERSIONINVL**


A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

## COPY

Copy resource table records.

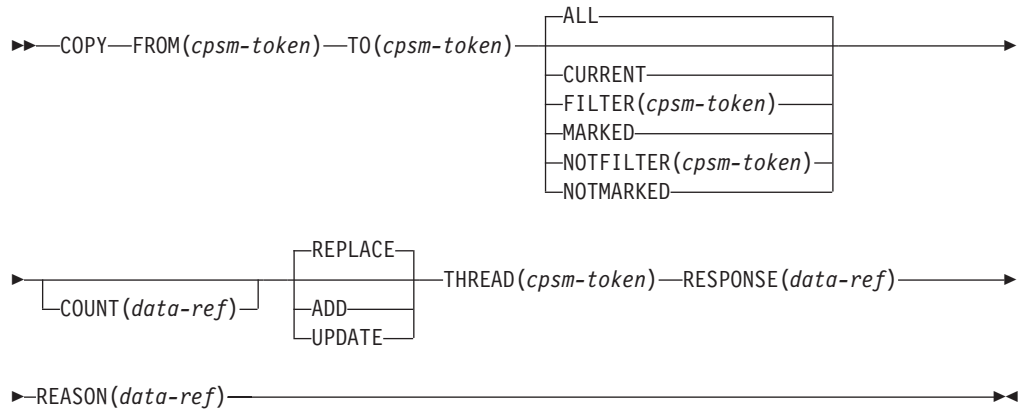

## Description

This command copies some or all of the resource table records in one result set to another result set on the same processin thread.

- The COPY command always begins processing with the last record that was fetched, rather than the next one in the result set.
- The target result set can be an existing result set or a new one that is created by this process. If you specify an existing result set as the target, you can either overwrite the existing records or add to them.
- A result set can contain only one record for a given resource. If duplicate records are found during the copy process, the ADD, REPLACE or UPDATE option you specified determines which record is retained.
- To copy selected records from a source result set, you can use:
  - The SPECIFY FILTER command to define a filter for the source result set.
  - The MARK and UNMARK commands to mark records in the source result set. Any marks you place on records in the source result set are not retained when those records are copied to the target result set.
- The relative position of records in the target result set may not be the same as it was in the source result set. The position can be affected by:
  - Deleted records being left in the source result set (when COPY ALL is specified) and other records assuming their position in the target result set.
  - The sort order associated with the target result set, if any. If the target result set does not exist, records are copied in the same order as they appeared in the source result set. If an existing result set is named as the target, records are copied and then sorted according to the sort order that was in effect for that result set.

## Related commands

DELETE, DISCARD, GET, GETDEF, LOCATE, MARK, ORDER, PERFORM OBJECT, QUERY, SPECIFY FILTER

## Options

### ADD

Adds the resource table records from the source result set to an existing target result set. If duplicate records are found, the record in the target result set is retained.

If no existing result set is specified as the target, the ADD option is ignored.

### ALL

Copies all the resource table records in the source result set to the target result set.

Any records that have been deleted from the source result set are not copied. In effect, the ALL option compresses a result set by leaving deleted records in the source result set and copying the remaining records to a new result set.

### COUNT(*data-ref*)

Names a variable to receive the number of resource table records in the target result set after the copy process is complete.

### CURRENT

Copies only the current resource table record in the source result set to the target result set.

### FILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option copies only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### FROM(*cpsm-token*)

Identifies the source result set for this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- PERFORM OBJECT.

### MARKED

Copies only those resource table records that are marked in the source result set. You can mark resource table records by using the MARK and UNMARK commands.

### NOTFILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option copies only those resource table records that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### NOTMARKED

Copies only those resource table records that are not marked in the source result set. You can mark resource table records by using the MARK and UNMARK commands.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

## COPY

### REPLACE

Deletes the resource table records in an existing target result set and replaces them with the results of this copy operation. If the copy operation does not result in any resource table records being copied, the target result set is discarded.

If no existing result set is specified as the target, the REPLACE option is ignored.

### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### THREAD(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

### TO(*cpsm-token*)

Identifies the target result set for this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- PERFORM OBJECT.

**Note:** The target result set cannot be the same as the source result set that you specified on the FROM option.

If this field is:

- Set to binary zero (in COBOL, C, PL/I or Assembler)
- An uninitialized variable (in REXX).

CICSplex SM creates a new result set and returns its identifying token in the same field.

### UPDATE

Updates an existing target result set with resource table records from the source result set. If duplicate records are found, the record in the source result set replaces the record in the target result set.

If no existing result set is specified as the target, the UPDATE option is ignored.

## Conditions

The following is a list of the RESPONSE values that can be returned by the COPY command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### NODATA

No records were found that matched the specified search criteria.

**BUSY** A busy condition occurred for one of the following reasons:

**FROM** The source result set specified on the FROM option is being processed by another command.

**TO** The target result set specified on the TO option is being processed by another command. This condition can occur if you specified the same result set on the FROM and TO options.



**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INCOMPATIBLE**

An incompatible condition occurred for one of the following reasons:

**INVALIDOBJ**

The target result set specified on the TO option is not compatible with the source result set specified on the FROM option. The result sets must contain the same type of resource table records.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

FILTER  
FROM  
NOTFILTER  
THREAD  
TO.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## CREATE

---

## CREATE

Create a new CICSplex SM or CICS definition.

```
►► CREATE OBJECT (data-value) FROM (data-area) LENGTH (data-value) ►►
|
| [ PARM (data-area) PARMLEN (data-value) ] [ CONTEXT (data-value) ]
|
►► THREAD (cpsm-token) RESPONSE (data-ref) REASON (data-ref) ►►
```

## Description

This command creates a new CICSplex SM or CICS definition using the attribute values you specify. The new definition is stored in the CICSplex SM data repository. For definitions that have a CICSplex as their context (such as workload management or real-time analysis definitions), the new definition is automatically distributed to all the CMASs involved in managing the CICSplex.

## Related commands

REMOVE, UPDATE

## Options

### CONTEXT (data-value)

Identifies the context for this command. The context must be the 1- to 8-character name of a CMAS or CICSplex.

If you do not specify the CONTEXT option, the default context for the thread is assumed.

### FROM (data-area)

Identifies a buffer containing a resource table record that represents the definition to be created.

The record must include all of the attributes for the resource table specified on the OBJECT option. For optional attributes that you do not want to specify, set the field to null (that is, zero) values .

See the *CICSplex System Manager Resource Tables Reference* for a list of all permitted null values

### LENGTH (data-value)

A fullword value that specifies the length of the FROM buffer.

### OBJECT (data-value)

Identifies the resource table that represents the definition being created. This value must be the 1- to 8-character name of a valid CPSM Definition or CICS Definition resource table. For a list of the CICSplex SM resource tables by type, see *CICSplex System Manager Application Programming Guide*.

### PARM (data-area)

Identifies a buffer containing the parameter expression to be used in creating the definition.

For details on how to use a parameter expression with the CREATE command, see *CICSplex System Manager Application Programming Guide*. For a description of the parameters that are valid for a given resource table, see *CICSplex System Manager Resource Tables Reference*.

**PARMLEN**(*data-value*)

A fullword value that specifies the length of the PARM buffer.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the CREATE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**REQTIMEOUT**

One of the CMASs to which the request was directed did not respond.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
FROM  
LENGTH  
OBJECT  
PARM  
PARMLEN

## CREATE

### THREAD.

Check the command description for valid parameter syntax.

### NOTAVAILABLE

A not available condition occurred for one of the following reasons:

#### APITASK

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

#### CPSMAPI

The CMAS to which the processing thread is connected is not available for API processing.

#### MAINTPOINT

The maintenance point for the current context is not available.

### NOTPERMIT

A not permitted condition occurred for one of the following reasons:

#### USRID

The user ID associated with the processing thread does not have the required security authorization.

### SERVERGONE

The CMAS to which the processing thread was connected is no longer active.

### TABLEERROR

A resource table record is invalid for one of the following reasons:

#### DATAERROR

The value associated with one or more resource table attributes is invalid. This error can occur if:

- The resource table is missing required attributes, contains one or more conflicting attributes, or is a duplicate.
- A CICS resource definition contains attributes that would cause the EXEC CICS CREATE command to issue warnings.

Use the FEEDBACK command to retrieve additional data about this error.

#### INVALIDATTR

One of the resource table attributes is invalid.

#### INVALIDVER

The specified version of the resource table is not supported by CICSplex SM.

### VERSIONINVL

A version conflict occurred for one of the following reasons:

#### NOTSUPPORTED


The version of the application stub program used for this command is not supported.

#### NOTVSNCONN

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## DELETE

Delete resource table records.

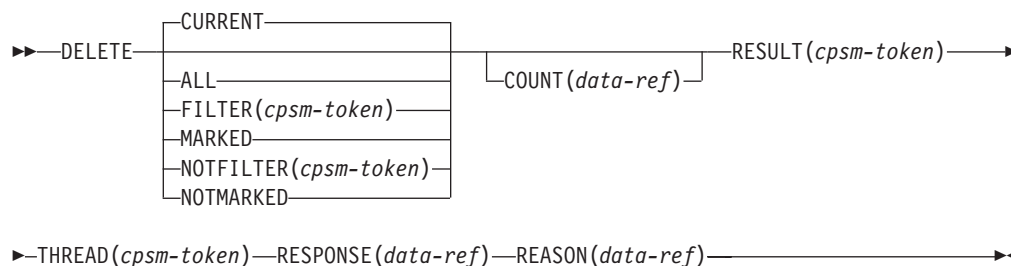

## Description

This command deletes one or more resource table records from a result set.

- The DELETE command always begins processing with the last record that was fetched, rather than the next one in the result set.
- The records you delete are marked as deleted, but they retain their positions in the result set. The remaining records also retain their positions; they are not renumbered. Any API commands that you issue after a DELETE command skip over the deleted records in a result set. One exception is the ORDER command, which sorts all the records in a result set, including deleted records. If you try to issue a command against a deleted record, you receive a RESPONSE value of NODATA.
- To remove deleted records and compress a result set, you can copy the remaining records to a new result set. Use the COPY command with the ALL option to copy all the records in a result set except those that have been deleted.

**Note:** Deleted records are also removed and the remaining records renumbered when you issue a REFRESH command.

## Related commands

COPY, DISCARD, GET, GROUP, LOCATE, MARK, ORDER, PERFORM OBJECT, REFRESH, SPECIFY FILTER

## Options

### ALL

Deletes all the resource table records in the result set.

### COUNT(*data-ref*)

Names a variable to receive the number of resource table records in the result set after the delete process is complete.

### CURRENT

Deletes only the current resource table record in the result set.

**Note:** The record pointer remains positioned on the deleted record. If you issue another API command with the CURRENT option before repositioning the pointer, you receive a RESPONSE value of NODATA.

### FILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option deletes only those resource table records that meet the specified filter criteria.

## DELETE

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### MARKED

Deletes only those resource table records that are marked in the result set. You can mark resource table records by using the MARK and UNMARK commands.

### NOTFILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option deletes only those resource table records that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### NOTMARKED

Deletes only those resource table records that are not marked in the result set. You can mark resource table records by using the MARK and UNMARK commands.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### RESULT(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

### THREAD(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the DELETE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### NODATA

No records were found that matched the specified search criteria.

**BUSY** A busy condition occurred for the following reason:

#### RESULT

The result set specified on the RESULT option is being processed by another command.

### ENVIRONERROR

An environment error occurred for one of the following reasons:

#### NOSERVICE

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**SOLRESOURCE**

A required resource that is locally owned (that is, owned by the address space where the processing thread is running) is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

FILTER  
NOTFILTER  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**


The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## DISCARD

---

## DISCARD

Discard a result set, filter, or view.

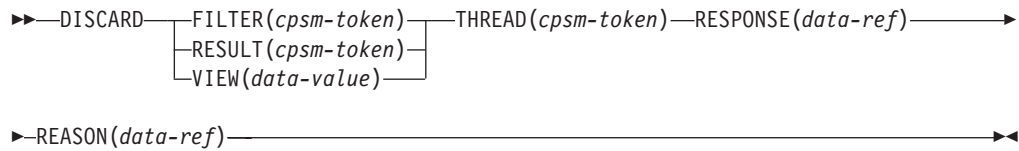

## Description

This command discards a result set, filter, or view.

## Related commands

COPY, GET, GETDEF, GROUP, PERFORM OBJECT, SPECIFY FILTER, SPECIFY VIEW

## Options

### **FILTER**(*cpsm-token*)

Identifies the filter to be discarded. The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### **RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### **RESULT**(*cpsm-token*)

Identifies the API result set to be discarded. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

**Note:** If you discard a result set that was summarized by the GROUP command, all of the summarized result sets are also discarded.

### **THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

### **VIEW**(*data-value*)

Identifies the view to be discarded. This value must be the 1- to 8-character name of a view as defined on a SPECIFY VIEW command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the DISCARD command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.



**OK** The command completed processing successfully.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INUSE**

An in use condition occurred for one of the following reasons:

**FILTER**

The specified filter is currently in use and cannot be discarded.

**VIEW** The specified view is currently in use and cannot be discarded.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

FILTER

RESULT

THREAD

VIEW.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

## **DISCARD**

### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the **CONNECT** command.

## DISCONNECT

Disconnects an API processing thread from CICSplex SM.

►►—DISCONNECT—THREAD(*cpsm-token*)—RESPONSE(*data-ref*)—REASON(*data-ref*)—►►

### Description

Any resources that are associated with the thread are released, including result sets, filters, views, diagnostic data, and outstanding asynchronous requests.

### Related commands

CONNECT, TERMINATE

### Options

#### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

#### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

#### THREAD(*cpsm-token*)

Identifies the API thread to be disconnected. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

### Conditions

The following is a list of the RESPONSE values that can be returned by the DISCONNECT command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

#### ENVIRONERROR

An environment error occurred for one of the following reasons:

##### NOSERVICE

The application stub program could not load the API service module.

##### NOSTORAGE

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

##### SOCRESOURCE

A required resource that is owned by the CMAS is not available.

#### FAILED

The command failed for one of the following reasons:

##### ABENDED

Command processing abended.

##### EXCEPTION

Command processing encountered an exceptional condition.

#### INVALIDPARM

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

THREAD.

## DISCONNECT

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## FEEDBACK

Retrieve diagnostic data.

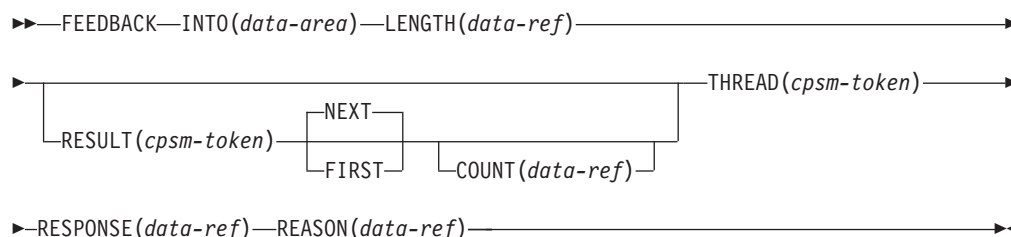

## Description

This command retrieves diagnostic data about a previously issued API command.

- The diagnostic data is returned as FEEDBACK resource table records.
- If the previous command involved processing a result set and it returned a RESPONSE value other than OK, a FEEDBACK resource table record is appended to the end of each resource table record in the result set that had an error associated with it causing the non-OK RESPONSE to be sent. The diagnostic data is available to the FEEDBACK command until another command processes the same result set. At that point, the data is replaced with FEEDBACK records for the subsequent command.

#  
#  
#

**Note:** If a command that processed a result set returned a RESPONSE value of OK, FEEDBACK records are produced if CICS returns additional information in the EIBRESP2 field.

- If the previous command did not process a result set, the FEEDBACK resource table records are returned in a separate feedback area. The records in that feedback area are cleared and refreshed for each command that is not result set-oriented. So for commands that place their diagnostic data in the feedback area rather than in a result set, FEEDBACK can retrieve data only for the most recently issued command.
- Once you have issued the FEEDBACK command to retrieve diagnostic data for a command, the feedback record or area is cleared. You cannot request the same FEEDBACK resource table records more than once.
- If a command is processed asynchronously (that is, you specify the NOWAIT option) the diagnostic data for that command is returned in the ASYNCREQ notification resource table. No FEEDBACK resource table records are produced for an asynchronous request.
- Diagnostic data is not available for these commands:
  - DISCONNECT
  - FEEDBACK
  - TERMINATE
- The TBUILD and TPARSE commands supplied for use in REXX programs do not provide any useful FEEDBACK information.

For a complete description of the FEEDBACK resource table, see *CICSplex System Manager Resource Tables Reference*.

### Options

#### **COUNT** (*data-ref*)

Specifies the number of feedback records to be retrieved from the result set named in the RESULT option. If you do not specify the COUNT option, only one feedback record is retrieved.

If you are retrieving multiple feedback records, they are placed one after another in the INTO buffer. The INTO buffer must be long enough to hold all the feedback records being retrieved.

The value that CICSplex SM returns in this field depends on the RESPONSE value for the FEEDBACK command:

**OK** The actual number of records returned in the INTO buffer.

#### **WARNING AREATOOSMALL**

The number of records returned in the INTO buffer, which is not the total number of records requested.

#### **INVALIDPARM LENGTH**

The field is not set because the INTO buffer was not long enough to hold even one resource table record.

#### **FIRST**

Retrieves the first feedback record from the result set named in the RESULT option.

If you specify the COUNT option, FIRST retrieves the specified number of records, beginning with the first record in the result set.

#### **INTO** (*data-area*)

Identifies a buffer (or stem variable, in REXX) to receive the feedback data. This buffer must be long enough to hold all the feedback data being retrieved.

#### **LENGTH** (*data-ref*)

A fullword value that specifies the length of the INTO buffer.

The value that CICSplex SM returns in this field depends on the RESPONSE value for the FEEDBACK command:

**OK** The actual length of the data returned in the INTO buffer.

#### **WARNING AREATOOSMALL**

The buffer length that would be required to hold all the requested records.

#### **INVALIDPARM LENGTH**

The field is not set because the INTO buffer was not long enough to hold even one resource table record.

#### **NEXT**

Retrieves the next available feedback record from the result set named in the RESULT option.

If you specify the COUNT option, NEXT retrieves the specified number of records, beginning with the next record in the result set.

#### **REASON** (*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

#### **RESPONSE** (*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT** (*cpsm-token*)

Identifies an API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

Use the RESULT option to retrieve feedback data about a previously issued command that processed a result set. Use FEEDBACK without the RESULT option to retrieve data about the most recently issued command that did not process a result set.

**THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the FEEDBACK command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**NODATA**

No records were found that matched the specified search criteria, or a command that processed a result set returned a RESPONSE of OK.

**WARNING**

The command completed processing with a warning, for the following reason:

**AREATOOSMALL**

The INTO buffer is not long enough to hold the number of records requested and available.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

## FEEDBACK

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

COUNT  
INTO  
LENGTH  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**

The version of the application stub program used for this command is not supported.


#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.



## FETCH

Retrieve data and status information for resource table records.

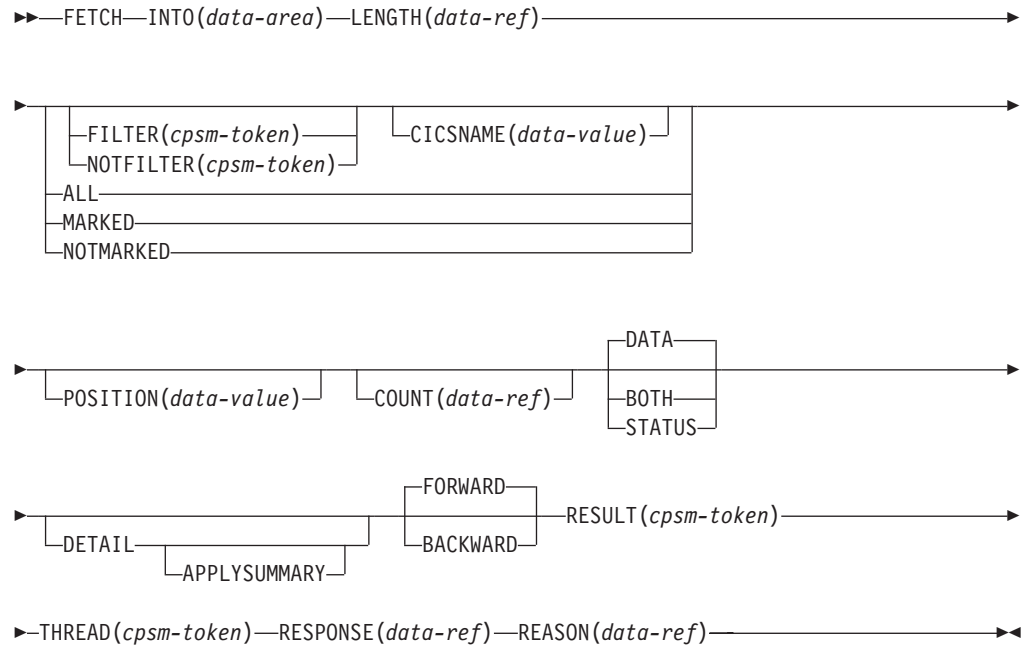

## Description

This command retrieves data and status information for one or more resource table records in a result set.

- After a FETCH command, the record pointer is usually positioned to the next record in the result set (that is, the record following the last record fetched in whichever direction the pointer was moving, forward or backward). However, the following API commands always act upon the last record that was fetched (that is, the record pointer is not advanced):
  - COPY
  - DELETE
  - MARK.
  - UNMARK
  - PERFORM SET CURRENT
  - REFRESH CURRENT
  - SET CURRENT
- If no records were fetched (because no records matched the specified criteria), the pointer is positioned to the top or bottom of the result set, depending on which direction it was moving.

#  
#  
#

## Related commands

COPY, GET, GETDEF, GROUP, LOCATE, MARK, ORDER, PERFORM OBJECT, QUERY, SPECIFY FILTER

## FETCH

### Options

#### ALL

Retrieves all the resource table records in the result set. When you specify ALL, the POSITION and COUNT options are ignored.

#### APPLYSUMMARY

Apply any, some, or all of the following options to the summary records and retrieve the detail records associated with the summary records selected.

- MARKED
- NOTMARKED
- FILTER
- NOTFILTER

The APPLYSUMMARY option is only valid if the DETAIL option is also specified.

If the DETAIL option is specified without the APPLYSUMMARY option the result will be as described under the DETAIL option.

If neither the DETAIL option nor the APPLYSUMMARY option are specified but any combination of some or all of the following record selection options: MARKED, NOTMARKED, FILTER, and NOTFILTER are issued against a summary result set, the record selection options are applied to the summary result set and the selected summary records are retrieved.

#### BACKWARD

Begins the retrieval process with the last record fetched and continues in a backward direction through the specified result set.

#### BOTH

Retrieves both the resource table data and the OBJSTAT status information about the last action performed against the resource table. Each record contains OBJSTAT information followed by resource table data.

#### CICSNAME (*data-value*)

Specifies a 1- to 8-character specific or generic CICS system name to be used for this operation.

The CICSNAME option indicates that only those resource table records that originate from CICS systems that match the specified name pattern should be considered for retrieval. When CICSNAME is specified in conjunction with FILTER or NOTFILTER, only records which meet the FILTER or NOTFILTER requirements and also match the CICSNAME pattern will be considered. The number of records actually retrieved is determined by the COUNT option.

When you specify CICSNAME, the result set named on the RESULT option must not be a summarized result set and must contain resource table records that have an EYU\_CICSNAME attribute. If the result set specified by RESULT contains summarized records or resource table records that do not have an EYU\_CICSNAME attribute, you receive an INVALIDPARM response for the CICSNAME option.

#### COUNT (*data-ref*)

Specifies the number of resource table records to be processed.

The COUNT option applies to the result set named in the RESULT option. When you also specify the DETAIL option, COUNT provides the number of summary records in the summarized result set in RESULT for which source records are returned. The OBJSTAT table for each summary record contains the number of source records that will be returned for that record if the DETAIL option is specified.

If you do not specify the COUNT option, the default is one.

If the COUNT option is specified, COUNT contains the number of records processed. In most cases this is also the number of records returned. However, if you also specify the DETAIL option, all source records associated with the requested number of summary record are retrieved. This is normally greater than the number specified in the COUNT option.

If you are retrieving multiple records, they are placed one after another in the INTO buffer. The INTO buffer should be long enough to hold all the records being retrieved.

The value that CICSPlex SM returns in this field depends on the RESPONSE value for the FETCH command as follows:

**OK** The actual number of records returned in the INTO buffer.

**WARNING AREATOOSMALL**

The number of records returned in the INTO buffer, which is not the total number of records requested.

**INVALIDPARM LENGTH**

The field is not set because the INTO buffer was not long enough to hold even one resource table record.

**DATA**

Retrieves only the specified resource table data. The records do not contain any OBJSTAT status information about the last action performed against the resource table.

**Note:** The OBJSTAT information includes a summary count field that is set when resource table records are summarized using the GROUP command. If you plan to GROUP the resource table records and you want to know how many records are combined to form a summary record, you should specify BOTH to obtain both data and OBJSTAT information when the records are fetched.

**DETAIL**

Retrieves the source records associated with specific summary resource table records.

When you specify DETAIL, the result set named in the RESULT option must be a summarized result set. DETAIL expands the summary record by retrieving the resource table records associated with it from the source result set. If you do not specify DETAIL when a summarized result set is being processed, the summary records themselves are retrieved. If the result set is not a summarized result set, this option has no meaning and is ignored.

You can use the FORWARD or BACKWARD options along with DETAIL to select which summary record you want to expand. The FORWARD and BACKWARD options also control the direction in which records are retrieve from the source result set.

By default, all the source records associated with the summary record or records are retrieved. However, you can use the FILTER or NOTFILTER option to limit the records retrieved from the source result set. You can also use the MARKED or NOTMARKED option to retrieve only those records associated with the summary record that are marked (or not marked) in the source result set.

You cannot explicitly position the record pointer in the source result set. When you specify DETAIL, the POSITION option refers to the record in the summary result set. If the APPLYSUMMARY option is specified, FILTER, NOTFILTER,

## FETCH

MARKED, and NOTMARKED options are applied to records in the summary result set rather than to the source records.

For more information on processing summarized result sets, see *CICSplex System Manager Application Programming Guide*. For a description of the GROUP command, which creates summarized result sets, see “GROUP” on page 58.

### **FILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option indicates that only those resource table records that meet the specified filter criteria should be considered for retrieval. The number of records that are actually retrieved is determined by the COUNT option.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **FORWARD**

Begins the retrieval process with the next record (that is, the record that follows the last record fetched) and continues in a forward direction through the specified result set.

### **INTO**(*data-area*)

Identifies a buffer (or stem variable, in REXX) to receive the resource table records. This buffer must be long enough to hold all the records being retrieved.

### **LENGTH**(*data-ref*)

A fullword value that specifies the length of the INTO buffer.

The value that CICSplex SM returns in this field depends on the RESPONSE value for the FETCH command:

**OK** The actual length of the data returned in the INTO buffer.

### **NODATA**

The length is set to zero.

### **WARNING AREATOOSMALL**

The buffer length that would be required to hold all the requested records.

### **INVALIDPARM LENGTH**

The field is not set because the INTO buffer was not long enough to hold even one resource table record.

### **MARKED**

Indicates that only those resource table records that are marked in the result set should be considered for retrieval. The number of records that are actually retrieved is determined by the COUNT option.

You can mark resource table records by using the MARK and UNMARK commands.

### **NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option indicates that only those resource table records that do not meet the specified filter criteria should be considered for retrieval. The number of records that are actually retrieved is determined by the COUNT option.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **NOTMARKED**

Indicates that only those resource table records that are not marked in the

result set should be considered for retrieval. The number of records that are actually retrieved is determined by the COUNT option.

You can mark resource table records by using the MARK and UNMARK commands.

**POSITION**(*data-value*)

Begins the retrieval process with the nth resource table record in the result set.

This value must be a number that identifies the record's relative position in the result set. The first record in a result set is identified by the number 1.

For example, to begin the retrieval process with the fifth resource table record in a result set, you would specify POSITION(5).

**Note:** When the POSITION option is used with the DETAIL option to retrieve source records for a specific summarized result set record, the value of the COUNT option is forced to one (1). In this case, the value returned by the COUNT option is the number of source records summarized in the specified result set record.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

**STATUS**

Retrieves only the OBJSTAT status information for the last action performed against the resource table. The records do not contain any resource table data.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the FETCH command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**NODATA**

No records were found that matched the specified search criteria, for one of the following reasons:

**BACKWARD**

There are no more records that satisfy the search criteria in the backward direction.

## FETCH

### FORWARD

There are no more records that satisfy the search criteria in the forward direction.

### WARNING

The command completed processing with a warning, for the following reason:

#### AREATOOSMALL

The INTO buffer is not long enough to hold the number of records requested and available.

**BUSY** A busy condition occurred for the following reason:

#### RESULT

The result set specified on the RESULT option is being processed by another command.

### ENVIRONERROR

An environment error occurred for one of the following reasons:

#### NOSERVICE

The application stub program could not load the API service module.

#### NOSTORAGE

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### SOCRESOURCE

A required resource that is owned by the CMAS is not available.

#### SOLRESOURCE

A required resource that is locally owned (that is, owned by the address space where the processing thread is running) is not available.

### FAILED

The command failed for one of the following reasons:

#### ABENDED

Command processing abended.

#### EXCEPTION

Command processing encountered an exceptional condition.

### INVALIDPARM

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

COUNT  
FILTER  
INTO  
LENGTH  
NOTFILTER  
POSITION  
RESULT  
THREAD  
CICSNAME

Check the command description for valid parameter syntax.

### NOTAVAILABLE

A not available condition occurred for one of the following reasons:

#### APITASK

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.


**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

---

**GET**

Return a result set containing selected resource table records.

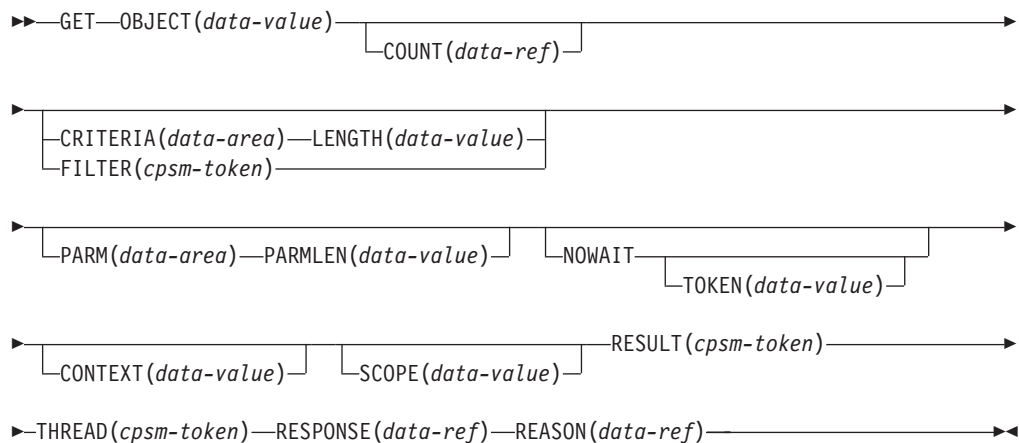

## Description

This command returns a result set containing selected resource table records.

- The resource table can be one that represents a CICS resource, a CICSplex SM or CICS definition, or a CICSplex SM run-time object.
- After a GET command, the record pointer is positioned to the top of the result set (that is, the first record in the result set).
- If the context and scope in effect when you issue a GET command include CICS systems that do not support the requested resource table, the request is ignored for those CICS systems.
- In some CICS environments, the resource table attribute values that are returned by CICSplex SM for:

Resource table	Attribute value	CICS Environment
LOCTRAN	RESSEC(RESSECEXT)	CICS/MVS

do not match the CVDA values returned by CICS. The values returned by CICS conflict with CVDA values in other CICS environments. In order to retain the attributes' uniqueness, CICSplex SM adds 9000 to the values returned by CICS.

## Related commands

DISCARD, FETCH, GETDEF, QUERY, RECEIVE, REFRESH, SPECIFY FILTER, SPECIFY VIEW

## Options

### CONTEXT (data-value)

Identifies the context for this command. The context must be the 1- to 8-character name of a CMAS or CICSplex.

If you do not specify the CONTEXT option, the default context for the thread is assumed.

### COUNT (data-ref)

Names a variable to receive the number of resource table records in the target result set after this operation is complete.



**CRITERIA**(*data-area*)

Identifies a buffer containing the filter expression to be used for this operation. The CRITERIA option retrieves only those resource table records that meet the specified filter criteria.

For details on how to form a filter expression, see *CICSplex System Manager Application Programming Guide*.

**FILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option retrieves only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**LENGTH**(*data-value*)

A fullword value that specifies the length of the CRITERIA buffer.

**Note:** The buffer length you specify should not include any data other than a filter expression.

**NOWAIT**

Returns control to your program as soon as the GET command has been accepted, which allows the command to be processed asynchronously.

If you specify the NOWAIT option, you must use a subsequent RECEIVE command to test for the completion of this request. The results of an asynchronous request are returned as ASYNCREQ resource table records. For a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

**Note:** If you specify the TOKEN option, the NOWAIT option is assumed by default.

**OBJECT**(*data-value*)

Identifies the resource table for which records are to be retrieved. This value must be the 1- to 8-character name of either a valid resource table or a valid view.

**PARM**(*data-area*)

Identifies a buffer containing the parameter expression to be used in preselecting resource table records.

For details on how to use a parameter expression with the GET command, see *CICSplex System Manager Application Programming Guide*. For a description of the parameters that can be specified for a given resource table, see the *CICSplex System Manager Resource Tables Reference*.

**PARMLN**(*data-value*)

A fullword value that specifies the length of the PARM buffer.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

## GET

- COPY
- GET
- GROUP
- PERFORM OBJECT.

CICSplex SM replaces the contents of the existing result set with the resource table records requested by this GET command. If the operation does not result in any resource table records being selected, the target result set is discarded.

If this field is:

- Set to binary zero (in COBOL, C, PL/I or Assembler)
- An uninitialized variable (in REXX).

CICSplex SM creates a new result set and returns its identifying token in the same field.

### **SCOPE**(*data-value*)

Identifies the scope for this command.

If the current context (as set by this command or a previous CONNECT or QUALIFY command) is a CICSplex and the OBJECT option identifies a CICS resource, a valid scope is required. The scope can be:

- The 1- to 8-character name of the CICSplex itself
- A CICS system or CICS system group within the CICSplex
- A logical scope, as defined in a CICSplex SM resource description (RESDESC).

If the current context is a CMAS or the OBJECT option identifies any other type of resource table this option has no meaning and is ignored.

If you do not specify the SCOPE option, the default scope for the thread is assumed. If the current context is a CICSplex and no default scope has been set on a CONNECT or QUALIFY command, you receive an INVALIDPARAM response for the SCOPE option.

### **STATE**(*cpsm-token*)

Returns active or inactive topology objects. The default is to return both.

### **THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

### **TOKEN**(*data-value*)

Defines a 1- to 4-character token that you choose to correlate an asynchronous GET request with the result of a subsequent RECEIVE command. This token is for use by your program; CICSplex SM makes no use of the value. The token is returned by the RECEIVE command when this GET request is complete.

## Conditions

The following is a list of the RESPONSE values that can be returned by the GET command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **SCHEDULED**

The command has been scheduled for processing.

### **NODATA**

No records were found that matched the specified search criteria.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**REQTIMEOUT**

One of the CMASs or MASs to which the request was directed did not respond.

#  
#  
#  
#

If only some of the CMASs or MASs did not respond, the GET can still yield a valid result. COUNT might be greater than zero and RESULT might be non-zero. Such a result set contains data from those CMASs and MASs that did respond.

**SOCRESOURCE**

#  
#  
#

A required resource that is owned by the CMAS is not available, or the maximum number of result set, view or filter tokens has been reached.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDDATA**

Invalid data was detected. The parameter that contains invalid data is returned as the reason value:

**CRITERIA**

An attribute value listed in the CRITERIA buffer is not valid for the specified attribute.

**INVALIDCMD**

The command is invalid for one of the following reasons:

**FILTER**

The filter expression passed on the operation is too large or complex.

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
CRITERIA  
FILTER  
LENGTH  
OBJECT

## GET

PARM  
PARMLEN  
RESULT  
SCOPE  
TOKEN  
THREAD.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

#### **MAINTPOINT**

The maintenance point for the current context is not available.

#### **SCOPE**

Either none of the MASs in the specified scope are available or none of them support the requested resource table.

#### **WORKLOAD**

The workload identified on the API request is not available on the local CMAS.

### **NOTFOUND**

A not found condition occurred for the following reason:

#### **ATTRIBUTE**

An attribute specified in the CRITERIA buffer was not found for the specified resource table.

### **NOTPERMIT**

A not permitted condition occurred for the following reason:

#### **USRID**

The user ID associated with the processing thread does not have the required security authorization.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **TABLEERROR**

A resource table record is invalid for the following reason:

#### **DATAERROR**

The value associated with one or more resource table attributes is invalid. Use the FEEDBACK command to retrieve additional data about this error.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

**WARNING**


The command completed processing with a warning, for the following reason:

**MAXRECORDS**

The number of records added to the result set by a MAS would have exceeded the MAXHISTRECS value for that MAS. Records within the MAXHISTRECS limit have been added to the result set. Modify the FILTER or PARM parameter values to reduce the number of records the MAS should add to the result set.

## GETDEF

Returns a result set containing selected descriptive records for a resource table.

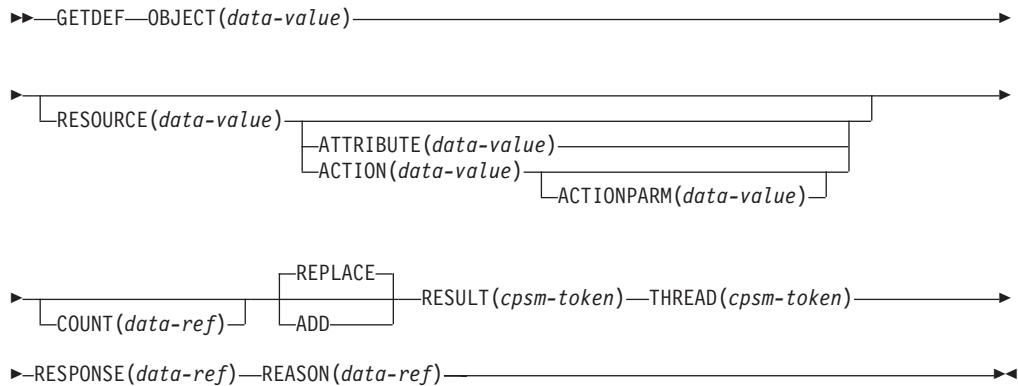

## Description

This command returns a result set containing selected descriptive records for a resource table.

- GETDEF is a variation of the GET command. GET retrieves data records for the resource represented by a table. GETDEF, on the other hand, retrieves internal data that describes the resource table itself.
- The GETDEF command retrieves its data, which is called meta-data, from internal resource tables that describe each of the external resource tables. These internal resource tables are called CPSM MetaData tables. The attributes of a CPSM MetaData table are the characteristics of the external table, not the resource that it represents. For a list of the CPSM MetaData resource tables that can be retrieved by GETDEF, see the description of the OBJECT option on page “Object” on page 53.
- You can use GETDEF to find out what resource tables are available for processing by other commands. In addition, you can identify the attributes of a resource table, the values allowed for its modifiable attributes, and the actions that can be performed on it. You can also use GETDEF to request descriptions of the CPSM MetaData resource tables themselves.
- You can use the GETDEF command only with resource tables supplied by CICSplex SM. GETDEF is not valid for user-defined views of a resource table that were created by the SPECIFY VIEW command.
- You cannot use the REFRESH command to refresh the data records retrieved by GETDEF.

## Related commands

DISCARD, FETCH, GET, LOCATE, QUERY

## Options

### **ACTION**(data-value)

The 12-character name of an action against the resource table for which CPSM MetaData records are to be retrieved.

**ACTIONP***ARM*(*data-value*)

The 12-character name of a parameter to an action against the resource table for which CPSM MetaData records are to be retrieved, as it appears in the API parameter string.

**ADD**

Adds the CPSM MetaData resource table records that are being retrieved to an existing target result set. If no existing result set is specified as the target, the ADD option is ignored.

**ATTRIBUTE**(*data-value*)

Identifies one or more attributes of the resource table specified on the RESOURCE option for which CPSM MetaData records are to be retrieved.

Depending on which CPSM MetaData table is named in the OBJECT option, this value can be the 1- to 12-character name of a specific attribute or an asterisk (\*), for all attributes in the resource table. If you do not specify the ATTRIBUTE option for an OBJECT that does not require it, data is retrieved for all attributes in the resource table.

For details on the CPSM MetaData resource tables and the valid ATTRIBUTE values for each, see the description of the OBJECT option.

**COUNT**(*data-ref*)

Names a variable to receive the number of resource table records in the target result set after this operation is complete.

**OBJECT**(*data-value*)

Identifies the type of meta-data to be retrieved for the resource table specified on the RESOURCE option. This value must be one of the following CPSM MetaData resource table names:

**OBJECT**

One record is returned for each instance of the resource table specified on the RESOURCE option. The record describes the resource table's general characteristics. Related options and restrictions include:

- ACTION is ignored.
- ATTRIBUTE is ignored.
- ACTIONP
- ARM is ignored.
- RESOURCE must be a specific resource table name or \* for all resource tables.

**OBJECT**

One record is returned for each action that is available for the resource table specified on the RESOURCE option.

Related options and restrictions include:

- ACTION is normally omitted. If present, it may specify the name of an action or \*.
- ATTRIBUTE is ignored.
- ACTIONP
- ARM is ignored.
- RESOURCE must be a specific resource table name; a value of \* is not allowed.

**METADESC**

One record is returned for each attribute of the resource table specified on the RESOURCE option. Each record provides only the basic structure of the attribute, including the name, data type, length, and

## GETDEF

offset in the resource table. Such information might be useful for accessing the attribute fields in a buffer returned by the FETCH command.

Related options and restrictions include:

- ACTION is ignored.
- ATTRIBUTE can be a specific attribute name or \* for all attributes in the resource table.
- ACTIONPARM is ignored.
- RESOURCE must be a specific resource table name; a value of \* is not allowed.

**ATTR** One record is returned for each attribute of the resource table specified on the RESOURCE option. Each record provides complete information about the attribute.

Related options and restrictions include:

- ATTRIBUTE can be a specific attribute name or \* for all attributes in the resource table.
- RESOURCE must be a specific resource table name; a value of \* is not allowed.

### ATTRAVA

One record is returned for each of the EYUDA or CVDA values that are valid for the specified attribute.

Related options and restrictions include:

- ATTRIBUTE must be the name of a specific attribute that has a data type of EYUDA, CVDAS, or CVDAT.
- RESOURCE must be a specific resource table name; a value of \* is not allowed.

**Note:** The AVAAVAIL attribute of the ATTR internal resource table indicates whether an AVA list is available for a given attribute.

### METANAME

One record is returned for each CVDA and EYUDA. The RESOURCE, ATTRIBUTE, ACTION and ACTIONPARM keywords are ignored.

### METAPARM

One record is returned for every parameter for the specified RESOURCE and ACTION.

- ACTION must be a specific action name; a value of \* is not allowed.
- ACTIONPARM is ignored.
- RESOURCE must be a specific table; a value of \* is not allowed.

### PARMAVA

One record is returned for the specified RESOURCE, ACTION, and ACTIONPARM.

- ACTION must be a specific action name; a value of \* is not allowed.
- ACTIONPARM must be a specific parameter name; a value of \* is not allowed.
- RESOURCE must be a specific table; a value of \* is not allowed.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.



**REPLACE**

Deletes the contents of an existing target result set and replaces them with the results of this operation. If the operation does not result in any CPSM MetaData resource table records being selected, the target result set is discarded.

If no existing result set is specified as the target, the REPLACE option is ignored.

**RESOURCE** (*data-value*)

Identifies the resource table for which CPSM MetaData records are to be retrieved.

If you specify the ATTRIBUTE option, this value must be the 1- to 8-character name of a specific CICSplex SM resource table. Otherwise, you can specify a value of asterisk (\*) to retrieve data for all resource tables.

**Note:** You can use GETDEF only with resource tables supplied by CICSplex SM. GETDEF is not valid for user-defined views of a resource table that were created by the SPECIFY VIEW command.

**RESPONSE** (*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT** (*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

CICSplex SM replaces the contents of the existing result set with the resource table records requested by this GETDEF command. If the operation does not result in any resource table records being selected, the target result set is discarded.

If this field is:

- Set to binary zero (in COBOL, C, PL/I or Assembler)
- An uninitialized variable (in REXX).

CICSplex SM creates a new result set and returns its identifying token in the same field.

**THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the GETDEF command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**NODATA**

OBJECT was specified with the OBJECT option, but there are no actions defined for the specified RESOURCE.

**BUSY** A busy condition occurred for the following reason:

### **RESULT**

The result set specified on the RESULT option is being processed by another command.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INCOMPATIBLE**

An incompatible condition occurred for the following reason:

#### **INVALIDOBJ**

The target result set specified on the RESULT option is not compatible with the output of this command. The result set must contain the same type of meta-data (as specified on the OBJECT option) as the command produces.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

ACTION  
ACTIONPARM  
ATTRIBUTE  
OBJECT  
RESOURCE  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **TABLEERROR**

A resource table record is invalid for one of the following reasons:

**DATAERROR**

The value associated with one or more resource table attributes is invalid. Use the FEEDBACK command to retrieve additional data about this error.

**INVALIDVER**

The specified version of the resource table is not supported by CICSplex SM.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**


The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## GROUP

---

## GROUP

Return a summarized result set.

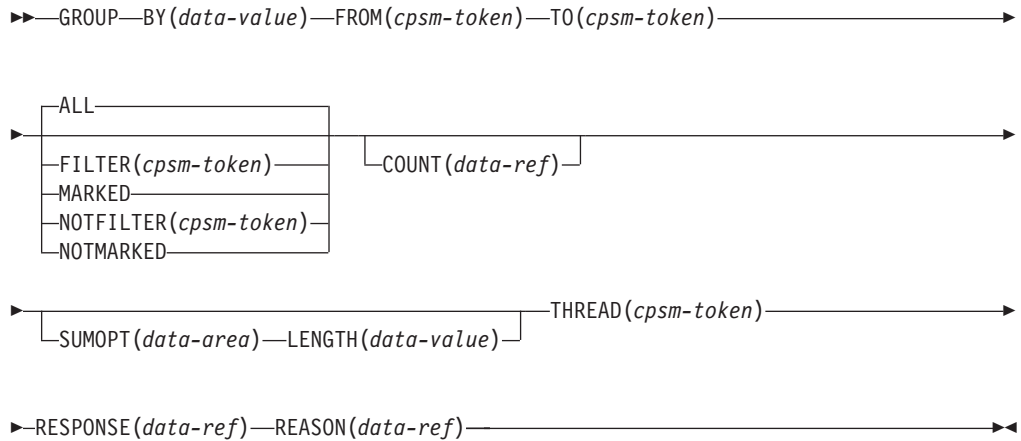

## Description

This command returns a summarized result set by grouping some or all of the resource table records in a result set.

- The target result set can be an existing result set or a new one that is created by this process. If you specify an existing result set as the target of a GROUP command:
  - It must be a summarized result set that was produced by a previous GROUP command against the same source result set.
  - It must contain the same type of resource table records currently found in the source result set.
  - The existing records in the result set are overwritten.
- To create a summarized result set from selected records of a source result set, you can use:
  - The SPECIFY FILTER command to define a filter for the source result set.
  - The MARK and UNMARK commands to mark records in the source result set.
- The GROUP command may be used only for attributes with a length less than 255. A FAILED EXCEPTION error occurs for attribute lengths of 255 or greater.
- For more information on processing summarized result sets, see *CICSplex System Manager Application Programming Guide*.

## Related commands

DISCARD, FETCH, GET, LOCATE, MARK, ORDER, QUERY, SPECIFY FILTER

## Options

### ALL

Summarizes all the resource table records in the source result set.

### BY (data-value)

Identifies the resource table attribute whose value is to be used as the grouping factor for this operation. This value must be the 1- to 12-character name of a valid attribute for the resource table.

**COUNT**(*data-ref*)

Names a variable to receive the number of resource table records in the target result set after this operation is complete.

**FILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option summarizes only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**FROM**(*cpsm-token*)

Identifies the source result set for this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- PERFORM OBJECT.

**Note:** If you discard the source result set, all of the summarized result sets that were created from it are also discarded.

**LENGTH**(*data-value*)

A fullword value that specifies the length of the SUMOPT buffer.

**Note:** The buffer length you specify should not include any data other than a summary expression.

**MARKED**

Summarizes only those resource table records that are marked in the source result set. You can mark resource table records by using the MARK and UNMARK commands.

**NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option summarizes only those resource table records that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**NOTMARKED**

Summarizes only those resource table records that are not marked in the source result set. You can mark resource table records by using the MARK and UNMARK commands.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**SUMOPT**(*data-area*)

Identifies a buffer containing the summary expression to be used for this operation. The SUMOPT value overrides the default summary options for the resource table attributes.

## GROUP

For details on how to form a summary expression, see *CICSplex System Manager Application Programming Guide*. For a list of the default summary options for a given resource table, see the *CICSplex System Manager Resource Tables Reference*.

### **THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

### **TO**(*cpsm-token*)

Identifies the target result set for this operation.

If this field is:

- Set to binary zero (in COBOL, C, PL/I or Assembler)
- An uninitialized variable (in REXX).

CICSplex SM creates a new summarized result set and returns its identifying token in the same field.

Otherwise, you can specify an existing summarized result that was produced by a previous GROUP command against the result set specified in the FROM option. That is, you can reuse a summarized result set, but only to resummaries the records in the same result set.

**Note:** If you specify the token of a previously produced summarized result set, make sure the result set still exists. When you discard a source result set, all of the summarized result sets that were created from it are also discarded.

## Conditions

The following is a list of the RESPONSE values that can be returned by the GROUP command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **NODATA**

No records were found that matched the specified search criteria.

**BUSY** A busy condition occurred for one of the following reasons:

**FROM** The source result set specified on the FROM option is being processed by another command.

**TO** The target result set specified on the TO option is being processed by another command.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

### **FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

BY  
FILTER  
FROM  
LENGTH  
NOTFILTER  
SUMOPT  
THREAD  
TO.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**


The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## LISTEN

---

## LISTEN

Request a notification be sent to the processing thread.

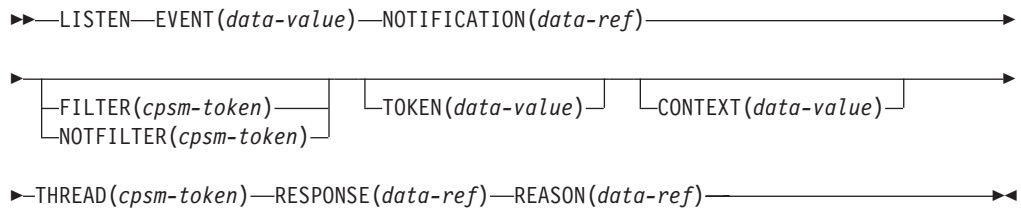

## Description

This command requests that a notification be sent to the processing thread when a specific event occurs in the CICSplex.

- An event is represented by a resource table with a type of CPSM Notification.
- The LISTEN command is used in conjunction with the RECEIVE command. If you use LISTEN to request notification of an event, you must use a subsequent RECEIVE command to retrieve information about the event.
- An API processing thread can have a maximum of 256 completed asynchronous requests outstanding at one time. If you do not issue the RECEIVE command at regular intervals and your processing thread reaches its maximum of 256, asynchronous requests are discarded and are not processed. For a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

## Related commands

ADDRESS, CANCEL, RECEIVE

## Options

### CONTEXT(data-value)

Identifies the context for this command. The context must be the 1- to 8-character name of a CMAS or CICSplex.

If you do not specify the CONTEXT option, the default context for the thread is assumed.

### EVENT(data-value)

Identifies the resource table that represents the event to be listened for. This value must be the 1- to 8-character name of a valid CPSM Notification resource table. For a list of the CICSplex SM resource tables by type, see *CICSplex System Manager Application Programming Guide*.

### FILTER(cpsm-token)

Identifies a filter to be used for this operation. The FILTER option listens for only those events that meet the specified filter criteria.

Using the FILTER option, you can limit the notifications you receive to events that are associated with a specific CMAS or CICSplex. For example, you could create a filter like this:

```
PLEXNAME=EYUPLX01.
```

and specify that filter on the LISTEN command to be notified only of events generated by CICSplex EYUPLX01.



The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option listens for only those events that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**NOTIFICATION**(*data-ref*)

Names a variable to receive the fullword token that CICSplex SM assigns to this notification request.

This identifying token must be specified on the CANCEL command when you want to cancel the notification request.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**TOKEN**(*data-value*)

Defines a 1- to 4-character token that you choose to correlate this LISTEN request with the result of a subsequent RECEIVE command. This token is for use by your program; CICSplex SM makes no use of the value. The token is returned by the RECEIVE command when an event of the specified type occurs.

## Conditions

The following is a list of the RESPONSE values that can be returned by the LISTEN command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

## LISTEN

### **INCOMPATIBLE**

An incompatible condition occurred for the following reason:

#### **INVALIDEVT**

The specified event is not compatible with the filter specified on the FILTER or NOTFILTER option.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
EVENT  
FILTER  
NOTFILTER  
NOTIFICATION  
THREAD  
TOKEN.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread was trying to connect is not available for API processing.

#### **PLEXMGR**

The CMAS to which the processing thread is currently connected does not participate in managing the specified CICSplex and no other CMAS is available that does manage the CICSplex.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## LOCATE

Position the record pointer within a result set.




### pointer\_group



### POSITION\_group



### FILTER\_group

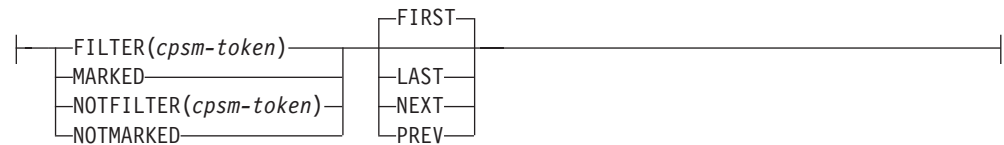

## Description

This command positions the record pointer within a result set.

- API commands that manipulate records or update the data in a result set affect the position of the record pointer:
  - After a GET command, the pointer is positioned to the top of the result set.
  - After a FETCH command, the pointer is positioned to the next record in the result set (that is, the record following the last record fetched in whichever direction the pointer was moving, forward or backward). If no records were fetched (because no records matched the specified criteria), the pointer is positioned to the top or bottom of the result set, depending on which direction it was moving.

After issuing any other command that manipulates records or updates data, the position of the record pointer depends on a combination of factors, including the options that you specified on the command. To be certain of the pointer's location, you should use the LOCATE command to explicitly position it within the result set.

- The LOCATE command skips over any deleted records in the result set. If you try to position the record pointer to a deleted record, you receive a RESPONSE value of NODATA.

## LOCATE

### Related commands

COPY, DELETE, FETCH, GETDEF, GROUP, MARK, ORDER, PERFORM OBJECT, PERFORM SET, REFRESH, SET, SPECIFY FILTER, UNMARK

### Options

#### **BACKWARD** (*data-value*)

Moves the record pointer backward by the specified number of resource table records.

If the pointer reaches the top of the result set, it remains positioned on the first resource table record. The pointer does not continue moving backward to the bottom of the result set.

#### **BOTTOM**

Moves the record pointer to the the last resource table record in the result set.

#### **FILTER** (*cpsm-token*)

Identifies a filter to be used for this operation.

The FILTER option positions the record pointer to a resource table record that meets the specified filter criteria. The FIRST, LAST, NEXT, or PREV option determines where in the result set the search begins and in what direction it continues.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

#### **FIRST**

Begins a search based upon filter or marking criteria with the first resource table record in the result set. The search continues in a forward direction through the result set until a match is found.

#### **FORWARD** (*data-value*)

Moves the record pointer forward by the specified number of resource table records.

If the pointer reaches the bottom of the result set, it remains positioned on the last resource table record. The pointer does not continue moving forward to the top of the result set.

#### **LAST**

Begins a search based upon filter or marking criteria with the last resource table record in the result set. The search continues in a backward direction through the result set until a match is found.

#### **MARKED**

Positions the record pointer to a resource table record that is marked. The FIRST, LAST, NEXT, or PREV option determines where in the result set the search begins and in what direction it continues.

You can mark resource table records by using the MARK and UNMARK commands.

#### **NEXT**

Begins a search based upon filter or marking criteria with the current resource table record in the result set. The search continues in a forward direction through the result set until a match is found.

#### **NOTFILTER** (*cpsm-token*)

Identifies a filter to be used for this operation.

The NOTFILTER option positions the record pointer to a resource table record that does not meet the specified filter criteria. The FIRST, LAST, NEXT, or PREV option determines where in the result set the search begins and in what direction it continues.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**NOTMARKED**

Positions the record pointer to a resource table record that is not marked. The FIRST, LAST, NEXT, or PREV option determines where in the result set the search begins and in what direction it continues.

You can mark resource table records by using the MARK and UNMARK commands.

**POSITION**(*data-value*)

Moves the record pointer to the *n*th resource table record in the result set.

This value must be a number that identifies the record's relative position in the result set. The first record in a result set is identified by the number 1.

For example, to move the record pointer to the fifth resource table record in a result set, you would specify POSITION(5).

**PREV**

Begins a search based upon filter or marking criteria with the previous resource table record in the result set. The search continues in a backward direction through the result set until a match is found.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**TOP**

Moves the record pointer to the first resource table record in the result set.

## Conditions

The following is a list of the RESPONSE values that can be returned by the LOCATE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

## LOCATE

### **NODATA**

No records were found that matched the specified search criteria, for one of the following reasons:

#### **BACKWARD**

There are no more records that satisfy the search criteria in the backward direction.

#### **FORWARD**

There are no more records that satisfy the search criteria in the forward direction.

**BUSY** A busy condition occurred for the following reason:

#### **RESULT**

The result set specified on the RESULT option is being processed by another command.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

#### **SOLRESOURCE**

A required resource that is locally owned (that is, owned by the address space where the processing thread is running) is not available.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

BACKWARD  
FILTER  
FORWARD  
NOTFILTER  
POSITION  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread was trying to connect is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

**NOTVSNCONN**


The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## MARK

Mark selected resource table records in a result set.

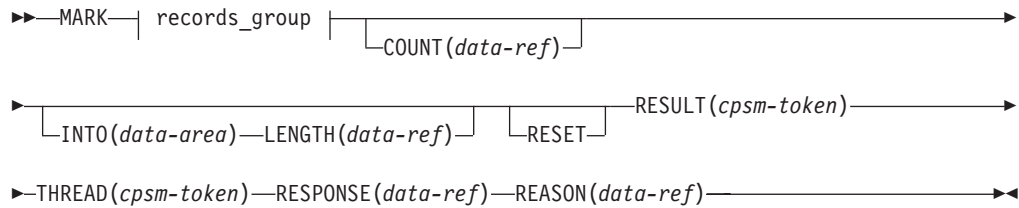

### records\_group

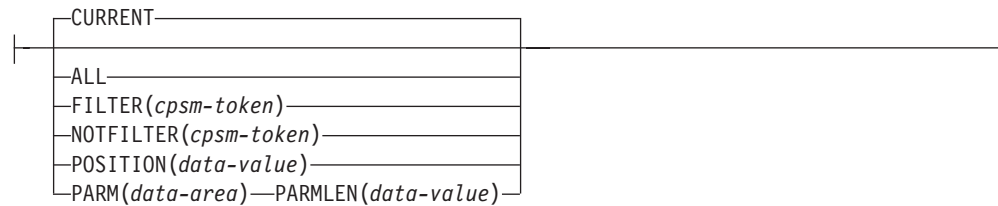

## Description

This command marks selected resource table records in a result set.

- The MARK command always begins processing with the last record that was fetched, rather than the next one in the result set.
- Any resource table records that you marked in the result set previously remain marked unless you use the RESET option.

## Related commands

COPY, DELETE, FETCH, GROUP, LOCATE, PERFORM SET, REFRESH, SET, SPECIFY FILTER, UNMARK

## Options

### ALL

Marks all the resource table records in the result set. When you specify ALL, the RESET option is ignored.

### COUNT(*data-ref*)

Names a variable to receive the number of resource table records that could not be marked.

### CURRENT

Marks only the current resource table record.

### FILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option marks only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### INTO(*data-area*)

Identifies a buffer to receive a list of resource table records that could not be marked.



This buffer must be long enough to hold the maximum number of record numbers that could result from your MARK request (in the event that none of them can be marked). Record numbers are listed individually (not by range) in the INTO buffer and are separated by commas.

**Note:** If you receive a RESPONSE value of WARNING AREATOOSMALL (because the buffer was not long enough), the data returned in this buffer represents a partial list of the records that could not be marked.

#### **LENGTH**(*data-ref*)

A fullword value that specifies the length of the INTO buffer.

The value that CICSplex SM returns in this field depends on the RESPONSE value for the MARK command:

**OK** The actual length of the data returned in the INTO buffer.

#### **WARNING AREATOOSMALL**

The buffer length that would be required to hold a complete list of records that could not be marked.

#### **NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option marks only those resource table records that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

#### **PARAM**(*data-area*)

Identifies a buffer containing the parameter expression that lists the resource table records to be marked.

The parameter expression for the MARK command is a character string of record numbers. For example:

```
PARAM('1,3,6:9,24.')
```

To specify individual records, separate the record numbers with a comma. To specify a range of records, separate the low and high record numbers with a colon. The whole parameter expression must end with a period.

For details on how to use a parameter expression with the MARK command, see *CICSplex System Manager Application Programming Guide*.

#### **PARMLN**(*data-value*)

A fullword value that specifies the length of the PARAM buffer.

#### **POSITION**(*data-value*)

Marks the nth resource table record in the result set.

This value must be a number that identifies the record's relative position in the result set. The first record in a result set is identified by the number 1.

For example, to mark the fifth resource table record in a result set, you would specify POSITION(5).

#### **REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

#### **RESET**

Removes any marks previously placed on resource table records in the result set and marks only those records you identify in the current MARK request.

## MARK

If you do not use the RESET option, any records that you marked previously remain marked. That is, the records identified in the current MARK request are marked in addition to any previously marked records.

### **RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### **RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

### **THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the MARK command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **NODATA**

No records were found that matched the specified search criteria.

### **WARNING**

The command completed processing with a warning, for one of the following reasons:

#### **AREATOOSMALL**

You specified the INTO and LENGTH options, but the buffer was not long enough to hold the string of records that could not be marked.

#### **DATAERROR**

One or more of the records specified in the PARM buffer could not be found to be marked. If you specified the COUNT option, the number of records that could not be marked is returned. If you specified the INTO and LENGTH options, a list of the records is returned in the buffer.

**BUSY** A busy condition occurred for the following reason:

#### **RESULT**

The result set specified on the RESULT option is being processed by another command.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**SOLRESOURCE**

A required resource that is locally owned (that is, owned by the address space where the processing thread is running) is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

COUNT  
 FILTER  
 INTO  
 LENGTH  
 NOTFILTER  
 PARM  
 PARMLEN  
 RESULT  
 THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

---

**ORDER**

Sort the resource table records in a result set.

►—ORDER—BY(*data-area*)—LENGTH(*data-value*)—RESULT(*cpsm-token*)—►

►—THREAD(*cpsm-token*)—RESPONSE(*data-ref*)—REASON(*data-ref*)—►

## Description

This command sorts the resource table records in a result set into a user-specified order.

- By default, records are sorted by the key attributes for the resource table.
- The sort order you specify for a result set remains in effect until you issue another ORDER command.
- If the result set contains deleted records, those records are included in the sorting process. They are sorted by the same attributes as other records and their position in the newly ordered result set may be difficult to determine. To prevent this happening, issue the REFRESH command before issuing ORDER; REFRESH removes any deleted records from the result set.

## Related commands

COPY, GET, GETDEF, GROUP, LOCATE, PERFORM OBJECT

## Options

### BY(*data-area*)

Identifies a buffer containing the order expression to be used for this operation.

An order expression is a list of attributes to be used in sorting the resource table records. For example:

```
CICSSYS,TRANID.
```

where the attribute names are separated by commas or blank spaces and the whole expression ends with a period.

In this example, the resource table records are sorted using CICS system name as the primary sort key and transaction ID as the secondary key. The default sort order is ascending. To sort attribute values in descending order, add /D to the end of the attribute name.

For more information on using order expressions with the ORDER command, see *CICSplex System Manager Application Programming Guide*.

**Note:** You cannot specify the EYU\_CICSNAME or EYU\_CICSREL attributes in an order expression.

### LENGTH(*data-value*)

A fullword value that specifies the length of the BY buffer.

**Note:** The buffer length you specify should not include any data other than an order expression.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the ORDER command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

BY

## ORDER

LENGTH  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## PERFORM OBJECT

Perform an action on one or more resources.

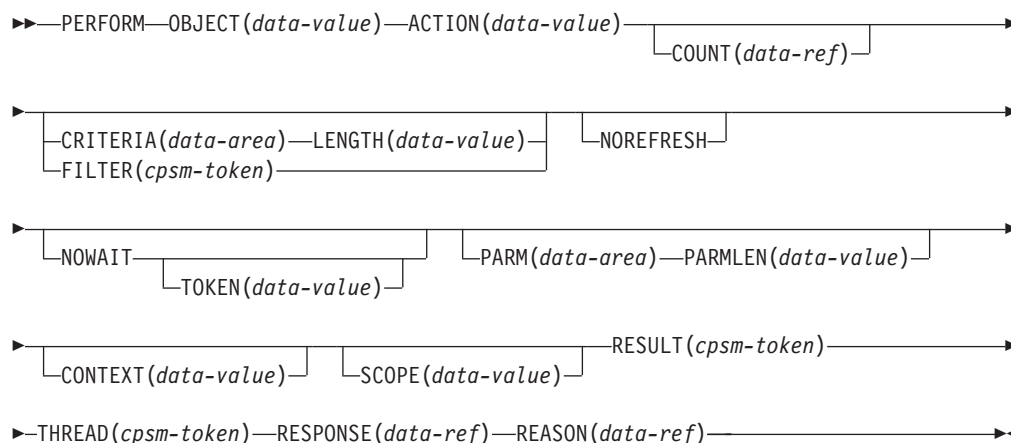

## Description

This command performs an action on one or more resources.

- The resources to be acted upon by PERFORM OBJECT do not have to exist as records in a result set; a result set is implicitly created by this process.
- If the context and scope in effect when you issue a PERFORM OBJECT command include CICS systems that do not support the requested action, the request is ignored for those CICS systems.
- The PERFORM OBJECT command contains two phases; the first is to build the result set, and the second is to take the requested action against the records in the result set. If an error occurs during the building of the result set, but the result set is not empty, the requested action will still be attempted on the records that are present in the result set.

## Related commands

DISCARD, GET, LOCATE, PERFORM SET, QUERY, SET, SPECIFY FILTER

## Options

### **ACTION** (*data-value*)

Identifies the action to be performed. This value must be the 1- to 12-character name of a valid action for the resource table.

For a description of the actions that are valid for a given resource table, see the *CICSplex System Manager Resource Tables Reference*.

### **CONTEXT** (*data-value*)

Identifies the context for this command. The context must be the 1- to 8-character name of a CMAS or CICSplex.

If you do not specify the CONTEXT option, the default context for the thread is assumed.

### **COUNT** (*data-ref*)

Names a variable to receive the number of resource table records in the target result set after this operation is complete.

## PERFORM OBJECT

### CRITERIA(*data-area*)

Identifies a buffer containing the filter expression to be used for this operation. The CRITERIA option retrieves only those resource table records that meet the specified filter criteria.

For details on how to form a filter expression, see *CICSplex System Manager Application Programming Guide*.

### FILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option retrieves only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### LENGTH(*data-value*)

A fullword value that specifies the length of the CRITERIA buffer.

**Note:** The buffer length you specify should not include any data other than a filter expression.

### NOREFRESH

Specifies that the resource table records in the result set created by PERFORM OBJECT should not be refreshed. The records reflect the status of the resources when the result set was created.

If you do not specify the NOREFRESH option, the resource table records are refreshed to reflect the resource status after this operation is complete.

### NOWAIT

Returns control to your program as soon as the PERFORM OBJECT command has been accepted, which allows the command to be processed asynchronously.

If you specify the NOWAIT option, you must use a subsequent RECEIVE command to test for the completion of this request. The results of an asynchronous request are returned as ASYNCREQ resource table records. For a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

**Note:** If you specify the TOKEN option, the NOWAIT option is assumed by default.

### OBJECT(*data-value*)

Identifies the resource table against which the action is to be performed. This value must be the 8-character name of a valid resource table.

### PARM(*data-area*)

Identifies a buffer containing the parameter expression to be used in performing the action.

For details on how to use a parameter expression with the PERFORM OBJECT command, see *CICSplex System Manager Application Programming Guide*. For a description of the parameters that are required for a given resource table action, see the *CICSplex System Manager Resource Tables Reference*.

### PARMLEN(*data-value*)

A fullword value that specifies the length of the PARM buffer.



**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

CICSplex SM replaces the contents of the existing result set with the resource table records requested by this PERFORM OBJECT command.

If this field is:

- Set to binary zero (in COBOL, C, PL/I or Assembler)
- An uninitialized variable (in REXX).

CICSplex SM creates a new result set and returns its identifying token in the same field.

**SCOPE**(*data-value*)

Identifies the scope for this command.

To use the SCOPE option, the current context (as set by this command or a previous CONNECT or QUALIFY command) must be a CICSplex. The scope can be:

- The 1- to 8-character name of the CICSplex itself
- A CICS system or CICS system group within the CICSplex
- A logical scope, as defined in a CICSplex SM resource description (RESDESC).

If the current context is a CMAS, this option has no meaning and is ignored.

If you do not specify the SCOPE option, the default scope for the thread is assumed.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**TOKEN**(*data-value*)

Defines a 1- to 4-character token that you choose to correlate an asynchronous PERFORM OBJECT request with the result of a subsequent RECEIVE command. This token is for use by your program; CICSplex SM makes no use of the value. The token is returned by the RECEIVE command when this PERFORM OBJECT request is complete.

## Conditions

The following is a list of the RESPONSE values that can be returned by the PERFORM OBJECT command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

## PERFORM OBJECT

### **SCHEDULED**

The command has been scheduled for processing.

### **NODATA**

No records were found that matched the specified search criteria.

**BUSY** A busy condition occurred for the following reason:

#### **RESULT**

The result set specified on the RESULT option is being processed by another command.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **REQTIMEOUT**

One of the CMASs or MASs to which the request was directed did not respond.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INVALIDDATA**

Invalid data was detected. The parameter that contains invalid data is returned as the reason value:

**PARM** An attribute value listed in the PARM buffer is not valid for the specified attribute.

#### **CRITERIA**

An attribute value listed in the CRITERIA buffer is not valid for the specified attribute.

### **INVALIDCMD**

The command is invalid for one of the following reasons:

#### **FILTER**

The filter expression passed on the operation is too large or complex.

#### **LENGTH**

The total length of all the options on the command exceeds the maximum limit.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

ACTION  
CONTEXT  
CRITERIA  
FILTER

LENGTH  
 OBJECT  
 PARM  
 PARMLEN  
 RESULT  
 SCOPE  
 THREAD  
 TOKEN.

Check the command description for valid parameter syntax.

#### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

##### **APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

##### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

##### **MAINTPOINT**

The maintenance point for the current context is not available.

##### **PLEXMGR**

The CMAS to which the processing thread is currently connected does not participate in managing the specified CICSplex and no other CMAS is available that does manage the CICSplex.

##### **SCOPE**

Either none of the MASs in the specified scope are available or none of them support the requested action.

##### **WORKLOAD**

The workload identified on the API request is not available on the local CMAS.

#### **NOTFOUND**

A not found condition occurred for one of the following reasons:

##### **ACTION**

The action specified on the ACTION option was not found for the specified resource table.

##### **ATTRIBUTE**

An attribute specified in the CRITERIA or PARM buffer was not found for the specified resource table.

#### **NOTPERMIT**

A not permitted condition occurred for the following reason:

##### **USRID**

The user ID associated with the processing thread does not have the required security authorization.

#### **TABLEERROR**

A resource table record is invalid for the following reason:

##### **DATAERROR**

The value associated with one or more resource table attributes is invalid. This error can occur if the resource table is missing required fields, contains one or more conflicting fields, or is a duplicate. For BAS this error can also occur if you do not have the required security authorization. Use the FEEDBACK command to retrieve additional data about this error.

## PERFORM OBJECT

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

### **WARNING**

The PERFORM OBJECT command may have only partially completed for one of the following reasons:

#### **RESULT**

During the building of the result set to be used on the command, a non-OK response was received. However some result set records were available and the requested action was successfully performed against them. Use the FEEDBACK command without the RESULT option to obtain information about the non-OK response.

#### **ACTION**

During the building of the result set to be used on the command, a non-OK response was received. However some result set records were available and the requested action was attempted. The action specified did not complete successfully on, at least one result set record due to a TABLEERROR or DATAERROR CICSplex SM response or reason.


Use the FEEDBACK command without the RESULT option to obtain information about the error that occurred during the building of the result set. Use the FEEDBACK command with the RESULT option to obtain information about records that caused the TABLEERROR or DATAERROR response or reason.

### **WORKLOAD**

The workload identified on the API request is not available on the local CMAS.

## PERFORM SET

Performs an action on one or more resources.

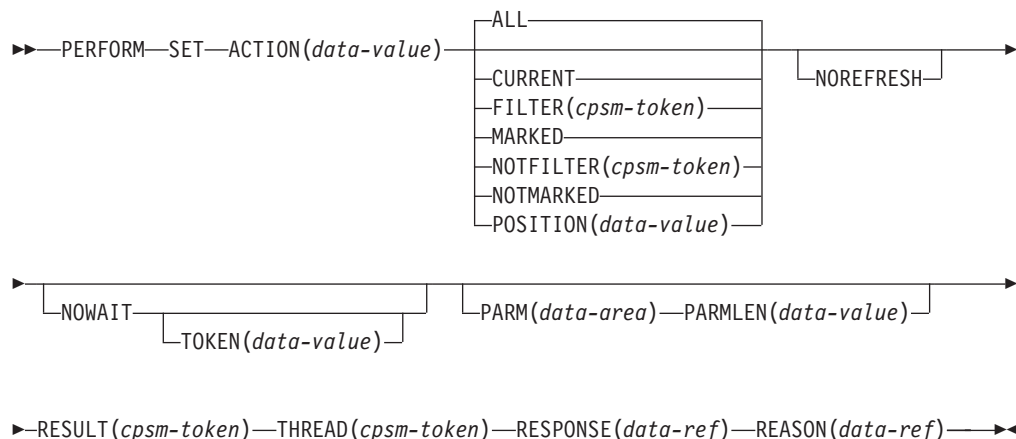

## Description

This command performs an action on one or more resources as represented by resource table records in an existing result set. If the context and scope in effect when you issue a PERFORM SET command include CICS systems that do not support the requested action, the request is ignored for those CICS systems.

## Related commands

LOCATE, MARK, PERFORM OBJECT, SET, SPECIFY FILTER

## Options

### **ACTION**(data-value)

Identifies the action to be performed. This value must be the 1- to 12-character name of a valid action for the resource table.

For a description of the actions that are valid for a given resource table, see the *CICSplex System Manager Resource Tables Reference*.

### **ALL**

Performs the specified action against all the resource table records in the result set.

### **CURRENT**

Performs the specified action against only the current resource table record.

### **FILTER**(cpsm-token)

Identifies a filter to be used for this operation. The FILTER option performs the action against only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **MARKED**

Performs the specified action against only those resource table records that are marked in the result set. You can mark resource table records by using the MARK and UNMARK commands.

## PERFORM SET

### **NOREFRESH**

Specifies that the resource table records in the source result set should not be refreshed. The records reflect the status of the resources before the PERFORM SET command was processed.

If you do not specify the NOREFRESH option, the resource table records are refreshed to reflect the resource status after this operation is complete.

### **NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option performs the action against only those resource table records that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **NOTMARKED**

Performs the specified action against only those resource table records that are not marked in the result set. You can mark resource table records by using the MARK and UNMARK commands.

### **NOWAIT**

Returns control to your program as soon as the PERFORM SET command has been accepted, which allows the command to be processed asynchronously.

If you specify the NOWAIT option, you must use a subsequent RECEIVE command to test for the completion of this request. The results of an asynchronous request are returned as ASYNCREQ resource table records. For a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

**Note:** If you specify the TOKEN option, the NOWAIT option is assumed by default.

### **PARM**(*data-area*)

Identifies a buffer containing the parameter expression to be used in performing the action.

For details on how to use a parameter expression with the PERFORM SET command, see *CICSplex System Manager Application Programming Guide*. For a description of the parameters that are required for a given resource table action, see the *CICSplex System Manager Resource Tables Reference*.

### **PARMLN**(*data-value*)

A fullword value that specifies the length of the PARM buffer.

### **POSITION**(*data-value*)

Performs the specified action against the nth resource table record in the result set.

This value must be a number that identifies the record's relative position in the result set. The first record in a result set is identified by the number 1.

For example, to perform the specified action on the fifth resource table record in a result set, you would specify POSITION(5).

### **REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### **RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT** (*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

**THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**TOKEN** (*data-value*)

Defines a 1- to 4-character token that you choose to correlate an asynchronous PERFORM SET request with the result of a subsequent RECEIVE command. This token is for use by your program; CICSplex SM makes no use of the value. The token is returned by the RECEIVE command when this PERFORM SET request is complete.

## Conditions

The following is a list of the RESPONSE values that can be returned by the PERFORM SET command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**SCHEDULED**

The command has been scheduled for processing.

**NODATA**

No records were found that matched the specified search criteria. If the ALL option was specified, the following reason may be returned:

**FORWARD**

There are no more records that satisfy the search criteria in the forward direction.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**REQTIMEOUT**

One of the CMASs or MASs to which the request was directed did not respond.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

## PERFORM SET

### **ABENDED**

Command processing abended.

### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INVALIDDATA**

Invalid data was detected. The parameter that contains invalid data is returned as the reason value:

**PARM** An attribute value listed in the PARM buffer is not valid for the specified attribute.

### **INVALIDCMD**

The command is invalid for the following reason:

#### **LENGTH**

The total length of all the options on the command exceeds the maximum limit.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

ACTION  
FILTER  
NOTFILTER  
PARM  
PARMLEN  
POSITION  
RESULT  
THREAD  
TOKEN.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

#### **MAINTPOINT**

The maintenance point for the current context is not available.

#### **PLEXMGR**

The CMAS to which the processing thread is currently connected does not participate in managing the specified CICSplex and no other CMAS is available that does manage the CICSplex.

#### **SCOPE**

Either none of the MASs in the specified scope are available or none of them support the requested action.

#### **WORKLOAD**

The workload identified on the API request is not available on the local CMAS.

### **NOTFOUND**

A not found condition occurred for one of the following reasons:

#### **ACTION**

The action specified on the ACTION option was not found for the specified resource table.



**ATTRIBUTE**

An attribute specified in the CRITERIA or PARM buffer was not found for the specified resource table.

**NOTPERMIT**

A not permitted condition occurred for the following reason:

**USRID**

The user ID associated with the processing thread does not have the required security authorization.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**TABLEERROR**

A resource table record is invalid for the following reason:

**DATAERROR**

The value associated with one or more resource table attributes is invalid. This error can occur if the resource table is missing required fields, contains one or more conflicting fields, or is a duplicate. For BAS this error can also occur if you do not have the required security authorization. Use the FEEDBACK command to retrieve additional data about this error.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## QUALIFY

Define the CICSplex SM context and scope.



## Related commands

CONNECT

## Description

This command defines the CICSplex SM context and scope for subsequent commands issued by an API processing thread.

## Options

### CONTEXT(*data-value*)

Identifies the context for subsequent commands issued against this thread. The context must be the 1- to 8-character name of a CMAS or CICSplex.

The specified context remains in effect for the thread until you override it or change it on a subsequent command.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### SCOPE(*data-value*)

Identifies the scope for subsequent commands issued against this thread.

The SCOPE option qualifies the CONTEXT option. When the context is a CICSplex, the scope can be:

- The 1- to 8-character name of the CICSplex itself
- A CICS system or CICS system group within the CICSplex
- A logical scope, as defined in a CICSplex SM resource description (RESDESC).

When the context is a CMAS, this option has no meaning and is ignored.

The specified scope remains in effect for the thread unless you override it for a specific command or change it by issuing another QUALIFY command. If you do not specify the SCOPE option, no scope value is assumed (that is, the default scope established for the thread by the CONNECT command is not retained).

**Note:** Certain API commands require a valid scope when the context is a CICSplex. If you do not specify a scope on the QUALIFY command, then you must specify the SCOPE option when you issue any of these commands for a resource table that represents a CICS resource:

- GET
- PERFORM OBJECT

- PERFORM SET
- REFRESH
- SET.

**THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the QUALIFY command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
SCOPE  
THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**PLEXMGR**

The CMAS to which the processing thread is currently connected does not participate in managing the specified CICSplex and no other CMAS is available that does manage the CICSplex.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

## QUALIFY

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the **CONNECT** command.

## QUERY

Retrieve information about a result set and the resource table records it contains.

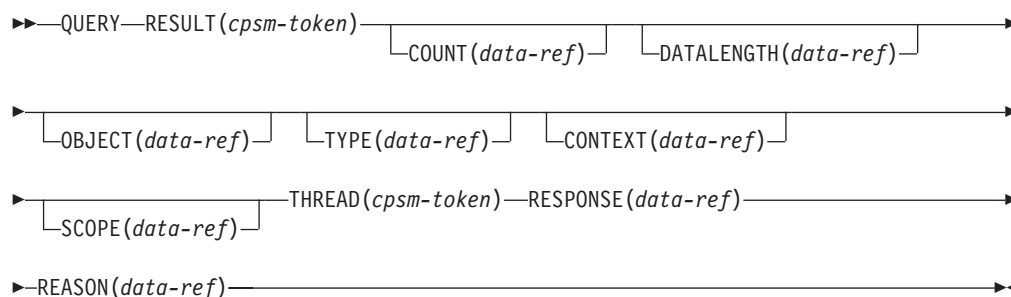

## Description

This command retrieves information about a result set and the resource table records it contains.

- You can use the QUERY command to determine:
  - The context and scope of the result set
  - The type of resource table records the result set contains
  - Whether the records are from the CICSplex SM resource table or a user-defined view of that table
  - The number of resource table records in the result set
  - The length of the resource table records
- For programs written in REXX, issuing the QUERY command is the only way to determine the length of a given resource table record.

## Related commands

COPY, GET, GETDEF, GROUP, PERFORM OBJECT

## Options

### CONTEXT (*data-ref*)

Names a variable to receive the context associated with the result set.

### COUNT (*data-ref*)

Names a variable to receive the number of resource table records in the result set.

### DATALENGTH (*data-ref*)

Names a variable to receive the length of the resource table records in the result set.

### OBJECT (*data-ref*)

Names a variable to receive the name of the resource table currently associated with the result set.

### REASON (*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE (*data-ref*)

Names a variable to receive the fullword response value returned by this command.

## QUERY

### **RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

### **SCOPE**(*data-ref*)

Names a variable to receive the scope associated with the result set. This value may be blank for result sets containing CMAS type resources.

### **THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

### **TYPE**(*data-ref*)

Names a variable to receive a 1-character value that indicates what type of records are in the result set:

- T** Resource tables supplied by CICSplex SM.
- V** Views of a resource table created by a SPECIFY VIEW command issued previously on this processing thread.

## Conditions

The following is a list of the RESPONSE values that can be returned by the QUERY command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**BUSY** A busy condition occurred for the following reason:

#### **RESULT**

The result set specified on the RESULT option is being processed by another command.

#### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

##### **NOSERVICE**

The application stub program could not load the API service module.

##### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

##### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

#### **FAILED**

The command failed for one of the following reasons:

##### **ABENDED**

Command processing abended.

##### **EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
DATALENGTH  
OBJECT  
RESULT  
THREAD  
TYPE.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.


**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

---

**RECEIVE**

Receive the output from completed asynchronous requests.

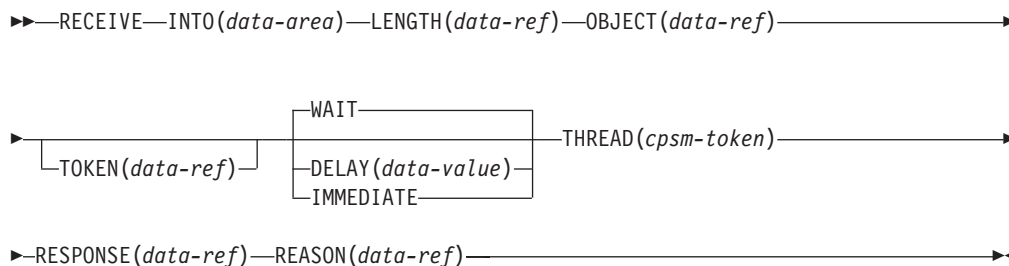

## Description

This command receives the output from completed asynchronous requests associated with the processing thread.

- Asynchronous output can result if you previously issued either a LISTEN command or one of these commands with the NOWAIT option:
  - GET
  - PERFORM OBJECT
  - PERFORM SET
  - REFRESH
  - SET.
- To determine if there is any asynchronous output to be received, issue the ADDRESS command and check the SENTINEL value before you issue the RECEIVE command.
- An API processing thread can have a maximum of 256 completed asynchronous requests outstanding at one time. If you do not issue the RECEIVE command at regular intervals and your processing thread reaches its maximum of 256, asynchronous requests are discarded and are not processed. For a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

## Related commands

ADDRESS, GET, LISTEN, PERFORM OBJECT, PERFORM SET, REFRESH, SET

## Options

### DELAY(data-value)

Specifies the number of seconds that processing will wait if no output is available when the RECEIVE command is issued. At the end of the specified number of seconds, control returns to the processing thread, whether or not any output becomes available. If output becomes available during the delay period, control returns to the processing thread. If output is immediately available, there is no delay; control returns immediately to the processing thread.

DELAY must specify a non-zero value. If you want to make sure that your program never enters a wait, use the IMMEDIATE option instead of DELAY.

### IMMEDIATE

Returns control to the processing thread immediately, whether or not any output is available.



**INTO**(*data-area*)

Identifies a buffer to receive asynchronous output, if any is available for this thread. This buffer must be long enough to hold all the output being received.

The output returned can be:

- A resource table record representing an event named in a previous LISTEN command
- An ASYNCREQ resource table record representing completion of an asynchronous GET, PERFORM, REFRESH, or SET request.

**LENGTH**(*data-ref*)

A fullword value that specifies the length of the INTO buffer.

After the operation is complete, this field is set to the actual length of the data returned in the INTO buffer. If the operation cannot complete because the buffer is not long enough, this field is set to the length that is required.

**OBJECT**(*data-ref*)

Names a variable to receive a resource table name, if output is available for this thread.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**WAIT**

Waits until asynchronous output becomes available before returning control to the processing thread.

**Note:** The WAIT option waits indefinitely for asynchronous output. Be sure to verify that there are completed asynchronous requests outstanding by issuing the ADDRESS command before you issue RECEIVE.

**TOKEN**(*data-ref*)

Names a variable to receive the user-defined token associated with the asynchronous output. This value is the token you defined on the GET, LISTEN, PERFORM, REFRESH or SET command that produced the output.

## Conditions

The following is a list of the RESPONSE values that can be returned by the RECEIVE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**NODATA**

There was no data to receive.

**WARNING**

The command completed processing with a warning, for the following reason:

## RECEIVE

### **AREATOOSMALL**

The INTO buffer is not long enough to hold the number of records requested and available.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

DELAY  
INTO  
LENGTH  
OBJECT  
THREAD  
TOKEN.

Check the command description for valid parameter syntax.

### **NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

#### **APITASK**

The API control subtask is not active.

#### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## REFRESH

Refreshes the data for resource table records.

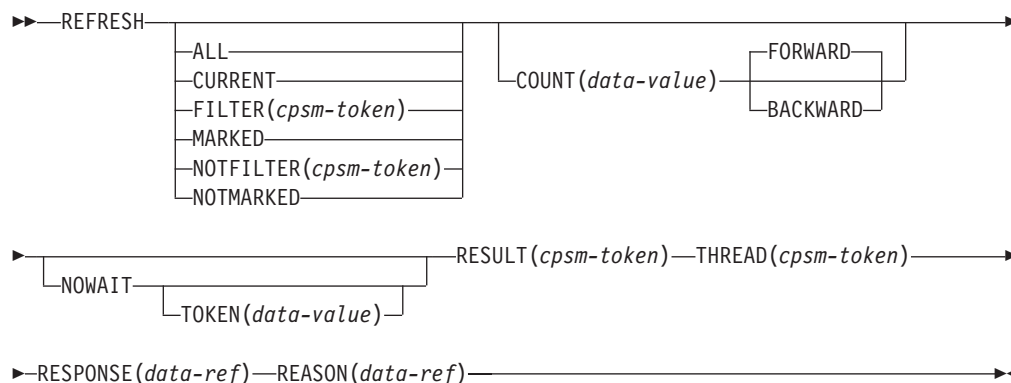

## Description

- This command refreshes the data for some or all of the resource table records in a result set.
- For the MAS resource table, REFRESH provides data only if the MAS was active when the result set was last built.

## Related commands

COPY, GET, LOCATE, MARK, PERFORM OBJECT, SPECIFY FILTER

## Options

### ALL

Refreshes all the resource table records in the result set. When you specify ALL:

- The COUNT option is ignored.
- Any records that have been deleted are removed from the result set. Any positions previously held by deleted records are filled in and the remaining records are renumbered. Therefore, the relative position of a given record in a result set may be different after a refresh.

### BACKWARD

Refreshes the previous resource table record and continues in a backward direction through the result set refreshing as many records as the COUNT option specifies.

**Note:** If the record pointer is at the bottom of the result set, using BACKWARD refreshes the current record (which is the last record) and then continues on to previous records.

### COUNT(*data-value*)

Specifies the number of resource table records to be refreshed. If you do not specify the COUNT option, only one record is refreshed.

If you do not specify the FORWARD or BACKWARD option, the refresh process moves in a forward direction through the result set.

## REFRESH

### **CURRENT**

Refreshes only the current resource table record. When you specify CURRENT, the COUNT option is ignored.

### **FILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option indicates that only those resource table records that meet the specified filter criteria should be considered for refresh.

The number of records that are actually refreshed is determined by the COUNT option. If you do not specify the COUNT option, only the first record that meets the filter criteria is refreshed.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **FORWARD**

Refreshes the current resource table record and continues in a forward direction through the result set refreshing as many records as the COUNT option specifies.

### **MARKED**

Indicates that only those resource table records that are marked in the result set should be considered for refresh.

The number of records that are actually refreshed is determined by the COUNT option. If you do not specify the COUNT option, only the first record that is marked is refreshed.

You can mark resource table records by using the MARK and UNMARK commands.

### **NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option indicates that only those resource table records that do not meet the specified filter criteria should be considered for refresh.

The number of records that are actually refreshed is determined by the COUNT option. If you do not specify the COUNT option, only the first record that does not meet the filter criteria is refreshed.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **NOTMARKED**

Indicates that only those resource table records that are not marked in the result set should be considered for refresh.

The number of records that are actually refreshed is determined by the COUNT option. If you do not specify the COUNT option, only the first record that is not marked is refreshed.

You can mark resource table records by using the MARK and UNMARK commands.

### **NOWAIT**

Returns control to your program as soon as the REFRESH command has been accepted, which allows the command to be processed asynchronously.

If you specify the NOWAIT option, you must use a subsequent RECEIVE command to test for the completion of this request. The results of an asynchronous request are returned as ASYNCREQ resource table records. For

a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

**Note:** If you specify the TOKEN option, the NOWAIT option is assumed by default.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- PERFORM OBJECT.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**TOKEN**(*data-value*)

Defines a 1- to 4-character token that you choose to correlate an asynchronous REFRESH request with the result of a subsequent RECEIVE command. This token is for use by your program; CICSplex SM makes no use of the value. The token is returned by the RECEIVE command when this REFRESH request is complete.

## Conditions

The following is a list of the RESPONSE values that can be returned by the REFRESH command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**SCHEDULED**

The command has been scheduled for processing.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**REQTIMEOUT**

One of the CMASs or MASs to which the request was directed did not respond.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

COUNT  
FILTER  
NOTFILTER  
RESULT  
THREAD  
TOKEN.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**MAINTPOINT**

The maintenance point for the current context is not available.

**SCOPE**

None of the MASs in the specified scope are available.

**NOTPERMIT**

A not permitted condition occurred for the following reason:

**USRID**

The user ID associated with the processing thread does not have the required security authorization.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**TABLEERROR**

A resource table record is invalid for the following reason:

**DATAERROR**

The value associated with one or more resource table attributes is invalid. This error can occur if the resource table is missing required attributes, contains one or more conflicting attributes, or does not exist. Use the FEEDBACK command to retrieve additional data about this error.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the **CONNECT** command.

## REMOVE

---

## REMOVE

Remove a CICSplex SM or CICS definition from the data repository.

```
►►—REMOVE—OBJECT(data-value)—FROM(data-area)—LENGTH(data-value)—►►
┌──────────────────────────────────┐ ┌──────────────────┐
│ PARM(data-area)—PARMLEN(data-value) │ CONTEXT(data-value) │
└──────────────────────────────────┘ └──────────────────┘
►—THREAD(cpsm-token)—RESPONSE(data-ref)—REASON(data-ref)—►►
```

## Description

This commands removes a CICSplex SM or CICS definition from the data repository. For definitions that have a CICSplex as their context (such as workload management or real-time analysis definitions), the definition is also removed from the data repositories of all CMASs involved in managing the CICSplex.

## Related commands

CREATE, UPDATE

## Options

### CONTEXT(*data-value*)

Identifies the context for this command. The context must be the 1- to 8-character name of a CMAS or CICSplex.

If you do not specify the CONTEXT option, the default context for the thread is assumed.

### FROM(*data-area*)

Identifies a buffer containing a resource table record that represents the definition to be removed. The record must include all of the attributes for the resource table specified on the OBJECT option.

### LENGTH(*data-value*)

A fullword value that specifies the length of the FROM buffer.

### OBJECT(*data-value*)

Identifies the resource table that represents the definition being removed. This value must be the 1- to 8-character name of a valid CPSM Definition or CICS Definition resource table. For a list of the CICSplex SM resource tables by type, see *CICSplex System Manager Application Programming Guide*.

### PARM(*data-area*)

Identifies a buffer containing the parameter expression to be used in removing the definition.

For details on how to use a parameter expression with the REMOVE command, see *CICSplex System Manager Application Programming Guide*. For a description of the parameters that are valid for a given resource table, see the *CICSplex System Manager Resource Tables Reference*.

### PARMLEN(*data-value*)

A fullword value that specifies the length of the PARM buffer.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.



**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the REMOVE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**REQTIMEOUT**

One of the CMASs to which the request was directed did not respond.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
FROM  
LENGTH  
OBJECT  
PARM  
PARMLEN  
THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

## REMOVE

### **APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **MAINTPOINT**

The maintenance point for the current context is not available.

### **NOTPERMIT**

A not permitted condition occurred for the following reason:

#### **USRID**

The user ID associated with the processing thread does not have the required security authorization.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **TABLEERROR**

A resource table record is invalid for one of the following reasons:

#### **DATAERROR**

The value associated with one or more resource table attributes is invalid. This error can occur if the resource table is missing required attributes, contains one or more conflicting attributes, or does not exist. Use the FEEDBACK command to retrieve additional data about this error.

#### **INVALIDATTR**

One of the resource table attributes is invalid.

#### **INVALIDVER**

The specified version of the resource table is not supported by CICSplex SM.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## SET

Modify the attributes of one or more resources.

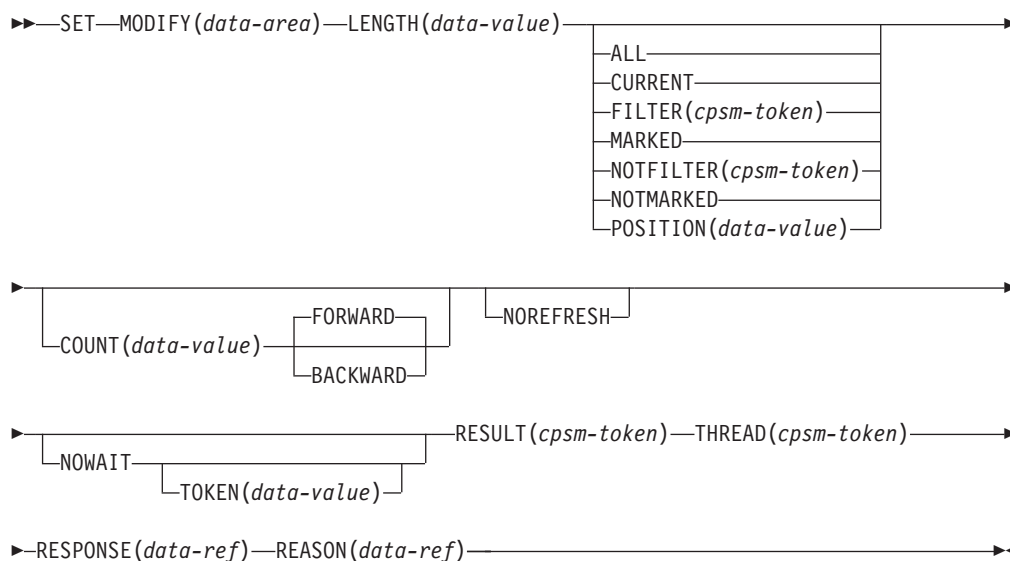

## Description

This command modifies the attributes of one or more resources as represented by resource table records in an existing result set.

- The SET command is valid only for CICS Resource and some CPSM Manager resource tables.
- If the context and scope in effect when you issue a SET command include CICS systems that do not support the requested modification, the request is ignored for those CICS systems.

## Related commands

COPY, GET, GROUP, LOCATE, MARK, PERFORM OBJECT, PERFORM SET, SPECIFY FILTER

## Options

### ALL

Modifies all the resource table records in the result set. When you specify ALL, the COUNT option is ignored.

### BACKWARD

Modifies the previous resource table record and continues in a backward direction through the result set modifying as many records as the COUNT option specifies.

**Note:** If the record pointer is at the bottom of the result set, using BACKWARD modifies the current record (which is the last record) and then continues on to previous records.

### COUNT (data-value)

Specifies the number of resource table records to be modified. If you do not specify the COUNT option, only one record is refreshed.

## SET

If you do not specify the FORWARD or BACKWARD option, the modification process moves in a forward direction through the result set.

### CURRENT

Modifies only the current resource table record. When you specify CURRENT, the COUNT option is ignored.

### FILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option indicates that only those resource table records that meet the specified filter criteria should be considered for modification.

The number of records that are actually modified is determined by the COUNT option. If you do not specify the COUNT option, only the first record that meets the filter criteria is modified.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### FORWARD

Modifies the current resource table record and continues in a forward direction through the result set modifying as many records as the COUNT option specifies.

### LENGTH(*data-value*)

A fullword value that specifies the length of the MODIFY buffer.

**Note:** The buffer length you specify should not include any data other than a modification expression.

### MARKED

Indicates that only those resource table records that are marked in the result set should be considered for modification.

The number of records that are actually modified is determined by the COUNT option. If you do not specify the COUNT option, only the first record that is marked is modified.

You can mark resource table records by using the MARK and UNMARK commands.

### MODIFY(*data-area*)

Identifies a buffer containing the modification expression to be used in modifying the resource table records.

For details on how to form a modification expression, see *CICSplex System Manager Application Programming Guide*.

### NOREFRESH

Specifies that the resource table records in the source result set should not be refreshed. The records reflect the status of the resources before the SET command was processed.

If you do not specify the NOREFRESH option, the resource table records are refreshed to reflect the resource status after this operation is complete.

### NOTFILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option indicates that only those resource table records that do not meet the specified filter criteria should be considered for modification.

The number of records that are actually modified is determined by the COUNT option. If you do not specify the COUNT option, only the first record that does not meet the filter criteria is modified.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

**NOTMARKED**

Indicates that only those resource table records that are not marked in the result set should be considered for modification.

The number of records that are actually modified is determined by the COUNT option. If you do not specify the COUNT option, only the first record that is not marked is modified.

You can mark resource table records by using the MARK and UNMARK commands.

**NOWAIT**

Returns control to your program as soon as the SET command has been accepted, which allows the command to be processed asynchronously.

If you specify the NOWAIT option, you must use a subsequent RECEIVE command to test for the completion of this request. The results of an asynchronous request are returned as ASYNCREQ resource table records. For a complete description of asynchronous processing, see *CICSplex System Manager Application Programming Guide*.

**Note:** If you specify the TOKEN option, the NOWAIT option is assumed by default.

**POSITION**(*data-value*)

Modifies the *n*th resource table record in the result set. When you specify POSITION, the COUNT option is ignored.

This value must be a number that identifies the record's relative position in the result set. The first record in a result set is identified by the number 1.

For example, to modify the fifth resource table record in a result set, you would specify POSITION(5).

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## SET

### **TOKEN** (*data-value*)

Defines a 1- to 4-character token that you choose to correlate an asynchronous SET request with the result of a subsequent RECEIVE command. This token is for use by your program; CICSplex SM makes no use of the value. The token is returned by the RECEIVE command when this SET request is complete.

## Conditions

The following is a list of the RESPONSE values that can be returned by the SET command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **SCHEDULED**

The command has been scheduled for processing.

**BUSY** A busy condition occurred for the following reason:

#### **RESULT**

The result set specified on the RESULT option is being processed by another command.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **REQTIMEOUT**

One of the CMASs or MASs to which the request was directed did not respond.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INVALIDDATA**

An invalid data error occurred for one of the following reasons:

#### **MODIFY**

An attribute value listed in the MODIFY buffer is not valid for the specified attribute.

#### **NOTSUPPORTED**

An attribute listed in the MODIFY buffer is not modifiable.

### **INVALIDCMD**

The command is invalid for the following reason:

#### **LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected in either the command string or the MODIFY buffer. The parameter that is invalid is returned as the reason value:

ATTRIBUTE  
COUNT  
FILTER  
LENGTH  
MODIFY  
NOTFILTER  
POSITION  
RESULT  
THREAD  
TOKEN.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**MAINTPOINT**

The maintenance point for the current context is not available.

**SCOPE**

Either none of the MASs in the specified scope are available or none of them support the requested modification.

**NOTFOUND**

A not found condition occurred for one of the following reasons:

**ACTION**

An action requested in the MODIFY buffer was not found for the specified resource table.

**ATTRIBUTE**

An attribute specified in the MODIFY buffer was not found for the specified resource table.

**NOTPERMIT**

A not permitted condition occurred for the following reason:

**USRID**

The user ID associated with the processing thread does not have the required security authorization.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**TABLEERROR**

A resource table record is invalid for one of the following reasons:

**DATAERROR**

The value associated with one or more resource table attributes is invalid. This error can occur if the resource table is missing required attributes, contains one or more conflicting attributes, or is a duplicate. Use the FEEDBACK command to retrieve additional data about this error.

## SET

### **INVALIDVER**

The specified version of the resource table is not supported by CICSplex SM.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.



## SPECIFY FILTER

Defines an attribute or value filter and assign an identifying token to it.

```
►►—SPECIFY—FILTER(data-ref)—CRITERIA(data-area)—LENGTH(data-value)—►►
►—OBJECT(data-value)—THREAD(cpsm-token)—RESPONSE(data-ref)—REASON(data-ref)—►►
```

## Description

This command defines an attribute or value filter and assigns an identifying token to it.

- Filters are associated with the specific processing thread on which they are defined; they cannot be shared by other processing threads.
- You can define multiple filters for use by a processing thread; CICSplex SM assigns a unique identifying token to each one.
- When a processing thread is terminated, any filters defined by it are discarded.

## Related commands

COPY, DELETE, DISCARD, FETCH, GET, GROUP, LISTEN, LOCATE, MARK, PERFORM OBJECT, PERFORM SET, REFRESH, SET, UNMARK

## Options

### CRITERIA(*data-area*)

Identifies a buffer containing the filter expression to be used for this operation. The CRITERIA option filters only those resource table records that meet the specified criteria.

For details on how to form a filter expression, see *CICSplex System Manager Application Programming Guide*.

**Note:** You cannot specify the EYU\_CICSNAME or EYU\_CICSREL attributes in a filter expression.

### FILTER(*data-ref*)

Names a variable to receive the token that CICSplex SM assigns to this filter.

This identifying token must be specified on all subsequent commands that use this filter.

### LENGTH(*data-value*)

A fullword value that specifies the length of the CRITERIA buffer.

**Note:** The buffer length you specify should not include any data other than a filter expression.

### OBJECT(*data-value*)

Identifies the resource table for which a filter is being created. This value must be the 8-character name of a valid resource table.

### REASON(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### RESPONSE(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

## SPECIFY FILTER

### **THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the SPECIFY FILTER command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

### **FAILED**

The command failed for one of the following reasons:

#### **ABENDED**

Command processing abended.

#### **EXCEPTION**

Command processing encountered an exceptional condition.

### **INVALIDDATA**

Invalid data was detected. The parameter that contains invalid data is returned as the reason value:

#### **CRITERIA**

An attribute value listed in the CRITERIA buffer is not valid for the specified attribute.

### **INVALIDCMD**

The command is invalid for one of the following reasons:

#### **FILTER**

The filter expression passed on the operation is too large or complex.

#### **LENGTH**

The total length of all the options on the command exceeds the maximum limit.

### **INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CRITERIA

FILTER

LENGTH

OBJECT

THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**NOTFOUND**

A not found condition occurred for the following reason:

**ATTRIBUTE**

An attribute specified in the CRITERIA buffer was not found for the specified resource table.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

---

## SPECIFY VIEW

Build a customized view of a given resource table.

►►—SPECIFY—VIEW(*data-value*)—FIELDS(*data-area*)—LENGTH(*data-value*)—►►

►—OBJECT(*data-value*)—THREAD(*cpsm-token*)—RESPONSE(*data-ref*)—REASON(*data-ref*)—►

## Description

This command builds a customized view of a given resource table.

- Views can be built only for resource tables with a type of CICS Resource.
- Views are associated with the specific processing thread on which they are built; they cannot be shared by other processing threads.
- When a processing thread is terminated, any views built by it are deleted.
- The name you assign to a view takes precedence over any existing resource table names. You can redefine an existing resource table name to represent a customized view of that resource table.
- You are recommended to use names for customized views that are not already assigned either to other customized views or to CICSplex SM-supplied resource tables. If you do use a name that is already assigned, you should be aware that your processing could be affected. For more details, see *CICSplex System Manager Application Programming Guide*.
- If and when you migrate to a later version of CICSplex SM, you should check that any new resource tables do not have the same names as any customized views. For more details, see *CICSplex System Manager Application Programming Guide*.

## Related commands

DISCARD, GET

## Options

### FIELDS(*data-area*)

Identifies a buffer containing the order expression to be used for this operation.

For details on how to use an order expression with the SPECIFY VIEW command, see *CICSplex System Manager Application Programming Guide*.

**Note:** You cannot specify the EYU\_CICSNAME or EYU\_CICSREL attributes in an order expression.

### LENGTH(*data-value*)

A fullword value that specifies the length of the FIELDS buffer.

**Note:** The buffer length you specify should not include any data other than an order expression.

### OBJECT(*data-value*)

Identifies the resource table for which a view is being created. This value must be the 1- to 8-character name of a valid CICS Resource table. For a list of the CICSplex SM resource tables by type, see *CICSplex System Manager Application Programming Guide*.

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**VIEW**(*data-value*)

Defines a 1- to 8-character name for the view being built.

## Conditions

The following is a list of the RESPONSE values that can be returned by the SPECIFY VIEW command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**DUPE** A duplicate condition occurred for the following reason:

**VIEW** The specified view already exists and cannot be built.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected in either the command string or the FIELDS buffer. The parameter that is invalid is returned as the reason value:

ATTRIBUTE

FIELDS

LENGTH

OBJECT

THREAD

## SPECIFY VIEW

### VIEW.

Check the command description for valid parameter syntax.

### NOTAVAILABLE

A not available condition occurred for one of the following reasons:

#### APITASK

The API control subtask is not active.

#### CPSMAPI

The CMAS to which the processing thread is connected is not available for API processing.

### NOTFOUND

A not found condition occurred for the following reason:

#### ATTRIBUTE

An attribute specified in the FIELDS buffer was not found for the specified resource table.

### SERVERGONE

The CMAS to which the processing thread was connected is no longer active.

### TABLEERROR

A resource table record is invalid for one of the following reasons:

#### DATAERROR

The value associated with one or more resource table attributes is invalid. This error can occur if the resource table is missing required attributes, contains one or more conflicting attributes, or does not exist. Use the FEEDBACK command to retrieve additional data about this error.

#### INVALIDVER

The specified version of the resource table is not supported by CICSplex SM.

### VERSIONINVL

A version conflict occurred for one of the following reasons:

#### NOTSUPPORTED

The version of the application stub program used for this command is not supported.

#### NOTVSNCONN

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

---

## TERMINATE

Terminate all API processing on all active threads.

►►—TERMINATE—RESPONSE(*data-ref*)—REASON(*data-ref*)—◀◀

### Description

This command terminates all API processing on all active threads created by the CICS or MVS task that issues the command.

- Issuing TERMINATE is equivalent to issuing the DISCONNECT command for each active thread individually.
- Any resources that are associated with the thread are released, including result sets, filters, views, diagnostic data, and outstanding asynchronous requests.

### Related commands

CONNECT, DISCONNECT

### Options

**REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### Conditions

The following is a list of the RESPONSE values that can be returned by the TERMINATE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

#### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

##### **NOSERVICE**

The application stub program could not load the API service module.

##### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

#### **FAILED**

The command failed for one of the following reasons:

##### **ABENDED**

Command processing abended.

##### **EXCEPTION**

Command processing encountered an exceptional condition.

---

**TRANSLATE**

Translate resource table attribute values.

```

▶—TRANSLATE—OBJECT(data-value)—ATTRIBUTE(data-value)—————▶
▶—FROMCV(data-value)—TOCHAR(data-ref)—THREAD(cpsm-token)————▶
  |—FROMCHAR(data-value)—TOCV(data-ref)—
▶—RESPONSE(data-ref)—REASON(data-ref)—————▶▶

```

## Description

This command translates resource table attribute values that are maintained in an encoded form (such as EYUDA and CVDA values) between their internal coded format and an external display format.

- If your program is written in REXX, you can use the TPARSE command to access a resource table record and translate its attribute values. However, if you use the ASIS option with TPARSE, attribute values are not translated into their external format; in that case, you would need to use TRANSLATE after using TPARSE to receive the formatted display values. For a description of the TPARSE command, see Chapter 3, “REXX functions and commands,” on page 129.
- In some CICS environments, the DFHVALUE function returns incompatible CVDA values for the following resource table attribute:

Resource table	Attribute value	CICS Environment
LOCTRAN	RESSEC(RESSECEXT)	CICS/MVS

Because these CVDA values conflict with values used in other CICS environments, CICSplex SM must modify them to retain their uniqueness. CICSplex SM adds 9000 to the value returned by DFHVALUE for each of these CICS CVDA attributes.

If you want to translate any of these attributes in a CICS environment, you must add 9000 to the value you received from DFHVALUE before presenting the attribute to CICSplex SM.

## Options

### **ATTRIBUTE**(*data-value*)

Identifies the resource table attribute that is to be translated. This value must be the 1- to 12-character name of a valid attribute for the resource table.

### **FROMCHAR**(*data-value*)

Specifies the 1- to 12-character value for the specified attribute.

### **FROMCV**(*data-value*)

Specifies the 4-byte internal coded value for the specified attribute.

### **OBJECT**(*data-value*)

Identifies the resource table to which the attribute being translated belongs. This value must be the 8-character name of a valid resource table.

### **REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.



**RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**TOCHAR**(*data-ref*)

Names a variable to receive the result of translating an internal coded value to the 1- to 12-character value for the specified attribute.

**TOCV**(*data-ref*)

Names a variable to receive the result of translating a character value to the 4-byte internal coded value for the specified attribute.

## Conditions

The following is a list of the RESPONSE values that can be returned by the TRANSLATE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

ATTRIBUTE  
FROMCHAR  
FROMCV  
OBJECT  
THREAD  
TOCHAR  
TOCV.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

## TRANSLATE

### **CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **TABLEERROR**

A resource table record is invalid for the following reason:

#### **INVALIDVER**

The specified version of the resource table is not supported by CICSplex SM.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**


The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## UNMARK

Remove the marks placed on resource table records.

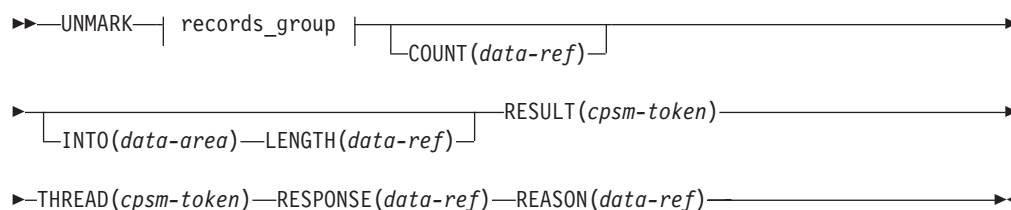

### records\_group

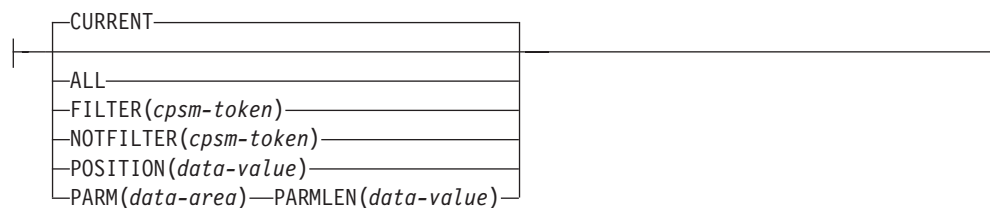

## Description

This command removes the marks placed on resource table records by a previous MARK command. The UNMARK command always begins processing with the last record that was fetched, rather than the next one in the result set.

## Related commands

LOCATE, MARK

## Options

### ALL

Removes the marks from all resource table records in the result set.

### COUNT(*data-ref*)

Names a variable to receive the number of resource table records that could not be unmarked.

### CURRENT

Removes the mark from only the current resource table record.

### FILTER(*cpsm-token*)

Identifies a filter to be used for this operation. The FILTER option removes the marks from only those resource table records that meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### INTO(*data-area*)

Identifies a buffer to receive a list of resource table records that could not be unmarked.

This buffer must be long enough to hold the maximum number of record numbers that could result from your UNMARK request (in the event that none of

## UNMARK

them can be unmarked). Record numbers are listed individually (not by range) in the INTO buffer and are separated by commas.

**Note:** If you receive a RESPONSE value of WARNING AREATOOSMALL (because the buffer was not long enough), the data returned in this buffer represents a partial list of the records that could not be unmarked.

### **LENGTH**(*data-ref*)

A fullword value that specifies the length of the INTO buffer.

The value that CICSplex SM returns in this field depends on the RESPONSE value for the UNMARK command:

**OK** The actual length of the data returned in the INTO buffer.

### **WARNING AREATOOSMALL**

The buffer length that would be required to hold a complete list of records that could not be unmarked.

### **NOTFILTER**(*cpsm-token*)

Identifies a filter to be used for this operation. The NOTFILTER option removes the marks from only those resource table records that do not meet the specified filter criteria.

The *cpsm-token* value that identifies a filter is returned by the SPECIFY FILTER command.

### **PARM**(*data-area*)

Identifies a buffer containing the parameter expression that lists the resource table records to be unmarked.

The parameter expression for the UNMARK command is a character string of record numbers. For example:

```
PARM('1,3,6:9,24.')
```

To specify individual records, separate the record numbers with a comma. To specify a range of records, separate the low and high record numbers with a colon. The whole parameter expression must end with a period.

For details on how to use a parameter expression with the UNMARK command, see *CICSplex System Manager Application Programming Guide*.

### **PARMLEN**(*data-value*)

A fullword value that specifies the length of the PARM buffer.

### **POSITION**(*data-value*)

Removes the mark from the nth resource table record in the result set.

This value must be a number that identifies the record's relative position in the result set. The first record in a result set is identified by the number 1.

For example, to unmark the fifth resource table record in a result set, you would specify POSITION(5).

### **REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### **RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

**RESULT** (*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set can be one produced by any of these commands:

- COPY
- GET
- GETDEF
- GROUP
- PERFORM OBJECT.

**THREAD** (*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the UNMARK command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

**NODATA**

No records were found that matched the specified search criteria.

**WARNING**

The command completed processing with a warning, for one of the following reasons:

**AREATOOSMALL**

You specified the INTO and LENGTH options, but the buffer was not long enough to hold the string of records that could not be unmarked.

**DATAERROR**

One or more of the records specified in the PARM buffer could not be found to be unmarked. If you specified the COUNT option, the number of records that could not be unmarked is returned. If you specified the INTO and LENGTH options, a list of the records is returned in the buffer.

**BUSY** A busy condition occurred for the following reason:

**RESULT**

The result set specified on the RESULT option is being processed by another command.

**ENVIRONERROR**

An environment error occurred for one of the following reasons:

**NOSERVICE**

The application stub program could not load the API service module.

**NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**SOLRESOURCE**

A required resource that is locally owned (that is, owned by the address space where the processing thread is running) is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

COUNT  
FILTER  
INTO  
LENGTH  
NOTFILTER  
PARM  
PARMLEN  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

**VERSIONINVL**

A version conflict occurred for one of the following reasons:

**NOTSUPPORTED**


The version of the application stub program used for this command is not supported.

**NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

## UPDATE

Update an existing CICSplex SM or CICS definition.

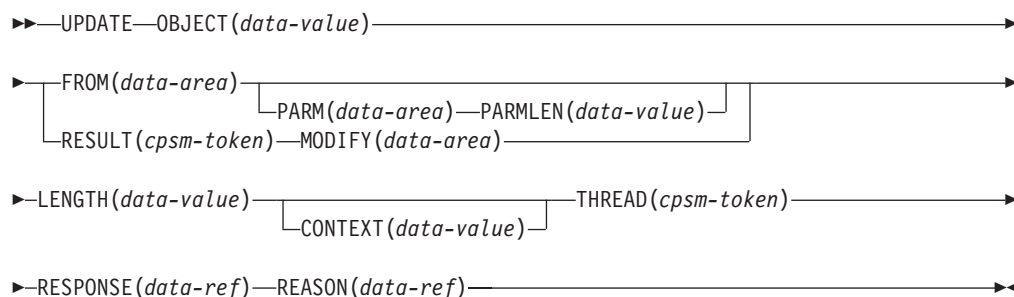

## Description

This command updates an existing CICSplex SM or CICS definition according to the attribute values you specify.

- The updated definition replaces the existing definition in the CICSplex SM data repository.
- For definitions that have a CICSplex as their context (such as workload management or real-time analysis definitions), the definition is also updated in the data repositories of all CMASs involved in managing the CICSplex.

## Related commands

CREATE, REMOVE

## Options

### CONTEXT (data-value)

Identifies the context for this command. The context must be the 1- to 8-character name of a CMAS or CICSplex.

If you do not specify the CONTEXT option, the default context for the thread is assumed.

### FROM (data-area)

Identifies a buffer containing a resource table record that represents the definition to be updated.

The record must include all of the attributes for the resource table specified on the OBJECT option. For optional attributes that you do not want to specify, set the field to null (that is, zero) values .

### LENGTH (data-value)

A fullword value that specifies the length of the FROM or MODIFY buffer.

**Note:** The buffer length you specify should not include any data other than a resource table record or modification expression.

### MODIFY (data-area)

Identifies a buffer containing the modification expression to be used in modifying CICS Definition resource table records.

For details on how to form a modification expression, see *CICSplex System Manager Application Programming Guide*.

## UPDATE

### **OBJECT**(*data-value*)

Identifies the resource table that represents the definition being updated. This value must be the 8-character name of a valid CPSM Definition or CICS Definition resource table. For a list of the CICSplex SM resource tables by type, see *CICSplex System Manager Application Programming Guide*.

### **PARM**(*data-area*)

Identifies a buffer containing a parameter expression to be used in updating the definition.

For details on how to use a parameter expression with the UPDATE command, see *CICSplex System Manager Application Programming Guide*. For a description of the parameters that are valid for a given resource table, see the *CICSplex System Manager Resource Tables Reference*.

### **PARMLEN**(*data-value*)

A fullword value that specifies the length of the PARM buffer.

### **REASON**(*data-ref*)

Names a variable to receive the fullword reason value returned by this command.

### **RESPONSE**(*data-ref*)

Names a variable to receive the fullword response value returned by this command.

### **RESULT**(*cpsm-token*)

Identifies the API result set to be processed by this operation. The result set must contain CICS Definition resource table records. The records are updated according to the modification expression you supply in the MODIFY buffer.

The result set can be one produced by any of these commands:

- COPY
- GET
- GROUP
- PERFORM OBJECT.

### **THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

## Conditions

The following is a list of the RESPONSE values that can be returned by the UPDATE command. The description of each RESPONSE includes a list of associated REASON values, if appropriate.

**OK** The command completed processing successfully.

### **ENVIRONERROR**

An environment error occurred for one of the following reasons:

#### **NOSERVICE**

The application stub program could not load the API service module.

#### **NOSTORAGE**

The application stub program could not obtain the necessary storage in the address space where the processing thread is running.



**REQTIMEOUT**

One of the CMASs or MASs to which the request was directed did not respond.

**SOCRESOURCE**

A required resource that is owned by the CMAS is not available.

**FAILED**

The command failed for one of the following reasons:

**ABENDED**

Command processing abended.

**EXCEPTION**

Command processing encountered an exceptional condition.

**INVALIDDATA**

An invalid data error occurred for one of the following reasons:

**MODIFY**

An attribute value listed in the MODIFY buffer is not valid for the specified attribute.

**NOTSUPPORTED**

An attribute listed in the MODIFY buffer is not modifiable.

**INVALIDCMD**

The command is invalid for the following reason:

**LENGTH**

The total length of all the options on the command exceeds the maximum limit.

**INVALIDPARM**

An invalid parameter was detected. The parameter that is invalid is returned as the reason value:

CONTEXT  
FROM  
LENGTH  
MODIFY  
OBJECT  
PARM  
PARMLEN  
RESULT  
THREAD.

Check the command description for valid parameter syntax.

**NOTAVAILABLE**

A not available condition occurred for one of the following reasons:

**APITASK**

The API control subtask is not active.

**CMAS** A CMAS to which the request was directed is not available.

**CPSMAPI**

The CMAS to which the processing thread is connected is not available for API processing.

**MAINTPOINT**

The maintenance point for the current context is not available.

**NOTPERMIT**

A not permitted condition occurred for the following reason:

**USRID**

The user ID associated with the processing thread does not have the required security authorization.

## UPDATE

### **SERVERGONE**

The CMAS to which the processing thread was connected is no longer active.

### **TABLEERROR**

A resource table record is invalid for one of the following reasons:

#### **DATAERROR**

The value associated with one or more resource table attributes is invalid. This error can occur if:

- The resource table is missing required attributes, contains one or more conflicting attributes, or does not exist.
- A CICS resource definition contains attributes that would cause the EXEC CICS CREATE command to issue warnings.

Use the FEEDBACK command to retrieve additional data about this error.

#### **INVALIDATTR**

One of the resource table attributes is invalid.

#### **INVALIDVER**

The specified version of the resource table is not supported by CICSplex SM.

### **VERSIONINVL**

A version conflict occurred for one of the following reasons:

#### **NOTSUPPORTED**

The version of the application stub program used for this command is not supported.

#### **NOTVSNCONN**

The version of the application stub program used for this command is not the same as the version used with the CONNECT command.

---

## Chapter 3. REXX functions and commands

This chapter contains detailed descriptions of the REXX functions and commands supplied with CICSplex SM. These functions and commands can be used only with the REXX run-time interface.

The REXX functions supplied with CICSplex SM make use of standard REXX variable substitution rules. In addition to REXX return codes, these functions can produce EYUARnnnn messages. For descriptions of those messages, see *CICSplex System Manager Messages and Codes*.

Each description includes the following

- A description of the command
- Purpose
- Syntax of command (*var* represents a variable)
- Available options for the command
- REXX response codes returned by the command

The functions are presented in alphabetical order:

- “EYUAPI()” on page 130
- “EYUINIT()” on page 131
- “EYUREAS()” on page 132
- “EYURESP()” on page 133
- “EYUTERM()” on page 134

---

### Functions

## EYUAPI()

## EYUAPI()

Passes an API command to CICSPlex SM.

```
var = EYUAPI(command string)
```

OR

```
var = EYUAPI('command string')
```

### Description

This function passes an API command to CICSPlex SM. You must issue an EYUAPI or EYUINIT function before you can use the ADDRESS CPSM command to pass API commands to REXX.

### Options

*command string*

Identifies the API command and options to be passed.

### Return codes

The following is a list of the REXX return codes that can be returned by the EYUAPI function in its assigned variable (*var*).

These return codes indicate what REXX did with the EYUAPI function; they do not indicate whether the API command that was passed was successfully processed by CICSPlex SM. For that information, you must refer to the RESPONSE and REASON values returned by the command.

- 0**      The EYUAPI function was successful.
- 1**      The EYUAPI function failed.

## EYUINIT()

Initialize the CICSplex SM API environment and allocate the necessary resources.

```
var = EYUINIT()
```

### Description

This command initializes the CICSplex SM API environment and allocates the necessary resources. EYUINIT should be the first function issued in a REXX program.

**Note:** You must issue an EYUINIT or EYUAPI function before you can use the ADDRESS CPSM command to pass API commands to REXX.

### Return codes

The following is a list of the REXX return codes that can be returned by the EYUINIT function in its assigned variable (*var*).

- 0 The EYUINIT function was successful.
- 1 The EYUINIT function failed.

## EYUREAS()

## EYUREAS()

Translate the numeric value returned by the REASON option of an API command.

```
var = EYUREAS(reason)
```

### Description

This command translates the numeric value returned by the REASON option of an API command into its character equivalent and vice versa.

### Options

*reason*

Is the REASON value to be translated.

### Return codes

The following is a list of the REXX return codes that can be returned by the EYUREAS function in its assigned variable (*var*).

- nnnn** The numeric or character equivalent of the specified REASON value.
- 1** The specified REASON value is invalid and could not be translated.

## EYURESP()

Translate the numeric value returned by the RESPONSE option of an API command.

```
var = EYURESP(response)
```

### Description

This command translates the numeric value returned by the RESPONSE option of an API command into its character equivalent and vice versa.

### Options

*response*

Is the RESPONSE value to be translated.

### Return codes

The following is a list of the REXX return codes that can be returned by the EYURESP function in its assigned variable (*var*).

- nnnn** The numeric or character equivalent of the specified RESPONSE value.
- 1** The specified RESPONSE value is invalid and could not be translated.

## EYUTERM()

## EYUTERM()

Terminate the CICSplex SM API environment and release any allocated resources.

```
var = EYUTERM()
```

### Description

This command terminates the CICSplex SM API environment and releases any allocated resources. EYUTERM should be the last function issued in a REXX program.

**Note:** If the CICSplex SM host subcommand environment is actually installed at your enterprise (as opposed to being called from the function package), you may not need to use EYUTERM at the end of every program. The resources that remain allocated can be reused by the next program that accesses the host subcommand environment.

### Return codes

The following is a list of the REXX return codes that can be returned by the EYUTERM function in its assigned variable (*var*).

- 0**      The EYUTERM function was successful.
- 1**      The EYUTERM function failed.



---

## Commands

The REXX-specific commands supplied with CICSplex SM perform a series of API commands internally and return the results to REXX.

The commands are presented here in alphabetical order. Each description includes the purpose, syntax, and available options for the command.

**Notes:**

1. You cannot use these commands to process user-defined views of a resource table that were created by the SPECIFY VIEW command. If you create a view with the same name as a supplied resource table and then specify that name on one of these commands, the command fails.
2. These commands do not use the RESPONSE and REASON options. The result of these REXX-specific processes is returned by the STATUS option.
3. These commands do not provide any useful FEEDBACK information. The API commands that are issued internally reuse the same feedback area. So, when one of these commands finishes processing, the feedback area does not represent the entire sequence of events.

The commands are:

- “TBUILD” on page 136
- “TPARSE” on page 138

## TBUILD

## TBUILD

Build a resource table record from a set of variables.

```
▶—TBUILD—OBJECT(data-value)—PREFIX(data-value)—STATUS(data-ref)—————▶
▶—VAR(data-area)—[ASIS]—THREAD(cpsm-token)—————▶
```

### Description

This command builds a resource table record from a set of variables that represent the individual attributes of a CICSplex SM or CICS definition. A definition is represented by a resource table with a type of CPSM Definition or CICS Definition.

You form the attribute variables by adding a prefix to the attribute name, like this:

```
prefix_attribute
```

where *prefix* is a text string that you supply and *attribute* is the name of an attribute in the resource table. You must insert an underscore character (`_`) between the prefix and the attribute name.

The resource table record can be placed in any valid REXX variable, including a stem variable.

TBUILD only uses the attributes that you specify; it does not assume any default values for optional attributes. If you do not supply a variable for an attribute that is optional, the corresponding field in the resource table record is initialized according to its data type (that is, character fields are set to blanks, binary data and EYUDA values are set to zeroes).

**Note:** For a list of the CICSplex SM resource tables by type, see *CICSplex System Manager Application Programming Guide*. For a complete description of a particular resource table and its attributes, see the *CICSplex System Manager Resource Tables Reference*.

### Options

#### ASIS

Indicates that the resource table attribute values are already in their internal format; they are to be processed as is, rather than translated.

You must use the ASIS option to rebuild a CICSplex SM or CICS definition that you previously parsed (with the TPARSE ASIS command).

#### OBJECT(*data-value*)

Identifies the resource table for which a record is to be built. This value must be the 1- to 8-character name of a valid CPSM Definition or CICS Definition resource table.

**Note:** You cannot use the TBUILD command to process a resource table view that was created by the SPECIFY VIEW command. If you create a view with the same name as a supplied resource table and then specify that name on a TBUILD command, the command fails.

#### PREFIX(*data-value*)

Specifies the prefix you used to name the variables that contain the resource table attributes.

**Note:** The maximum allowable length for a prefix is determined by REXX and the environment in which the program runs.

**STATUS***(data-ref)*

Names a variable to receive the REXX status value returned for this command. The status is returned in character form as one of the following:

**OK** The TBUILD command completed processing successfully.

**SYNTAX ERROR**

The TBUILD command could not be processed because of a syntax error. EYUARnnnn messages that describe the error are written to the destination defined on your system for IRXSAY WRITEERR output.

**FAILURE**

The TBUILD command failed because some of the data it was attempting to process is invalid. Trace data is written to a REXX stem variable called EYUTRACE. EYUARnnnn messages that describe the failure may also be written to the destination defined on your system for IRXSAY WRITEERR output.

**Note:** For more information about the EYUTRACE stem variable, see *CICSplex System Manager Application Programming Guide*.

**THREAD***(cpsm-token)*

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**VAR***(data-area)*

Names a variable to receive the resource table record that is built by TBUILD.

## TPARSE

## TPARSE

Parse a resource table record from a variable into a set of variables.

```
▶—TPARSE—OBJECT(data-value)—PREFIX(data-value)—STATUS(data-ref)—▶
▶—VAR(data-area)—└─┬─┘—THREAD(cpsm-token)—▶
                   └─┬─┘
                     ASIS
```

### Description

This command parses a resource table record from a variable into a set of variables that represent the individual attributes of the table. You can use TPARSE with any type of CICSplex SM resource table.

The resource table variable can be any valid REXX variable, including a stem variable. The output variables are formed by adding a prefix to the attribute name, like this:

```
prefix_attribute
```

where *prefix* is a text string that you supply and *attribute* is the name of an attribute in the resource table. An underscore (\_) is inserted between the prefix and the attribute name.

**Note:** For complete descriptions of the resource tables and their attributes, see the *CICSplex System Manager Resource Tables Reference*.

### Options

#### ASIS

Specifies that the resource table attribute values are not to be translated into their external format; they are to be returned as is. Attribute values are presented as follows:

- Character values have trailing blanks.
- Binary values have leading zeroes and are not converted to display format.
- EYUDA and CVDA values are not converted to character format.

You must use the ASIS option to parse a CPSM Definition or CICS Definition resource table that you want to rebuild (with the TBUILD ASIS command).

**Note:** If you use the ASIS option with EYUDA or CVDA values, you can use the TRANSLATE command to convert the coded numeric value into a character value.

#### OBJECT(*data-value*)

Identifies the resource table that is to be parsed. This value must be the 1- to 8-character name of a valid resource table.

**Note:** You cannot use the TPARSE command to process a resource table view that was created by the SPECIFY VIEW command. If you create a view with the same name as a supplied resource table and then specify that name on a PARSE command, the command fails.

#### PREFIX(*data-value*)

Specifies the prefix you want to use to name the attribute variables returned by TPARSE.

**Note:** The maximum allowable length for a prefix is determined by REXX and the environment in which the program runs.

**STATUS**(*data-ref*)

Names a variable to receive the REXX status value returned for this command. The status is returned in character form as one of the following:

**OK** The TPARSE command completed processing successfully.

**SYNTAX ERROR**

The TPARSE command could not be processed because of a syntax error. EYUARnnnn messages that describe the error are written to the destination defined on your system for IRXSAY WRITEERR output.

**FAILURE**

The TPARSE command failed because some of the data it was attempting to process is invalid. Trace data is written to a REXX stem variable called EYUTRACE. EYUARnnnn messages that describe the failure may also be written to the destination defined on your system for IRXSAY WRITEERR output.

**Note:** For more information about the EYUTRACE stem variable, see *CICSplex System Manager Application Programming Guide*.

**THREAD**(*cpsm-token*)

Identifies the API thread to be used for this operation. The *cpsm-token* value that identifies a thread is returned by the CONNECT command.

**VAR**(*data-area*)

Names a variable that contains the resource table record to be parsed.

## TPARSE

## Appendix A. RESPONSE and REASON values

This appendix provides a summary of the RESPONSE and REASON values returned by each API command.

For descriptions of these values, refer to the description of the command that returns them. For a list of RESPONSE and REASON character values and their numeric equivalents, see Appendix B, “EYUDA values,” on page 149. For a discussion of the RESPONSE and REASON options, see *CICSplex System Manager Application Programming Guide*.

COMMAND ADDRESS	RESPONSE	REASONS
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	ECB, SENTINEL, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
CANCEL	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	NOTIFICATION, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
CONNECT	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
	OK	
	ENVIRONERROR	APITASKERR, NOSERVICE, NOSTORAGE, SOCRESOURCE, SOERESOURCE, SOLRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	CONTEXT, SCOPE, SIGNONPARM, USRID, VERSION
COPY	NOTAVAILABLE	APITASK, CPSMAPI, CPSMSERVER, CPSMSYSTEM, CPSMVERSION
	NOTPERMIT	USRID
	VERSIONINVL	NOTSUPPORTED
	OK	
	NODATA	
	BUSY	FROM, TO
CREATE	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INCOMPATIBLE	INVALIDOBJ
	INVALIDPARM	FILTER, FROM, NOTFILTER, THREAD, TO
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	TABLEERROR	INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDCMD	LENGTH
	INVALIDPARM	CONTEXT, FROM, LENGTH, OBJECT, PARM, PARMLen, THREAD

## RESPONSE and REASON values

COMMAND	RESPONSE	REASONS
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT
	NOTPERMIT	USRID
	SERVERGONE	
	TABLEERROR	DATAERROR, INVALIDATTR, INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>DELETE</b>		
	OK	
	NODATA	
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE, SOLRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	FILTER, NOTFILTER, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>DISCARD</b>		
	OK	
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INUSE	FILTER, VIEW
	INVALIDPARM	FILTER, RESULT, THREAD, VIEW
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>DISCONNECT</b>		
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>FEEDBACK</b>		
	OK	
	NODATA	
	WARNING	AREATOOSMALL
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	COUNT, INTO, LENGTH, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>FETCH</b>		
	OK	
	NODATA	BACKWARD, FORWARD
	WARNING	AREATOOSMALL
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE, SOLRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	COUNT, FILTER, INTO, LENGTH, NOTFILTER, POSITION, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI



## RESPONSE and REASON values

COMMAND	RESPONSE	REASONS	
GET	SERVERGONE		
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN	
	OK		
	SCHEDULED		
	NODATA		
	BUSY	RESULT	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE	
	FAILED	ABENDED, EXCEPTION	
	INVALIDDATA	CRITERIA	
	INVALIDCMD	FILTER,LENGTH	
	INVALIDPARM	CONTEXT, CRITERIA, FILTER, LENGTH, OBJECT, PARM, PARMLEN, RESULT, SCOPE, THREAD, TOKEN	
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT, SCOPE, WORKLOAD	
	NOTFOUND	ATTRIBUTE	
	NOTPERMIT	USRID	
GETDEF	SERVERGONE		
	TABLEERROR	DATAERROR, INVALIDVER	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN	
	OK		
	NODATA		
	BUSY	RESULT	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE	
	FAILED	ABENDED, EXCEPTION	
	INCOMPATIBLE	INVALIDOBJ	
	INVALIDPARM	ATTRIBUTE, OBJECT, RESOURCE, RESULT, THREAD	
	NOTAVAILABLE	APITASK, CPSMAPI	
	SERVERGONE		
	TABLEERROR	DATAERROR, INVALIDVER	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN	
GROUP	OK		
	NODATA		
	BUSY	FROM, TO	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE	
	FAILED	ABENDED, EXCEPTION	
	INVALIDCMD	LENGTH	
	INVALIDPARM	BY, FILTER, FROM, LENGTH, NOTFILTER, SUMOPT, THREAD, TO	
	NOTAVAILABLE	APITASK, CPSMAPI	
	SERVERGONE		
	TABLEERROR	INVALIDVER	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN	
	LISTEN	OK	
		ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
		FAILED	ABENDED, EXCEPTION
INCOMPATIBLE		INVALIDEVT	
INVALIDPARM		CONTEXT, EVENT, FILTER, NOTFILTER, NOTIFICATION, THREAD, TOKEN	
NOTAVAILABLE		APITASK, CPSMAPI, PLEXMGR	
SERVERGONE			
VERSIONINVL		NOTSUPPORTED, NOTVSNCONN	
LOCATE		OK	

## RESPONSE and REASON values

COMMAND	RESPONSE	REASONS
	NODATA	BACKWARD, FORWARD
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE, SOLRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	BACKWARD, FILTER, FORWARD, NOTFILTER, POSITION, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>MARK</b>		
	OK	
	NODATA	
	WARNING	AREATOOSMALL, DATAERROR
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE, SOLRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	COUNT, FILTER, INTO, LENGTH, NOTFILTER, PARM, PARMLEN, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>ORDER</b>		
	OK	
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDCMD	LENGTH
	INVALIDPARM	BY, LENGTH, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>PERFORM OBJECT</b>		
	OK	
	SCHEDULED	
	NODATA	BACKWARD, FORWARD
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDDATA	PARM, CRITERIA
	INVALIDCMD	FILTER,LENGTH
	INVALIDPARM	ACTION, CONTEXT, CRITERIA, FILTER, LENGTH, OBJECT, PARM, PARMLEN, RESULT, SCOPE, THREAD, TOKEN
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT, PLEXMGR, SCOPE, WORKLOAD
	NOTFOUND	ACTION, ATTRIBUTE
	NOTPERMIT	USRID
	SERVERGONE	
	TABLEERROR	DATAERROR
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
	WARNING	RESULT, ACTION
<b>PERFORM SET</b>		
	OK	
	SCHEDULED	
	NODATA	BACKWARD, FORWARD
	BUSY	RESULT

## RESPONSE and REASON values

COMMAND	RESPONSE	REASONS
<b>COMMAND</b>	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDDATA	PARM, CRITERIA
	INVALIDCMD	LENGTH
	INVALIDPARM	ACTION, FILTER, NOTFILTER, PARM, PARMLen, POSITION, RESULT, THREAD, TOKEN
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT, PLEXMGR, SCOPE, WORKLOAD
	NOTFOUND	ACTION, ATTRIBUTE
	NOTPERMIT	USRID
	SERVERGONE	
	TABLEERROR	DATAERROR
VERSIONINVL	NOTSUPPORTED, NOTVSNCONN	
<b>QUALIFY</b>	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	CONTEXT, SCOPE, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI, PLEXMGR
	SERVERGONE	
VERSIONINVL	NOTSUPPORTED, NOTVSNCONN	
<b>QUERY</b>	OK	
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	CONTEXT, DATALENGTH, OBJECT, RESULT, THREAD, TYPE
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>RECEIVE</b>	OK	
	NODATA	
	WARNING	AREATOOSMALL
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	DELAY, INTO, LENGTH, OBJECT, THREAD, TOKEN
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
	<b>REFRESH</b>	OK
SCHEDULED		
BUSY		RESULT
ENVIRONERROR		NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE
FAILED		ABENDED, EXCEPTION
INVALIDPARM		COUNT, FILTER, NOTFILTER, RESULT, THREAD, TOKEN
NOTAVAILABLE		APITASK, CMAS, CPSMAPI, MAINTPOINT, SCOPE
NOTPERMIT		USRID
SERVERGONE		
TABLEERROR		DATAERROR
VERSIONINVL		NOTSUPPORTED, NOTVSNCONN
<b>REMOVE</b>		OK
	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE

## RESPONSE and REASON values

COMMAND	RESPONSE	REASONS
	FAILED	ABENDED, EXCEPTION
	INVALIDCMD	LENGTH
	INVALIDPARM	CONTEXT, FROM, LENGTH, OBJECT, PARM, PARMLN, THREAD
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT
	NOTPERMIT	USRID
	SERVERGONE	
	TABLEERROR	DATAERROR, INVALIDATTR, INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>SET</b>		
	OK	
	SCHEDULED	
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDDATA	MODIFY, NOTSUPPORTED
	INVALIDCMD	LENGTH
	INVALIDPARM	ATTRIBUTE, COUNT, FILTER, LENGTH, MODIFY, NOTFILTER, POSITION, RESULT, THREAD, TOKEN
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT, SCOPE
	NOTFOUND	ACTION, ATTRIBUTE
	NOTPERMIT	USRID
	SERVERGONE	
	TABLEERROR	DATAERROR, INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>SPECIFY FILTER</b>		
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDCMD	FILTER,LENGTH
	INVALIDPARM	CRITERIA, FILTER, LENGTH, OBJECT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	NOTFOUND	ATTRIBUTE
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>SPECIFY VIEW</b>		
	OK	
	DUPE	VIEW
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDDATA	CRITERIA
	INVALIDCMD	LENGTH
	INVALIDPARM	ATTRIBUTE, FIELDS, LENGTH, OBJECT, THREAD, VIEW
	NOTAVAILABLE	APITASK, CPSMAPI
	NOTFOUND	ATTRIBUTE
	SERVERGONE	
	TABLEERROR	DATAERROR, INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>TERMINATE</b>		
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE
	FAILED	ABENDED, EXCEPTION
<b>TRANSLATE</b>		
	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE

## RESPONSE and REASON values

COMMAND	RESPONSE	REASONS
	FAILED	ABENDED, EXCEPTION
	INVALIDPARM	ATTRIBUTE, FROMCHAR, FROMCV, OBJECT, THREAD, TOCHAR, TOCV
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	TABLEERROR	INVALIDVER, INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>UNMARK</b>	OK	
	NODATA	
	WARNING	AREATOOSMALL, DATAERROR
	BUSY	RESULT
	ENVIRONERROR	NOSERVICE, NOSTORAGE, SOCRESOURCE, SOLRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDCMD	LENGTH
	INVALIDPARM	COUNT, FILTER, INTO, LENGTH, NOTFILTER, PARM, PARMLEN, RESULT, THREAD
	NOTAVAILABLE	APITASK, CPSMAPI
	SERVERGONE	
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN
<b>UPDATE</b>	OK	
	ENVIRONERROR	NOSERVICE, NOSTORAGE, REQTIMEOUT, SOCRESOURCE
	FAILED	ABENDED, EXCEPTION
	INVALIDCMD	LENGTH
	INVALIDPARM	CONTEXT, FROM, LENGTH, MODIFY, OBJECT, PARM, PARMLEN, RESULT, THREAD
	NOTAVAILABLE	APITASK, CMAS, CPSMAPI, MAINTPOINT
	NOTPERMIT	USRID
	SERVERGONE	
	TABLEERROR	DATAERROR, INVALIDATTR, INVALIDVER
	VERSIONINVL	NOTSUPPORTED, NOTVSNCONN

## RESPONSE and REASON values

---

## Appendix B. EYUDA values

This appendix lists the CICSplex SM API EYUDA values and their numeric equivalents. There are three types of EYUDAs:

### General

Values that CICSplex SM uses to describe or define a resource. These EYUDAs have numeric values in the range of 1– 474. See “EYUDA general values in numerical order.”

### RESPONSE

Values returned by the RESPONSE option of an API command. These EYUDAs have numeric values in the range of 1024 – 1042. See “EYUDA RESPONSE values in numerical order” on page 180.

### REASON

Values returned by the REASON option of an API command. These EYUDAs have numeric values in the range of 1280 – 1370. See “EYUDA REASON values in numerical order” on page 181.

EYUDA information is provided in the following sections:

- “EYUDA general values in numerical order”
- “EYUDA general values in alphabetic order” on page 162
- “EYUDA RESPONSE values in numerical order” on page 180
- “EYUDA RESPONSE values in alphabetic order” on page 180
- “EYUDA REASON values in numerical order” on page 181
- “EYUDA REASON values in alphabetic order” on page 183

**Note:** The EYUDA values and their numeric equivalents listed for HOTPOOL are valid only in CICS Transaction Server 2.2 and 2.3.

---

## EYUDA general values in numerical order

This section lists the general EYUDAs in numerical order and shows the character value for each.

Value	EYUDA
0	N_A
0	NA
1	YES
2	NO
3	ON
4	OFF
5	VALID
6	INVALID
7	TRUE
8	FALSE
9	VLS
10	LS

## Numeric EYUDA general values

11	LW
12	NM
13	HW
14	HS
15	VHS
16	EQ
17	NE
18	GT
19	LT
20	LOW
21	HIGH
22	NORMAL
23	IMMEDIATE
24	TAKEOVER
25	SHUT
26	NOSHUT
27	GLOBAL
28	SYSTEM
30	SUSPEND
33	VALUE
34	THRESHOLD
35	SAM
36	APM
37	MRM
38	TRANID
39	TERMID
40	SIGNID
41	RACFGID
42	USERID
43	NULL
44	CHARSTR
45	ACTIVE
46	INACTIVE
47	WAITING
48	QUIESCING
49	POOL
50	LTRAN



51	RTRAN
53	GOAL
54	QUEUE
55	LUNAME
58	DELIMIT
59	PCONV
60	LOGON
61	SIGNON
63	PERMANENT
64	MCICS
65	MGLBL
66	MDBX
67	MCONN
68	MFILE
69	MJRNL
70	MPROG
71	MTERM
72	MTDQS
73	MTRAN
74	MAPPL
75	ABOVE
76	BELOW
77	NOCOPY
78	DSA
79	CDSA
80	UDSA
81	LPA
82	EDSA
83	ECDSA
84	EUDSA
85	ERDSA
86	ELPA
87	CICS
88	USER
89	READONLY
90	LU61
91	LU62

## Numeric EYUDA general values

92	INDIRECT
93	MRO
94	NOTAPPLIC
95	LFILE
96	RFILE
97	CTABL
98	UTABL
99	INSTALLED
100	PENDING
101	INHERIT
102	EXPLICIT
103	CICSSYS
104	SYSGROUP
105	KEEP
106	NAME
107	FORCE
108	NONE
109	UNASSIGNED
110	DROP
111	LOCAL
112	REMOTE
113	DEFAULT
114	REMOVE
115	DORMANT
116	START
117	END
118	ADJACENT
119	LOSTCON
120	CREATING
121	REMOVING
122	QUIESCED
123	LINKACTIVE
124	LINKDOWN
125	ESSS
126	CONACT
127	RESET
128	SYSDUMP

129	TRANDUMP
130	MAXTASK
131	STALLED
132	SOSUDSA
133	SOSCDSA
134	SOSEUDSA
135	SOSECDSA
136	SOSERDSA
137	SOSSDSA
138	SOSESDSA
139	SOSRDSA
140	QUIESCE
141	PRIMARY
142	SECONDARY
143	DUPLICATE
144	FROZEN
145	ALL
146	ANY
147	SUM
148	MIN
149	MAX
150	AVG
151	CNT
152	LE
153	GE
154	SDSA
155	ESDSA
156	RDSA
157	SOSMVS
158	SOSBELOW
159	SOSABOVE
161	EXECUTE
162	CHECK
163	LOSTCMAS
164	LOSTMAS
165	AASTERISK
166	BLANK

#  
#  
#

## Numeric EYUDA general values

167	INDEX
168	DATA
169	BOTH
170	NETBIOS
171	TCPIP
172	AFTER
173	ALLREQS
174	ASA
177	ASIS
178	ASSEMBLER
179	BACKOUTONLY
180	BEFORE
181	BLUE
182	C
183	CLEARCONV
184	CLOSE
185	COBOL
186	COLD
187	CYCLIC
188	DEFERRED
189	DIP
190	DISK
191	EODS
192	EXTA
193	FILE
194	FIRSTREF
195	GREEN
196	IDENTIFY
197	IGNORE
198	INITIAL
199	INOUT
200	INPUT
201	LEAVE
202	LE370
203	LINEAR
204	LINK
205	LMS

206	LOGICAL
207	LOGOFF
208	LRU
209	MACHINE
210	MESSAGE
211	MIXIDPE
212	MOD
213	MODIFYREQS
214	MSRE
215	NEUTRAL
216	NEW
217	NOFORCE
218	NONVTAM
219	OLD
220	ONLY
221	OPEN
222	OPID
223	OUTPUT
224	PERSISTENT
225	PHYSICAL
226	PINK
227	PLI
228	PRINTER
229	RED
230	RECOVERY
231	REJECT
232	RELEASESESS
233	REREAD
234	RPG
235	SCS
236	SECURITY
237	SHR
238	SKIP
239	SPECIFIC
240	STARTIO
241	STARTUP
242	STRFIELD

## Numeric EYUDA general values

243	SYSDEFAULT
244	TAPE
245	TERMINAL
246	TRANSACTION
247	TRANSIENT
248	TURQUOISE
249	U
250	UNCONDREL
251	UPDATEONLY
252	VB
253	VERIFY
254	VTAM
255	YELLOW
256	3270
257	AUTO
258	DYNAM
259	EXTRA
260	INTRA
261	IND
262	STAT
263	RELATED
264	TARGET
265	NEVER
266	ALWAYS
267	COLDONLY
268	WARMLY
269	PROMPT
270	CONTINUE
271	TERMINATE
272	SHUTDOWN
273	RTADEF
274	STATDEF
275	CONNDEF
276	FILEDEF
277	JRNLDEF
278	JRNMDEF
279	LSRDEF

280	MAPDEF
281	PARTDEF
282	PRTNDEF
283	PROFDEF
284	PROGDEF
285	SESSDEF
286	TDQDEF
287	TERMDEF
288	TRANDEF
289	TRNCLDEF
290	TSQDEF
291	TYPTMDEF
292	MPSYNCCR
293	ASSOCIATIONS
294	MEMBERS
295	DB2CDEF
296	DB2EDEF
297	DB2TDEF
298	FSEGDEF
299	TSMDEF
300	ENQMDEF
301	TCPDEF
302	DOCDEF
303	FULL
304	RELEASE
305	PA1
306	PA2
307	PA3
308	PF1
309	PF2
310	PF3
311	PF4
312	PF5
313	PF6
314	PF7
315	PF8
316	PF9

## Numeric EYUDA general values

317	PF10
318	PF11
319	PF12
320	PF13
321	PF14
322	PF15
323	PF16
324	PF17
325	PF18
326	PF19
327	PF20
328	PF21
329	PF22
330	PF23
331	PF24
332	STANDARD
333	APPC
334	BATCHDI
335	BCHLU
336	CONSOLE
337	CONTLU
338	INTLU
339	LUTYPE2
340	LUTYPE3
341	LUTYPE4
342	L3277
343	L3284
344	L3286
345	PIPELINE
346	SCSPRINT
347	TLX
348	TWX
349	USERPROG
350	3270P
351	3275
352	3277
353	3277CM



<b>354</b>	3284
<b>355</b>	3284CM
<b>356</b>	3286
<b>357</b>	3286CM
<b>358</b>	3600
<b>359</b>	3614
<b>360</b>	3650
<b>361</b>	3653
<b>362</b>	3767
<b>363</b>	3767C
<b>364</b>	3767I
<b>365</b>	3770
<b>366</b>	3770B
<b>367</b>	3770C
<b>368</b>	3770I
<b>369</b>	3790
<b>370</b>	BLINK
<b>371</b>	REVERSE
<b>372</b>	UNDERLINE
<b>373</b>	INSTALL
<b>374</b>	RESDEF
<b>375</b>	RASINDSC
<b>376</b>	RESTYPE
<b>377</b>	SCOPETYP
<b>378</b>	REBUILD
<b>379</b>	RECONNECT
<b>380</b>	CONNECTING
<b>381</b>	TWAIT
<b>382</b>	NOTWAIT
<b>383</b>	DISCONNING
<b>384</b>	CFTBL
<b>385</b>	CF
<b>386</b>	QUASIRENT
<b>387</b>	THREADSAFE
<b>388</b>	PROCDEF
<b>389</b>	BAPPL
<b>390</b>	ACTIVITY

## Numeric EYUDA general values

391	PROCESS
393	PMWINDOW
394	FULLSCREEN
395	COM1
396	COM2
397	COM3
398	COM4
399	COM5
400	COM6
401	COM7
402	COM8
403	CLIENTAUTH
404	RQMDEF
405	3270TERM
406	3270PRNT
407	3270DBTM
408	3270DBPR
409	3151TERM
410	SEQTERM
411	EOF
412	EOT
413	FEPOODEF
414	FETRGDEF
415	FENODDEF
416	FEPRODEF
417	DEBUG
418	LEVSE
419	KEY
420	RBA
423	EJCODEF
424	EJDJDEF
425	BASIC
426	CERTIFICATE
427	AUTOREGISTER
428	AUTOMATIC
429	CLIENTCERT
430	LINK3270

431	FACILITY
432	NOTOPEN
433	UNKNOWN
434	REENTPROT
435	NOREENTPROT
436	ASSERTED
437	MIRROR
438	DPL
439	ONCRPC
440	WEB
441	BRIDGE
442	CICSBTS
443	TDQUEUE
444	TERMSTART
445	XMRUN
446	SOCKET
447	RRS
448	IIRQRECVR
449	RZSTRPT
450	IIOP
451	ECI
452	HOTPOOL
453	JVM
454	HTASK
455	IOERROR
456	INVALIDFILE
457	SUSPENDED
458	SUSPENDING
459	HISTORY
460	REALTIME
461	VELOCITY
462	DISCRETIONRY
463	CONNECTED
464	NOTCONNECTED
465	RESUMING
466	URIMPDEF
467	PIPEDEF

## Numeric EYUDA general values

	468	WEBSVDEF
	469	STARTED
	470	STOPPED
	471	XPLINK
	472	SSL
	473	CICSAPI
	474	OPENAPI
#	475	EYUDA EXCI

---

## EYUDA general values in alphabetic order

This section lists the general EYUDAs in alphabetic order by their character values.

### **EYUDA** **Value**

**AASTERISK**  
165

**ABOVE**  
75

**ACTIVE**  
45

**ACTIVITY**  
390

**ADJACENT**  
118

**AFTER**  
172

**ALL** 145

**ALLREQS**  
173

**ALWAYS**  
266

**ANY** 146

**APM** 36

**APPC** 333

**ASA** 174

**ASIS** 177

**ASSEMBLER**  
178

**ASSERTED**  
436

**ASSOCIATIONS**  
293

**AUTO** 257

<b>AUTOMATIC</b>	428
<b>AUTOREGISTER</b>	427
<b>AVG</b>	150
<b>BACKOUTONLY</b>	179
<b>BAPPL</b>	389
<b>BASIC</b>	425
<b>BATCHDI</b>	334
<b>BCHLU</b>	335
<b>BEFORE</b>	180
<b>BELOW</b>	76
<b>BLANK</b>	166
<b>BLINK</b>	370
<b>BLUE</b>	181
<b>BOTH</b>	169
<b>BRIDGE</b>	441
<b>C</b>	182
<b>CDSA</b>	79
<b>CERTIFICATE</b>	426
<b>CF</b>	385
<b>CFTBL</b>	384
<b>CHARSTR</b>	44
<b>CHECK</b>	162
<b>CICS</b>	87
<b>CICSAPI</b>	473
<b>CICSBTS</b>	442

## Alphabetic EYUDA general values

<b>CICSSYS</b>	103
<b>CLEARCONV</b>	183
<b>CLIENTAUTH</b>	403
<b>CLIENTCERT</b>	429
<b>CLOSE</b>	184
<b>CNT</b>	151
<b>COBOL</b>	185
<b>COLD</b>	186
<b>COLDONLY</b>	267
<b>COM1</b>	395
<b>COM2</b>	396
<b>COM3</b>	397
<b>COM4</b>	398
<b>COM5</b>	399
<b>COM6</b>	400
<b>COM7</b>	401
<b>COM8</b>	402
<b>CONTACT</b>	126
<b>CONNDEF</b>	275
<b>CONNECTED</b>	463
<b>CONNECTING</b>	380
<b>CONSOLE</b>	336
<b>CONTINUE</b>	270
<b>CONTLU</b>	337
<b>CREATING</b>	120
<b>CTABL</b>	97

<b>CYCLIC</b>	187
<b>DATA</b>	168
<b>DB2CDEF</b>	295
<b>DB2EDEF</b>	296
<b>DB2TDEF</b>	297
<b>DEBUG</b>	417
<b>DEFAULT</b>	113
<b>DEFERRED</b>	188
<b>DELIMIT</b>	58
<b>DIP</b>	189
<b>DISCONNING</b>	383
<b>DISCRETIONRY</b>	462
<b>DISK</b>	190
<b>DOCDEF</b>	302
<b>DORMANT</b>	115
<b>DPL</b>	438
<b>DROP</b>	110
<b>DSA</b>	78
<b>DUPLICATE</b>	143
<b>DYNAM</b>	258
<b>ECDSA</b>	83
<b>ECI</b>	451
<b>EDSA</b>	82
<b>EJCODEF</b>	423
<b>EJDJDEF</b>	424
<b>ELPA</b>	86

## Alphabetic EYUDA general values

**END** 117  
**ENQMDEF**  
300  
**EODS** 191  
**EOF** 411  
**EOT** 412  
**EQ** 16  
**ERDSA**  
85  
**ESDSA**  
155  
**ESSS** 125  
**EUDSA**  
84  
**EXECUTE**  
161  
**EXPLICIT**  
102  
**EXTA** 192  
**EXTRA**  
259  
**EYUDA EXCI**  
475  
**FACILITY**  
431  
**FALSE**  
8  
**FENODDEF**  
415  
**FEPODEF**  
413  
**FEPRODEF**  
416  
**FETRGDEF**  
414  
**FILE** 193  
**FILEDEF**  
276  
**FIRSTREF**  
194  
**FORCE**  
107

#  
#



<b>FROZEN</b>	144
<b>FSEGDEF</b>	298
<b>FULL</b>	303
<b>FULLSCREEN</b>	394
<b>GE</b>	153
<b>GLOBAL</b>	27
<b>GOAL</b>	53
<b>GREEN</b>	195
<b>GT</b>	18
<b>HIGH</b>	21
<b>HISTORY</b>	459
<b>HOTPOOL</b>	452
<b>HS</b>	14
<b>HTASK</b>	454
<b>HW</b>	13
<b>IDENTIFY</b>	196
<b>IGNORE</b>	197
<b>IIOP</b>	450
<b>IIRQRECV</b>	448
<b>IMMEDIATE</b>	23
<b>INACTIVE</b>	46
<b>IND</b>	261
<b>INDEX</b>	167
<b>INDIRECT</b>	92
<b>INHERIT</b>	101
<b>INITIAL</b>	198

## Alphabetic EYUDA general values

**INOUT** 199  
**INPUT** 200  
**INSTALL** 373  
**INSTALLED** 99  
**INTLU** 338  
**INTRA** 260  
**INVALID** 6  
**INVALIDFILE** 456  
**IOERROR** 455  
**JRNLDEF** 277  
**JRNMDEF** 278  
**JVM** 453  
**KEEP** 105  
**KEY** 419  
**LE** 152  
**LEAVE** 201  
**LEVSE** 418  
**LE370** 202  
**LFILE** 95  
**LINEAR** 203  
**LINK** 204  
**LINKACTIVE** 123  
**LINKDOWN** 124  
**LINK3270** 430  
**LMS** 205  
**LOCAL** 111

<b>LOGICAL</b>	206
<b>LOGOFF</b>	207
<b>LOGON</b>	60
<b>LOSTCMAS</b>	163
<b>LOSTCON</b>	119
<b>LOSTMAS</b>	164
<b>LOW</b>	20
<b>LPA</b>	81
<b>LRU</b>	208
<b>LS</b>	10
<b>LSRDEF</b>	279
<b>LT</b>	19
<b>LTRAN</b>	50
<b>LUNAME</b>	55
<b>LUTYPE2</b>	339
<b>LUTYPE3</b>	340
<b>LUTYPE4</b>	341
<b>LU61</b>	90
<b>LU62</b>	91
<b>LW</b>	11
<b>L3277</b>	342
<b>L3284</b>	343
<b>L3286</b>	344
<b>MACHINE</b>	209
<b>MAPDEF</b>	280
<b>MAPPL</b>	74
<b>MAX</b>	149

## Alphabetic EYUDA general values

**MAXTASK**  
130

**MCICS**  
64

**MCONN**  
67

**MDBX** 66

**MEMBERS**  
294

**MESSAGE**  
210

**MFILE** 68

**MGLBL**  
65

**MIN** 148

**MIRROR**  
437

**MIXIDPE**  
211

**MJRNL**  
69

**MOD** 212

**MODIFYREQS**  
213

**MPROG**  
70

**MPSYNCCR**  
292

**MRM** 37

**MRO** 93

**MSRE** 214

**MTDQS**  
72

**MTERM**  
71

**MTRAN**  
73

**N\_A** 0

**NA** 0

**NAME** 106

**NE** 17

**NETBIOS**  
170

**NEUTRAL**  
215

**NEVER**  
265

**NEW** 216

**NM** 12

**NO** 2

**NOCOPY**  
77

**NOFORCE**  
217

**NONE** 108

**NONVTAM**  
218

**NOREENTPROT**  
435

**NORMAL**  
22

**NOSHUT**  
26

**NOTAPPLIC**  
94

**NOTCONNECTED**  
464

**NOTOPEN**  
432

**NOTWAIT**  
382

**NULL** 43

**OFF** 4

**OLD** 219

**ON** 3

**ONCRPC**  
439

**ONLY** 220

**OPEN** 221

**OPENAPI**  
474

**OPID** 222

**OUTPUT**  
223

**PARTDEF**  
281

## Alphabetic EYUDA general values

**PA1** 305

**PA2** 306

**PA3** 307

**PCONV**  
59

**PENDING**  
100

**PERMANENT**  
63

**PERSISTENT**  
224

**PF1** 308

**PF10** 317

**PF11** 318

**PF12** 319

**PF13** 320

**PF14** 321

**PF15** 322

**PF16** 323

**PF17** 324

**PF18** 325

**PF19** 326

**PF2** 309

**PF20** 327

**PF21** 328

**PF22** 329

**PF23** 330

**PF24** 331

**PF3** 310

**PF4** 311

**PF5** 312

**PF6** 313

**PF7** 314

**PF8** 315

**PF9** 316

**PHYSICAL**  
225

**PINK** 226

<b>PIPEDEF</b>	467
<b>PIPELINE</b>	345
<b>PLI</b>	227
<b>PMWINDOW</b>	393
<b>POOL</b>	49
<b>PRIMARY</b>	141
<b>PRINTER</b>	228
<b>PROCDEF</b>	388
<b>PROCESS</b>	391
<b>PROFDEF</b>	283
<b>PROGDEF</b>	284
<b>PROMPT</b>	269
<b>PRTNDEF</b>	282
<b>QUASIRENT</b>	386
<b>QUEUE</b>	54
<b>QUIESCE</b>	140
<b>QUIESCED</b>	122
<b>QUIESCING</b>	48
<b>RACFGID</b>	41
<b>RASINDSC</b>	375
<b>RBA</b>	420
<b>RDSA</b>	156
<b>READONLY</b>	89
<b>REALTIME</b>	460

## Alphabetic EYUDA general values

<b>REBUILD</b>	378
<b>RECONNECT</b>	379
<b>RECOVERY</b>	230
<b>RED</b>	229
<b>REENTPROT</b>	434
<b>REJECT</b>	231
<b>RELATED</b>	263
<b>RELEASE</b>	304
<b>RELEASESESS</b>	232
<b>REMOTE</b>	112
<b>REMOVE</b>	114
<b>REMOVING</b>	121
<b>REREAD</b>	233
<b>RESDEF</b>	374
<b>RESET</b>	127
<b>RESTYPE</b>	376
<b>RESUMING</b>	465
<b>REVERSE</b>	371
<b>RFILE</b>	96
<b>RPG</b>	234
<b>RQMDEF</b>	404
<b>RRS</b>	447
<b>RTADEF</b>	273
<b>RTRAN</b>	51



**RZSTRPT**  
449

**SAM** 35

**SCOPETYP**  
377

**SCS** 235

**SCSPRINT**  
346

**SDSA** 154

**SECONDARY**  
142

**SECURITY**  
236

**SEQTERM**  
410

**SESSDEF**  
285

**SHR** 237

**SHUT** 25

**SHUTDOWN**  
272

**SIGNID**  
40

**SIGNON**  
61

**SKIP** 238

**SOCKET**  
446

# **SOSABOVE**  
# 159

# **SOSBELOW**  
# 158

**SOSCDSA**  
133

**SOSECDSA**  
135

**SOSERDSA**  
136

**SOSESDSA**  
138

**SOSEUDSA**  
134

# **SOSMVS**  
# 157

## Alphabetic EYUDA general values

**SOSRDSA**  
139

**SOSSDSA**  
137

**SOSUDSA**  
132

**SPECIFIC**  
239

**SSL** 472

**STALLED**  
131

**STANDARD**  
332

**START**  
116

**STARTED**  
469

**STARTIO**  
240

**STARTUP**  
241

**STAT** 262

**STATDEF**  
274

**STOPPED**  
470

**STRFIELD**  
242

**SUM** 147

**SUSPEND**  
30

**SUSPENDED**  
457

**SUSPENDING**  
458

**SYSDEFAULT**  
243

**SYSDUMP**  
128

**SYSGROUP**  
104

**SYSTEM**  
28

<b>TAKEOVER</b>	24
<b>TAPE</b>	244
<b>TARGET</b>	264
<b>TCPDEF</b>	301
<b>TCPIP</b>	171
<b>TDQDEF</b>	286
<b>TDQUEUE</b>	443
<b>TERMDEF</b>	287
<b>TERMID</b>	39
<b>TERMINAL</b>	245
<b>TERMINATE</b>	271
<b>TERMSTART</b>	444
<b>THREADSAFE</b>	387
<b>THRESHOLD</b>	34
<b>TLX</b>	347
<b>TRANDEF</b>	288
<b>TRANDUMP</b>	129
<b>TRANID</b>	38
<b>TRANSACTION</b>	246
<b>TRANSIENT</b>	247
<b>TRNCLDEF</b>	289
<b>TRUE</b>	7
<b>TSMDEF</b>	299
<b>TSQDEF</b>	290

## Alphabetic EYUDA general values

**TURQUOISE**  
248

**TWAIT**  
381

**TWX** 348

**TYPTMDEF**  
291

**U** 249

**UDSA** 80

**UNASSIGNED**  
109

**UNCONDREL**  
250

**UNDERLINE**  
372

**UNKNOWN**  
433

**UPDATEONLY**  
251

**URIMPDEF**  
466

**USER** 88

**USERID**  
42

**USERPROG**  
349

**UTABL**  
98

**VALID** 5

**VALUE**  
33

**VB** 252

**VELOCITY**  
461

**VERIFY**  
253

**VHS** 15

**VLS** 9

**VTAM** 254

**WAITING**  
47

**WARMONLY**  
268

**WEB** 440  
**WEBSVDEF**  
 468  
**XMRUN**  
 445  
**XPLINK**  
 471  
**YELLOW**  
 255  
**YES** 1  
**3151TERM**  
 409  
**3270** 256  
**3270DBPR**  
 408  
**3270DBTM**  
 407  
**3270P** 350  
**3270PRNT**  
 406  
**3270TERM**  
 405  
**3275** 351  
**3277** 352  
**3277CM**  
 353  
**3284** 354  
**3284CM**  
 355  
**3286** 356  
**3286CM**  
 357  
**3600** 358  
**3614** 359  
**3650** 360  
**3653** 361  
**3767** 362  
**3767C** 363  
**3767I** 364  
**3770** 365  
**3770B** 366

## Alphabetic EYUDA general values

3770C 367

3770I 368

3790 369

---

## EYUDA RESPONSE values in numerical order

This section lists the RESPONSE EYUDAs in numerical order.

### Value EYUDA

1024 OK

1025 SCHEDULED

1026 NOTFOUND

1027 NODATA

1028 INVALIDPARM

1029 FAILED

1030 ENVIRONERROR

1031 NOTPERMIT

1032 BUSY

1033 SERVERGONE

1034 NOTAVAILABLE

1035 VERSIONINVL

1036 INVALIDCMD

1037 WARNING

1038 TABLEERROR

1039 INCOMPATIBLE

1040 INUSE

1041 INVALIDDATA

1042 DUPE

---

## EYUDA RESPONSE values in alphabetic order

This section lists the RESPONSE EYUDAs in alphabetic order.

### EYUDA

#### Value

1032 BUSY

1042 DUPE

1030 ENVIRONERROR

1029 FAILED

1039 INCOMPATIBLE

1040 INUSE

1041 INVALIDDATA

1036	INVALIDCMD
1028	INVALIDPARM
1027	NODATA
1034	NOTAVAILABLE
1026	NOTFOUND
1031	NOTPERMIT
1024	OK
1025	SCHEDULED
1033	SERVERGONE
1038	TABLEERROR
1035	VERSIONINVL
1037	WARNING

---

## EYUDA REASON values in numerical order

This section lists the REASON EYUDAs in numerical order.

Value	EYUDA
1280	THREAD
1281	OBJECT
1282	CONTEXT
1283	RESULT
1284	COUNT
1285	LENGTH
1286	FILTER
1287	NOTFILTER
1288	FORWARD
1289	BACKWARD
1290	POSITION
1291	DELAY
1292	NOTIFICATION
1293	SIGNONPARM
1294	SCOPE
1295	RESOURCE
1296	FROM
1297	TO
1298	INTO
1299	CRITERIA
1300	BY
1301	ACTION

## Numerical EYUDA REASON values

1302	ECB
1303	SENTINEL
1304	FEEDBACK
1305	EVENT
1306	TOKEN
1307	MODIFY
1308	VIEW
1309	FIELDS
1310	ATTRIBUTE
1311	FROMCV
1312	TOCHAR
1313	FROMCHAR
1314	TOCV
1315	PARM
1316	PARMLN
1317	SUMOPT
1318	TYPE
1319	DATALENGTH
1320	SOLRESOURCE
1321	SOCRESOURCE
1322	SOERESOURCE
1323	MAINTPOINT
1324	SYSNOTACT
1325	SYSLVLBAD
1326	SYSNOTLCL
1327	CICSRELBAD
1328	ARMNOTREG
1329	ARMNOTACT
1330	ARMPOLCHK
1331	ABENDED
1332	CPSMSYSTEM
1333	CPSMVERSION
1334	CPSMAPI
1335	NOTSUPPORTED
1336	NOTVSNCONN
1337	INVALIDATTR
1338	APITASKERR



1339	CPSMSERVER
1340	APITASK
1341	PLEXMGR
1342	REQTIMEOUT
1344	AREATOOSMALL
1345	USRID
1348	VERSION
1352	FILTERMATCH
1353	INVALIDOBJ
1354	INVALIDVER
1355	TASKDATAKEY
1356	INVALIDVERB
1357	NOSTORAGE
1358	NOSERVICE
1359	EXCEPTION
1360	INVALIDEVT
1361	DATAERROR
1362	CMAS
1363	FIRST
1364	NEXT
1365	EXPIRED
1366	WORKLOAD
1367	ACTIONPARM
1368	CICSNAME
1369	MAXRECORDS
1370	QUERY

---

## EYUDA REASON values in alphabetic order

This section lists the REASON EYUDAs in alphabetic order.

EYUDA	Value
1331	ABENDED
1301	ACTION
1367	ACTIONPARM
1340	APITASK
1338	APITASKERR
1344	AREATOOSMALL
1329	ARMNOTACT

## Alphabetic EYUDA REASON values

1328	ARMNOTREG
1330	ARMPOLCHK
1310	ATTRIBUTE
1289	BACKWARD
1300	BY
1368	CICSNAME
1327	CICSRELBAD
1362	CMAS
1282	CONTEXT
1284	COUNT
1334	CPSMAPI
1339	CPSMSERVER
1332	CPSMSYSTEM
1333	CPSMVERSION
1299	CRITERIA
1361	DATAERROR
1319	DATALLENGTH
1291	DELAY
1302	ECB
1305	EVENT
1359	EXCEPTION
1365	EXPIRED
1304	FEEDBACK
1309	FIELDS
1286	FILTER
1352	FILTERMATCH
1363	FIRST
1288	FORWARD
1296	FROM
1313	FROMCHAR
1311	FROMCV
1298	INTO
1337	INVALIDATTR
1360	INVALIDEVT
1353	INVALIDOBJ
1354	INVALIDVER
1356	INVALIDVERB

## Alphabetic EYUDA REASON values

1285 LENGTH  
1323 MAINTPOINT  
1369 MAXRECORDS  
1307 MODIFY  
1364 NEXT  
1358 NOSERVICE  
1357 NOSTORAGE  
1287 NOTFILTER  
1292 NOTIFICATION  
1335 NOTSUPPORTED  
1336 NOTVSNCONN  
1281 OBJECT  
1315 PARM  
1316 PARMLEN  
1341 PLEXMGR  
1290 POSITION  
1370 QUERY  
1342 REQTIMEOUT  
1295 RESOURCE  
1283 RESULT  
1294 SCOPE  
1303 SENTINEL  
1293 SIGNONPARM  
1321 SOCRESOURCE  
1322 SOERESOURCE  
1320 SOLRESOURCE  
1317 SUMOPT  
1325 SYSLVLBAD  
1324 SYSNOTACT  
1326 SYSNOTLCL  
1355 TASKDATAKEY  
1280 THREAD  
1297 TO  
1312 TOCHAR  
1314 TOCV  
1306 TOKEN  
1318 TYPE

## Alphabetic EYUDA REASON values

1345	USRID
1348	VERSION
1308	VIEW
1366	WORKLOAD

---

## Bibliography

---

### The CICS Transaction Server for z/OS library

The published information for CICS Transaction Server for z/OS is delivered in the following forms:

#### The CICS Transaction Server for z/OS Information Center

The CICS Transaction Server for z/OS Information Center is the primary source of user information for CICS Transaction Server. The Information Center contains:

- Information for CICS Transaction Server in HTML format.
- Licensed and unlicensed CICS Transaction Server books provided as Adobe Portable Document Format (PDF) files. You can use these files to print hardcopy of the books. For more information, see “PDF-only books.”
- Information for related products in HTML format and PDF files.

One copy of the CICS Information Center, on a CD-ROM, is provided automatically with the product. Further copies can be ordered, at no additional charge, by specifying the Information Center feature number, 7014.

Licensed documentation is available only to licensees of the product. A version of the Information Center that contains only unlicensed information is available through the publications ordering system, order number SK3T-6945.

#### Entitlement hardcopy books

The following essential publications, in hardcopy form, are provided automatically with the product. For more information, see “The entitlement set.”

### The entitlement set

The entitlement set comprises the following hardcopy books, which are provided automatically when you order CICS Transaction Server for z/OS, Version 3 Release 1:

*Memo to Licensees*, GI10-2559  
*CICS Transaction Server for z/OS Program Directory*, GI10-2586  
*CICS Transaction Server for z/OS Release Guide*, GC34-6421  
*CICS Transaction Server for z/OS Installation Guide*, GC34-6426  
*CICS Transaction Server for z/OS Licensed Program Specification*, GC34-6608

You can order further copies of the following books in the entitlement set, using the order number quoted above:

*CICS Transaction Server for z/OS Release Guide*  
*CICS Transaction Server for z/OS Installation Guide*  
*CICS Transaction Server for z/OS Licensed Program Specification*

### PDF-only books

The following books are available in the CICS Information Center as Adobe Portable Document Format (PDF) files:

#### CICS books for CICS Transaction Server for z/OS

##### General

*CICS Transaction Server for z/OS Program Directory*, GI10-2586  
*CICS Transaction Server for z/OS Release Guide*, GC34-6421  
*CICS Transaction Server for z/OS Migration from CICS TS Version 2.3*, GC34-6425

*CICS Transaction Server for z/OS Migration from CICS TS Version 1.3,*  
GC34-6423

*CICS Transaction Server for z/OS Migration from CICS TS Version 2.2,*  
GC34-6424

*CICS Transaction Server for z/OS Installation Guide,* GC34-6426

#### **Administration**

*CICS System Definition Guide,* SC34-6428

*CICS Customization Guide,* SC34-6429

*CICS Resource Definition Guide,* SC34-6430

*CICS Operations and Utilities Guide,* SC34-6431

*CICS Supplied Transactions,* SC34-6432

#### **Programming**

*CICS Application Programming Guide,* SC34-6433

*CICS Application Programming Reference,* SC34-6434

*CICS System Programming Reference,* SC34-6435

*CICS Front End Programming Interface User's Guide,* SC34-6436

*CICS C++ OO Class Libraries,* SC34-6437

*CICS Distributed Transaction Programming Guide,* SC34-6438

*CICS Business Transaction Services,* SC34-6439

*Java Applications in CICS,* SC34-6440

*JCICS Class Reference,* SC34-6001

#### **Diagnosis**

*CICS Problem Determination Guide,* SC34-6441

*CICS Messages and Codes,* GC34-6442

*CICS Diagnosis Reference,* GC34-6899

*CICS Data Areas,* GC34-6902

*CICS Trace Entries,* SC34-6443

*CICS Supplementary Data Areas,* GC34-6905

#### **Communication**

*CICS Intercommunication Guide,* SC34-6448

*CICS External Interfaces Guide,* SC34-6449

*CICS Internet Guide,* SC34-6450

#### **Special topics**

*CICS Recovery and Restart Guide,* SC34-6451

*CICS Performance Guide,* SC34-6452

*CICS IMS Database Control Guide,* SC34-6453

*CICS RACF Security Guide,* SC34-6454

*CICS Shared Data Tables Guide,* SC34-6455

*CICS DB2 Guide,* SC34-6457

*CICS Debugging Tools Interfaces Reference,* GC34-6908

### **CICSplex SM books for CICS Transaction Server for z/OS**

#### **General**

*CICSplex SM Concepts and Planning,* SC34-6459

*CICSplex SM User Interface Guide,* SC34-6460

*CICSplex SM Web User Interface Guide,* SC34-6461

#### **Administration and Management**

*CICSplex SM Administration,* SC34-6462

*CICSplex SM Operations Views Reference,* SC34-6463

*CICSplex SM Monitor Views Reference,* SC34-6464

*CICSplex SM Managing Workloads,* SC34-6465

*CICSplex SM Managing Resource Usage,* SC34-6466

*CICSplex SM Managing Business Applications,* SC34-6467

#### **Programming**

*CICSplex SM Application Programming Guide,* SC34-6468

*CICSplex SM Application Programming Reference,* SC34-6469

## Diagnosis

*CICSplex SM Resource Tables Reference*, SC34-6470  
*CICSplex SM Messages and Codes*, GC34-6471  
*CICSplex SM Problem Determination*, GC34-6472

## CICS family books

### Communication

*CICS Family: Interproduct Communication*, SC34-6473  
*CICS Family: Communicating from CICS on System/390*, SC34-6474

### Licensed publications

The following licensed publications are not included in the unlicensed version of the Information Center:

*CICS Diagnosis Reference*, GC34-6899  
*CICS Data Areas*, GC34-6902  
*CICS Supplementary Data Areas*, GC34-6905  
*CICS Debugging Tools Interfaces Reference*, GC34-6908

---

## Other CICS books

The following publications contain further information about CICS, but are not provided as part of CICS Transaction Server for z/OS, Version 3 Release 1.

<i>Designing and Programming CICS Applications</i>	SR23-9692
<i>CICS Application Migration Aid Guide</i>	SC33-0768
<i>CICS Family: API Structure</i>	SC33-1007
<i>CICS Family: Client/Server Programming</i>	SC33-1435
<i>CICS Transaction Gateway for z/OS Administration</i>	SC34-5528
<i>CICS Family: General Information</i>	GC33-0155
<i>CICS 4.1 Sample Applications Guide</i>	SC33-1173
<i>CICS/ESA 3.3 XRF Guide</i>	SC33-0661

---

## Determining if a publication is current

IBM regularly updates its publications with new and changed information. When first published, both hardcopy and BookManager<sup>®</sup> softcopy versions of a publication are usually in step. However, due to the time required to print and distribute hardcopy books, the BookManager version is more likely to have had last-minute changes made to it before publication.

Subsequent updates will probably be available in softcopy before they are available in hardcopy. This means that at any time from the availability of a release, softcopy versions should be regarded as the most up-to-date.

For CICS Transaction Server books, these softcopy updates appear regularly on the *Transaction Processing and Data Collection Kit* CD-ROM, SK2T-0730-xx. Each reissue of the collection kit is indicated by an updated order number suffix (the -xx part). For example, collection kit SK2T-0730-06 is more up-to-date than SK2T-0730-05. The collection kit is also clearly dated on the cover.

Updates to the softcopy are clearly marked by revision codes (usually a # character) to the left of the changes.





---

## Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully.

You can perform most tasks required to set up, run, and maintain your CICSplex SM system in one of these ways:

- using a 3270 emulator connected to CICSplex SM
- using a 3270 emulator logged on to CICS
- using a 3270 emulator logged on to TSO
- using a 3270 emulator as an MVS system console
- using the CICSplex SM web user interface.

IBM Personal Communications (Version 5.0.1 for Windows 95, Windows 98, Windows NT and Windows 2000; version 4.3 for OS/2) provides 3270 emulation with accessibility features for people with disabilities. You can use this product to provide the accessibility features you need in your CICSplex SM system.



---

# Index

## A

ADDRESS command  
description 12  
summary of RESPONSE values 141  
argument values  
for the command-level interface  
types 1  
using Assembler 4  
using C 3  
using COBOL 2  
using PL/I 3  
for the run-time interface 5  
Assembler language programs  
argument values for 4  
attributes, resource table  
translating  
with EYUVALUE 8  
with TPARSE 138  
with TRANSLATE 118

## C

C programs  
argument values for 3  
CANCEL command  
description 14  
summary of RESPONSE values 141  
CICS definitions  
creating 24  
removing 102  
updating 125  
CICSplex SM definitions  
creating 24  
removing 102  
updating 125  
CICSplex SM meta-data  
retrieving 52  
CICSplex SM notifications  
canceling 14  
requesting 62  
COBOL programs  
argument values for 2  
command responses  
summary 141  
command-level interface  
specifying API commands 1  
specifying argument values 1  
commands  
ADDRESS 12  
CANCEL 14  
CONNECT 16  
COPY 20  
CREATE 24  
DELETE 27  
DISCARD 30  
DISCONNECT 33  
FEEDBACK 35

commands (*continued*)

FETCH 39  
GET 46  
GETDEF 52  
GROUP 58  
LISTEN 62  
LOCATE 65  
MARK 70  
ORDER 74  
PERFORM OBJECT 77  
PERFORM SET 83  
QUALIFY 88  
QUERY 91  
RECEIVE 94  
REFRESH 97  
REMOVE 102  
SET 105  
SPECIFY FILTER 111  
SPECIFY VIEW 114  
TBUILD 136  
TERMINATE 117  
TPARSE 138  
TRANSLATE 118  
UNMARK 121  
UPDATE 125  
commands, specifying  
using the command-level interface 1  
using the run-time interface 5  
CONNECT command  
description 16  
summary of RESPONSE values 141  
context  
changing default 88  
setting default 16  
COPY command  
description 20  
summary of RESPONSE values 141  
copying result set records 20  
CREATE command  
description 24  
summary of RESPONSE values 141  
CVDA values, translating 8

## D

definitions, CICS  
creating 24  
removing 102  
updating 125  
definitions, CICSplex SM  
creating 24  
removing 102  
updating 125  
DELETE command  
description 27  
summary of RESPONSE values 142  
deleting result set records 27

DISCARD command  
description 30  
summary of RESPONSE values 142  
DISCONNECT command  
description 33  
summary of RESPONSE values 142

## E

ECB field  
requesting 12  
event control block (ECB)  
requesting 12  
EYU9XESV security routine  
options on CONNECT 17  
EYUAPI function  
description 130  
EYUDA values  
summary of 149  
translating 8  
EYUINIT function  
description 131  
EYUREAS function  
description 132  
EYURESP function  
description 133  
EYUTERM function  
description 134  
EYUVALUE function  
description 8

## F

FEEDBACK command  
description 35  
summary of RESPONSE values 142  
FETCH command  
description 39  
summary of RESPONSE values 142  
filter  
defining 111  
discarding 30  
filter expression  
specifying  
on GET 47  
on PERFORM OBJECT 78  
on SPECIFY FILTER 111  
format of commands  
using the command-level interface 1  
using the run-time interface 5

## G

GET command  
description 46  
summary of RESPONSE values 143  
GETDEF command  
description 52  
summary of RESPONSE values 143  
GROUP command  
description 58

GROUP command (*continued*)  
summary of RESPONSE values 143

## L

language considerations  
general 8  
length options, specifying 9  
LISTEN command  
description 62  
summary of RESPONSE values 143  
LOCATE command  
description 65  
summary of RESPONSE values 143

## M

MARK command  
description 70  
summary of RESPONSE values 144  
marking result set records 70  
meta-data, CICSPlex SM  
retrieving 52  
modification expression  
specifying  
on SET 106  
on UPDATE 125  
MVS restrictions 8

## N

notifications, CICSPlex SM  
canceling 14  
requesting 62

## O

ORDER command  
description 74  
summary of RESPONSE values 144  
order expression  
specifying  
on ORDER 74  
on SPECIFY VIEW 114

## P

parameter expression  
specifying  
on CREATE 24  
on GET 47  
on MARK 71  
on PERFORM OBJECT 78  
on PERFORM SET 84  
on REMOVE 102  
on UNMARK 122  
on UPDATE 126  
PERFORM OBJECT command  
description 77  
summary of RESPONSE values 144

PERFORM SET command  
description 83  
summary of RESPONSE values 144  
PL/I programs  
argument values for 3

## Q

QUALIFY command  
description 88  
summary of RESPONSE values 145  
QUERY command  
description 91  
summary of RESPONSE values 145

## R

REASON option  
description 9  
summary of values 141  
RECEIVE command  
description 94  
summary of RESPONSE values 145  
REFRESH command  
description 97  
summary of RESPONSE values 145  
refreshing result set records 97  
REMOVE command  
description 102  
summary of RESPONSE values 145  
resource table  
translating attributes  
with EYUVALUE 8  
with TPARSE 138  
with TRANSLATE 118  
RESPONSE option  
description 9  
summary of values 141  
responses, command  
summary 141  
result set  
commands  
COPY 20  
DELETE 27  
DISCARD 30  
FETCH 39  
GET 46  
GROUP 58  
LOCATE 65  
MARK 70  
ORDER 74  
PERFORM OBJECT 77  
PERFORM SET 83  
QUERY 91  
REFRESH 97  
SET 105  
SPECIFY FILTER 111  
SPECIFY VIEW 114  
UNMARK 121  
discarding 30  
querying 91

result set (*continued*)  
records  
copying 20  
deleting 27  
marking 70  
refreshing 97  
retrieving meta-data 52  
REXX commands  
TBUILD 136  
TPARSE 138  
REXX functions  
EYUAPI 130  
EYUINIT 131  
EYUREAS 132  
EYURESP 133  
EYUTERM 134  
REXX run-time interface  
commands 135  
specifying API commands 5  
specifying argument values 5

## S

scope  
changing default 88  
setting default 16  
security  
options on CONNECT 17  
sentinel field  
requesting 12  
SET command  
description 105  
summary of RESPONSE values 146  
SPECIFY FILTER command  
description 111  
summary of RESPONSE values 146  
SPECIFY VIEW command  
description 114  
summary of RESPONSE values 146  
summarized result set  
creating 58  
summary expression  
specifying 59  
summary options  
specifying 59  
syntax diagrams, reading 7

## T

TBUILD command  
description 136  
TERMINATE command  
description 117  
summary of RESPONSE values 146  
TPARSE command  
description 138  
TRANSLATE command  
description 118  
summary of RESPONSE values 146

translating  
  resource table attributes  
    with EYUVALUE 8  
    with TPARSE 138  
    with TRANSLATE 118

## U

UNMARK command  
  description 121  
  summary of RESPONSE values 147  
UPDATE command  
  description 125  
  summary of RESPONSE values 147

## V

view  
  building 114  
  discarding 30

---

## Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation  
Licensing  
2-31 Roppongi 3-chome, Minato-ku  
Tokyo 106, Japan

**The following paragraph does not apply in the United Kingdom or any other country where such provisions are inconsistent with local law:**

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore this statement may not apply to you.

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact IBM United Kingdom Laboratories, MP151, Hursley Park, Winchester, Hampshire, England, SO21 2JN. Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Programming License Agreement, or any equivalent agreement between us.

---

## Sample programs

This publication contains sample programs. Permission is hereby granted to copy and store the sample programs into a data processing machine and to use the stored copies for internal study and instruction only. No permission is granted to use the sample programs for any other purpose.

---

## Programming interface information

This book is intended to help you write application programs using the CICSplex SM application programming interface (API). This book documents General-use Programming Interface and Associated Guidance Information provided by CICSplex SM.

General-use programming interfaces allow the customer to write programs that obtain the services of CICSplex SM.

---

## Trademarks

IBM, the IBM logo, and [ibm.com](http://ibm.com) are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. A current list of IBM trademarks is available on the Web at Copyright and trademark information at [www.ibm.com/legal/copytrade.shtml](http://www.ibm.com/legal/copytrade.shtml).

Adobe and the Adobe logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Microsoft and Windows NT are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other product and service names might be trademarks of IBM or other companies.



---

## Sending your comments to IBM

If you especially like or dislike anything about this book, please use one of the methods listed below to send your comments to IBM.

Feel free to comment on what you regard as specific errors or omissions, and on the accuracy, organization, subject matter, or completeness of this book.

Please limit your comments to the information in this book and the way in which the information is presented.

To ask questions, make comments about the functions of IBM products or systems, or to request additional publications, contact your IBM representative or your IBM authorized remarketer.

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate, without incurring any obligation to you.

You can send your comments to IBM in any of the following ways:

- By mail, to this address:

IBM United Kingdom Limited  
User Technologies Department (MP095)  
Hursley Park  
Winchester  
Hampshire  
SO21 2JN  
United Kingdom

- By fax:
  - From outside the U.K., after your international access code use 44-1962-816151
  - From within the U.K., use 01962-816151
- Electronically, use the appropriate network ID:
  - IBMLink: HURSLEY(IDRCF)
  - Internet: idrcf@hursley.ibm.com

Whichever you use, ensure that you include:

- The publication title and order number
- The topic to which your comment applies
- Your name and address/telephone number/fax number/network ID.







Product Number: 5655-M15

SC34-6469-07



Spine information:



CICS TS for z/OS

CICSplex SM Application Programming Reference

Version 3  
Release 1